
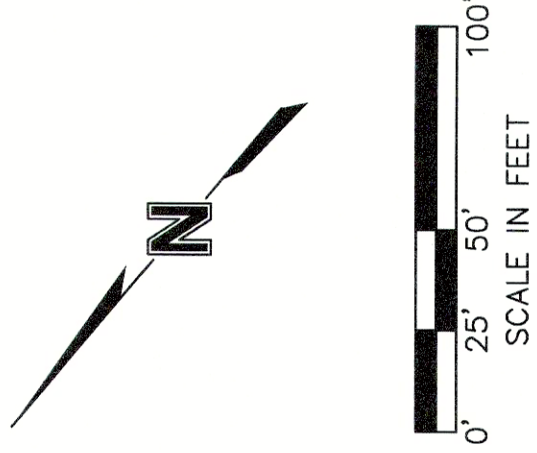


GENERAL NOTES

1. CONTRACTOR SHALL CALL 1-800-DIG-RITE PRIOR TO ANY PROJECT EXCAVATION.
2. THE UTILITY INFORMATION SHOWN HEREIN IS BASED ON THE BEST INFORMATION AVAILABLE TO THE ENGINEER; HOWEVER, ALL UTILITIES ACTUALLY EXISTING MAY NOT BE SHOWN. THE CONTRACTOR SHALL VERIFY ALL UTILITY DEPTHS AND LOCATIONS PRIOR TO CONSTRUCTION, AND COORDINATE ANY NECESSARY RELOCATIONS, UTILITIES DAMAGED THROUGH THE NEGLIGENCE OF THE CONTRACTOR TO OBTAIN THE LOCATION OF SAME SHALL BE REPAIRED AND REPLACED BY THE CONTRACTOR AT NO ADDITIONAL EXPENSE TO THE PROJECT.
3. THE CONTRACTOR SHALL INSTALL THE PROPOSED WATERLINES WITHOUT DISRUPTION OF WATER SERVICE TO CUSTOMERS UNTIL CONNECTIONS TO THE PROPOSED WATERLINES ARE READY TO BE MADE. ONCE SERVICE TO CUSTOMERS HAS BEEN INTERRUPTED, THE CONTRACTOR SHALL WORK CONTINUOUSLY UNTIL SERVICE IS RESTORED.
4. UTILITIES EXPOSED DURING CONSTRUCTION SHALL BE ADEQUATELY SUPPORTED BY THE CONTRACTOR TO PREVENT THE CONDUITS/LINES FROM SAGGING AND PUTTING STRESS ON ANY JOINTS.
5. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL FITTINGS REQUIRED TO PROVIDE PROPER HORIZONTAL AND VERTICAL ALIGNMENT FOR NEW WATER MAINS, CONNECTIONS TO EXISTING WATER MAINS AND INSTALLATION OF FIRE HYDRANTS AT THE PROPER LOCATION AND ELEVATION, WHETHER OR NOT THE PROPER FITTINGS, LOCATION OR ELEVATIONS ARE CALLED OUT ON THESE DRAWINGS, INCLUDING MODIFICATIONS OF EXISTING INFRASTRUCTURE REQUIRED TO MAKE ALL OF THE WORK CONFORM TO CURRENT STANDARDS.

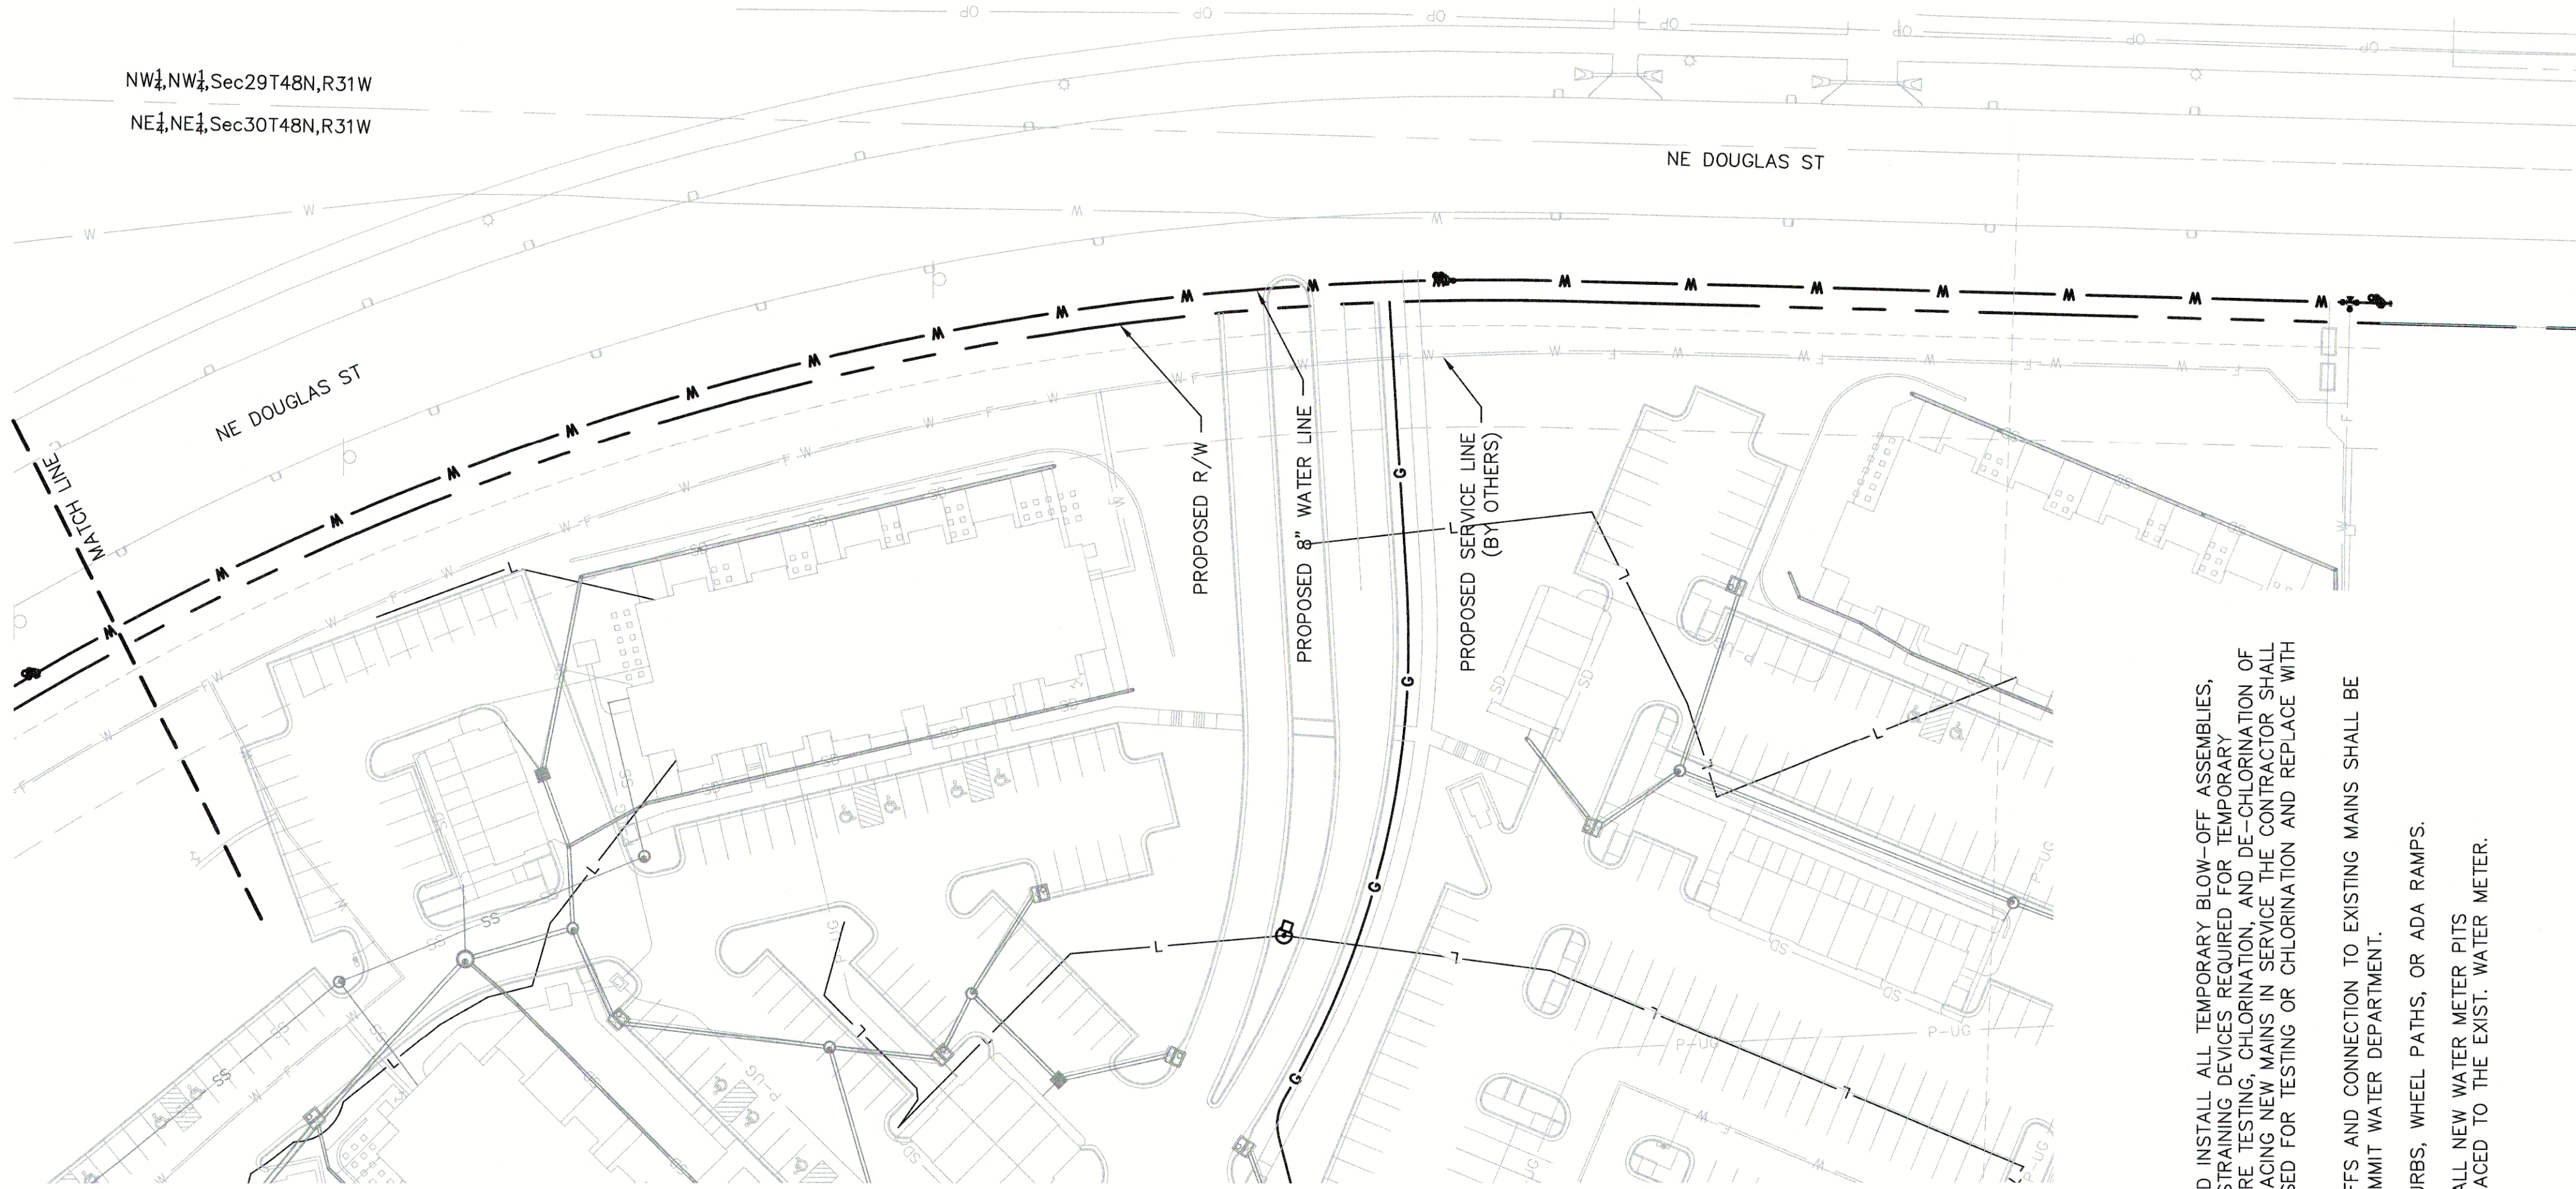

6. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL TEMPORARY BLOW-OFF ASSEMBLIES, FITTINGS, THRUST BLOCKING, AND RESTRAINING DEVICES REQUIRED FOR TEMPORARY CONNECTIONS FOR FLUSHING, PRESSURE TESTING, CHLORINATION, AND DE-CHLORINATION OF THE NEW WATER MAINS. PRIOR TO PLACING NEW MAINS IN SERVICE THE CONTRACTOR SHALL REMOVE ANY CORPORATION STOPS USED FOR TESTING OR CHLORINATION AND REPLACE WITH TAPERED BRASS PLUGS.
7. SCHEDULING OF WATER MAIN SHUT OFFS AND CONNECTION TO EXISTING MAINS SHALL BE AT THE DISCRETION OF THE LEE'S SUMMIT WATER DEPARTMENT.
8. VALVES SHALL NOT BE PLACED IN CURBS, WHEEL PATHS, OR ADA RAMPS.
9. CONTRACTOR SHALL FURNISH & INSTALL NEW WATER METER PITS WHERE NEW SERVICE LINES ARE REPLACED TO THE EXIST. WATER METER.

[illegible]

drawn by: _____ MGK
checked by: _____ TRJ
approved by: _____
QA/QC by: _____
project no.: _____ B19-0012
drawing no.: _____
date: _____ 6.10.2020


WATER LINE PLAN & PROFILE

ARIA APARTMENTS


FIRST PHASE

IT, MO

						2019
REV. NO.	DATE	REVISIONS DESCRIPTION	BY			
REVISIONS						

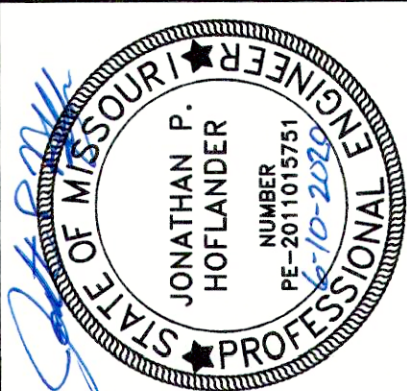

olsson

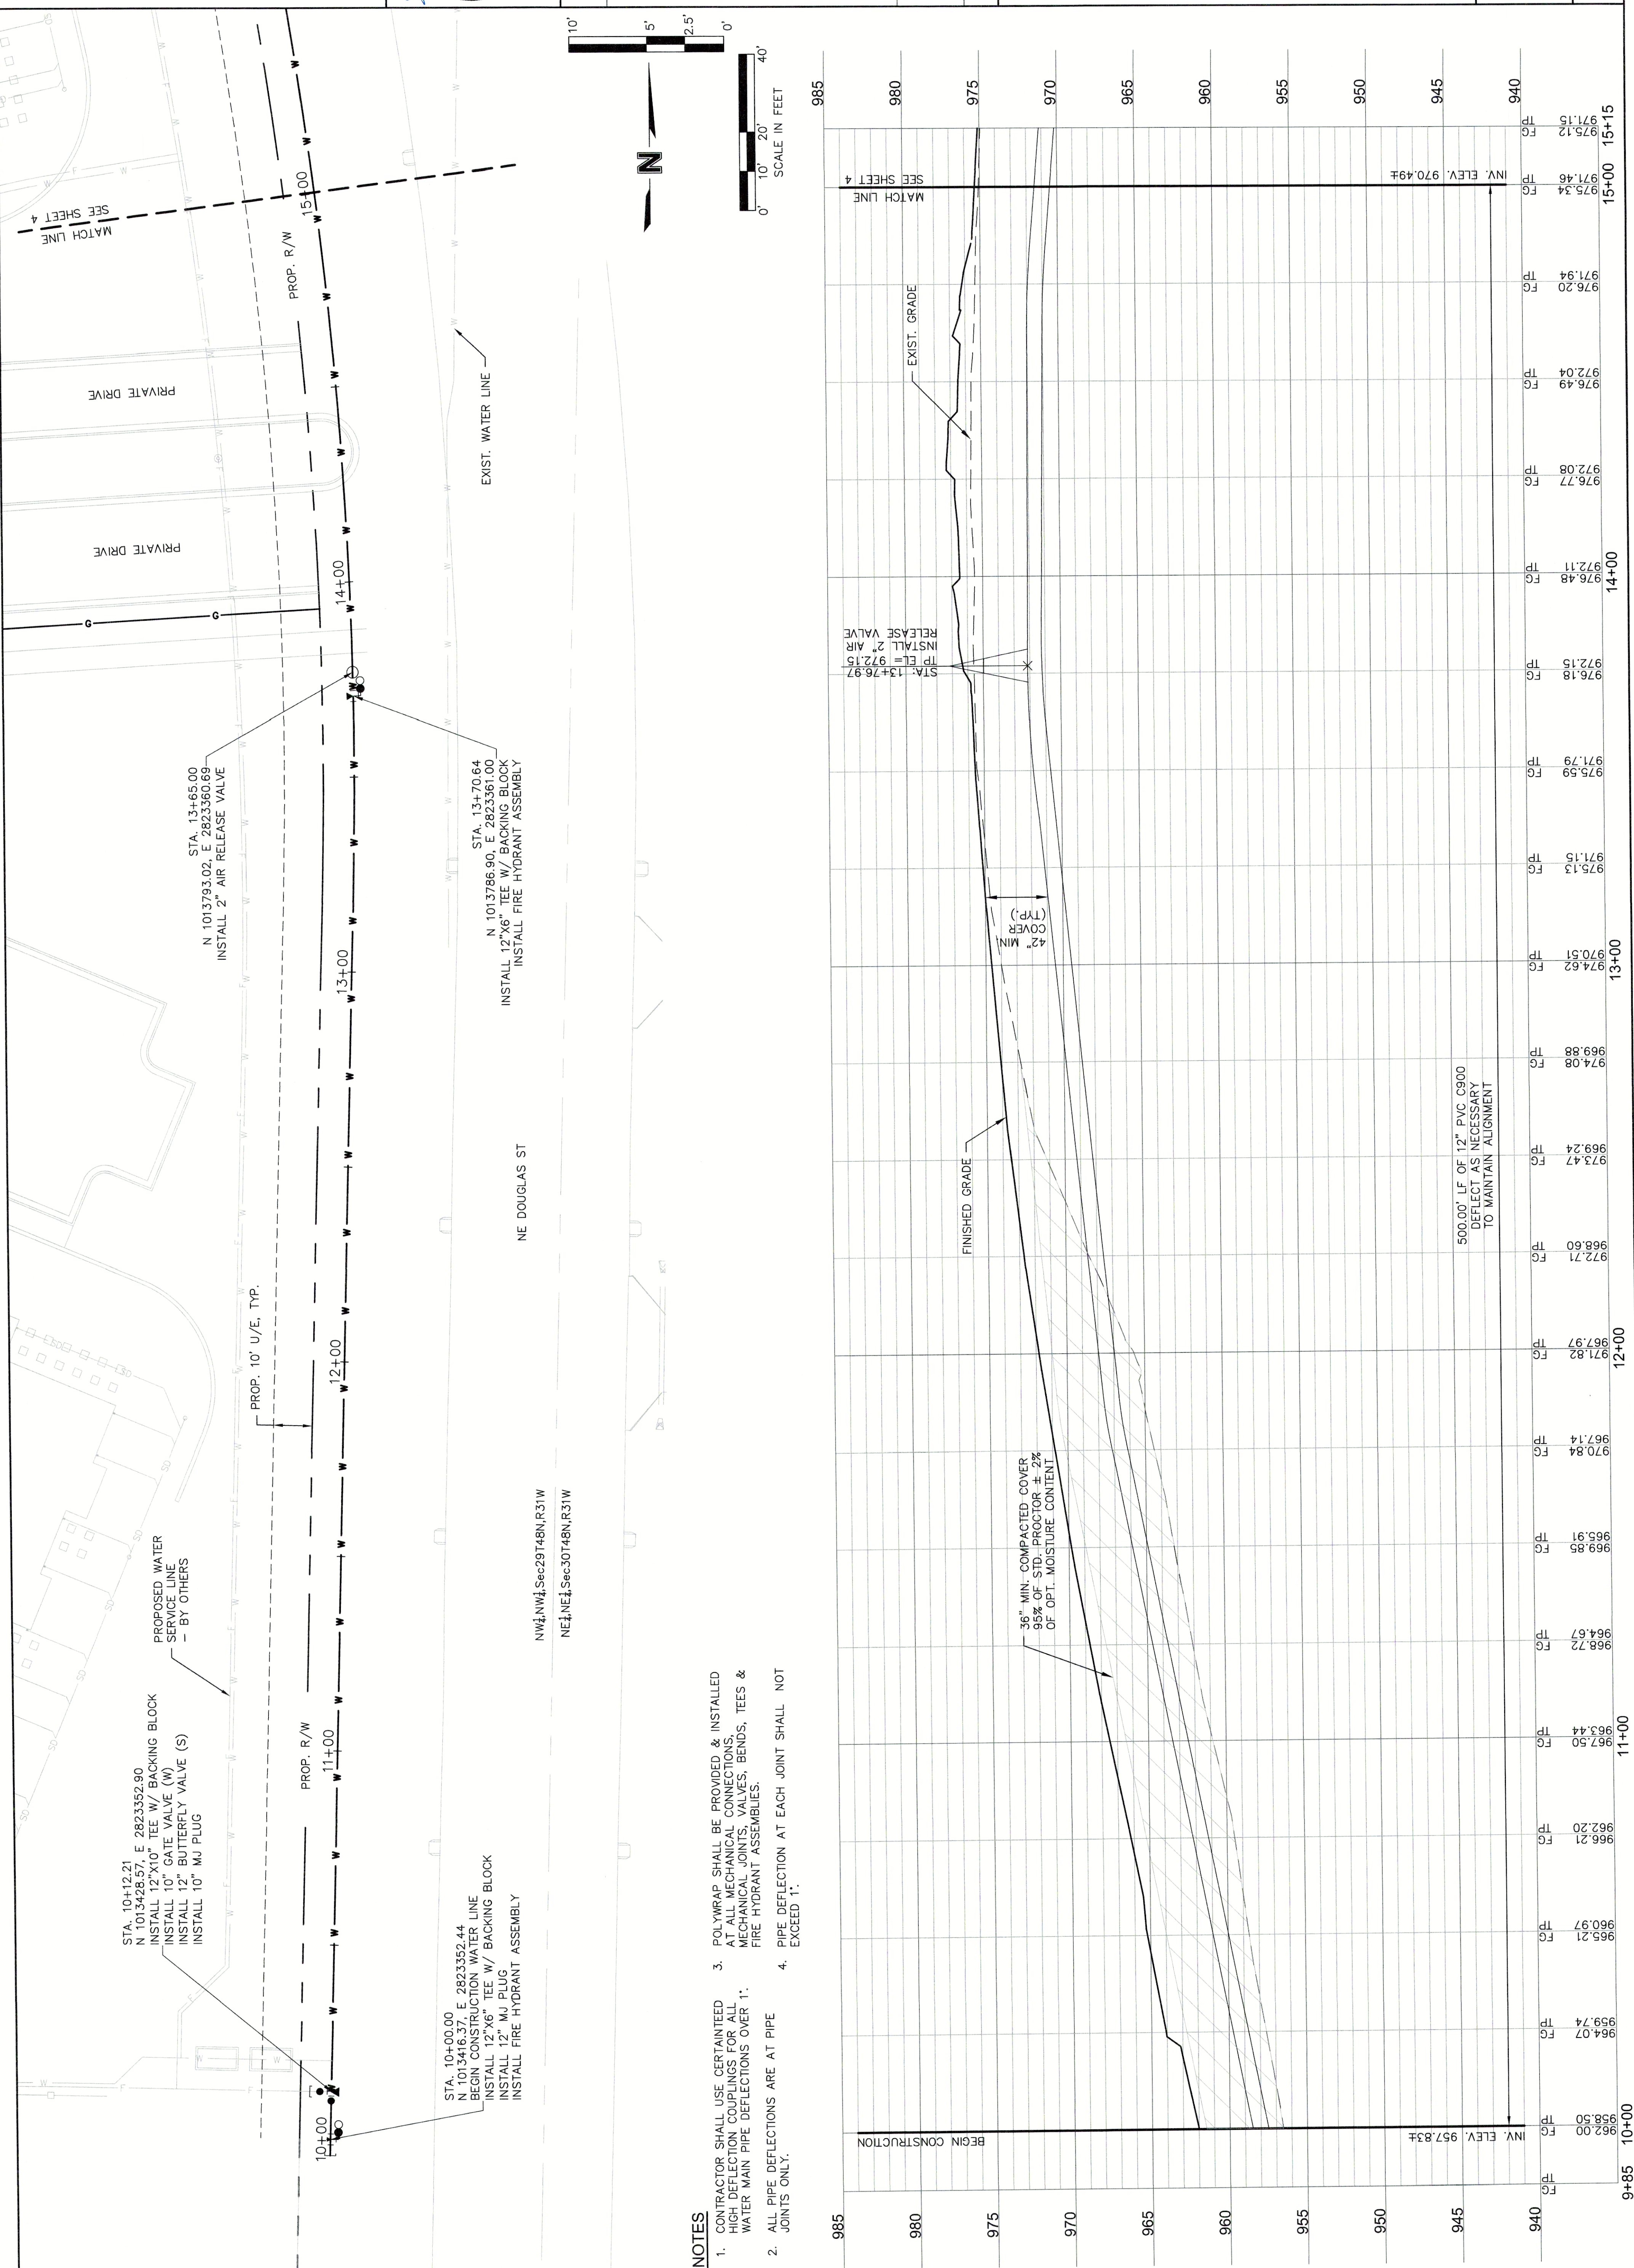

drawn by:
checked by:
approved by:

MGR:
JPH
JPH

QA/QC by:
project no.:
drawing no.:
date:

B18-0012
drawing no.:
date: 6.10.2020

LEE'S SUMMIT, MO

ARIA APARTMENTS
FIRST PHASE

2019

REVISIONS

REV. NO.	DATE	REVISIONS DESCRIPTION	BY

ENGINEER
STATE OF MISSOURI
JONATHAN P. HOFLANDER
NUMBER
PE-2011015761

Olsson - Civil Engineering
Missouri Certificate of Authority #
1301 Burlington Street
North Kansas City, MO 64116
TEL 816.361.1177
www.olsosn.com

