

STREETS OF WEST PRYOR

FOR

SOUTH POND IMPROVEMENTS

LEE'S SUMMIT, MO

UTILITIES
Electric Service
Evergy
Nathan Michael
913-347-4310
Nathan.michael@evergy.com

Gas Service
Spire
Katie Darnell
816-969-2247
Katie.darnell@spireenergy.com


Water/Sanitary Sewer
Water Utilities Department
1200 SE Hamblen Road
Lee's Summit, Mo 64081
Jeff Thorn
816-969-1900
jeff.thorn@cityofls.net

Communication Service
AT&T Carrie Cilke
816-703-4386
cc3527@att.com

Time Warner Cable
Steve Baxter
913-643-1928
steve.baxter@charter.com

Comcast
Ryan Alkire
816-795-2218
ryan.alkire@cable.comcast.com

Google Fiber
Becky Davis
913-725-8745
rebeccadavis@google.com

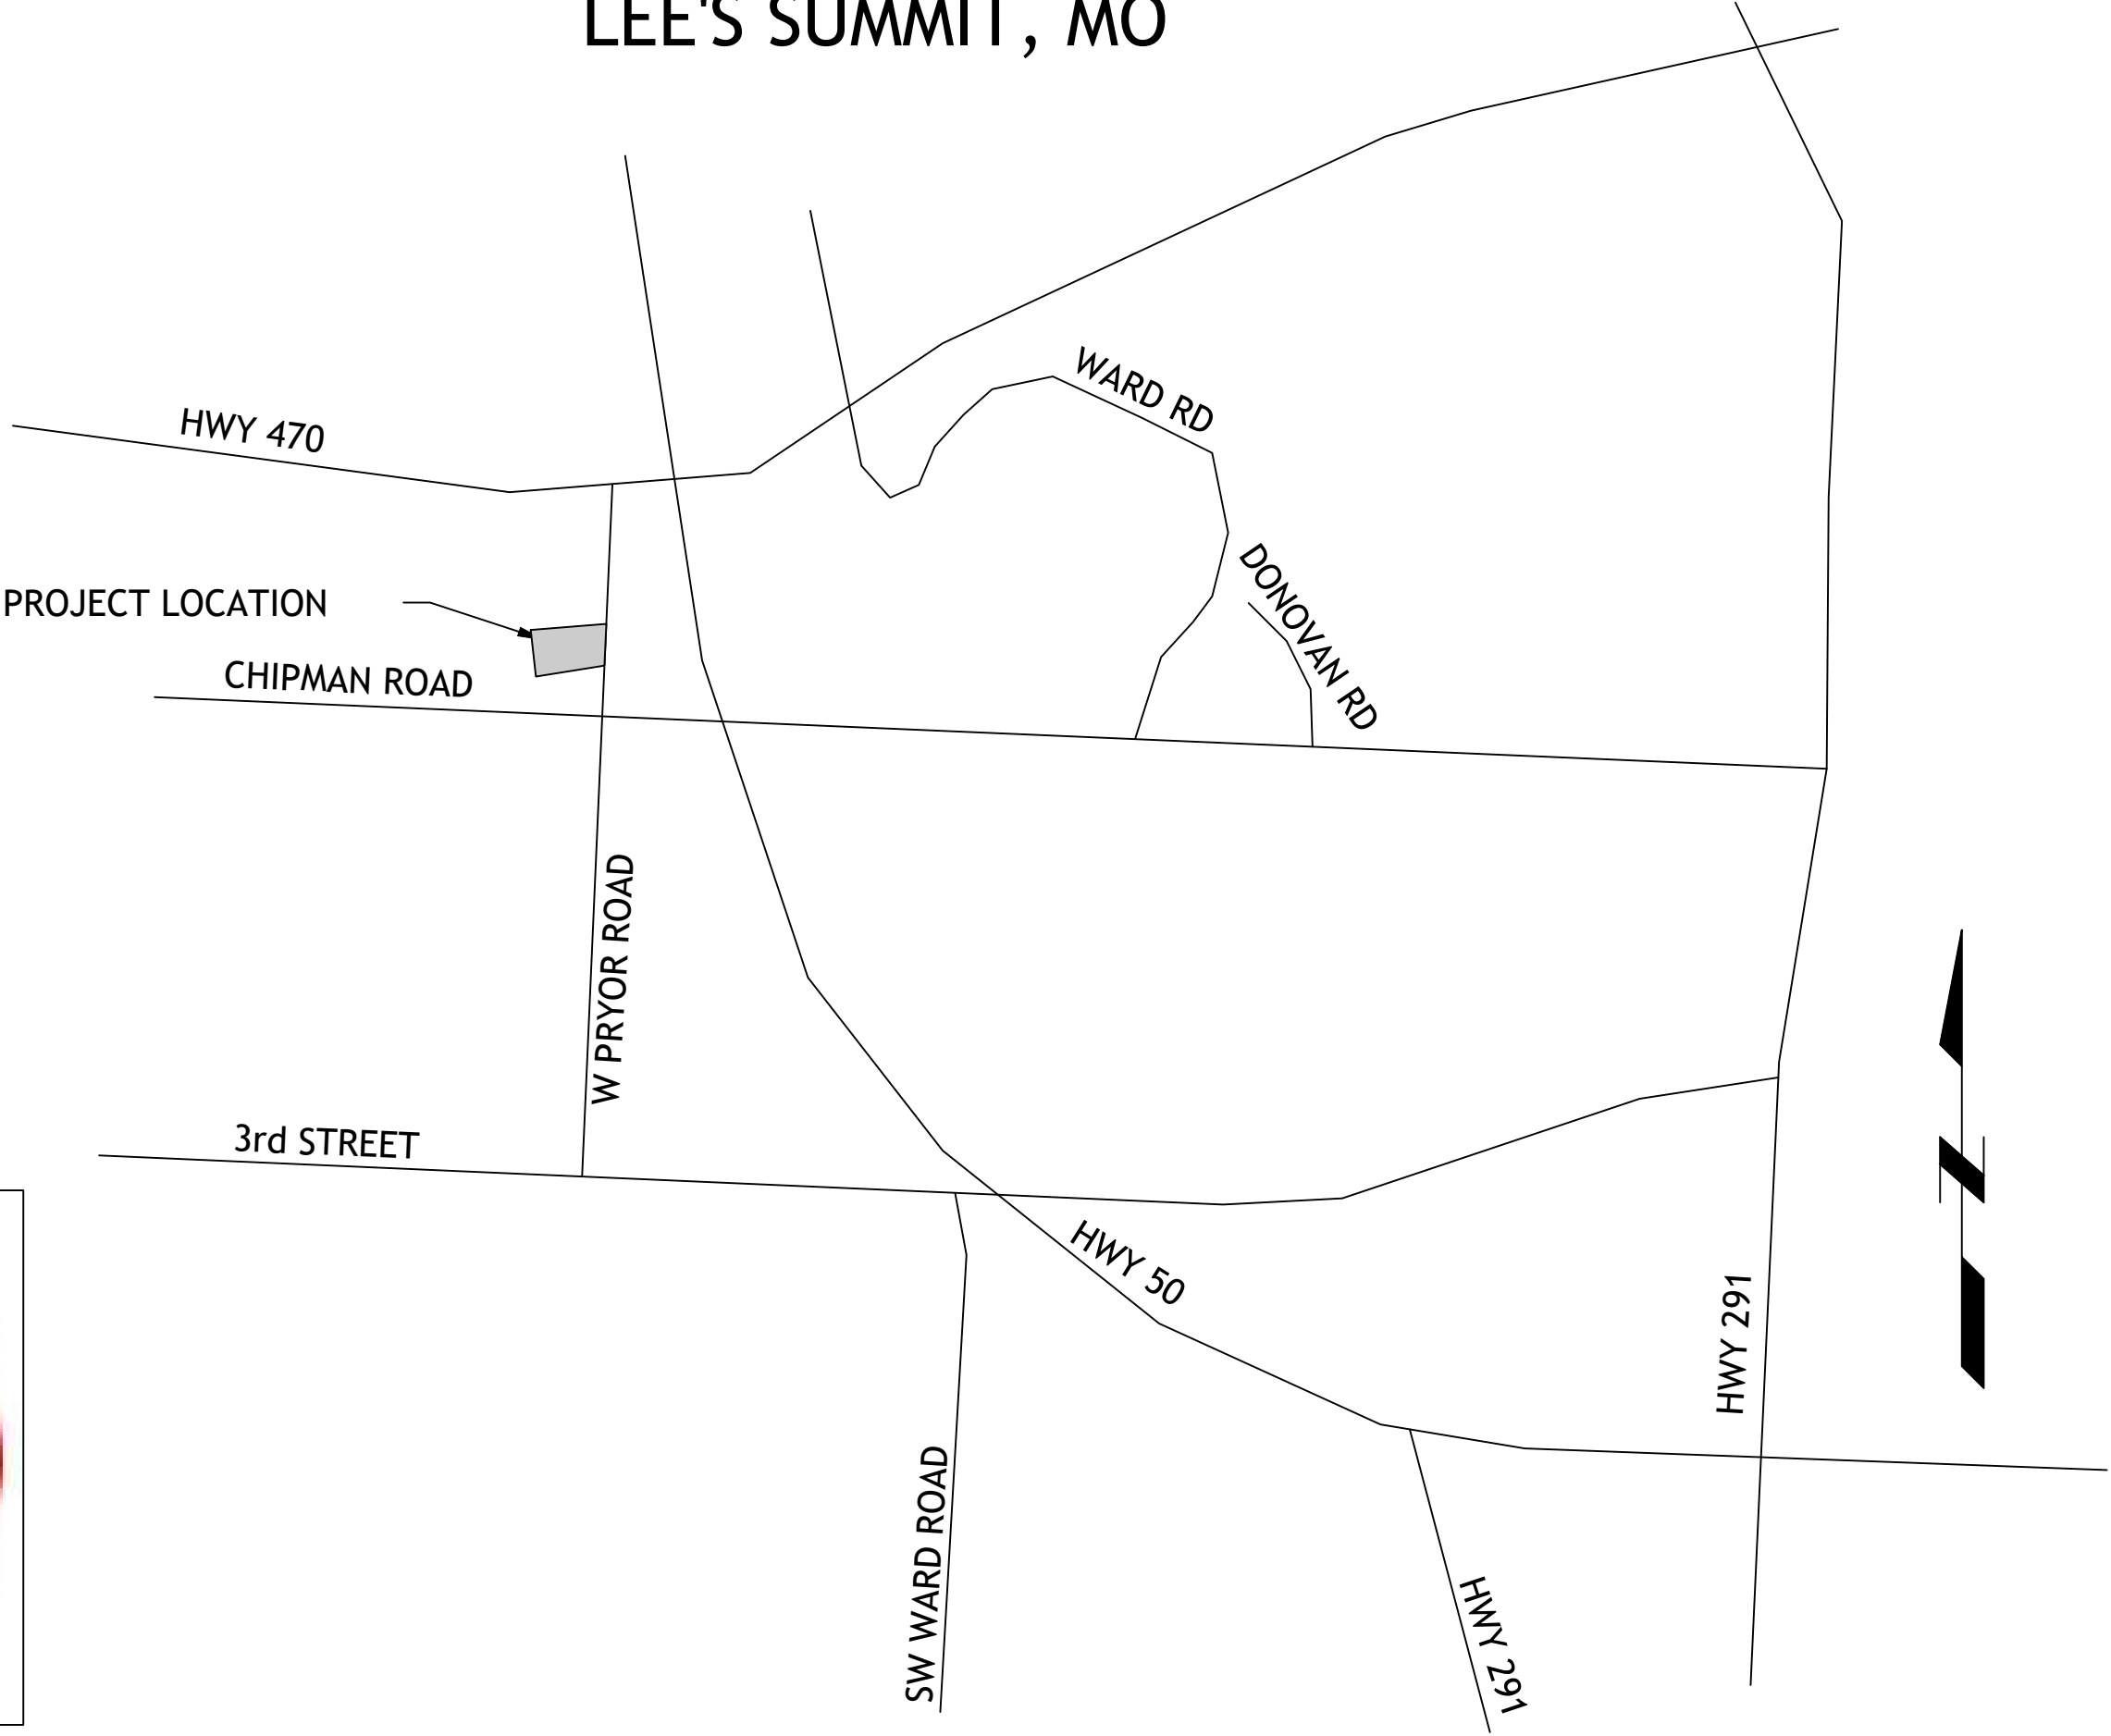

LOCATION MAP

UTILITY STATEMENT:
THE UNDERGROUND UTILITIES SHOWN HEREON ARE FROM FIELD SURVEY INFORMATION OF ONE-CALL LOCATED UTILITIES, FIELD SURVEY INFORMATION OF ABOVE GROUND OBSERVABLE EVIDENCE, AND/OR THE SCALING AND PLOTTING OF EXISTING UTILITY MAPS AND DRAWINGS AVAILABLE TO THE SURVEYOR AT THE TIME OF SURVEY. THE SURVEYOR MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. FURTHERMORE, THE SURVEYOR DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES BY EXCAVATION UNLESS OTHERWISE NOTED ON THIS SURVEY.
SAFETY NOTICE TO CONTRACTOR
IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICE, THE CONTRACTOR WILL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITIONS OF THE JOB SITE, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY DURING PERFORMANCE OF THE WORK. THIS REQUIREMENT WILL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS.

WARRANTY/DISCLAIMER
THE DESIGNS REPRESENTED IN THESE PLANS ARE IN ACCORDANCE WITH ESTABLISHED PRACTICES OF CIVIL ENGINEERING FOR THE DESIGN FUNCTIONS AND USES INTENEDED BY THE OWNER AT THIS TIME. HOWEVER, NEITHER SM ENGINEERING NOR ITS PERSONNEL CAN OR DO WARRANTY THESE DESIGNS OR PLANS AS CONSTRUCTED, EXCEPT IN THE SPECIFIC CASES WHERE SM ENGINEERING PERSONNEL INSPECT AND CONTROL THE PHYSICAL CONSTRUCTION ON A CONTEMPORARY BASIS AT THE SITE.

CAUTION- NOTICE TO CONTRACTOR
THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES AND, WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 72 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH PROPOSED IMPROVEMENTS SHOWN ON THE PLANS. THE CONTRACTOR SHALL EXPOSE EXISTING UTILITIES AT LOCATIONS OF POSSIBLE CONFLICTS PRIOR TO ANY CONSTRUCTION.

ALL EXISTING TOPOGRAPHIC DATA AND INFRASTRUCTURE IMPROVEMENTS SHOWN BASED ON INFORMATION BY KAW VALLEY ENGINEERING

BENCHMARKS:
#1 CHISELED "SQUARE" ON TOP OF CURB POINT OF INTERSECTION OF WEST PARK PARKING LOT AT EAST DRIVE ENTRANCE
ELEVATION 985.05

#2 CHISELED "SQUARE" ON NORTHWEST CORNER AREA INLET, 25' EAST OF CURB LINE AND ON-LINE WITH SOUTH CURB OF LOWENSTEIN DRIVE AT 90° BEND IN ROAD
ELEVATION 971.06

INDEX OF SHEETS


- C-1 COVER SHEET
- C-2 POND IMPROVEMENTS
- F1.00-F6.00 FOUNTAIN AND WATERFALL IMPROVEMENTS
- E1 FOUNTAIN CONTROL PANEL

DEVELOPER

SWP III, LLC
C/O DRAKE DEVELOPMENT, LLC
7200 W 132nd ST, SUITE 150
OVERLAND PARK, KS 66213
913-662-2630

ENGINEER

SM ENGINEERING
SAM MALINOWSKY
5507 HIGH MEADOW CIRCLE
MANHATTAN KANSAS, 66503
SMCIVILENGR@GMAIL.COM
785.341.9747

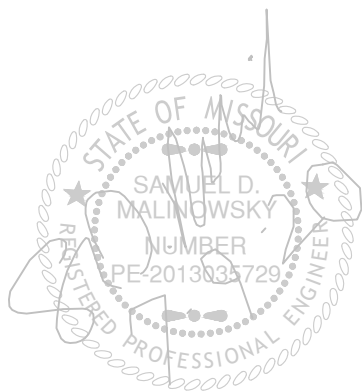

SAMUEL D. MALINOWSKY
PROFESSIONAL ENGINEER

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020



SM Engineering
SM E
5507 High Meadow Circle
Manhattan Kansas, 66503
smcivilengr@gmail.com
785.341.9747

Drawings and/or Specifications are original proprietary work and property of the Engineer and intended specifically for this project. Use of items contained herein without consent of the Engineer is prohibited. Drawings illustrate best information available to the Engineer. Field verification of actual elements, conditions, and dimensions is required.



Revisions
5-7-20 REVISED FOUNTAIN
5-11-20 SPILLWAY
7-9-20 SPILLWAY

STREETS OF WEST PRYOR
LEE'S SUMMIT, MISSOURI

s h e e t
C1.0
Civil
COVER SHEET
permit
11 MAY 2020

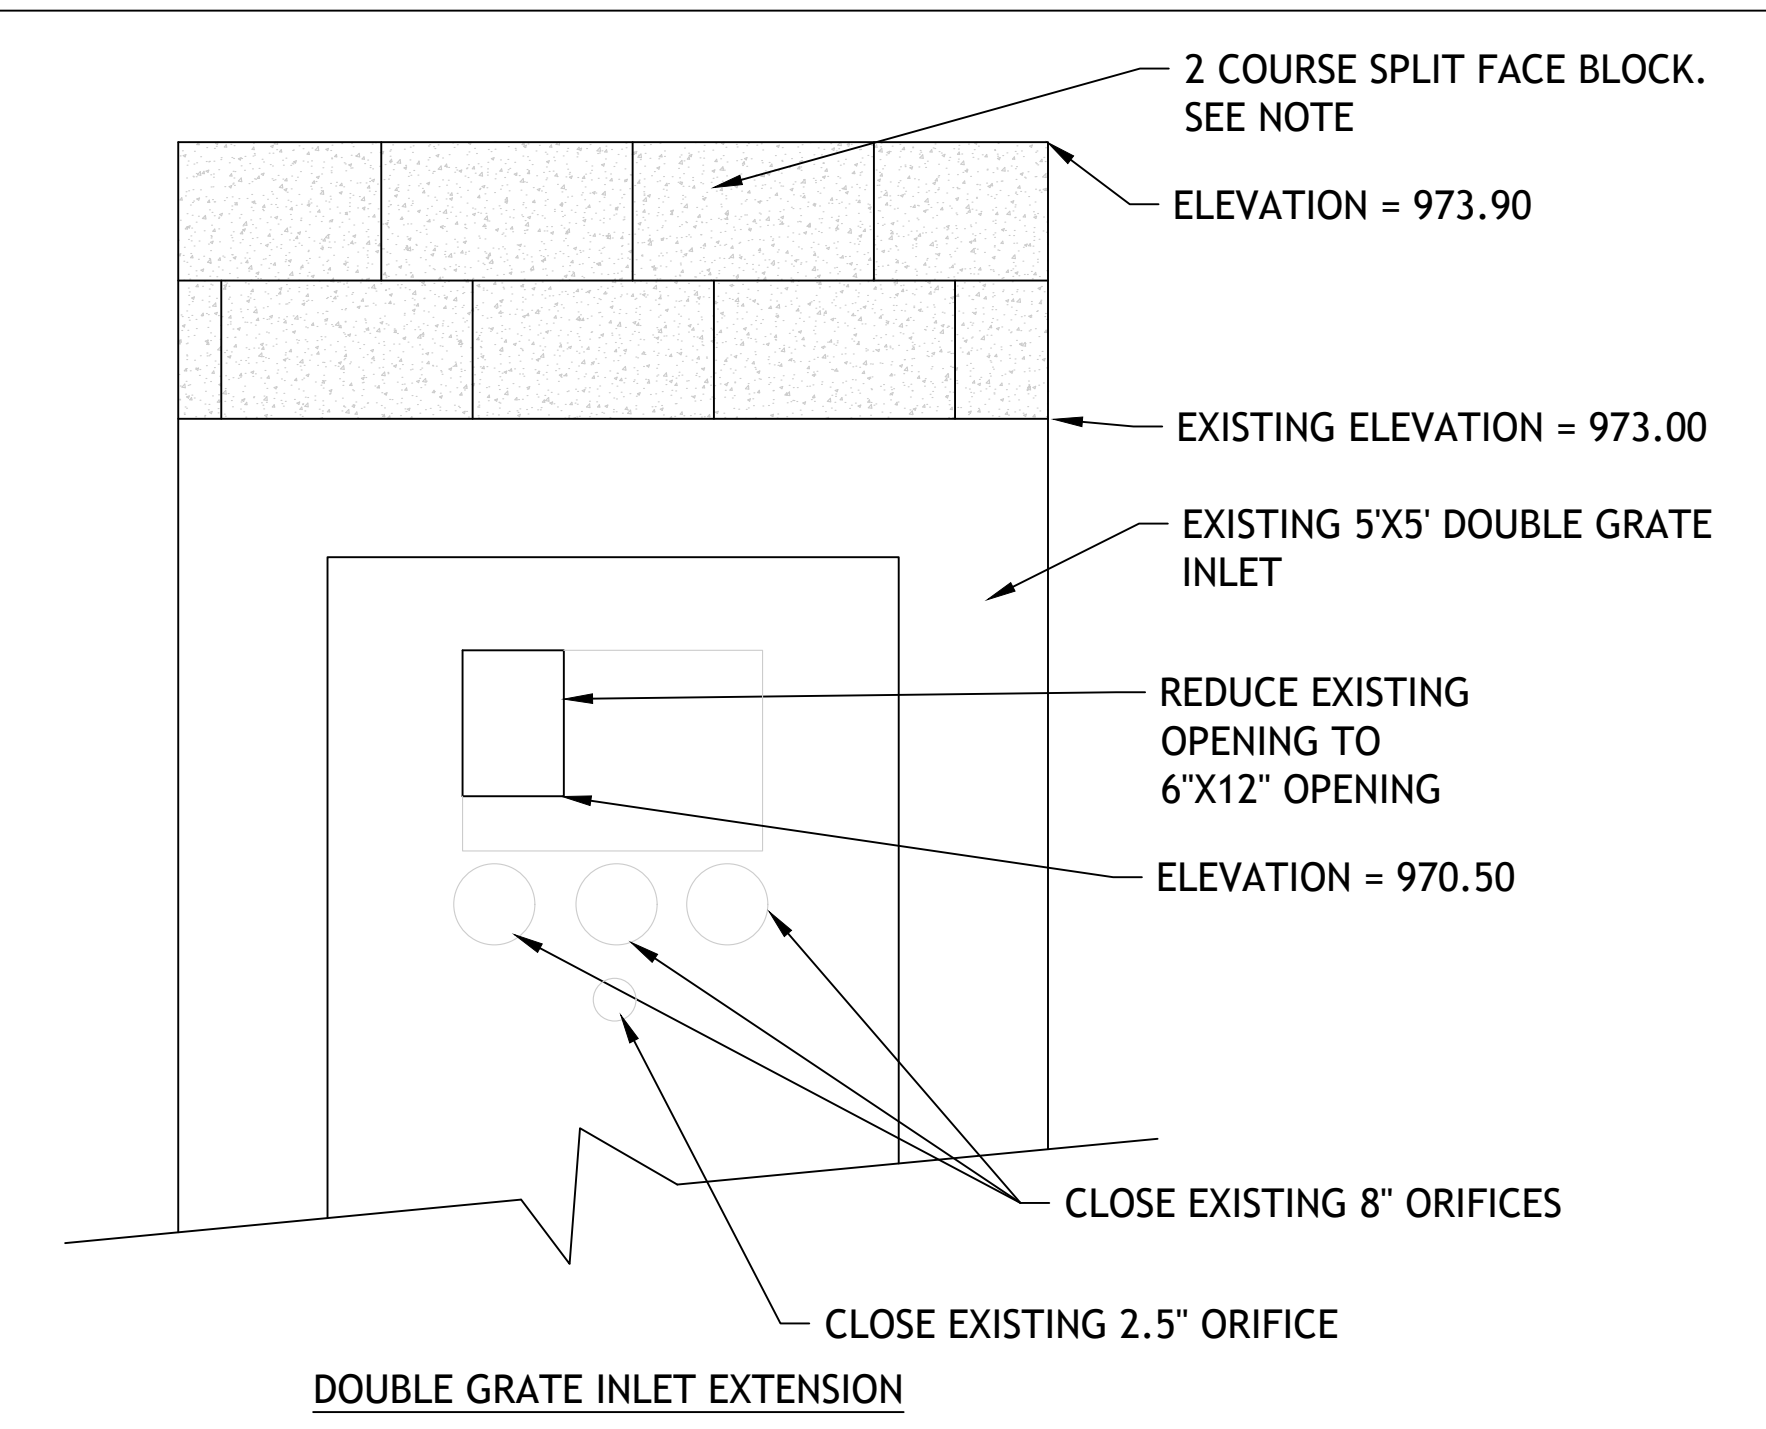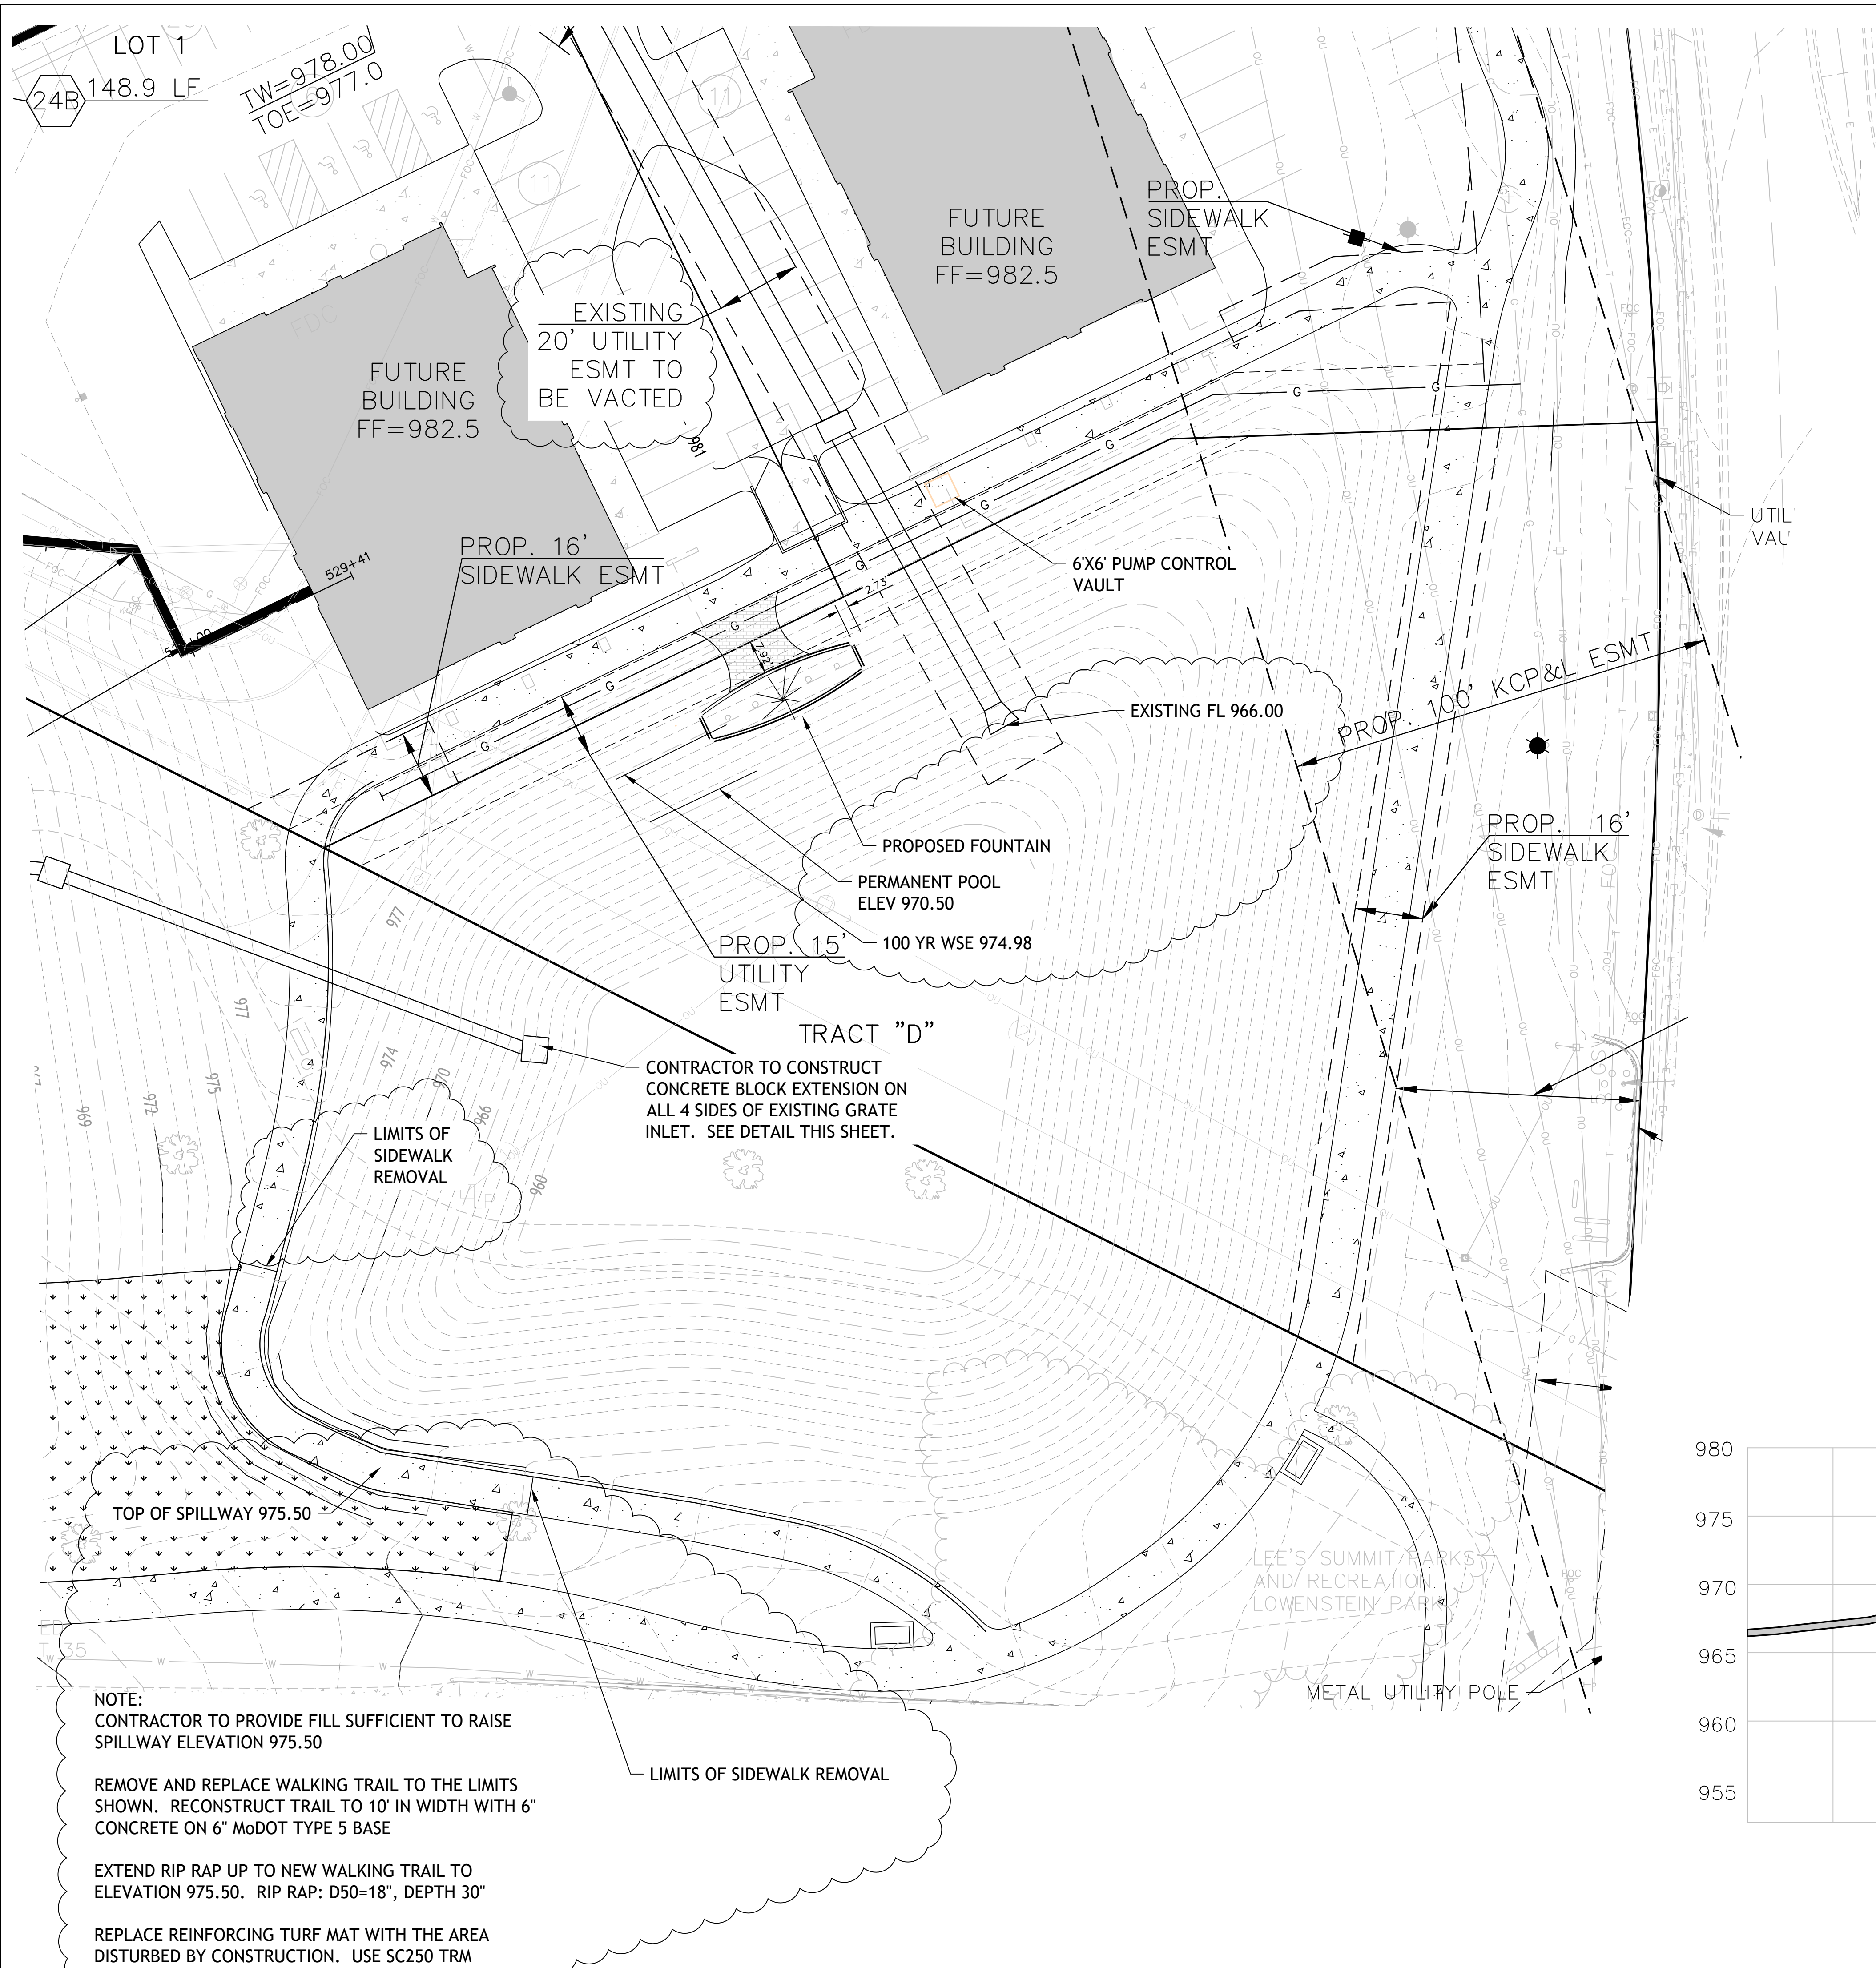

PLACE 2 COURSES ON SPLIT FACE BLOCK ON ALL 4 SIDES OF EXISTING STRUCTURE. ADJUST MORTAR JOINT AS REQUIRED TO ACHIEVE TOP ELEVATION. BLOCK TO BE INTEGRALLY COLORED, WITH COLOR SELECTED BY OWNER. #4 REBAR VERTICAL IN EACH CELL GROUTED FULL. REBAR SHALL BE IMBEDDED INTO EXISTING STRUCTURE A MINIMUM OF 4" WITH EPOXY. TOP COUSE SHALL BE BOND BEAM SHAPE. GROUT SOLID WITH CEMENT WASH ON TOP. MORTAR COLOR TO MATCH CMU.

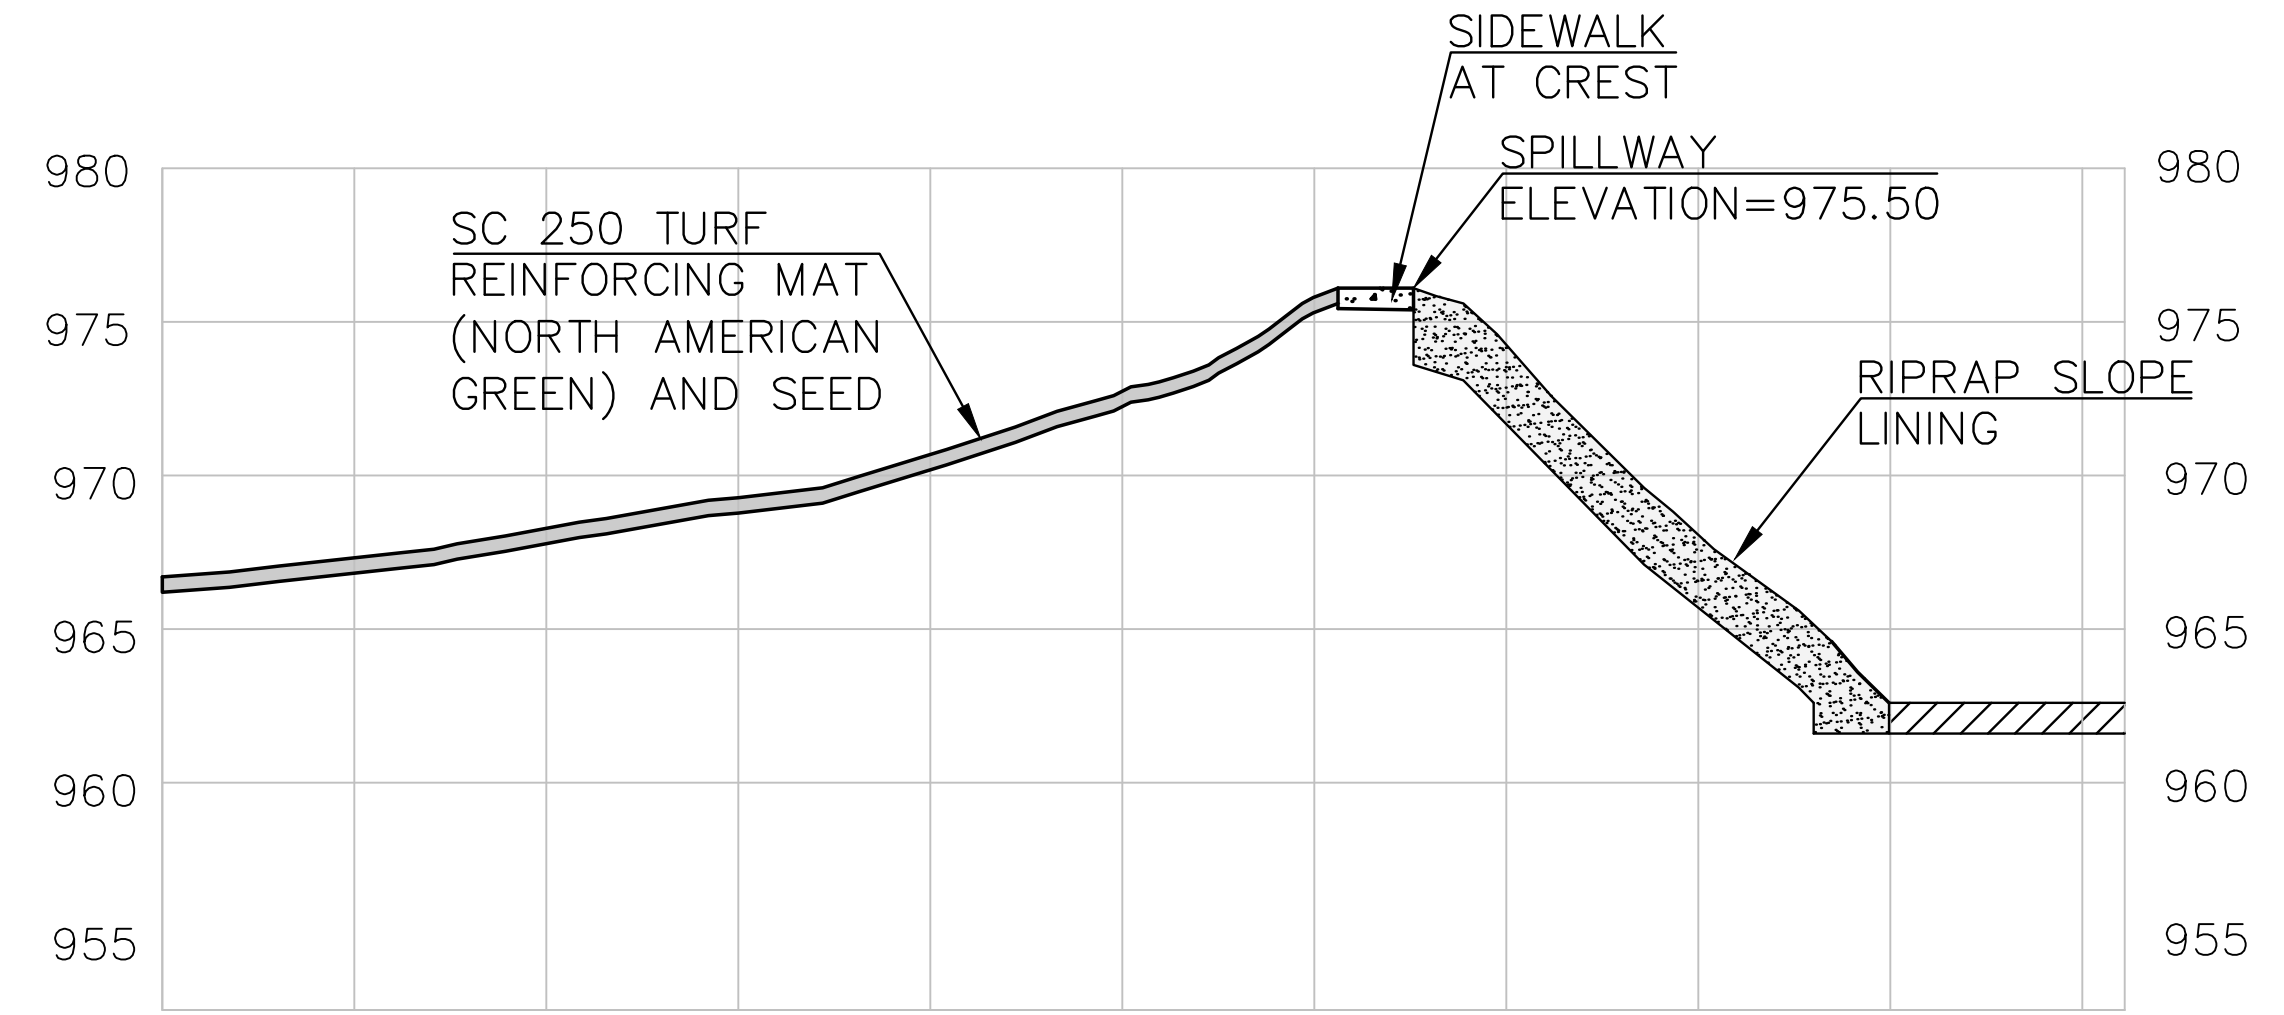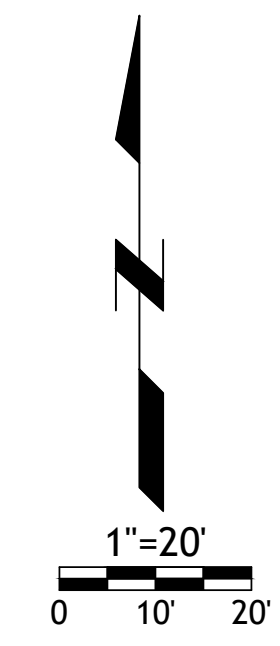

PROPOSED OVERFLOW (SOUTH BASIN)

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 08/13/2020

SM Engineering
SME
5507 High Meadow Circle
Manhattan Kansas, 66503
smcivilengr@gmail.com
785.341.9747

Drawings and/or Specifications are original proprietary work and property of the Engineer and intended specifically for this project. Use of items contained herein without consent of the Engineer is prohibited. Drawings illustrate best information available to the Engineer. Field verification of actual elements, conditions, and dimensions is required.

Revisions
5-7-20 REVISED FOUNTAIN
5-11-20 SPILLWAY
7-9-20 SPILLWAY

STREETS OF WEST PRYOR
LEE'S SUMMIT, MISSOURI

sheet
C2.0
Civil
POND IMPROVEMENTS
permit
11 MAY 2020



Drake Development

Pryor and Chipman

Lee's Summit

client:

scale

1" = 4'

date

4/22/2020


revision

drawn by

Charlie Brown


checked by

drawing #

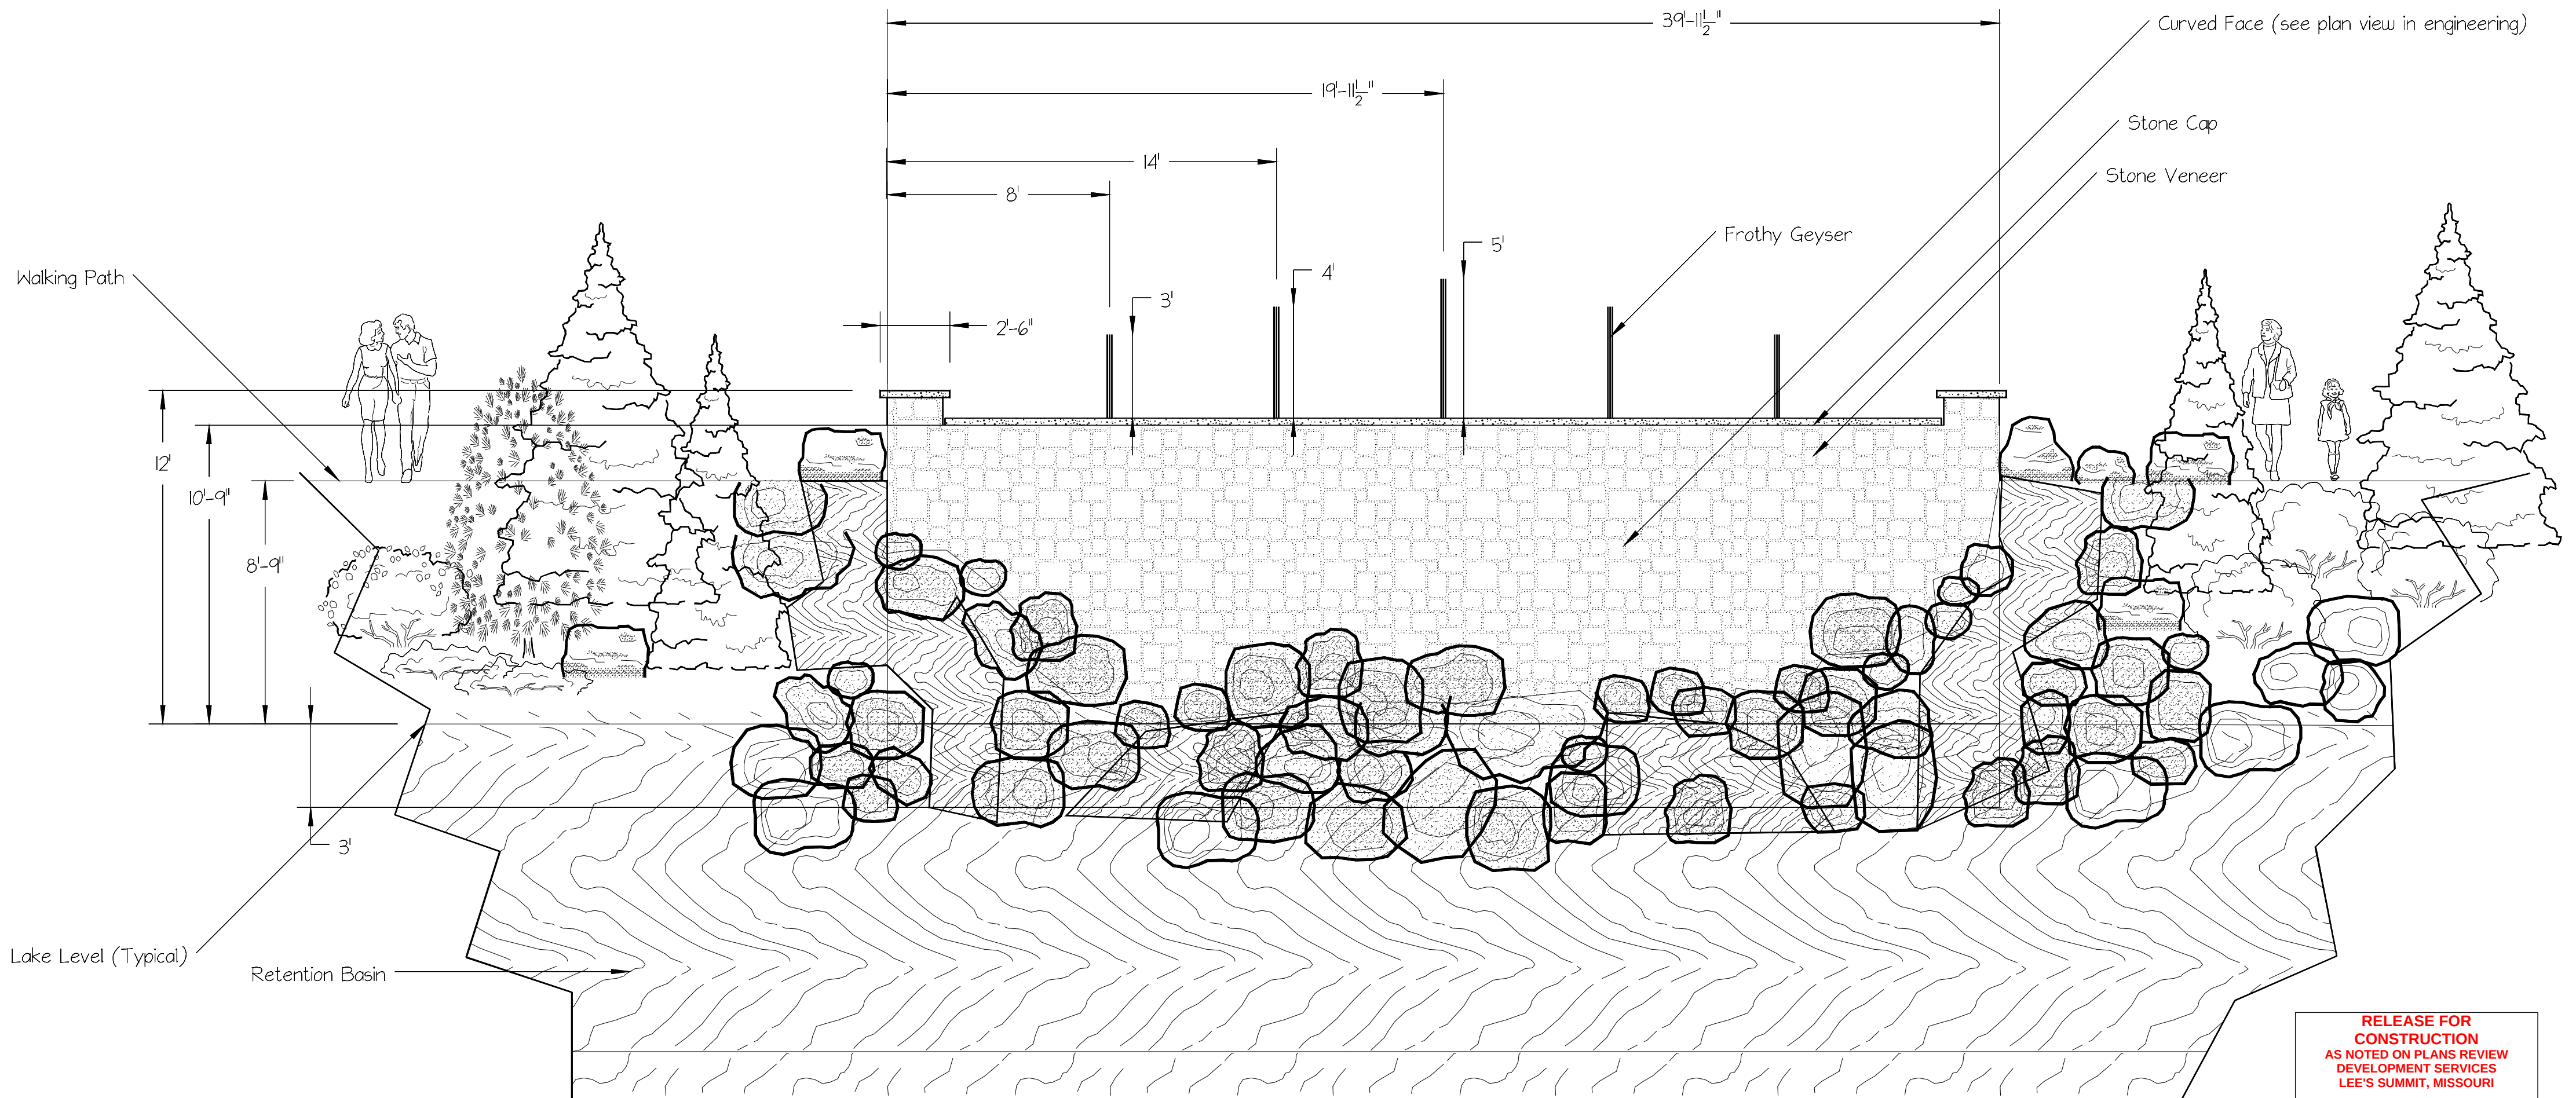


RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

08/13/2020

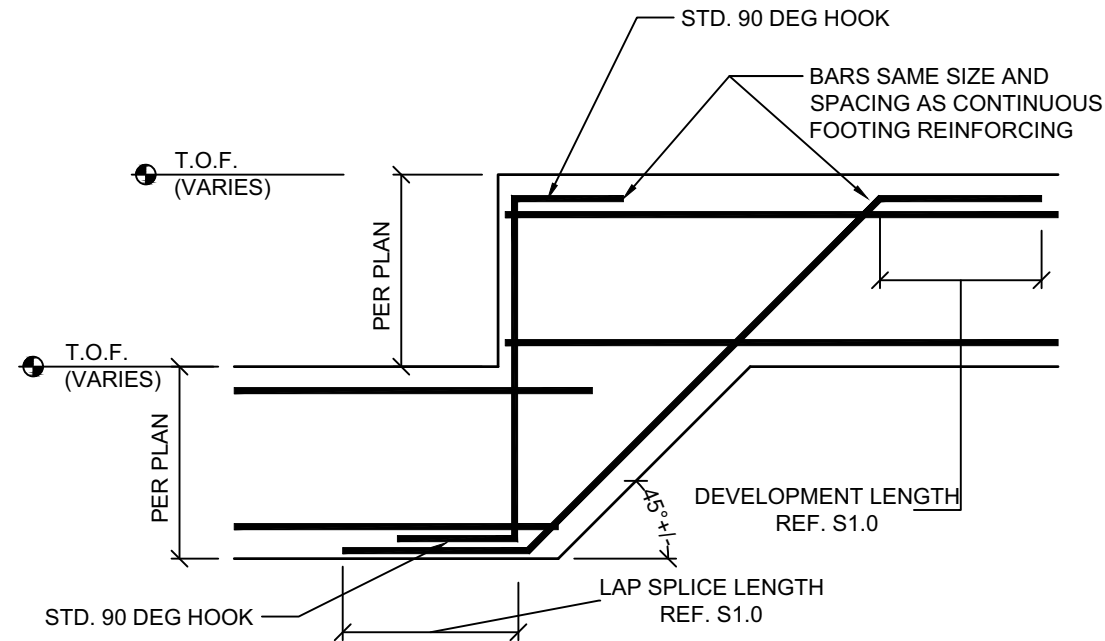

TYPICAL FOOTING STEP
SCALE: NOT TO SCALE

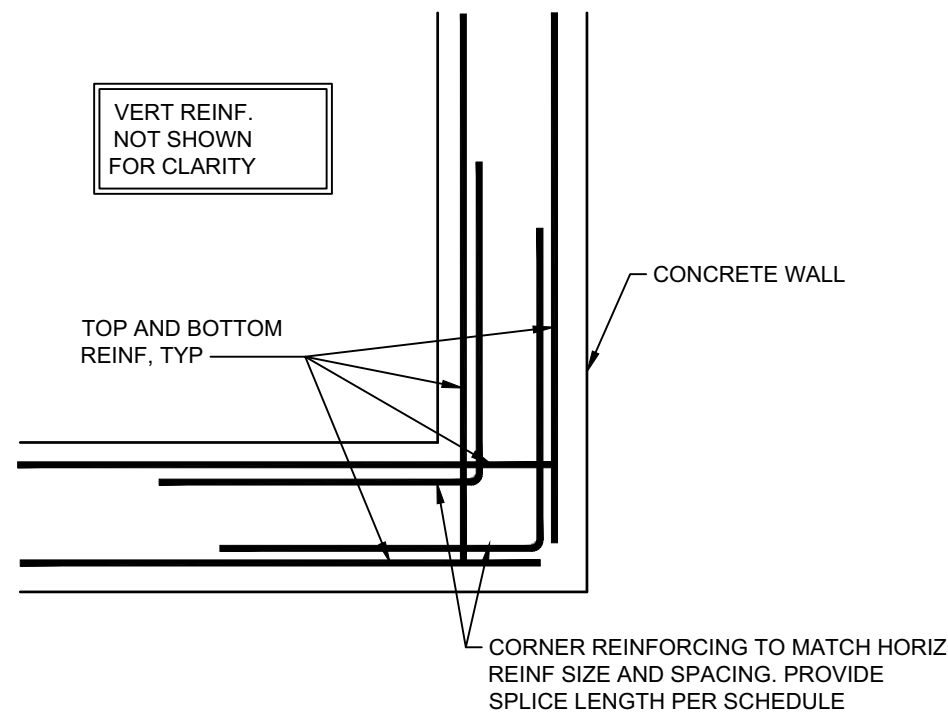

TYPICAL CORNER REINFORCING
SCALE: NOT TO SCALE

**RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI**

08/13/2020

FOUNDATIONS

- UNLESS INDICATED ON THE PLANS OR IF SITE CONDITIONS REQUIRE OTHERWISE, FOUNDATION DESIGN SHALL BE BASED ON THE FOLLOWING ALLOWABLE BEARING PRESSURES:
 - CONTINUOUS FOOTINGS: 2000 PSF
 - ISOLATED FOOTINGS: 2000 PSF
- ALL FOUNDATIONS TO BEAR ON ORIGINAL, UNDISTURBED SOIL OR FILL COMPACTED AND TESTED TO CONFORM TO THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER.
- ALL FOOTING EXCAVATIONS ARE TO BE APPROVED BY A GEOTECHNICAL ENGINEER BEFORE PLACING CONCRETE.
- FOOTINGS SHALL EXTEND BELOW THE FROST LINE: MINIMUM DEPTH OF 36" BELOW GRADE.
- UNLESS OTHERWISE NOTED ON THE PLANS OR IF SITE CONDITIONS REQUIRE OTHERWISE, FOOTINGS SHALL BE A MINIMUM OF 16" WIDE x 8" DEEP W/ (2) #4 BARS CONTINUOUS.
- COLUMN PADS SHALL BE A MINIMUM OF 24" x 24" x 12" W/ (3) #4 BARS EACH WAY UNLESS OTHERWISE NOTED.
- CONCRETE FLOOR SLABS-ON-GRADE SHALL BE A MINIMUM OF 4" THICK OVER A MINIMUM 4" BASE OF $\frac{3}{4}$ " CLEAN GRAVEL.

CONCRETE

- ALL CONCRETE CONSTRUCTION TO CONFORM TO ACI "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE" ACI 318-(MOST RECENT EDITION) AND ACI "SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS" ACI 301, UNLESS NOTED OTHERWISE.
- ALL REINFORCING STEEL TO BE DETAILED IN ACCORDANCE WITH ACI "MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES."
- CONCRETE MIX TO CONFORM TO THE FOLLOWING:
 - FOR FOOTINGS, FOUNDATION WALLS,:
 - 3,500 PSI AT 28 DAYS
 - W/C RATIO = 0.50 (MAXIMUM)
 - SLUMP LIMIT = 4" (+/- 1")
 - AIR-ENTRAINED = 5%-7%
 - FOR INTERIOR SLABS:
 - 4,000 PSI AT 28 DAYS
 - W/C RATIO = 0.45 (MAXIMUM)
 - SLUMP LIMIT = 4" (+/- 1")
 - AIR-ENTRAINED = MAX. 3%
- ALL REINFORCED STEEL TO BE ASTM A 615, DEFORMED.
 - GRADE 40, #4 BAR & <
 - GRADE 60, #5 BAR & >
- REINFORCING SHALL BE CONTINUOUS WHEREVER POSSIBLE. SPLICES AND LAPS TO CONFORM TO ACI 318 REQUIREMENTS.
- CONTRACTOR TO HIRE A TESTING LABORATORY TO TAKE CONCRETE CYLINDER TEST. FREQUENCY OF TESTING IS TO BE IN ACCORDANCE WITH ACI 318 REQUIREMENTS. TAKE FIVE (5) CYLINDERS EACH SAMPLE, TEST TWO (2) AT SEVEN (7) DAYS, AND TWO (2) AT 28, AND HOLD ONE IN RESERVE UNTIL PROJECT IS COMPLETED. TESTING LABORATORY IS TO FURNISH ARCHITECT/ENGINEER WITH TEST RESULTS PROMPTLY.
 - ONCE EACH DAY A GIVEN CLASS IS PLACED, NOR LESS THAN
 - ONCE FOR EACH 150 SQ/YD OF EACH CLASS PLACED EACH DAY. NOR LESS THAN
 - ONCE FOR EACH 5000 SQ/FT OF SLAB WALL OR SURFACE AREA PLACED EACH DAY
- DOWELS IN FOOTING, WALLS, AND DRILLED PIERS MUST BE IN POSITION BEFORE PLACING CONCRETE WHENEVER POSSIBLE.
- PROVIDE THE FOLLOWING ADDITIONAL REINFORCING UNLESS OTHERWISE CALLED FOR ON STRUCTURAL PLANS:
 - 2 - #5 BARS EACH SIDE OF OPENINGS 1'-0" OR LARGER IN SLABS AND WALLS.
 - CORNER BARS (2'-0" x 2'-0") IN OUTER FACE OF ALL CONCRETE WALLS AND TO MATCH SIZE AND SPACING OF BARS IN WALL OR BEAM.
- MINIMUM STRUCTURAL STEEL CONCRETE COVER, UNLESS NOTED OTHERWISE:
 - UNFORMED SURFACE IN CONTACT WITH THE GROUND - 3"
 - FORMED SURFACES EXPOSED TO GROUND OR WEATHER - 2"
 - FORMED SURFACES NOT EXPOSED TO GROUND OR WEATHER:
 - WALLS AND SLABS - 1"
 - BEAMS, GIRDERS, AND COLUMNS (TO TIES OF STIRRUPS) - $1\frac{1}{2}$ "



1625 LOCUST ST
KANSAS CITY, MO 64108
816.421.3222
www.apex-engineers.com

STRUCTURAL DESIGN REVIEW

KANSAS ENGINEERING LICENSE:
E-992
MISSOURI ENGINEERING LICENSE:
2003004673

PROJECT:
Streets of West Pryor Retaining Walls
7200 W 132nd St
Lee's Summit, MO

CLIENT:
Stonebridge Outdoor, LLC
13400 South US-71 Highway
Grandview, MO 64030

PROJECT #

36581


DRAWING NAME


DATE: 3/4/2020

DRAWN BY: APEX
CHECKED BY: BDC

SHEET #

S1.0

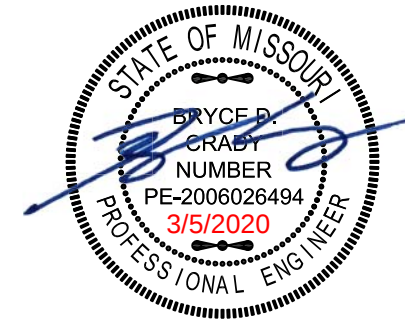



APEX
ENGINEERS

1625 LOCUST ST
KANSAS CITY, MO 64108
816.421.3222
www.apex-engineers.com

STRUCTURAL DESIGN REVIEW

KANSAS ENGINEERING LICENSE:
E-992
MISSOURI ENGINEERING LICENSE:
2003004673

PROJECT:
Streets of West Pryor Retaining Walls
7200 W 132nd St
Lee's Summit, MO

CLIENT:
Stonebridge Outdoor, LLC
13400 South US-71 Highway
Grandview, MO 64030


PROJECT #
36581
DRAWING NAME

DATE:	COMMENTS:
3/4/2020	
DRAWN BY: APEX CHECKED BY: BDC	

SHEET #
S1.1

SUSPENDED SLAB NOTES:


- 4000 PSI CONCRETE
- LAP SPLICES 36" MIN
- GRADE 60 REBAR
- EMBED BARS 24" OR DRILL & EPOXY MIN 5" AT FDTN WALLS
- BACKFILL WITH $\frac{3}{4}$ " CLEAN GRAVEL
- DO NOT SAW-CUT SLAB

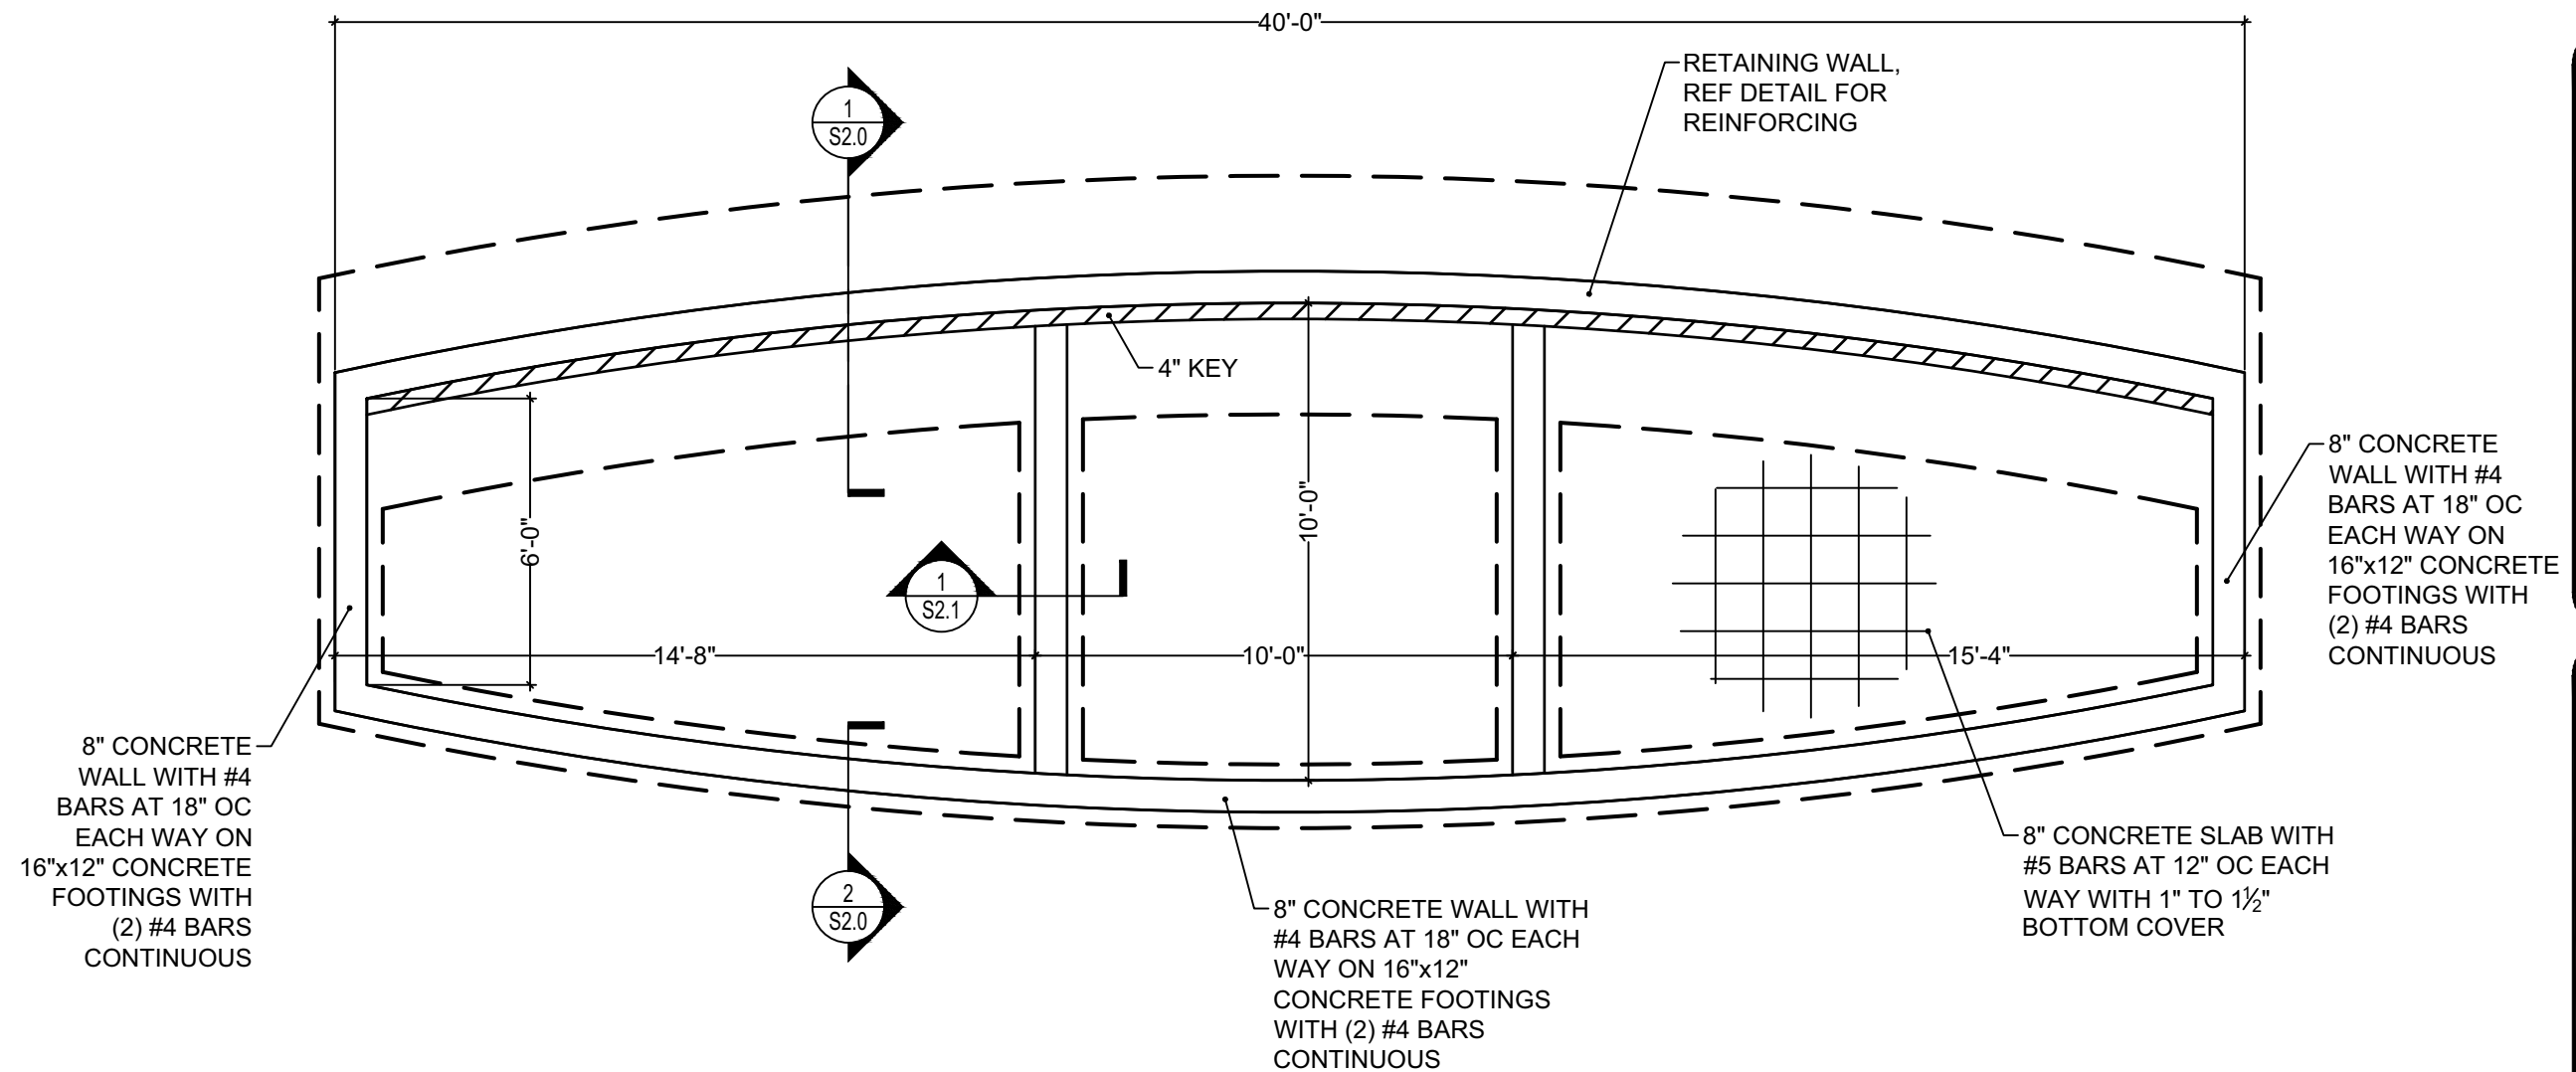


1
S1.1 PLAN VIEW
SCALE $\frac{1}{4}$ " = 1'-0"

**RELEASE FOR
CONSTRUCTION**
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI


08/13/2020

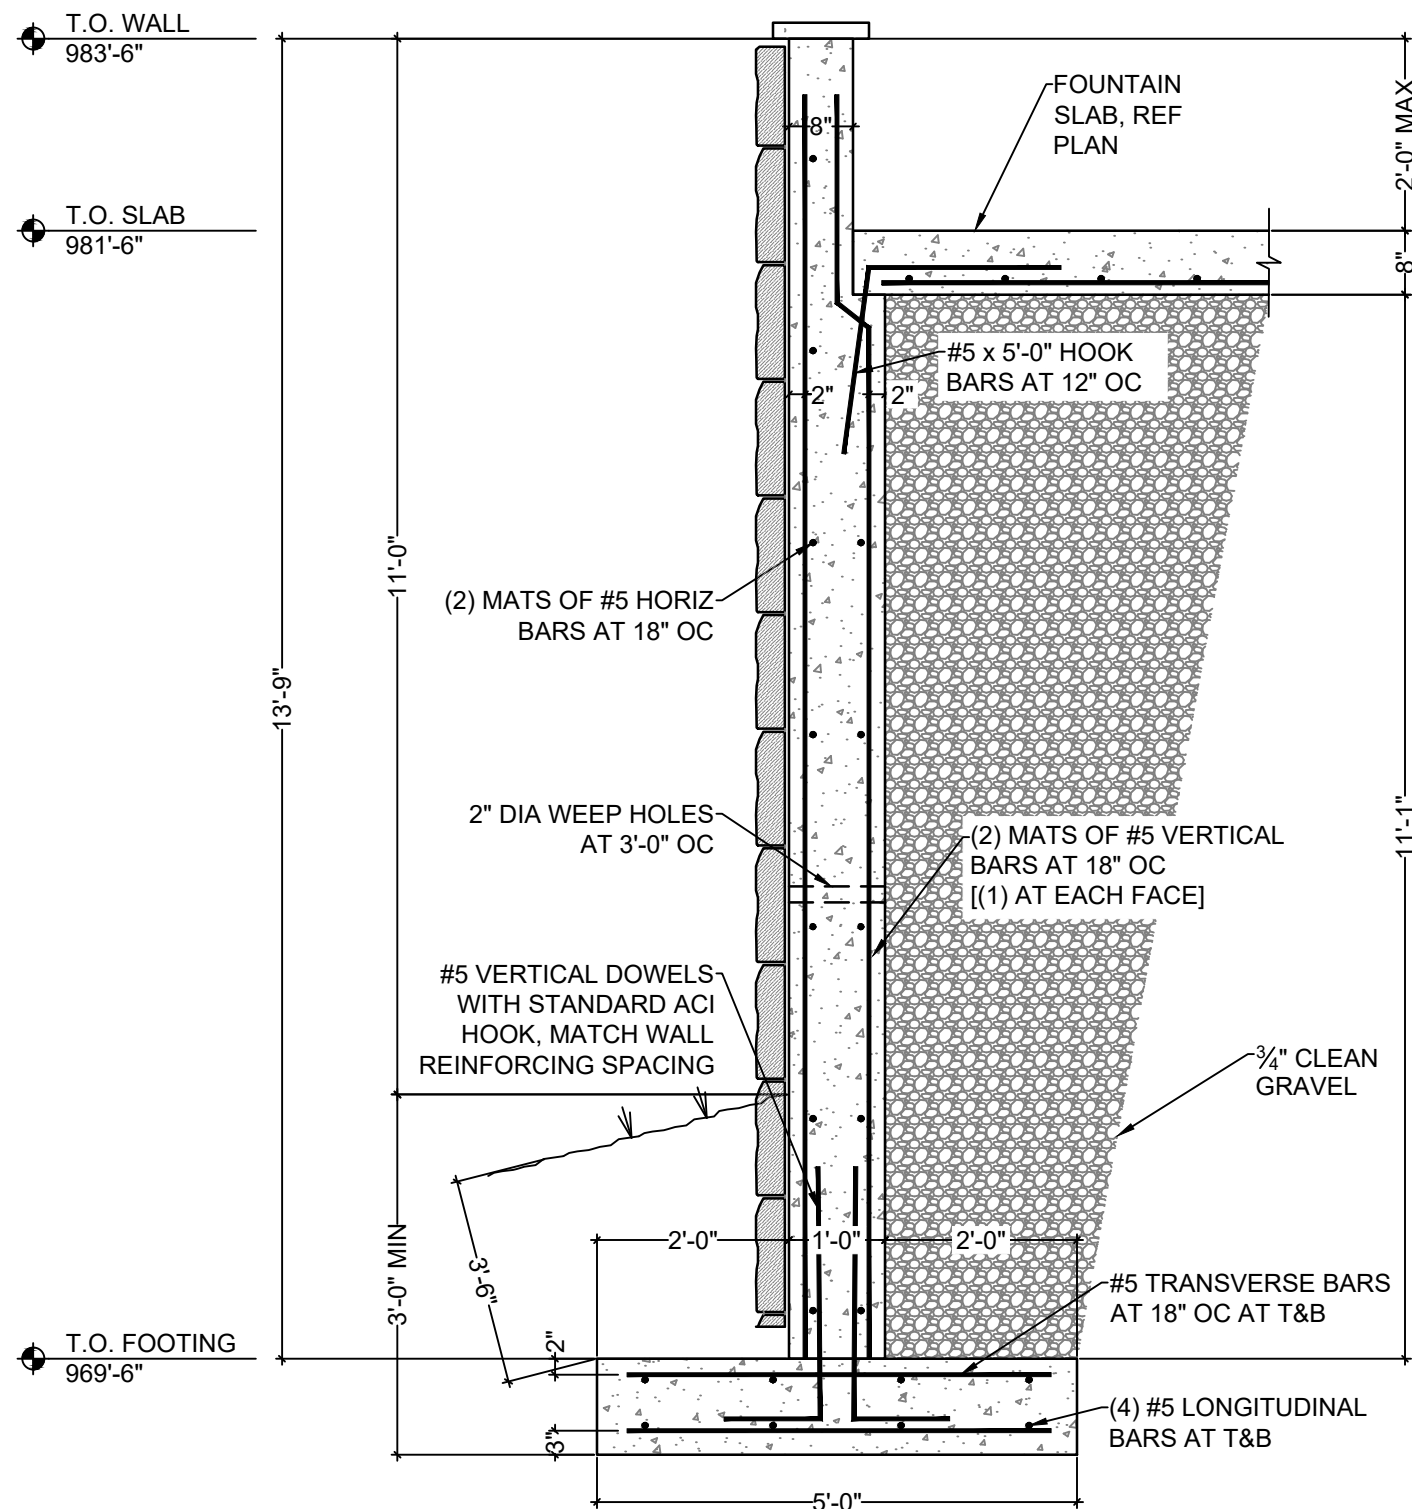

1
 S2.0
 RETAINING WALL DETAIL
 SCALE 1/2" = 1'-0"

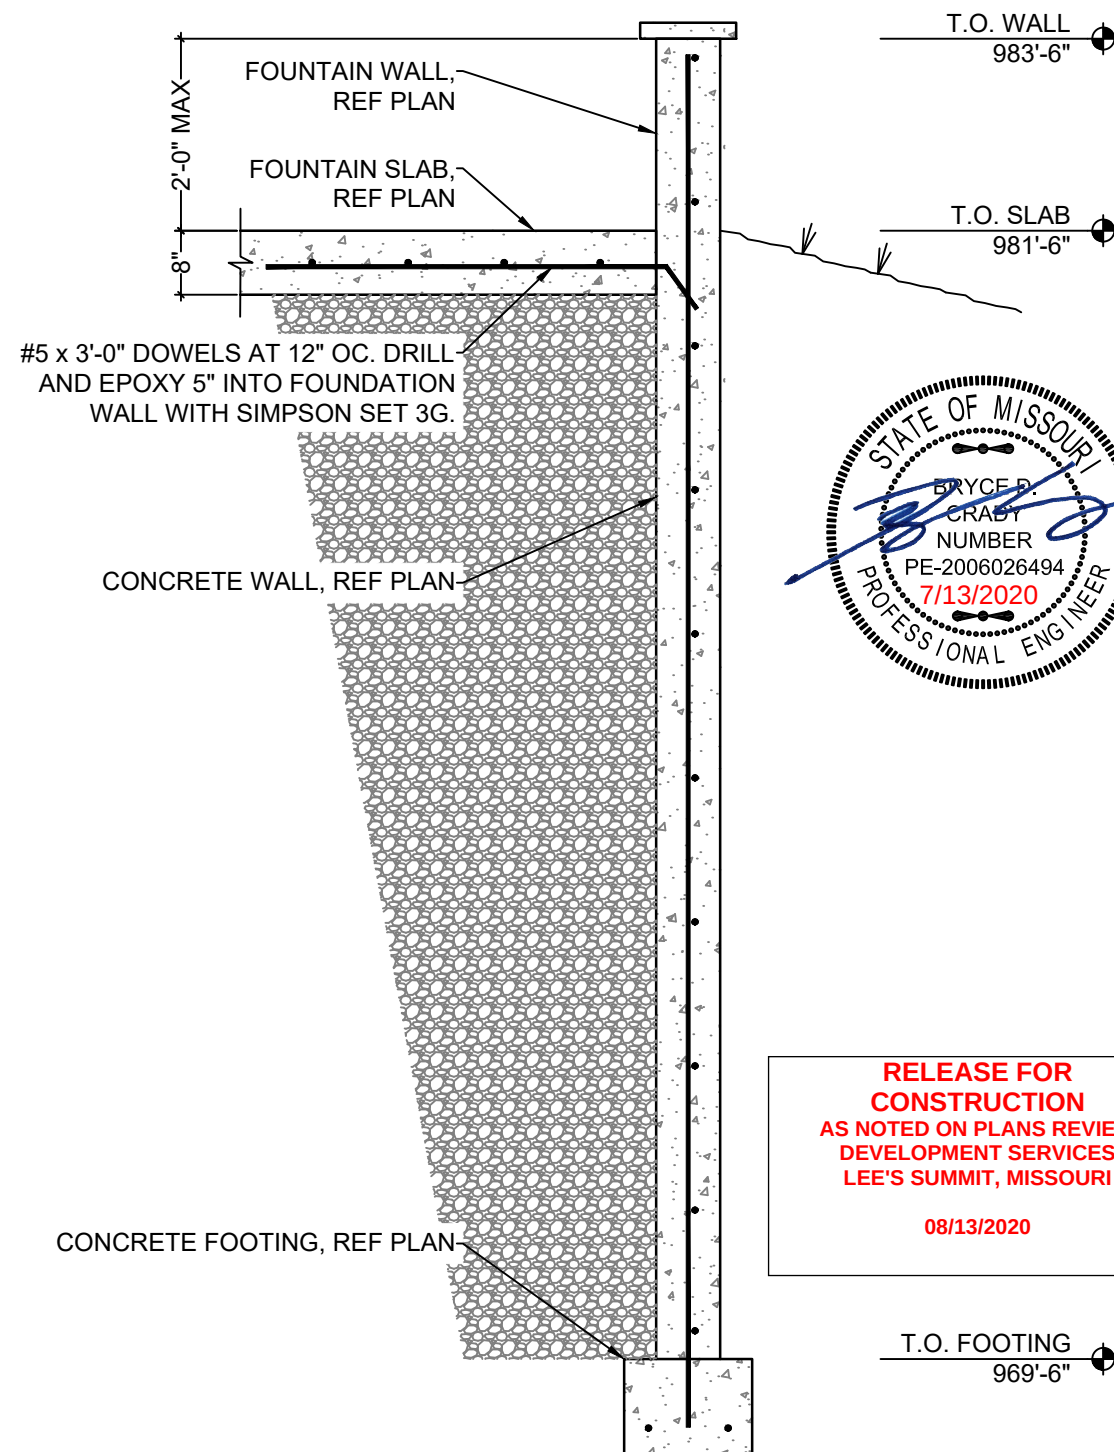

2
 S2.0
 SLAB AT CONCRETE WALL
 SCALE 3/4" = 1'-0"

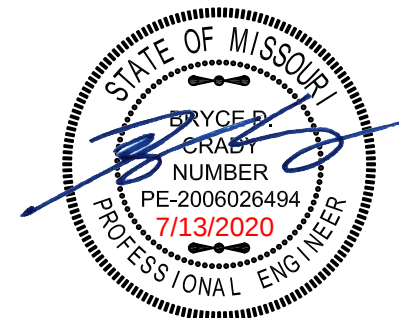

RELEASE FOR
 CONSTRUCTION
 AS NOTED ON PLANS REVIEW
 DEVELOPMENT SERVICES
 LEE'S SUMMIT, MISSOURI
 08/13/2020

1625 LOCUST ST
 KANSAS CITY, MO 64108
 816.421.3222
 www.apex-engineers.com

STRUCTURAL DESIGN REVIEW
 KANSAS ENGINEERING LICENSE:
 E-992
 MISSOURI ENGINEERING LICENSE:
 2003004673

PROJECT:
 Streets of West Pryor Retaining Walls
 7200 W 132nd St
 Lee's Summit, MO
 CLIENT:
 Stonebridge Outdoor, LLC
 13400 South US-71 Highway
 Grandview, MO 64030

PROJECT #	
36581	
DRAWING NAME	
DATE:	COMMENTS:
3/4/2020	
DRAWN BY: APEX CHECKED BY: BDC	

SHEET #
 S2.0



APEX
ENGINEERS

1625 LOCUST ST
KANSAS CITY, MO 64108
816.421.3222
www.apex-engineers.com



STRUCTURAL DESIGN REVIEW

KANSAS ENGINEERING LICENSE:
E-992
MISSOURI ENGINEERING LICENSE:
2003004673

PROJECT:
Streets of West Pryor Retaining Walls
7200 W 132nd St
Lee's Summit, MO

CLIENT:
Stonebridge Outdoor, LLC
13400 South US-71 Highway
Grandview, MO 64030

PROJECT #

36581


DRAWING NAME

DATE:	COMMENTS:
3/4/2020	

DRAWN BY: APEX
CHECKED BY: BDC

SHEET #

S2.1

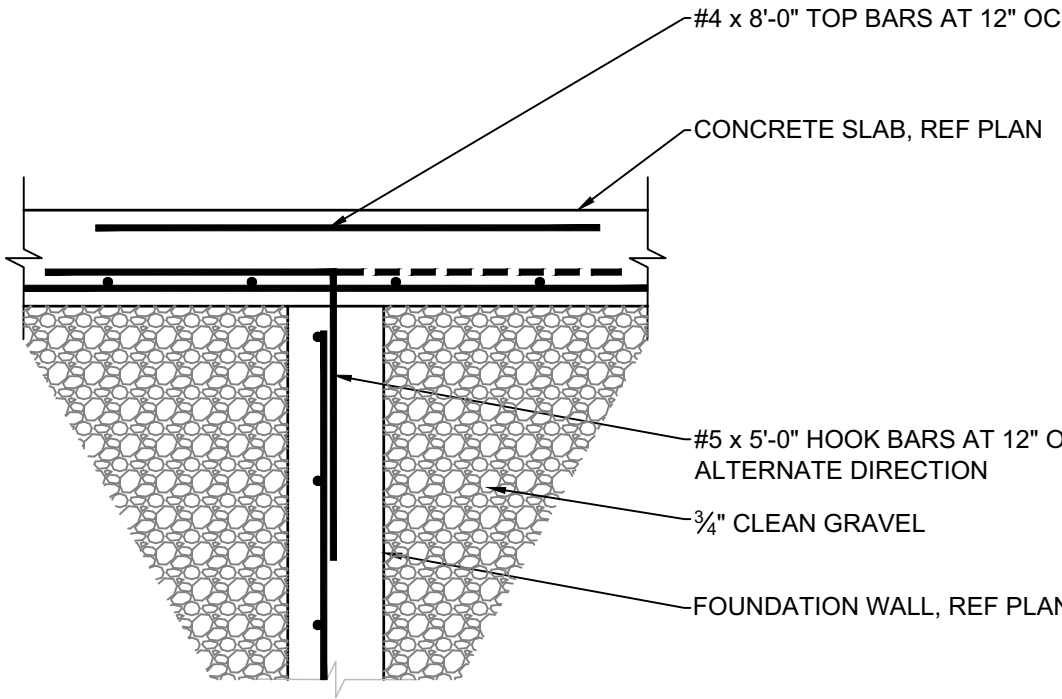

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

08/13/2020

1
S2.1

TYPICAL INTERIOR CONCRETE WALL

SCALE 3/4" = 1'-0"


WEST PRYOR
FOUNTAIN AND WATERFALL




1228 SOUTH 8TH ST., ST. LOUIS, MO., 314-231-9806

REVISION DATE:	BY:
DATE:	04-06-2020
SCALE:	SHOWN
DRAWN:	D.E.H.
JOB:	15239
SHEET:	F1.00
OF	6 SHEETS

DET.	QTY.	P/N	DESCRIPTION
1\F3.0	2	* EF150/WSC	EYEBALL INLET W/ 2" WATER STOP COUPLING
2\F3.0	5	UL316RW-NIL100	24VDC/24W LED RGBW LIGHT AND NOZZLE ASSEMBLY
3\F3.0	1	* EBJ-204	JCT BOX W/ 3/4" STUB-UP, CORD SEALS (2) AND POTTING COMPOUND
3a\F3.0	1	* EBJ-208	JCT BOX W/ 1" STUB-UP, CORD SEALS (3) AND POTTING COMPOUND
4\F3.0	1	* HDAVF15S4	FIBERGLASS SUMP, WITH 15" STAINLESS STEEL ANTI-VORTEX PLATE (4" OUTLET)
5\F3.0	1	* DOA-300	3" OVERFLOW STANDPIPE AND DRAIN FITTING
6\F3.0	1	* ESG-300	CONDUIT MOUNT LEVEL SENSOR WITH FITTINGS
7\F3.0	1	* SV-SKIM	BLACK PLASTIC SKIMMER W/ S.S. FACE PLATE (FRONT REMOVABLE BASKET)
8\F3.0	2	* UL316-27	24VDC/27W LED RGBW LIGHT W/ 10' CORD & TRIPOD STAND
9\F3.0	2	* PVCJCTBOX	GRADE LEVEL PVC JUNCTION BOX
10\F3.0	2	* O400WSC/DP	4" PVC WATER STOP COUPLING W/ 15" STAINLESS STEEL DIVERTER PLATE

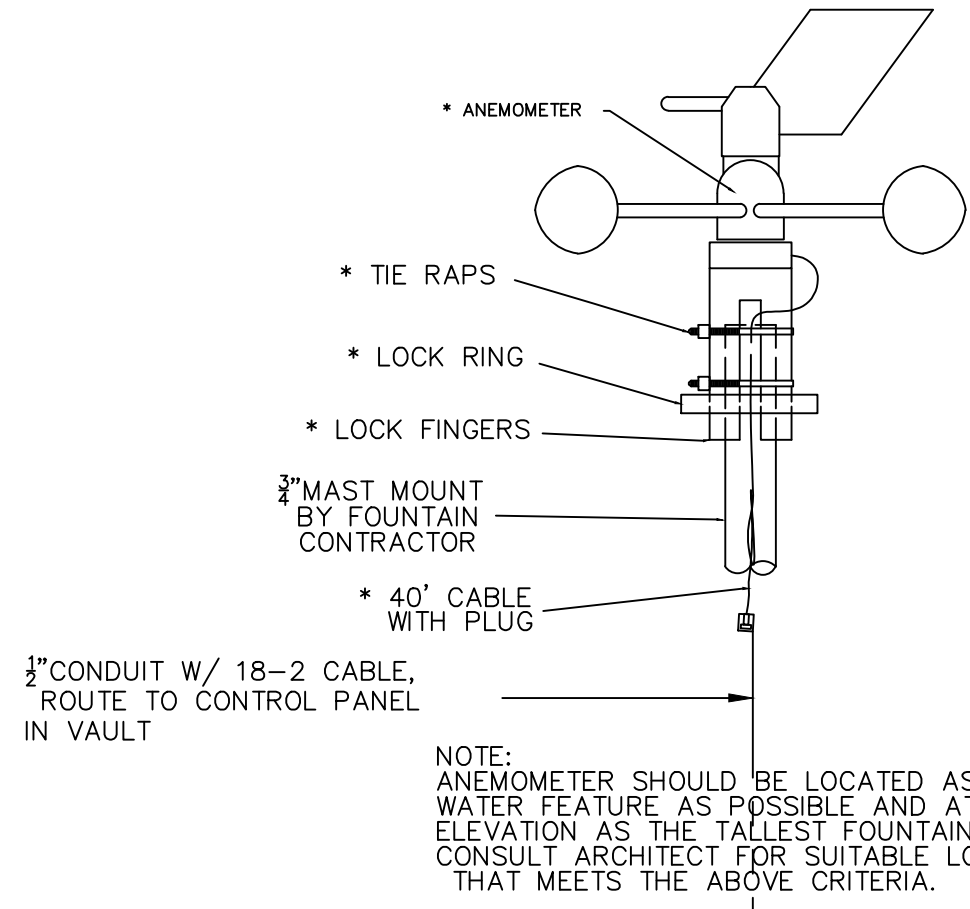


NOTE:
ANEMOMETER SHOULD BE LOCATED AS CLOSE TO
WATER FEATURE AS POSSIBLE AND AT THE SAME
ELEVATION AS THE TALLEST FOUNTAIN OF WATER.
CONSULT ARCHITECT FOR SUITABLE LOCATION
THAT MEETS THE ABOVE CRITERIA.

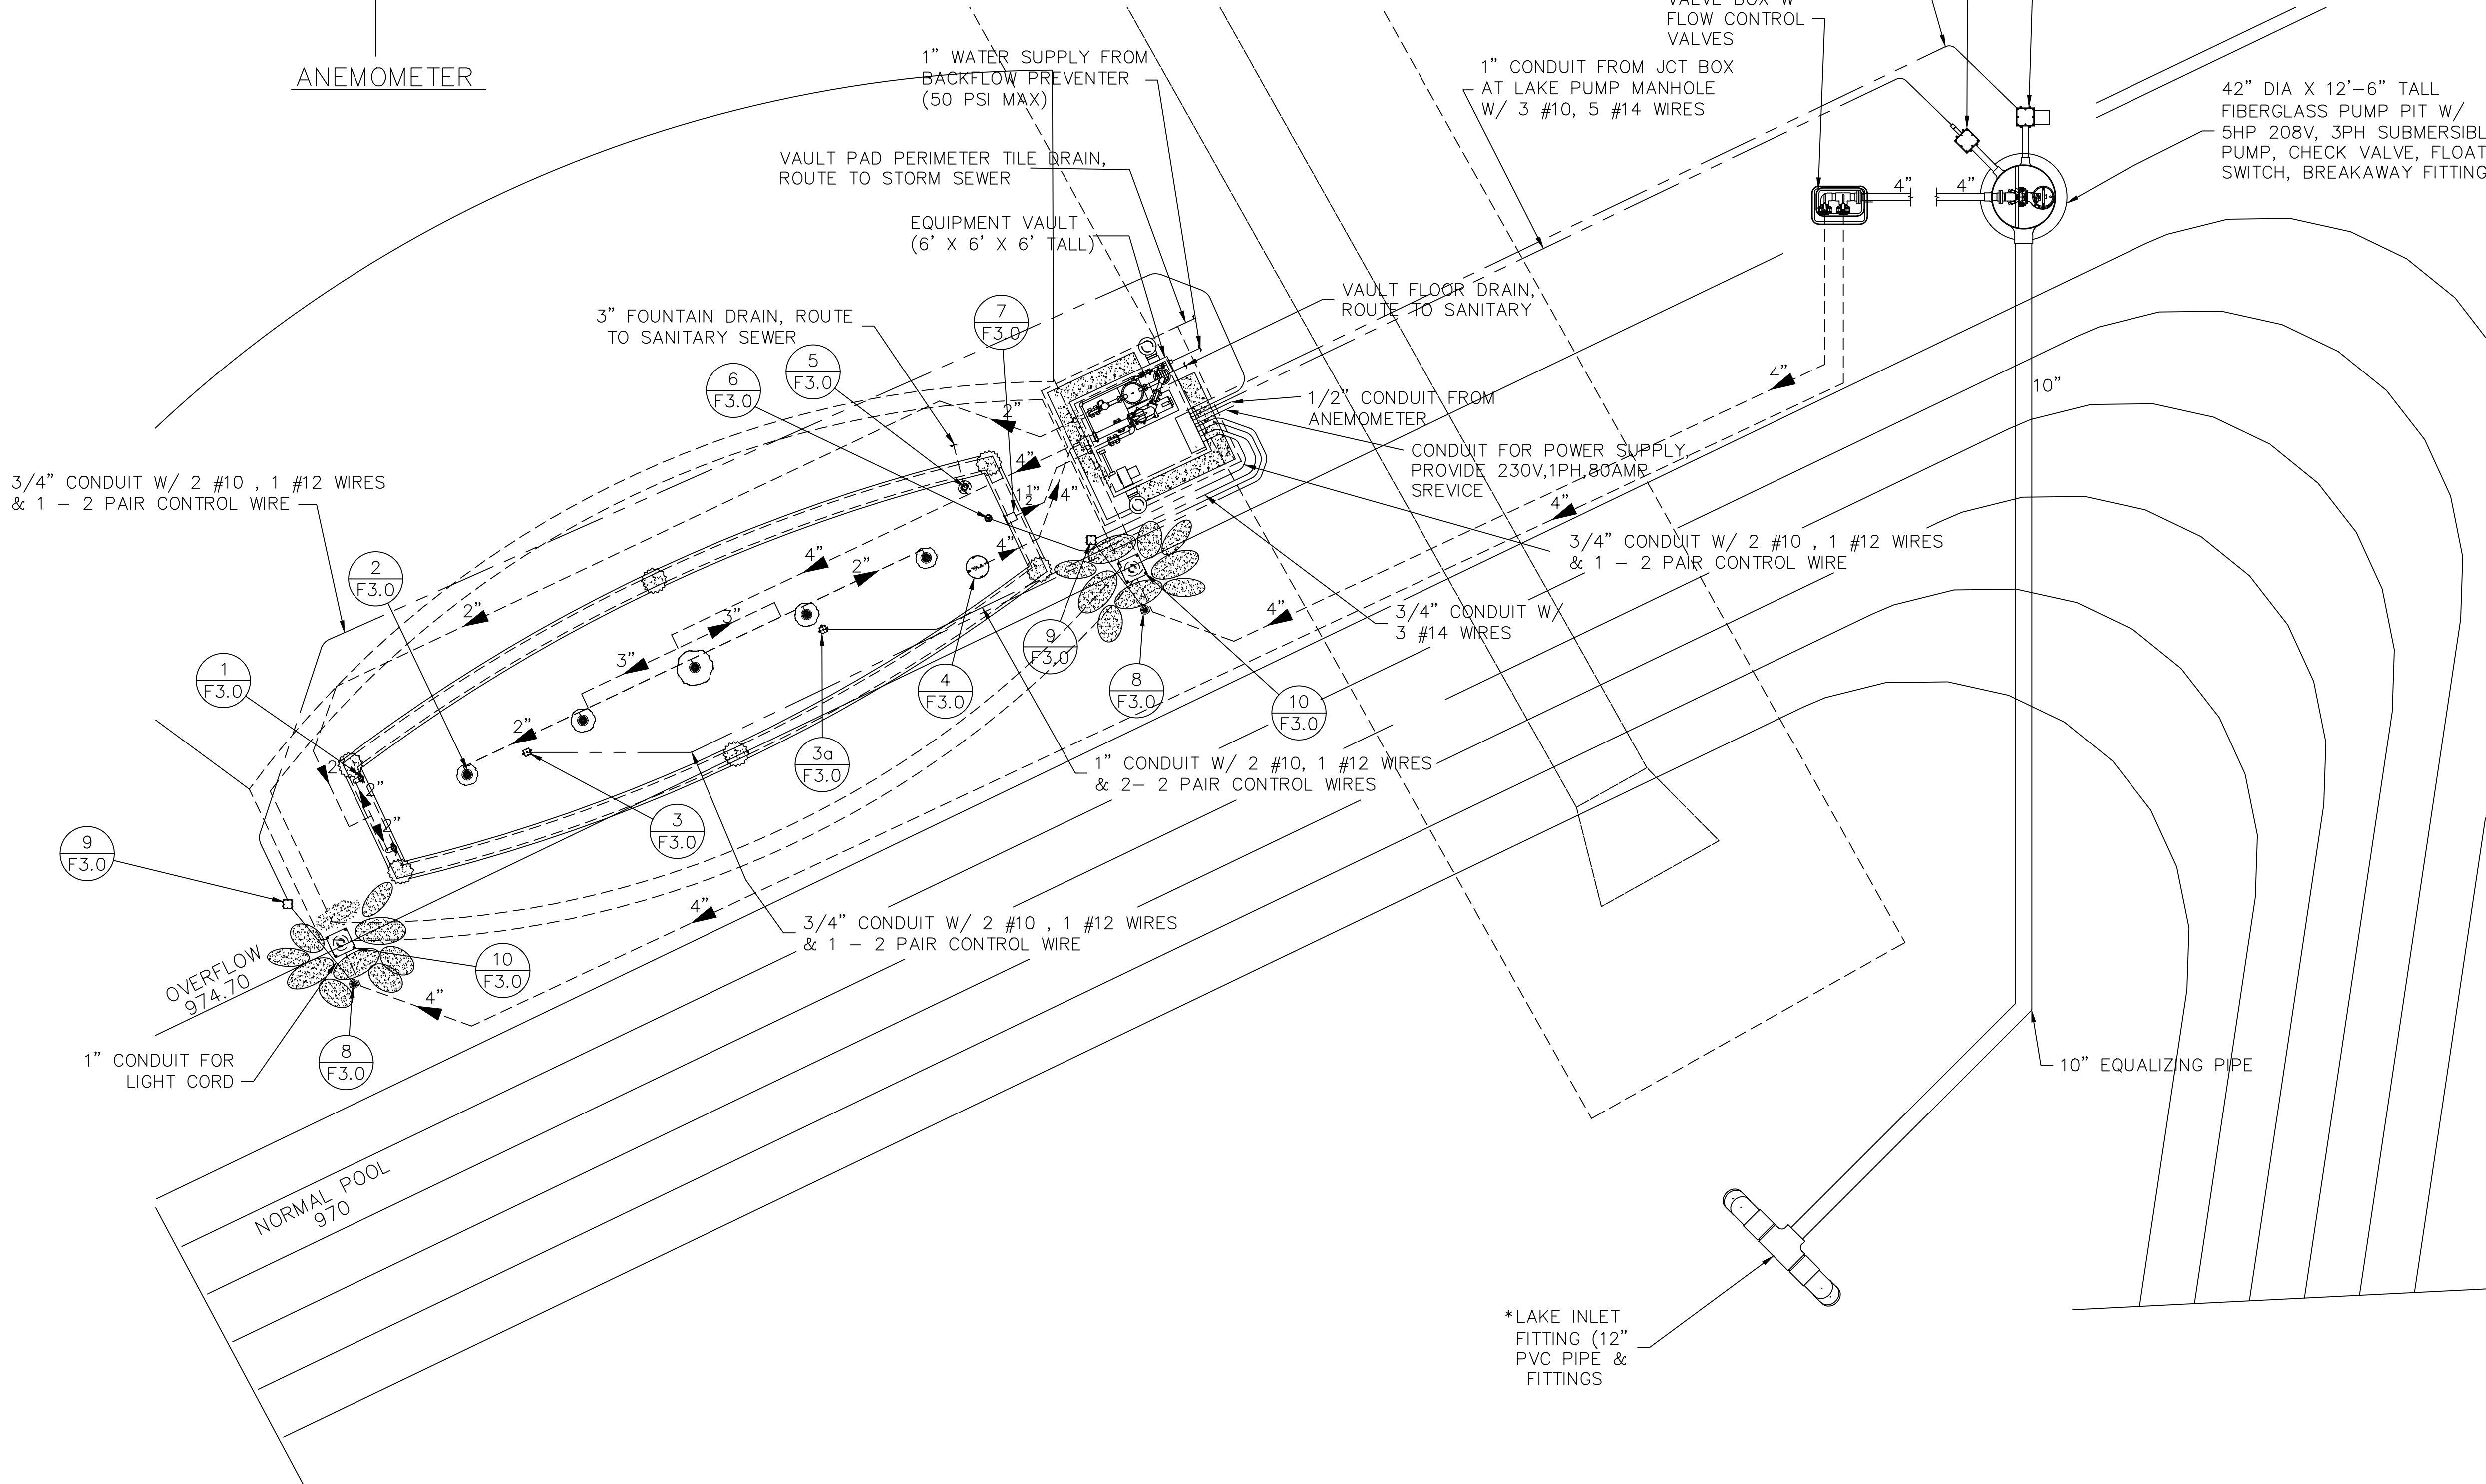


FOUNTAIN AND WATER FALL PLAN
SCALE: 3/16" = 1'

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020

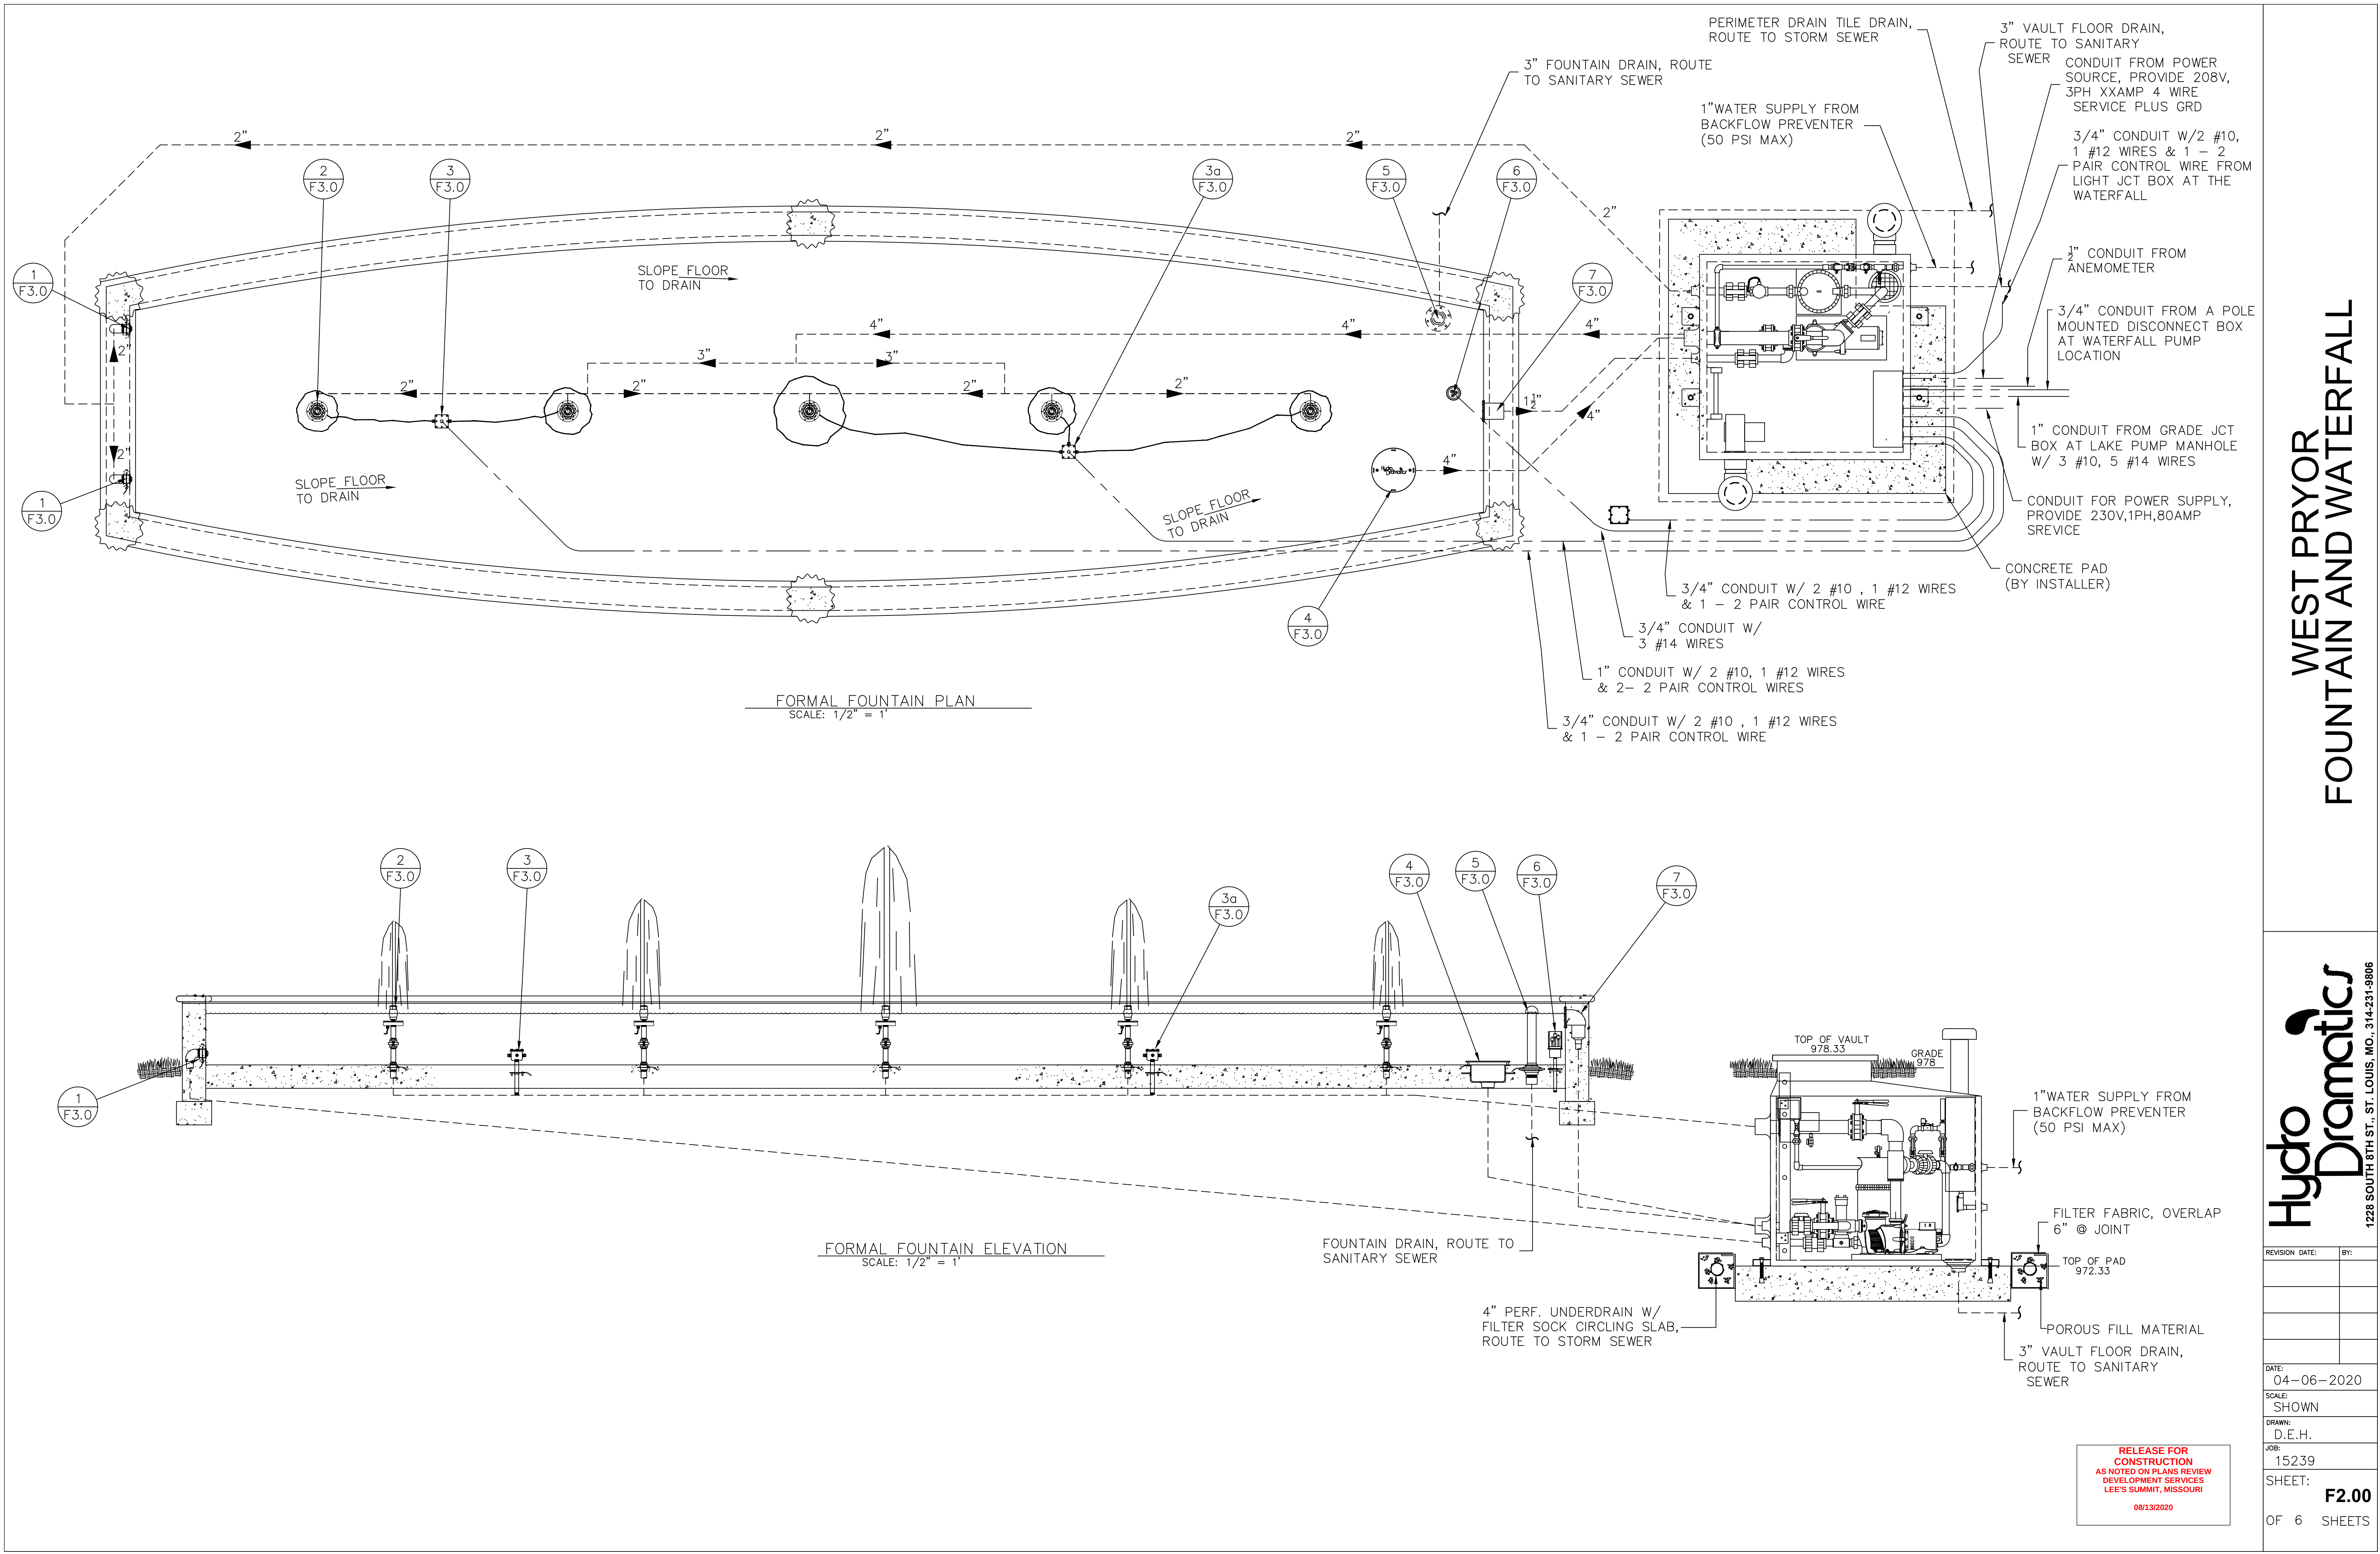


WEST PRYOR
FOUNTAIN AND WATERFALL

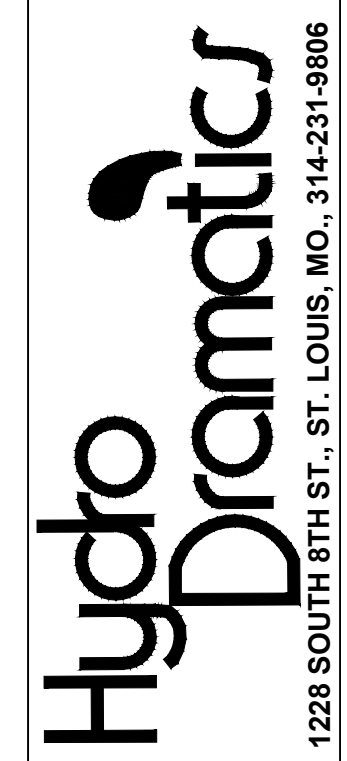


REVISION DATE:	BY:
DATE:	04-06-2020
SCALE:	SHOWN
DRAWN:	D.E.H.
JOB:	15239
SHEET:	F2.00
OF 6 SHEETS	


RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020

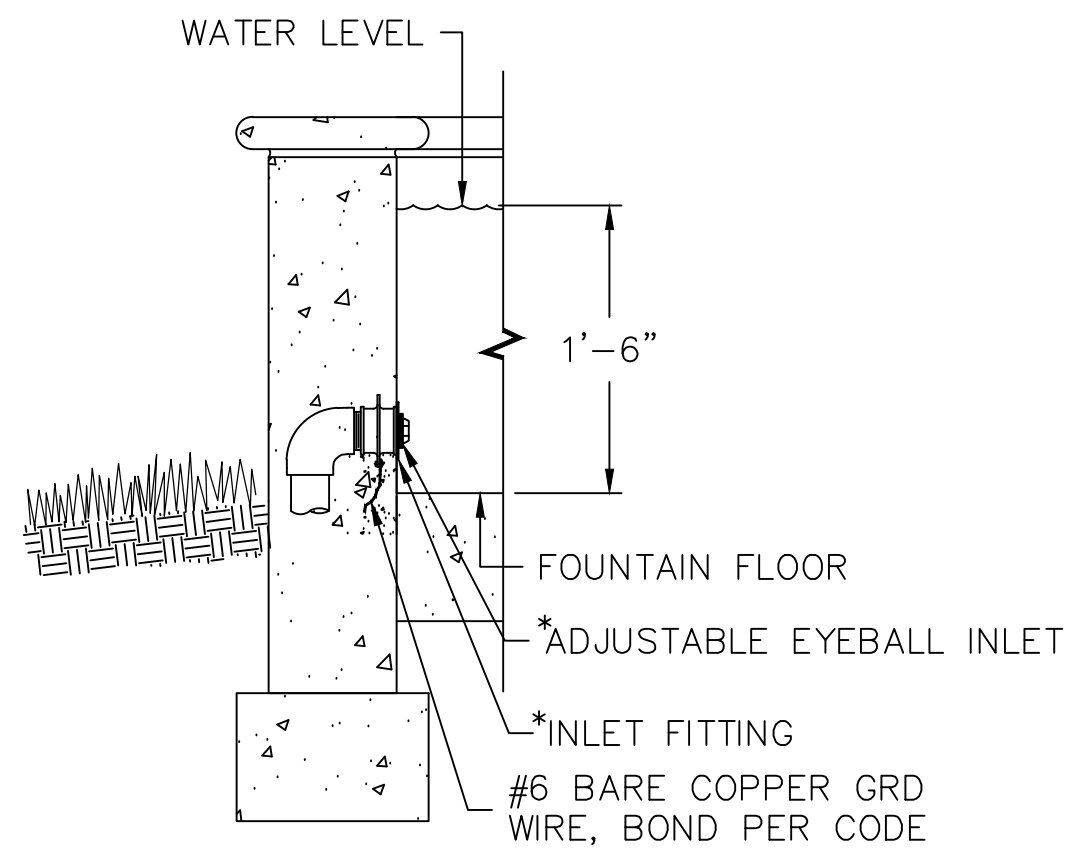


1 EYEBALL INLET W/ WATER STOP
F3.0 SCALE: 1" = 1'

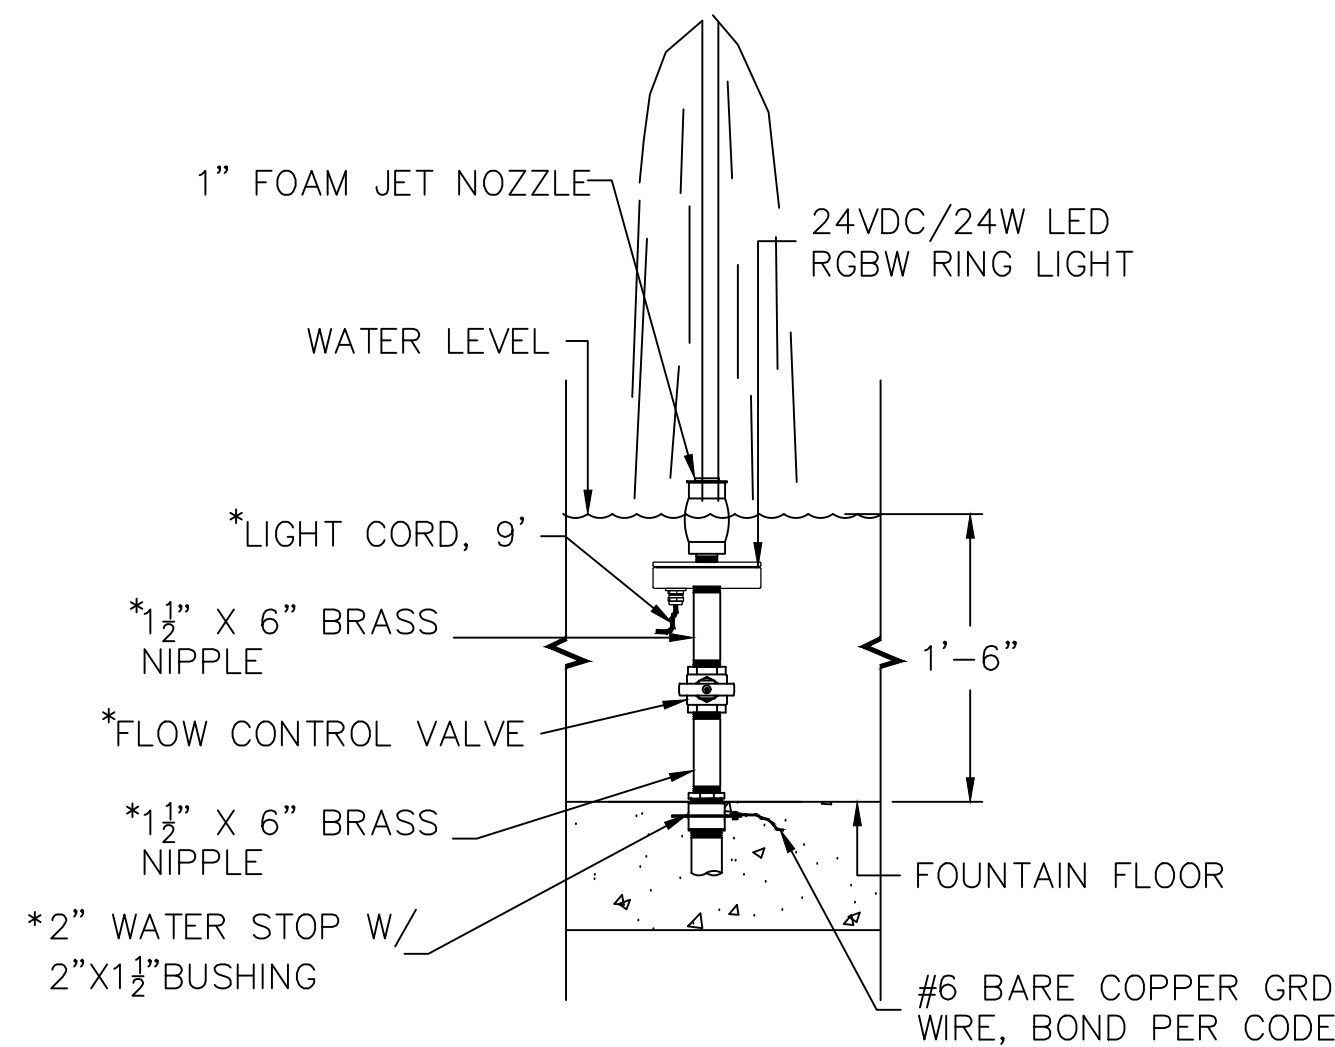


2 LED LIGHT & NOZZLE ASSEMBLY
F3.0 SCALE: 1" = 1'

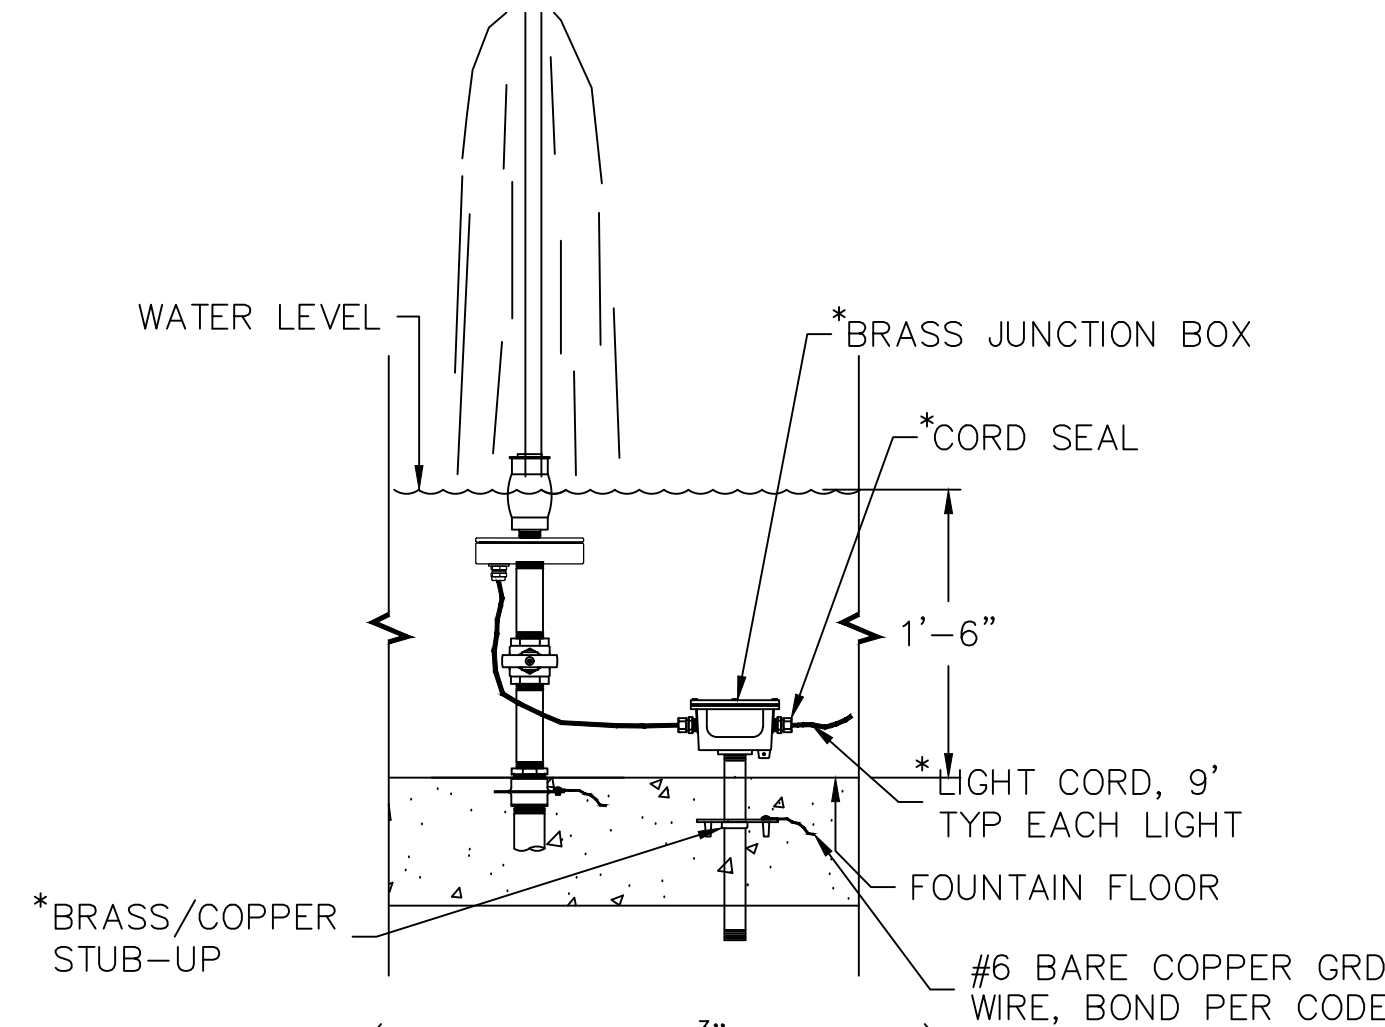


3 JUNCTION BOX & STUB-UP
F3.0 F3.0 SCALE: 1" = 1'

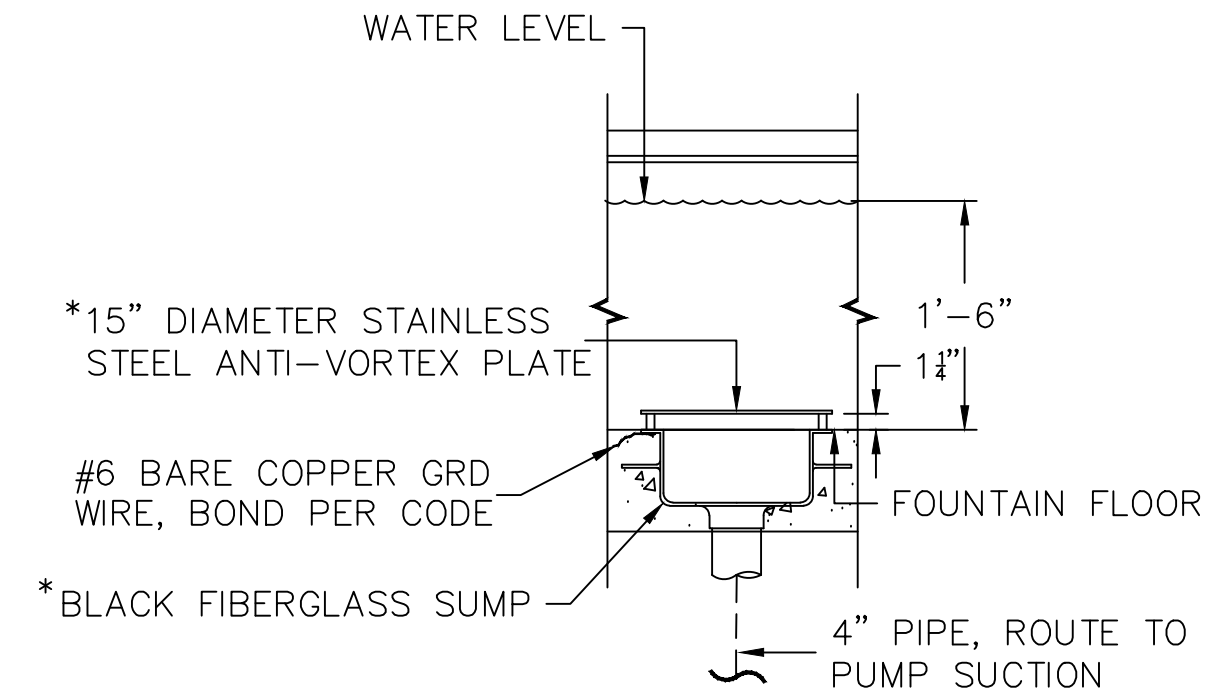


4 FIBERGLASS SUMP W/ S.S. ANTI-VORTEX PLATE
F3.0 SCALE: 1" = 1'

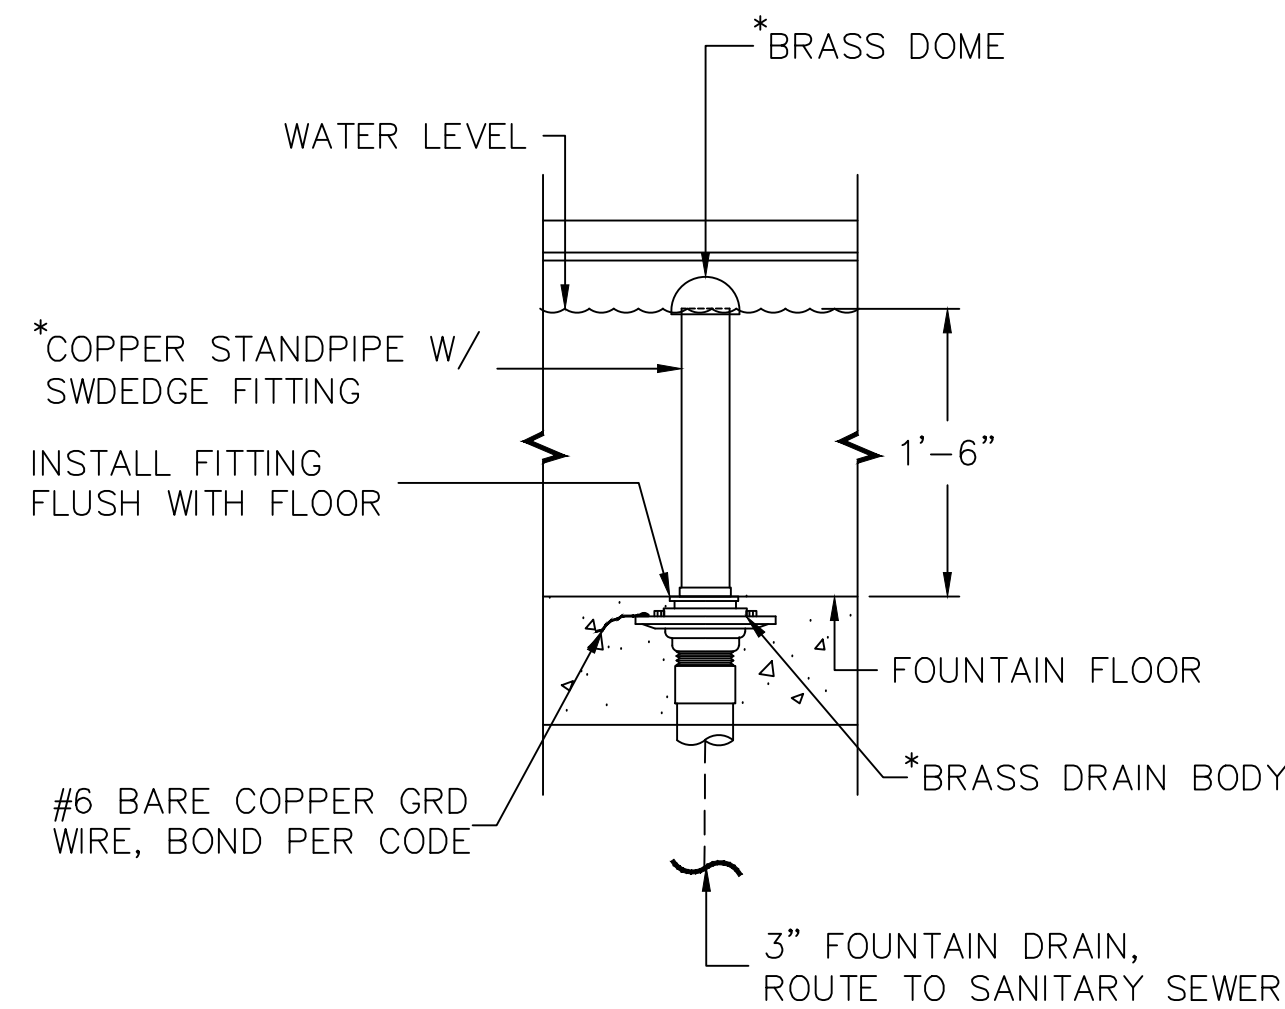


5 OVERFLOW STANDPIPE & DRAIN FITTING
F3.0 SCALE: 1" = 1'

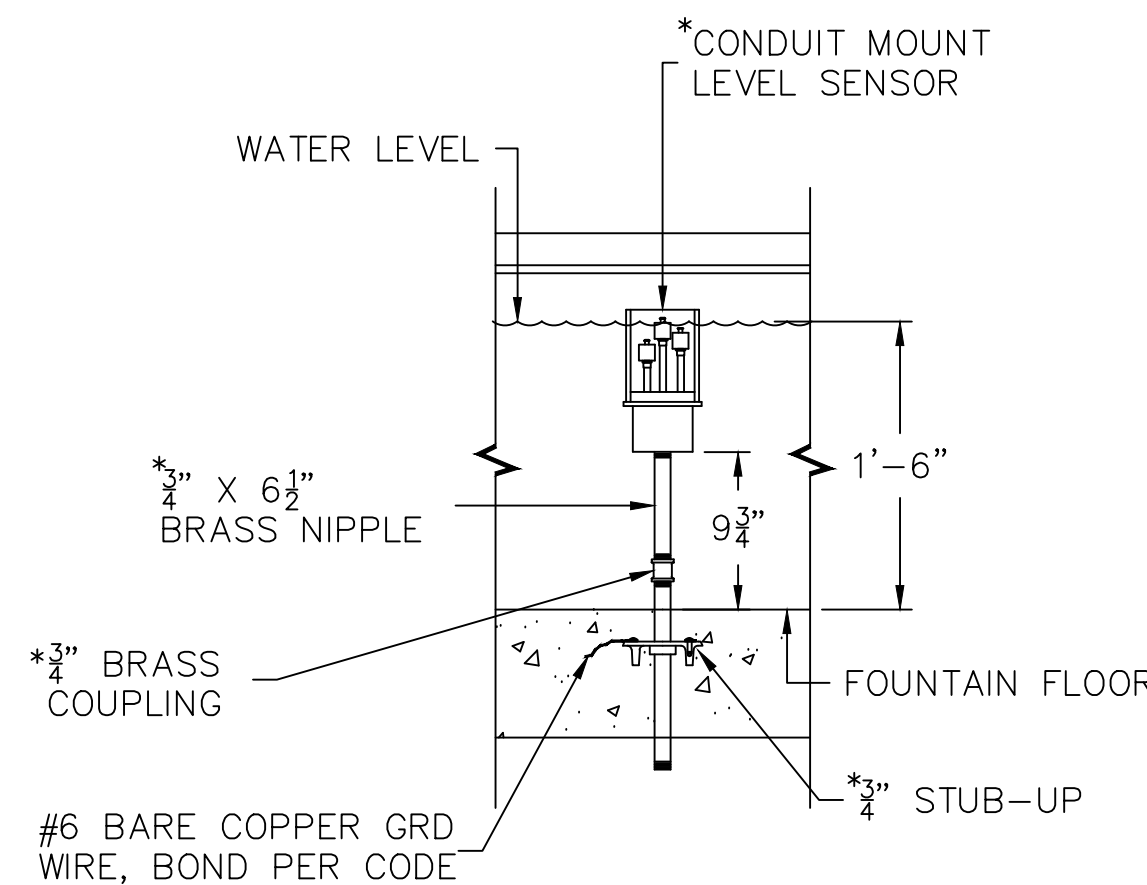


6 CONDUIT MOUNT LEVEL SENSOR
F3.0 SCALE: 1" = 1'

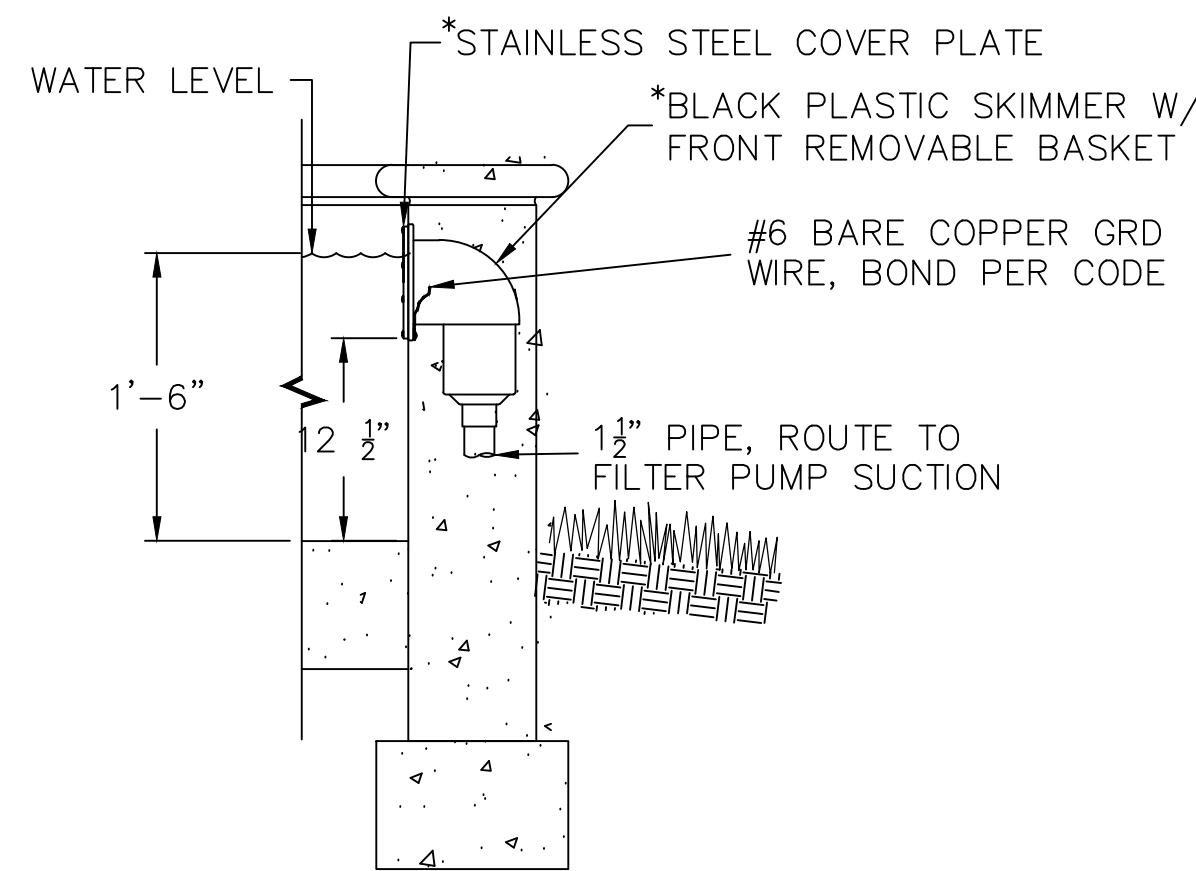


7 WALL SKIMMER W/ S.S. FACEPLATE
F3.0 SCALE: 1" = 1'

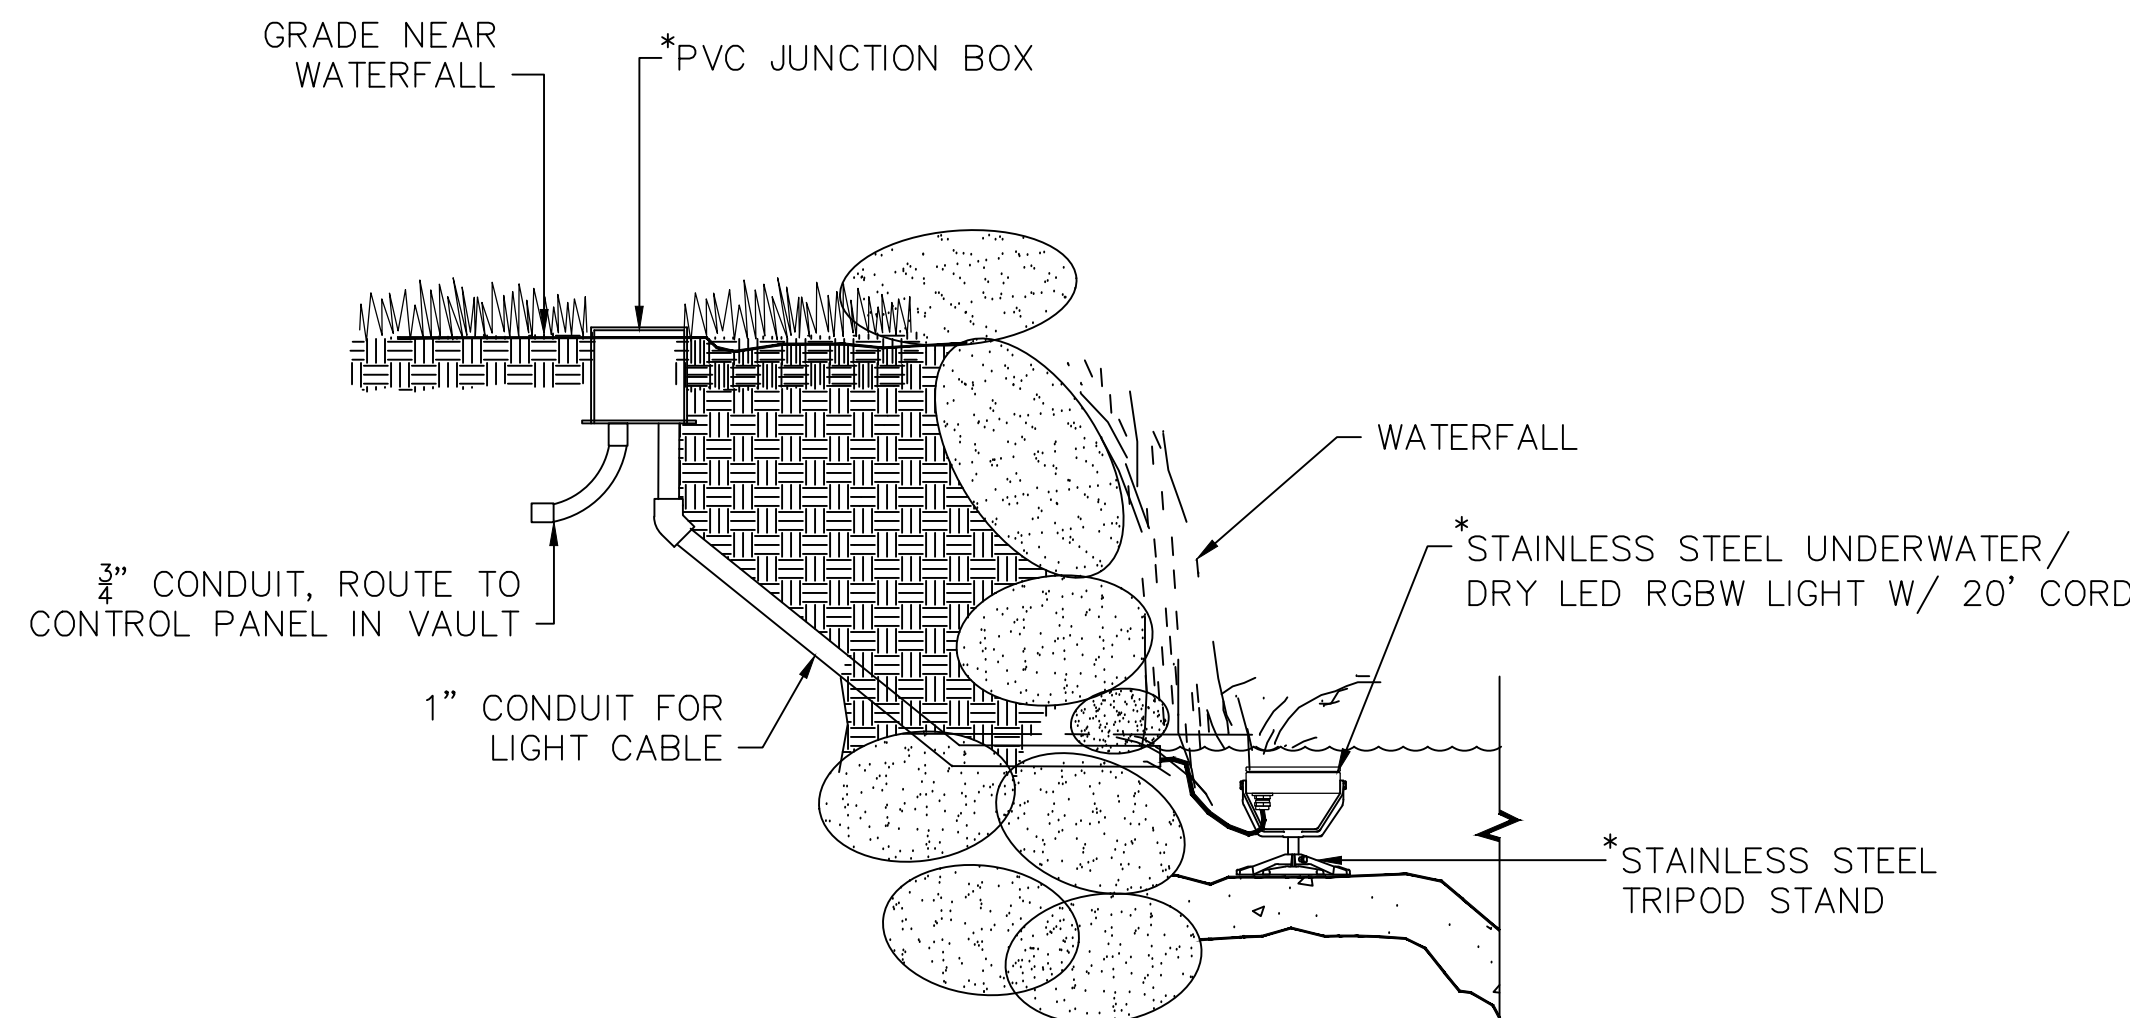

8 27W/24V RGBW LED LIGHT W/ TRIPOD
F3.0 F3.0 & PVC GRADE JUNCTION BOX
SCALE: 1" = 1'

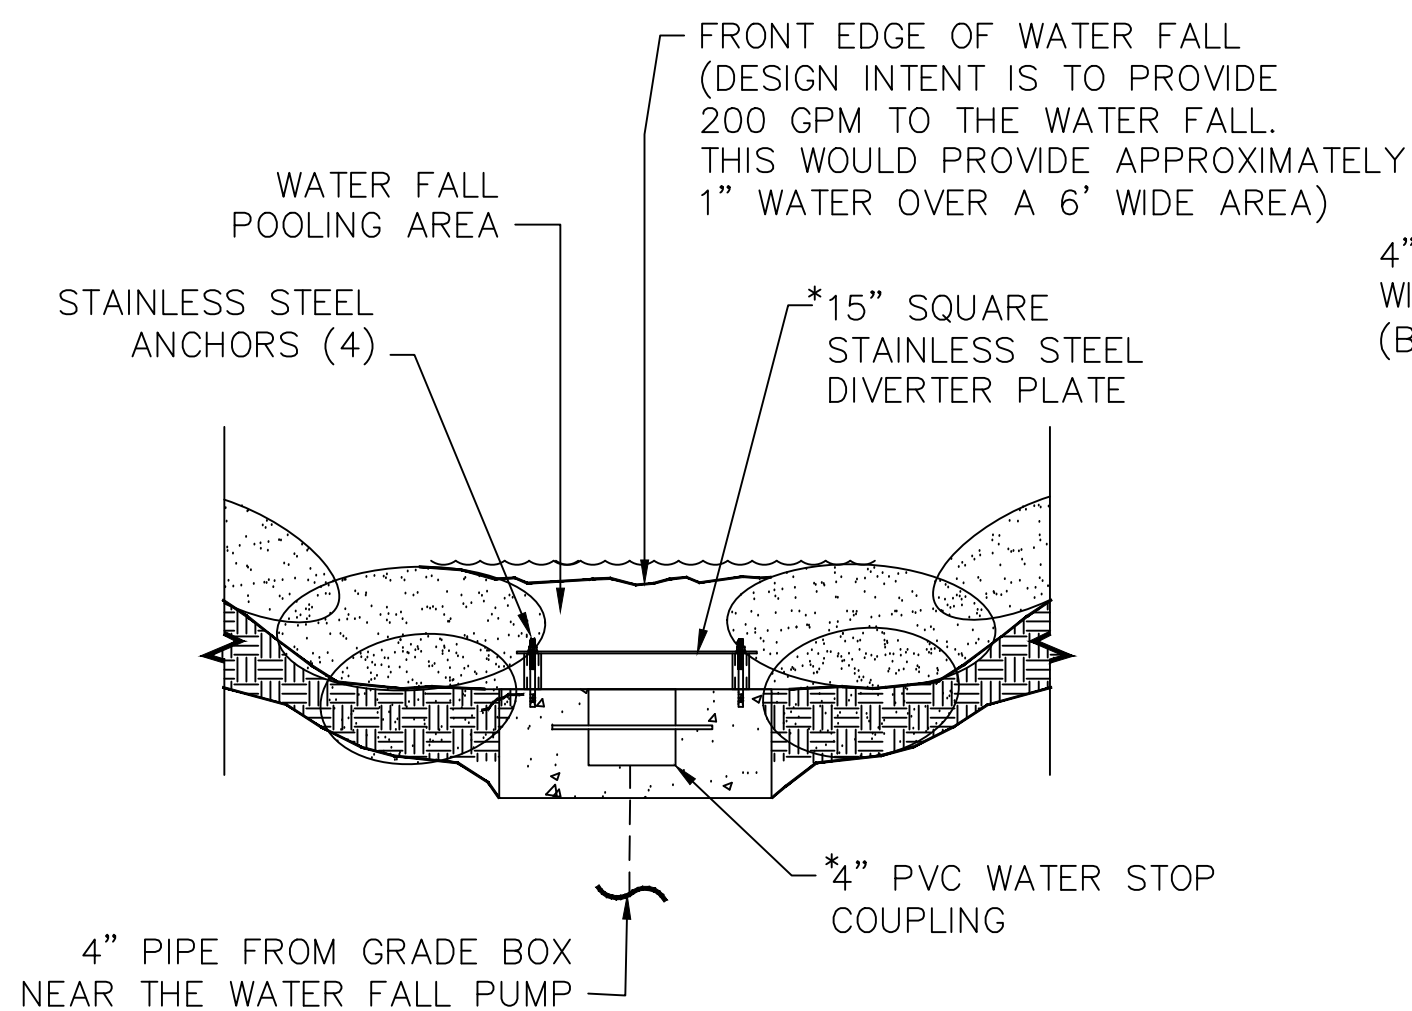

9 15" STAINLESS STEEL DIVERTER PLATE
F3.0 & PVC WATER STOP COUPLING
SCALE: 1" = 1'

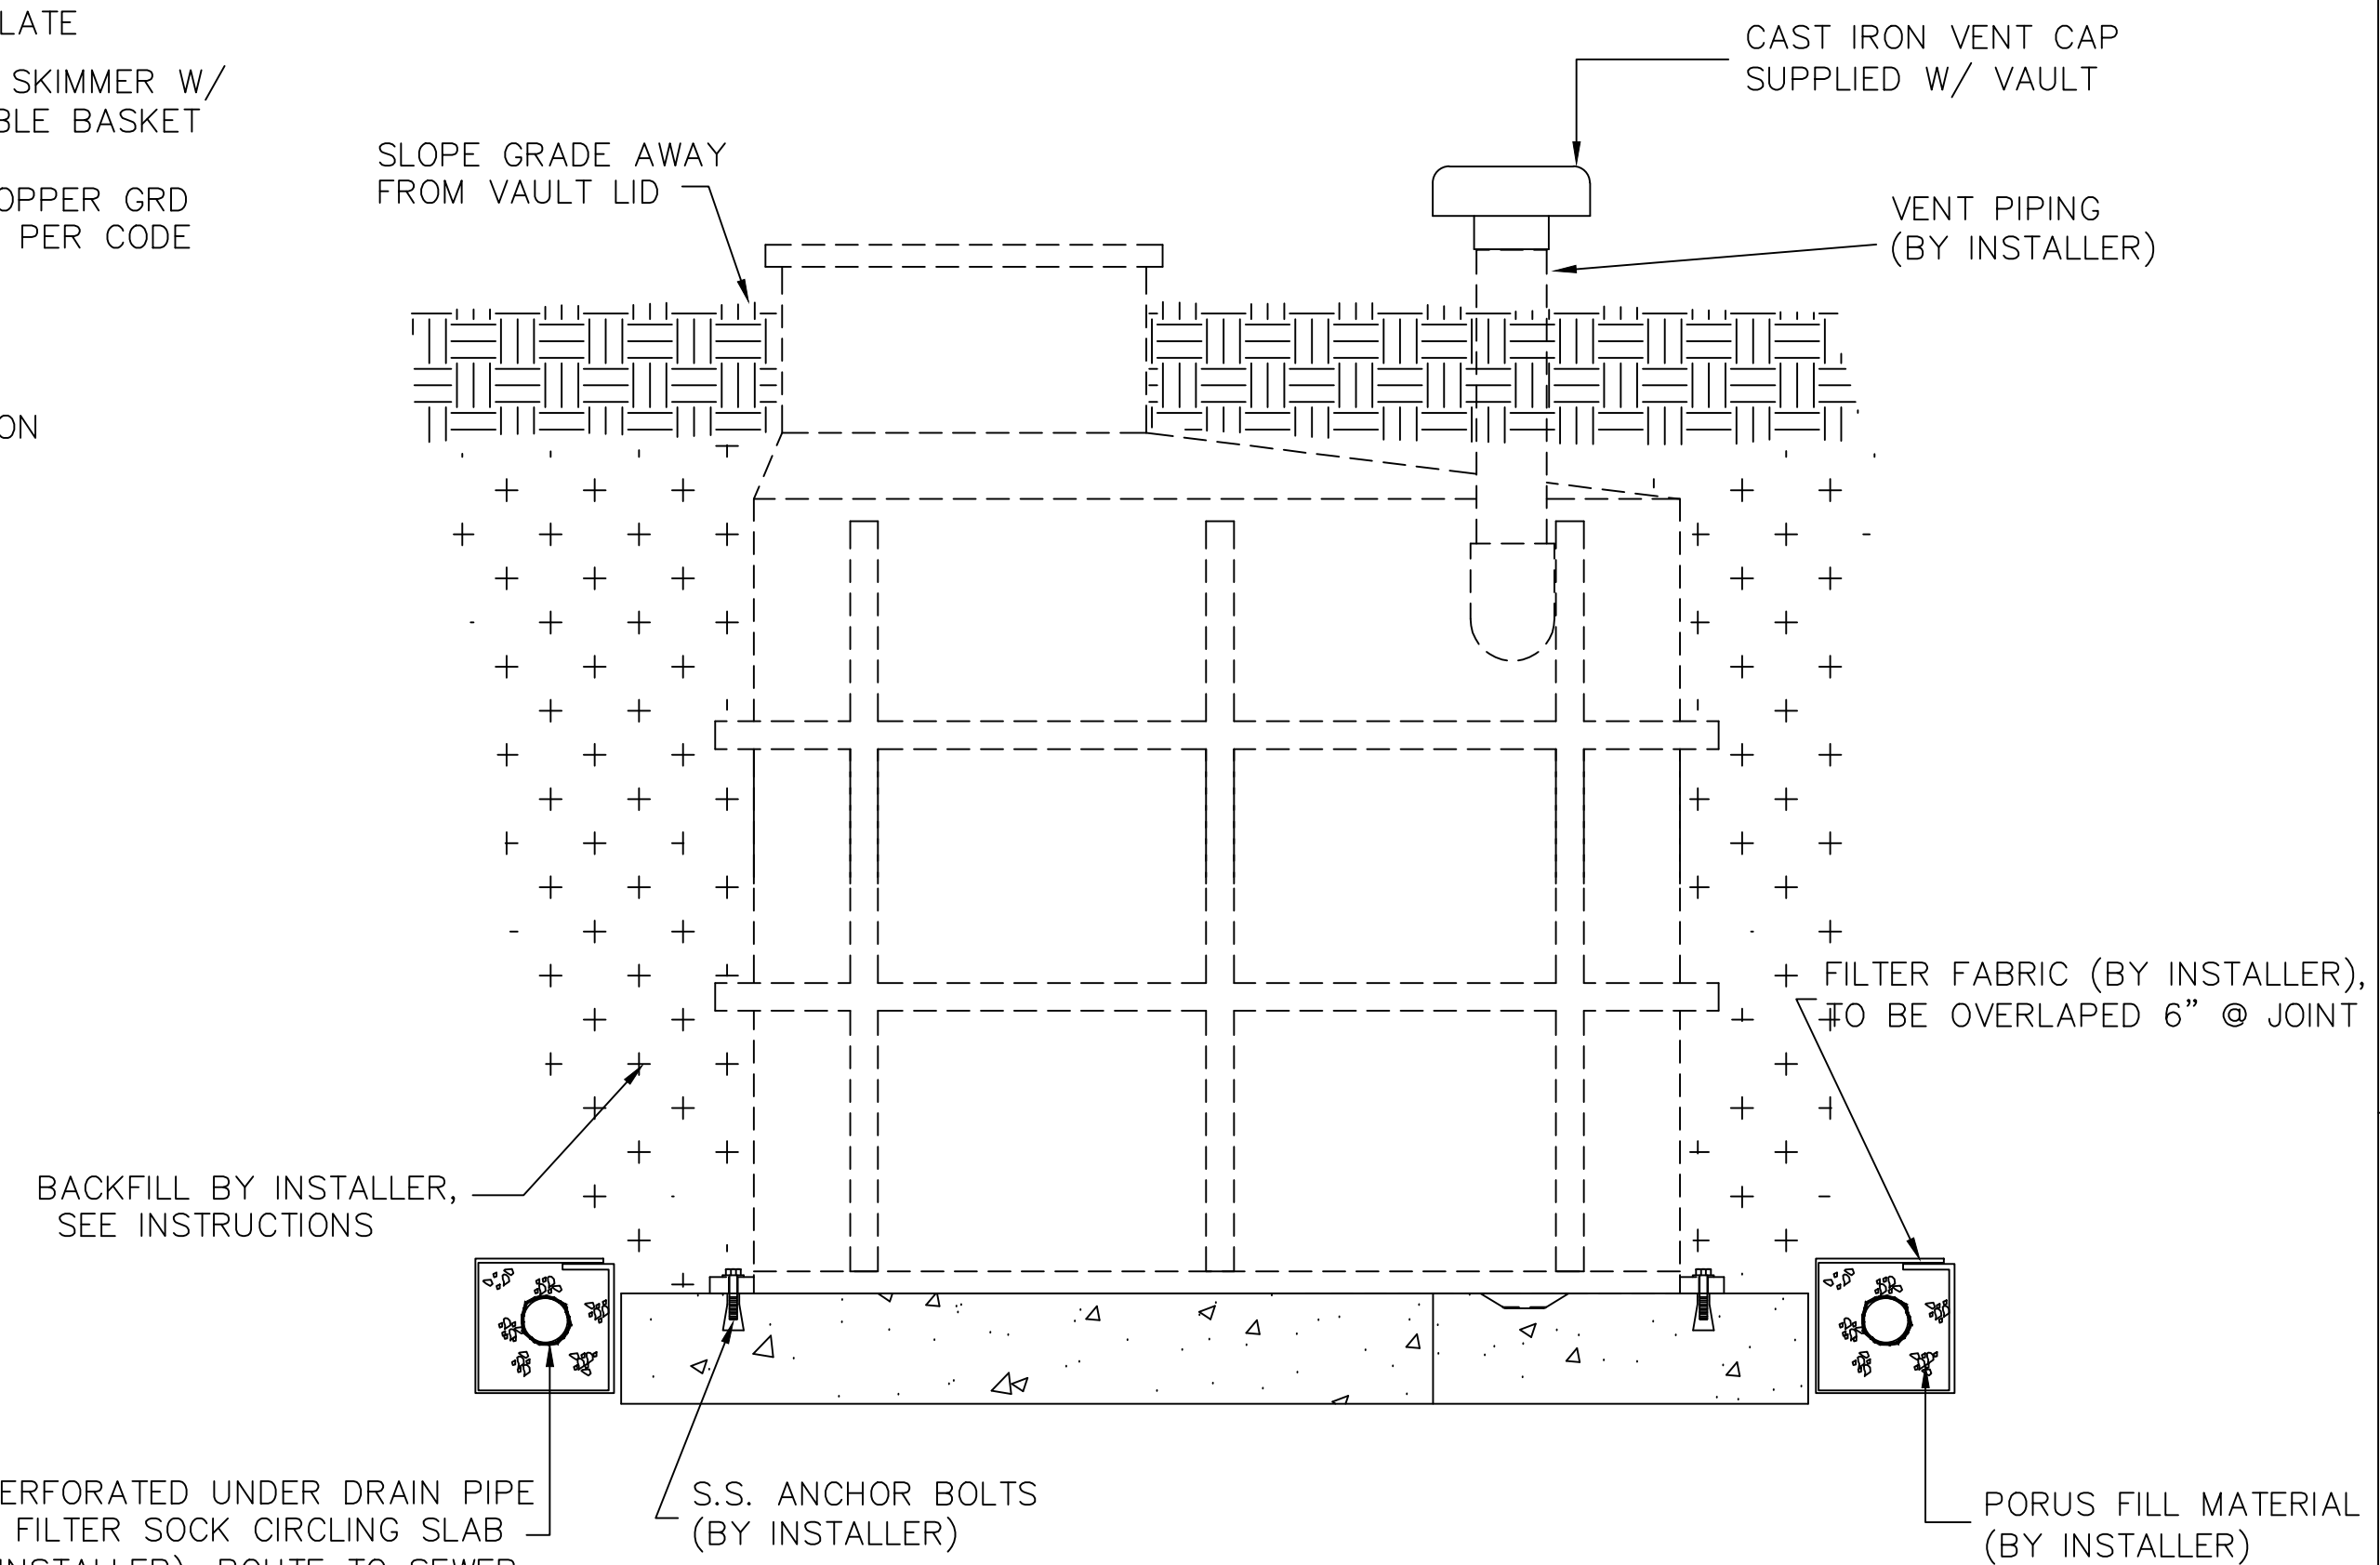

"HYDRO-Vault" INSTALLATION NOTES

1. CHECK "HYDRO Vault" ON ARRIVAL FOR INTERIOR AND EXTERIOR SHIPPING DAMAGE.
2. STORE "HYDRO Vault" IN A DRY AREA. WATER WILL DAMAGE Vault ELECTRICAL EQUIPMENT.
3. PRECAUTIONS, BASED ON LOCAL CONDITIONS, MUST BE TAKEN TO PREVENT ANY MOVEMENT OF THE "HYDRO Vault".
4. PROVIDE ADEQUATE DRAINAGE TO REMOVE WATER FROM "HYDRO Vault" LOCATION. Vault MUST NOT STAND IN WATER.
5. PROVIDE ADEQUATE INTERIOR BRACING DURING BACKFILLING TO PREVENT DAMAGE TO FIBERGLASS SHELL.
6. EXTEND VENT PIPES TO AN ELEVATION THAT WILL PREVENT WATER FROM ENTERING.
7. INSTALL SCREEN WIRE OR OTHER MATERIAL ON VENT PIPES TO KEEP OUT VERMIN AND INSECTS.
8. USE ONLY NYLON STRAPPING FOR RIGGING. DO NOT USE CHAINS.
9. FOR BEDDING AND BACKFILL USE CLEAN PEA GRAVEL TYPE MATERIAL. A NATURALLY ROUNDED AGGREGATE OF 1/4" NOMINAL SIZE, RANGING FROM 1/8" TO 3/4" DIA., CLEAN AND FREE FLOWING. IF GRAVEL IS NOT AVAILABLE, CLEAN STONE CRUSHINGS 1/8" TO 1/2" DIA., CLEAN AND FREE FLOWING, MAY BE USED. FAILURE TO USE SPECIFIED BACKFILL MATERIAL WILL VOID WARRANTY.
10. NEVER TURN OFF ELECTRICITY TO "HYDRO Vault" EXCEPT WHEN MAINTENANCE IS REQUIRED. SUMP PUMP AND FAN SHOULD REMAIN OPERATIONAL AT ALL TIMES.
11. IMMEDIATELY UPON SETTING Vault, MAKE SURE THAT EXCAVATION DRAINS AWAY AND DOES NOT ENTER Vault.


HYDRO Vault SCALE: N.T.S.

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020


WEST PRYOR FOUNTAIN AND WATERFALL

Hydro
Dramatics
1228 SOUTH 8TH ST., ST. LOUIS, MO., 314-231-9806

REVISION DATE: BY:
DATE: 04-06-2020
SCALE: SHOWN
DRAWN: D.E.H.
JOB: 15239
SHEET: F3.0
OF 6 SHEETS


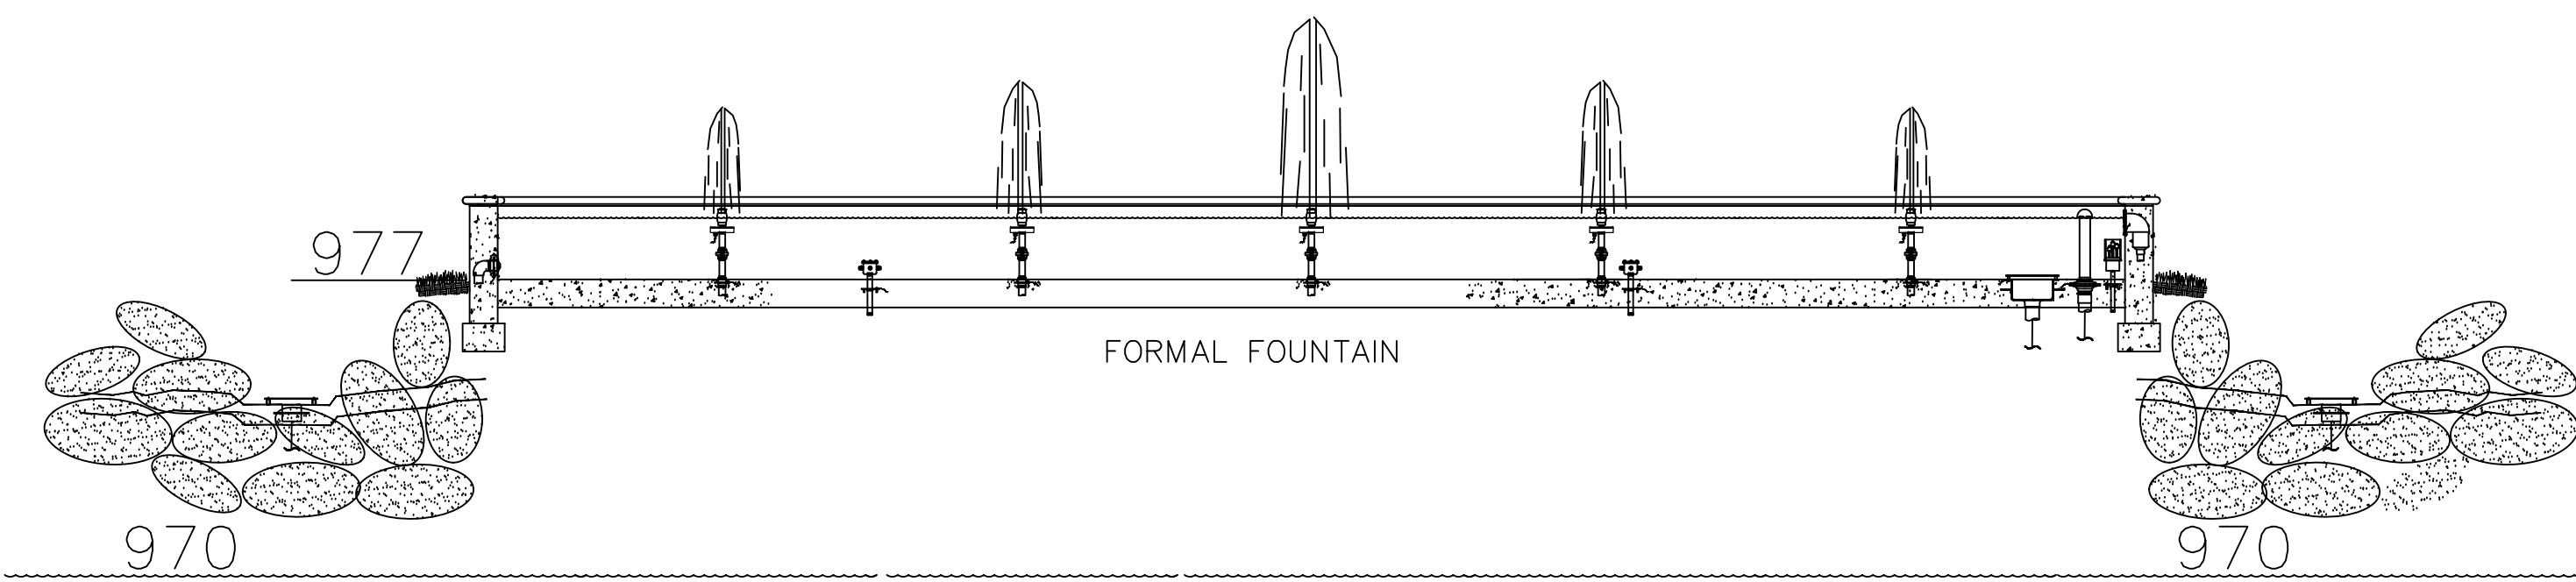


FORMAL FOUNTAIN & WATERFALL ELEVATION
SCALE: 1/4" = 1'

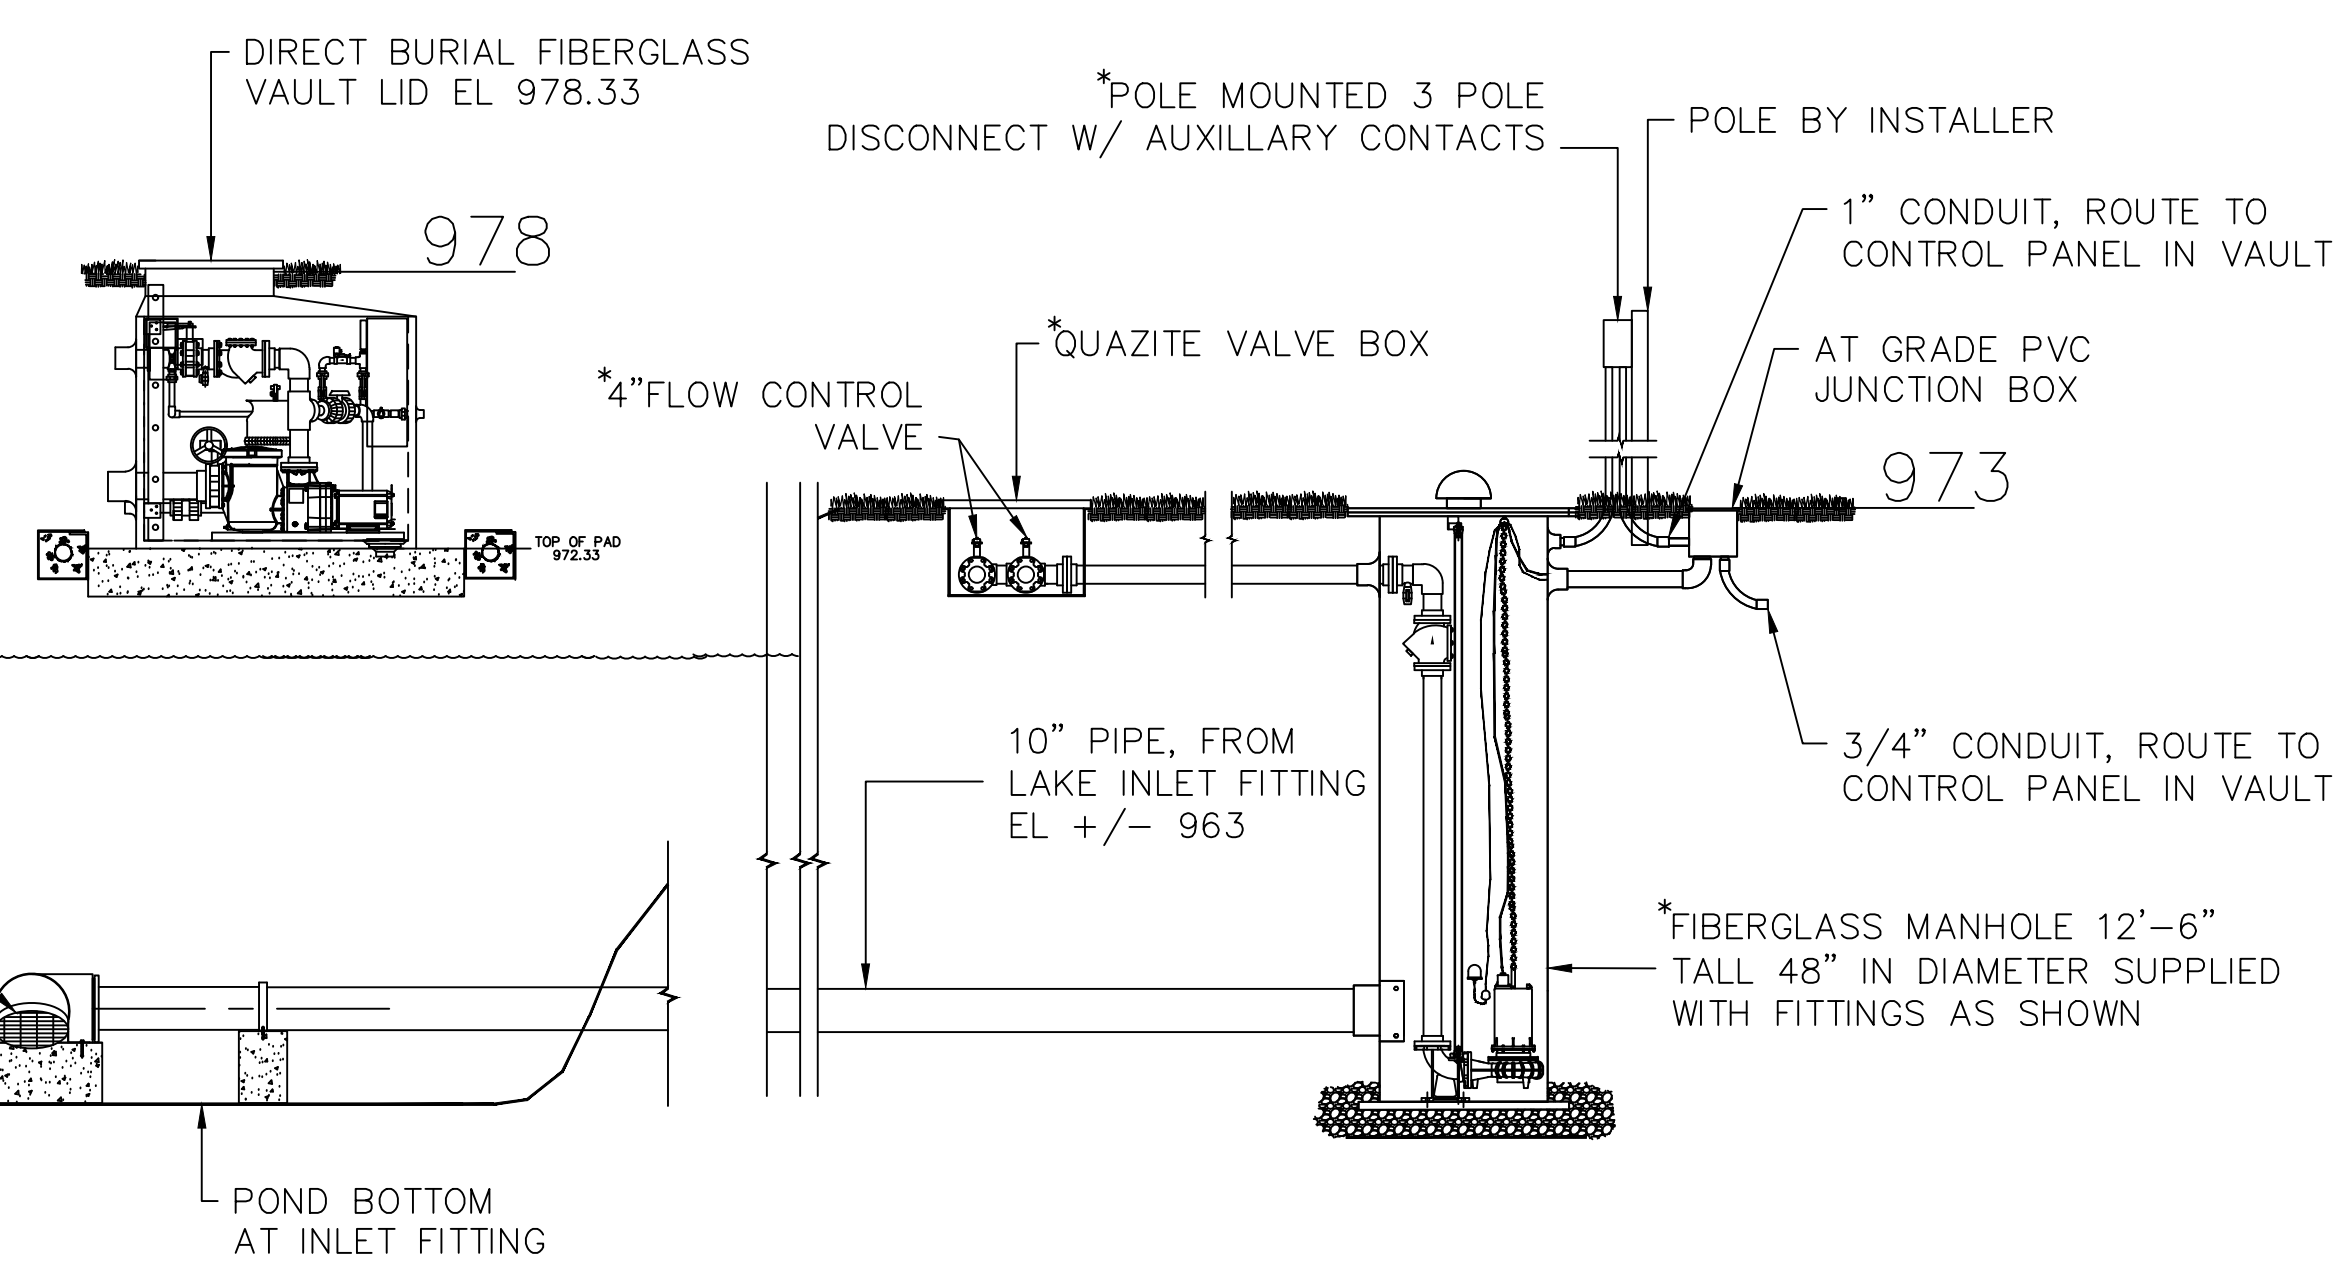


*LAKE INLET FITTING:
12" TEE,
12" COUPLINGS,
12" PIPE BEVEL CUT
W/ PVC GRATE CAP

POND BOTTOM
AT INLET FITTING

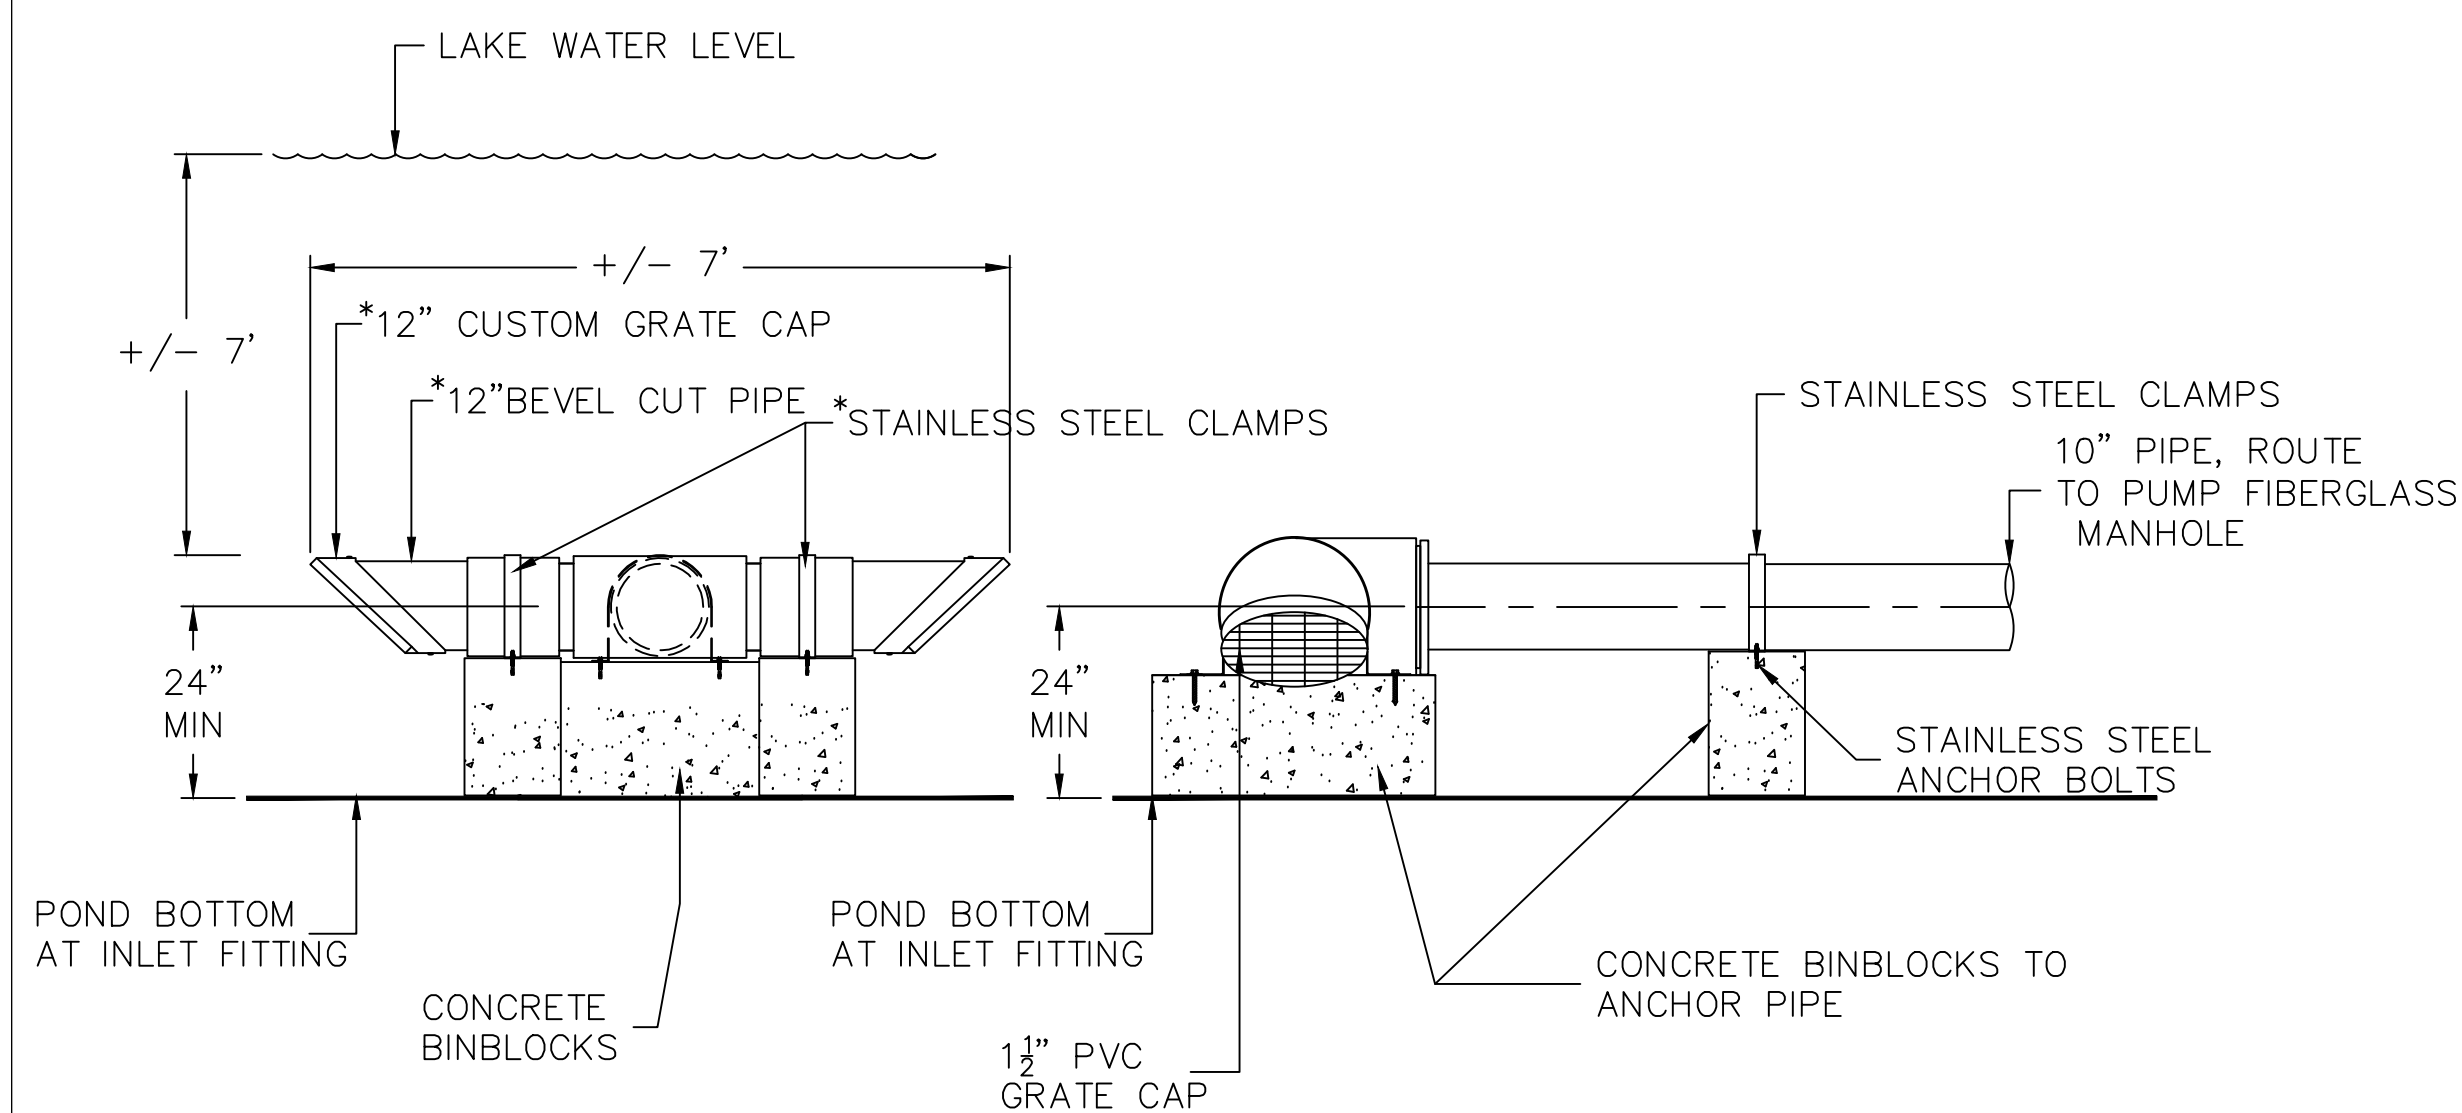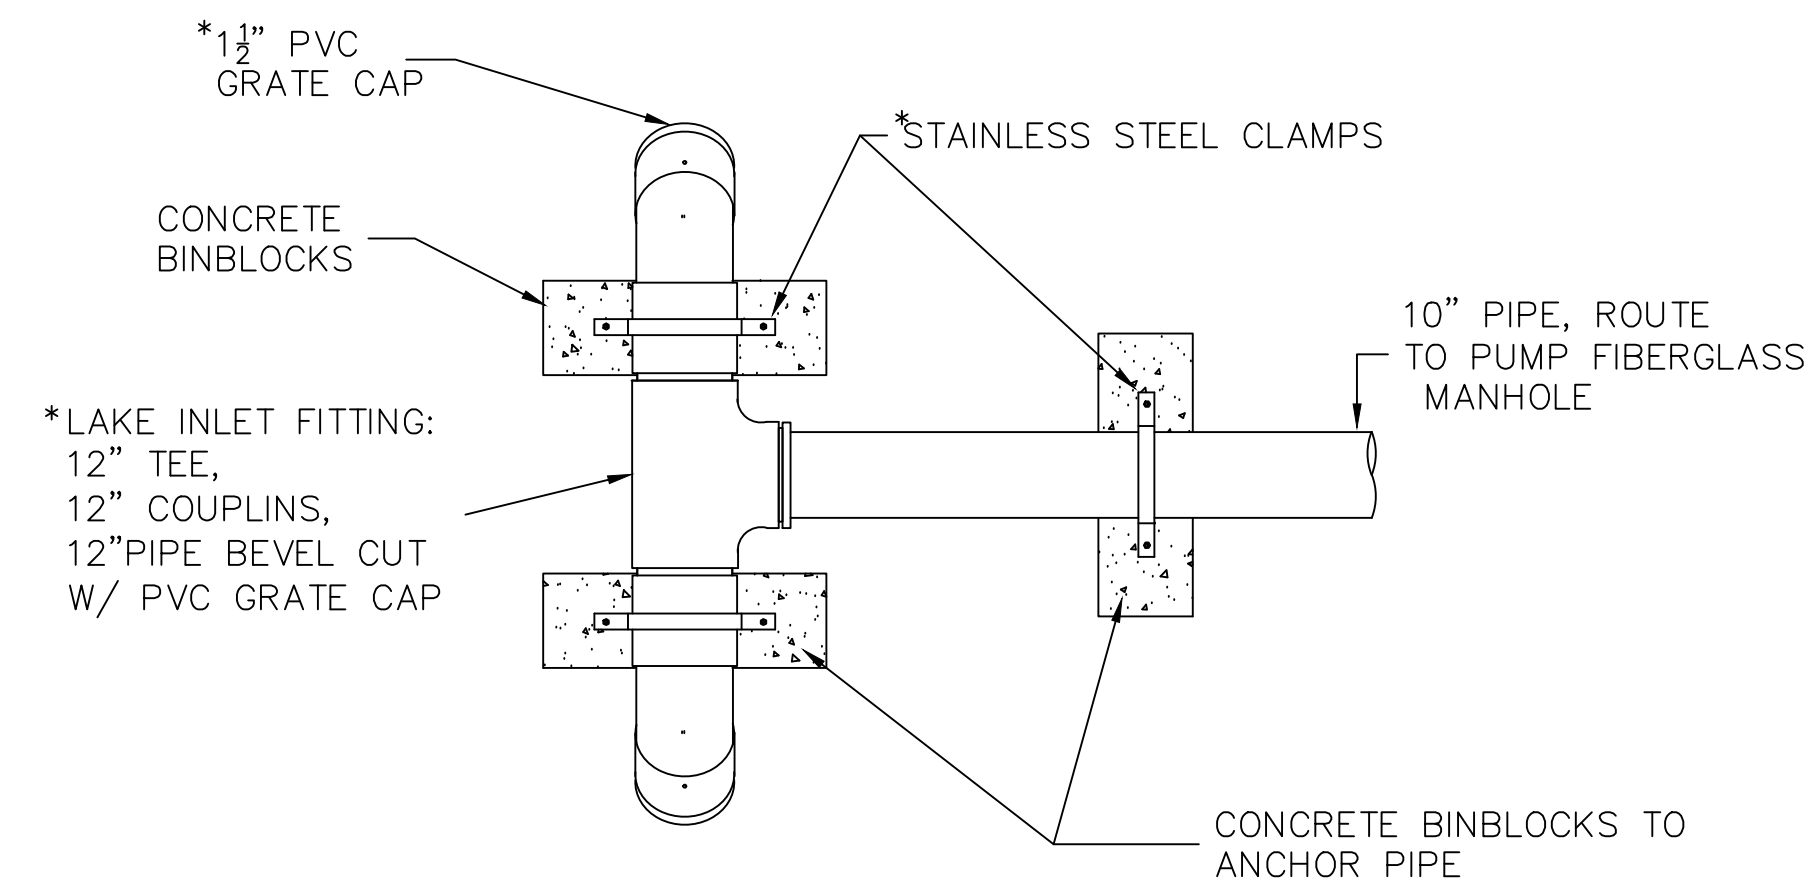

LAKE INLET FITTING
SCALE: 1/2" = 1'

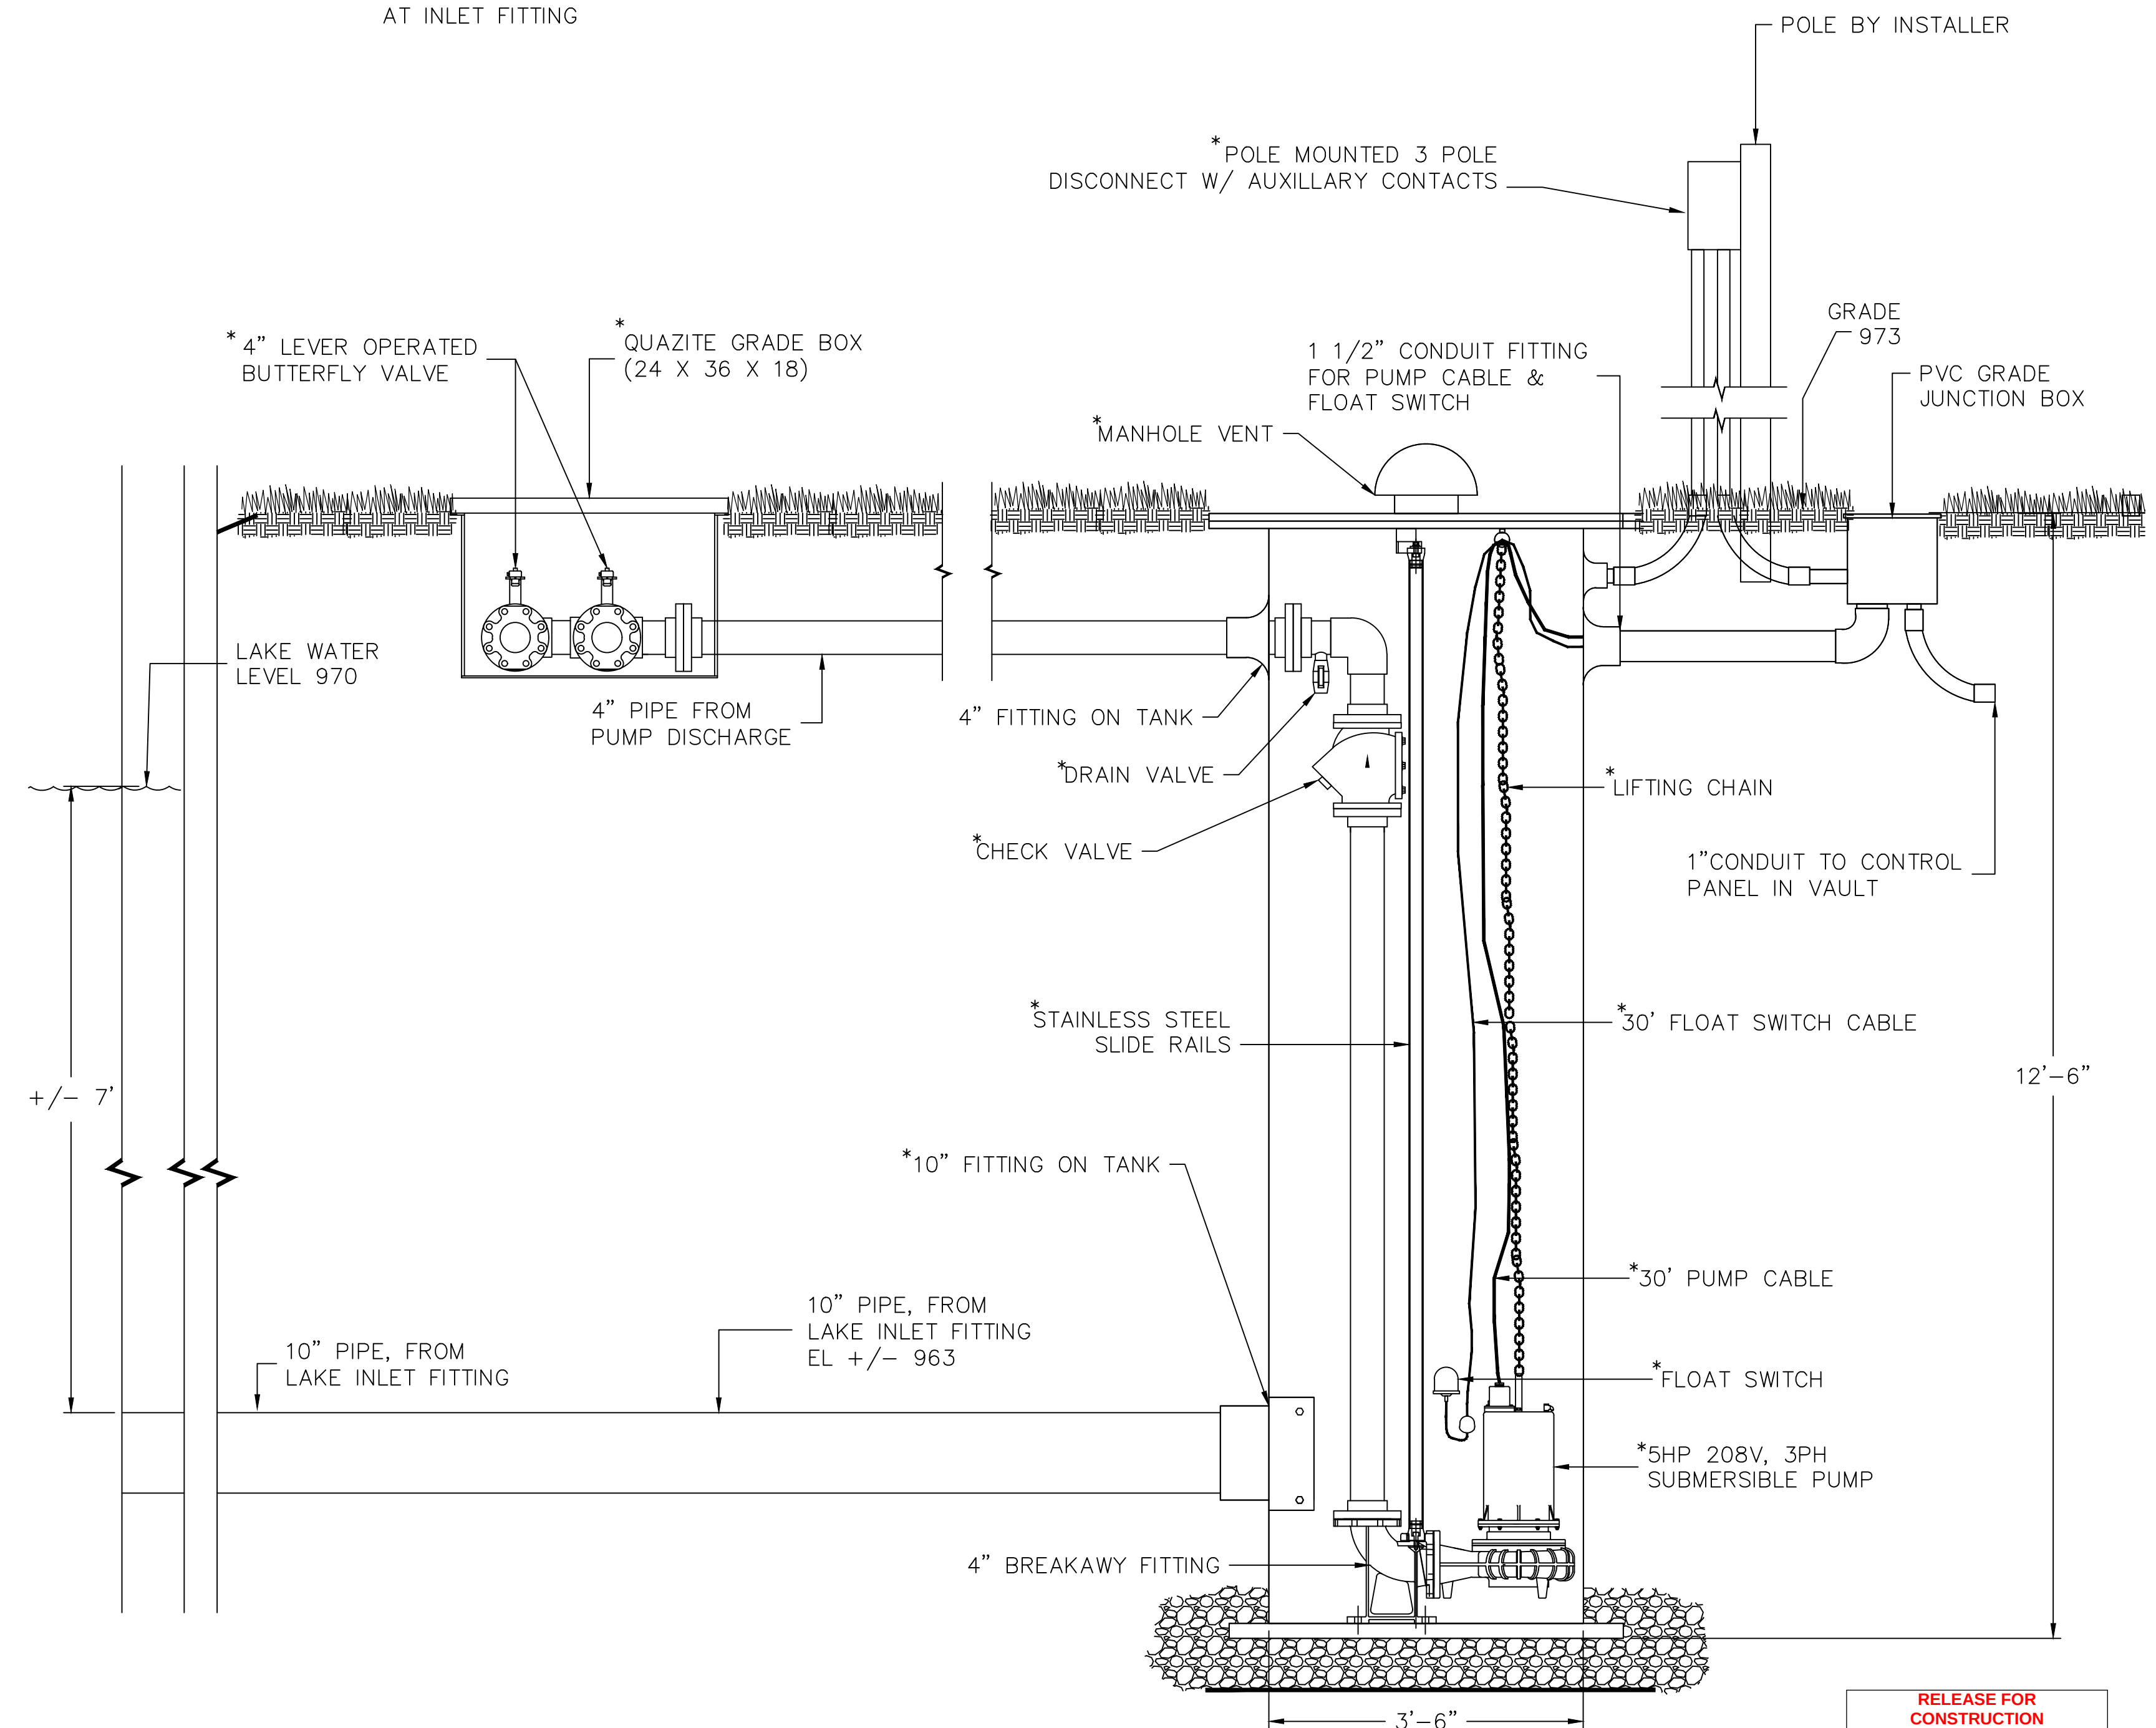

SUBMERSIBLE PUMP, RESERVOIR, VALVE BOX
SCALE: 3/4" = 1'


RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020

WEST PRYOR FOUNTAIN AND WATERFALL


Hydro
Dramatics

1228 SOUTH 8TH ST., ST. LOUIS, MO., 314-231-9806



REVISION DATE:	BY:
DATE:	04-06-2020
SCALE:	SHOWN
DRAWN:	D.E.H.
JOB:	15239
SHEET:	F4.00
OF 6 SHEETS	

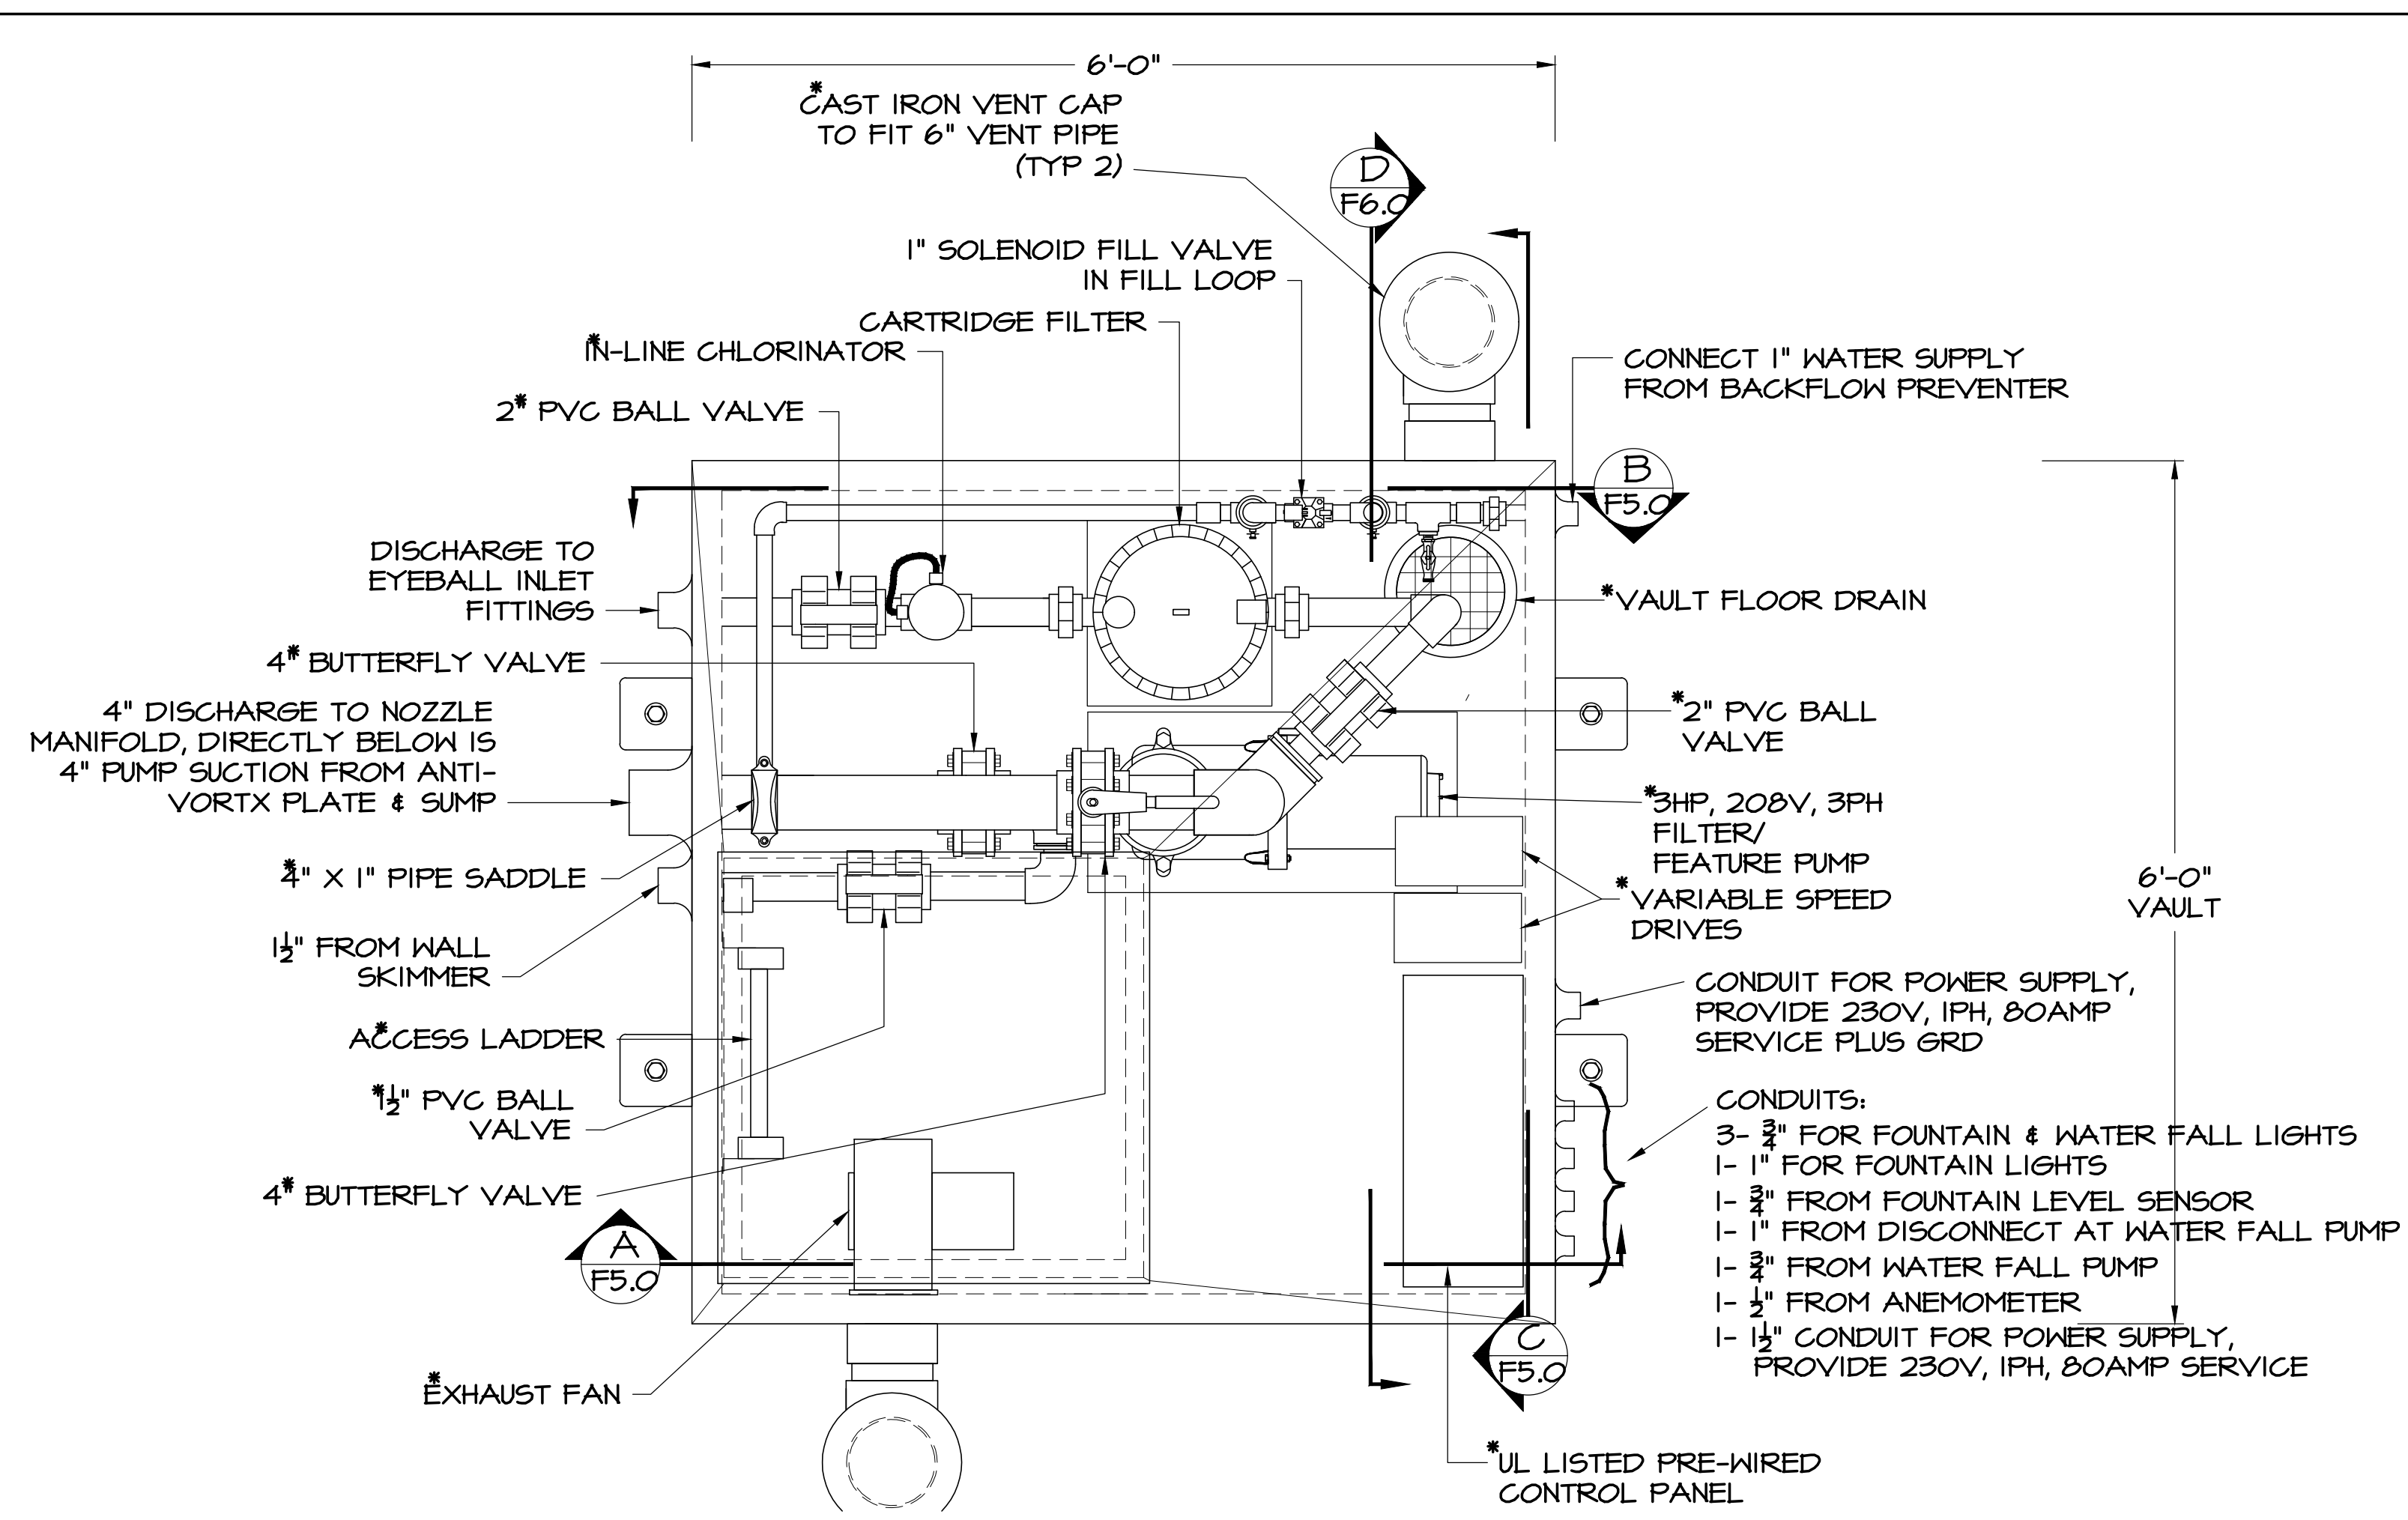

VAULT PLAN
SCALE: 1" = 1'

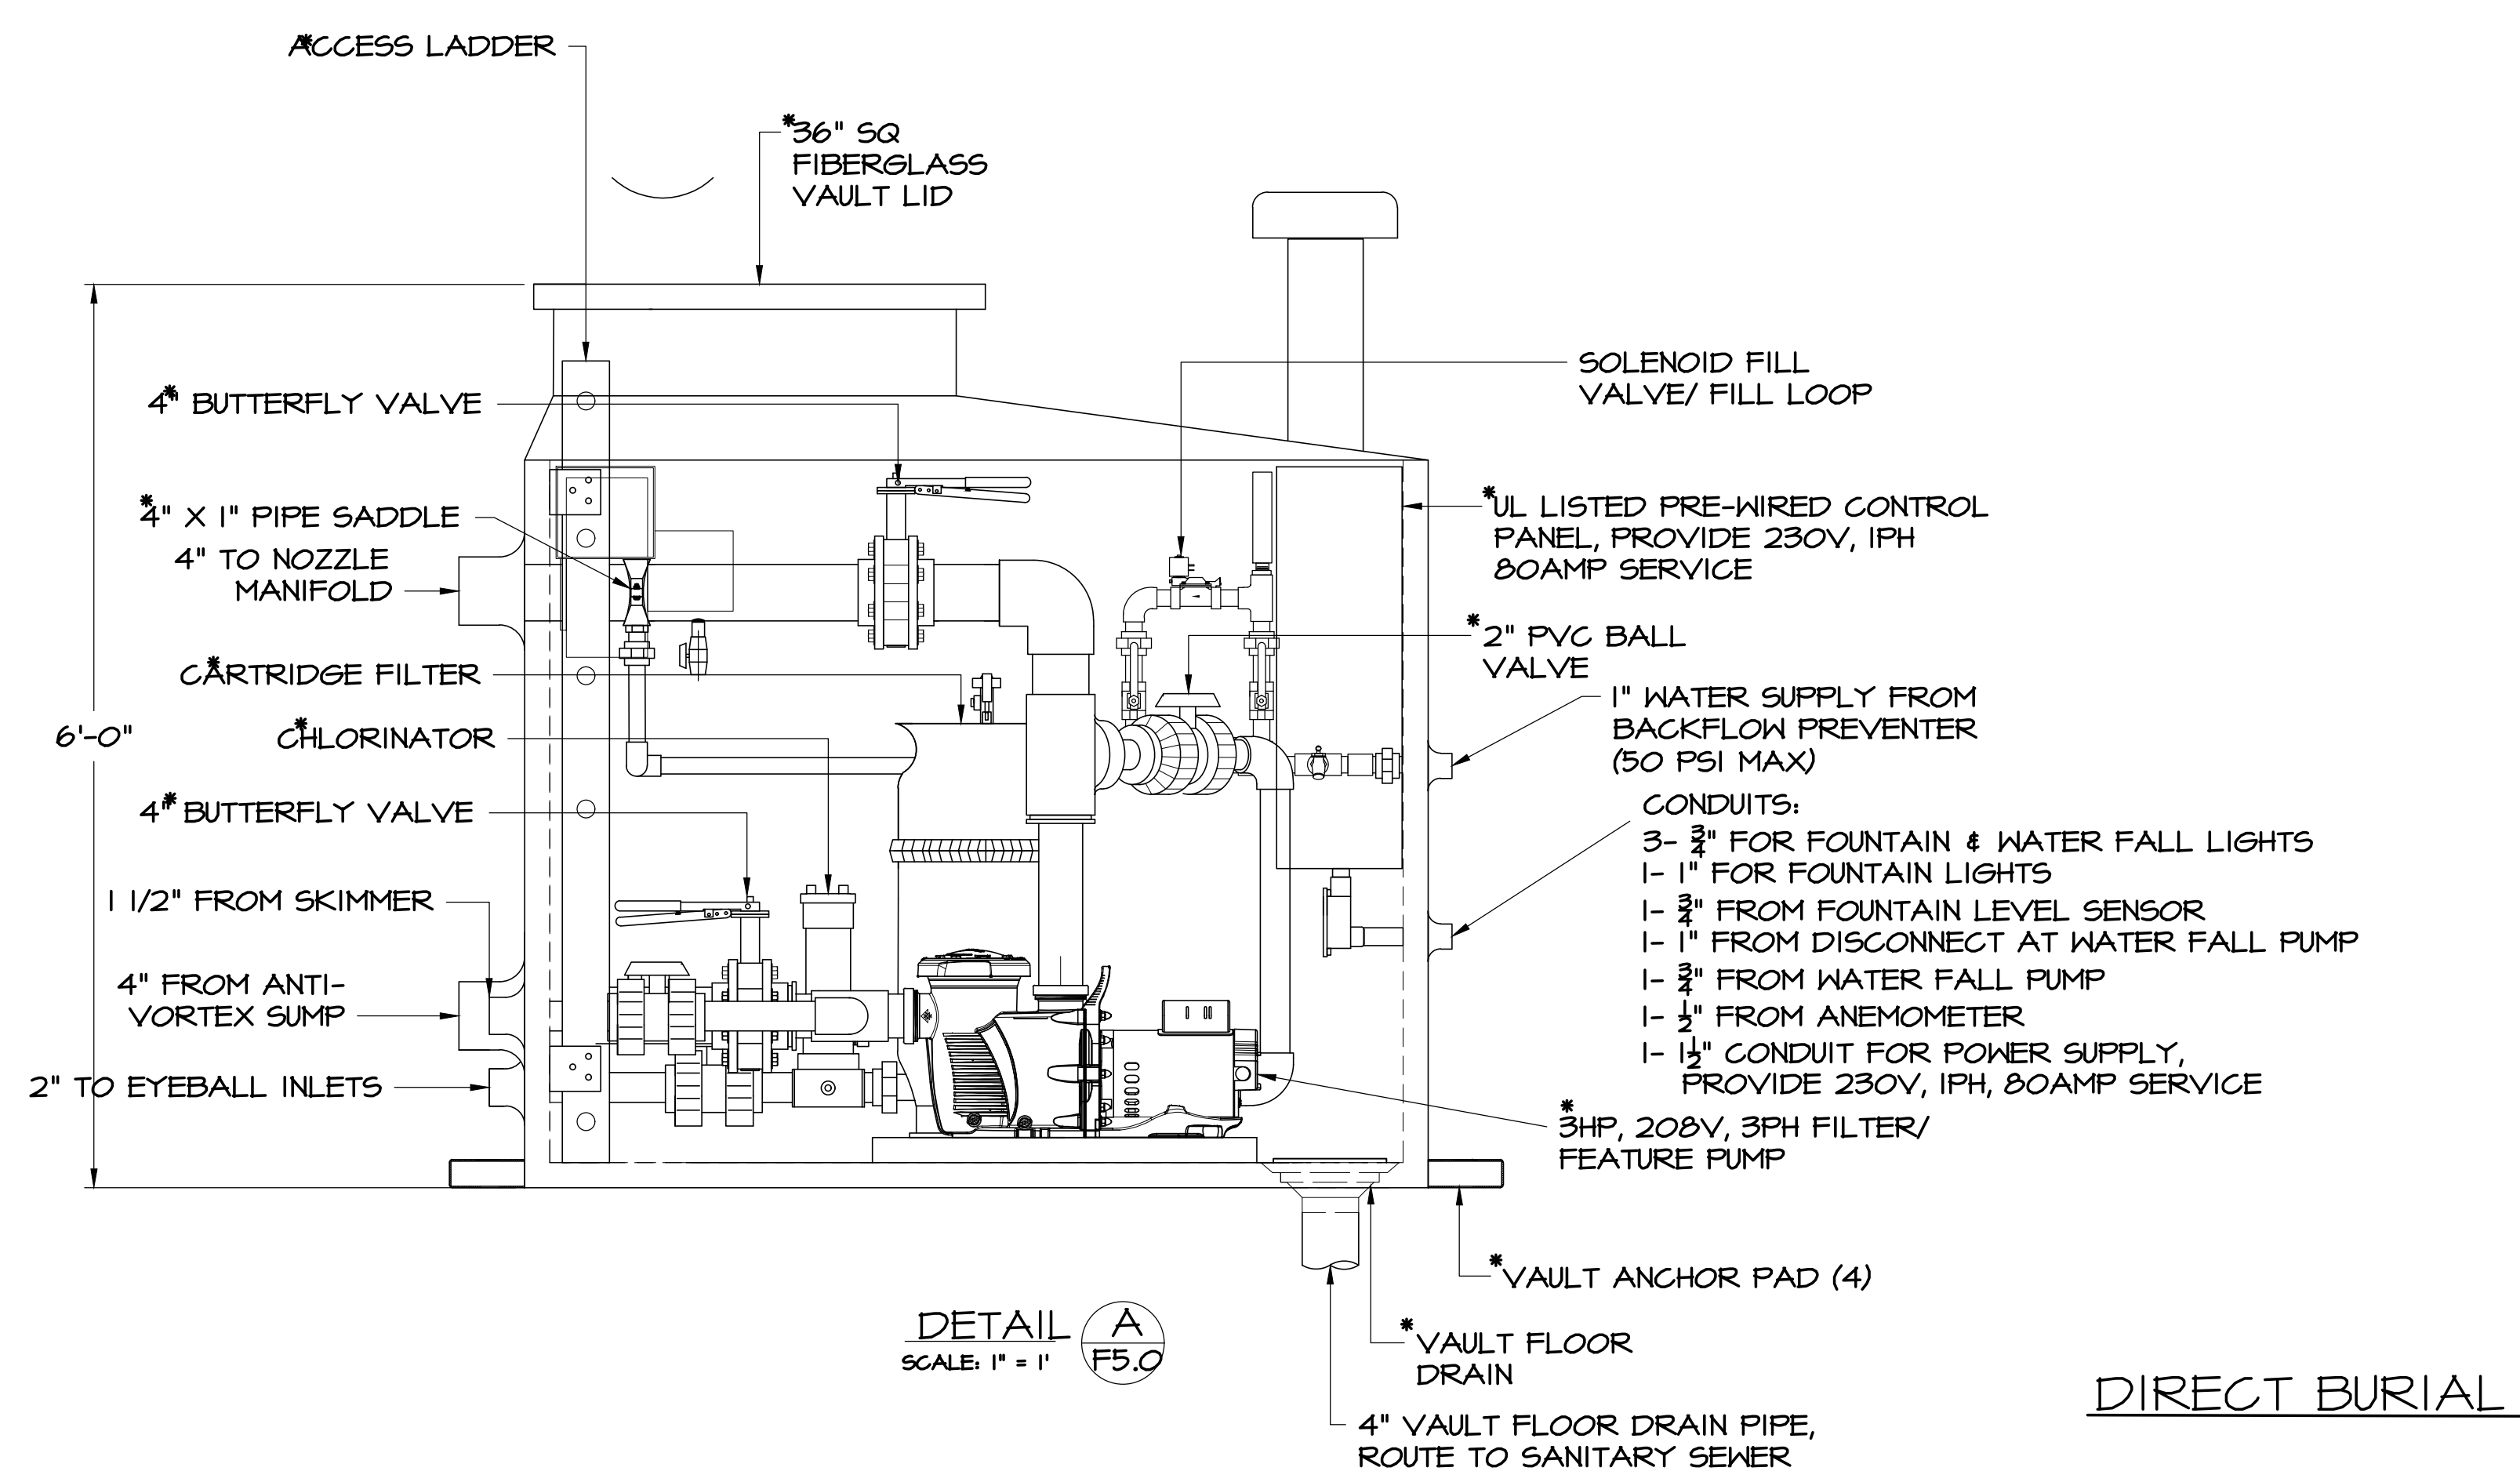

DIRECT BURIAL VAULT

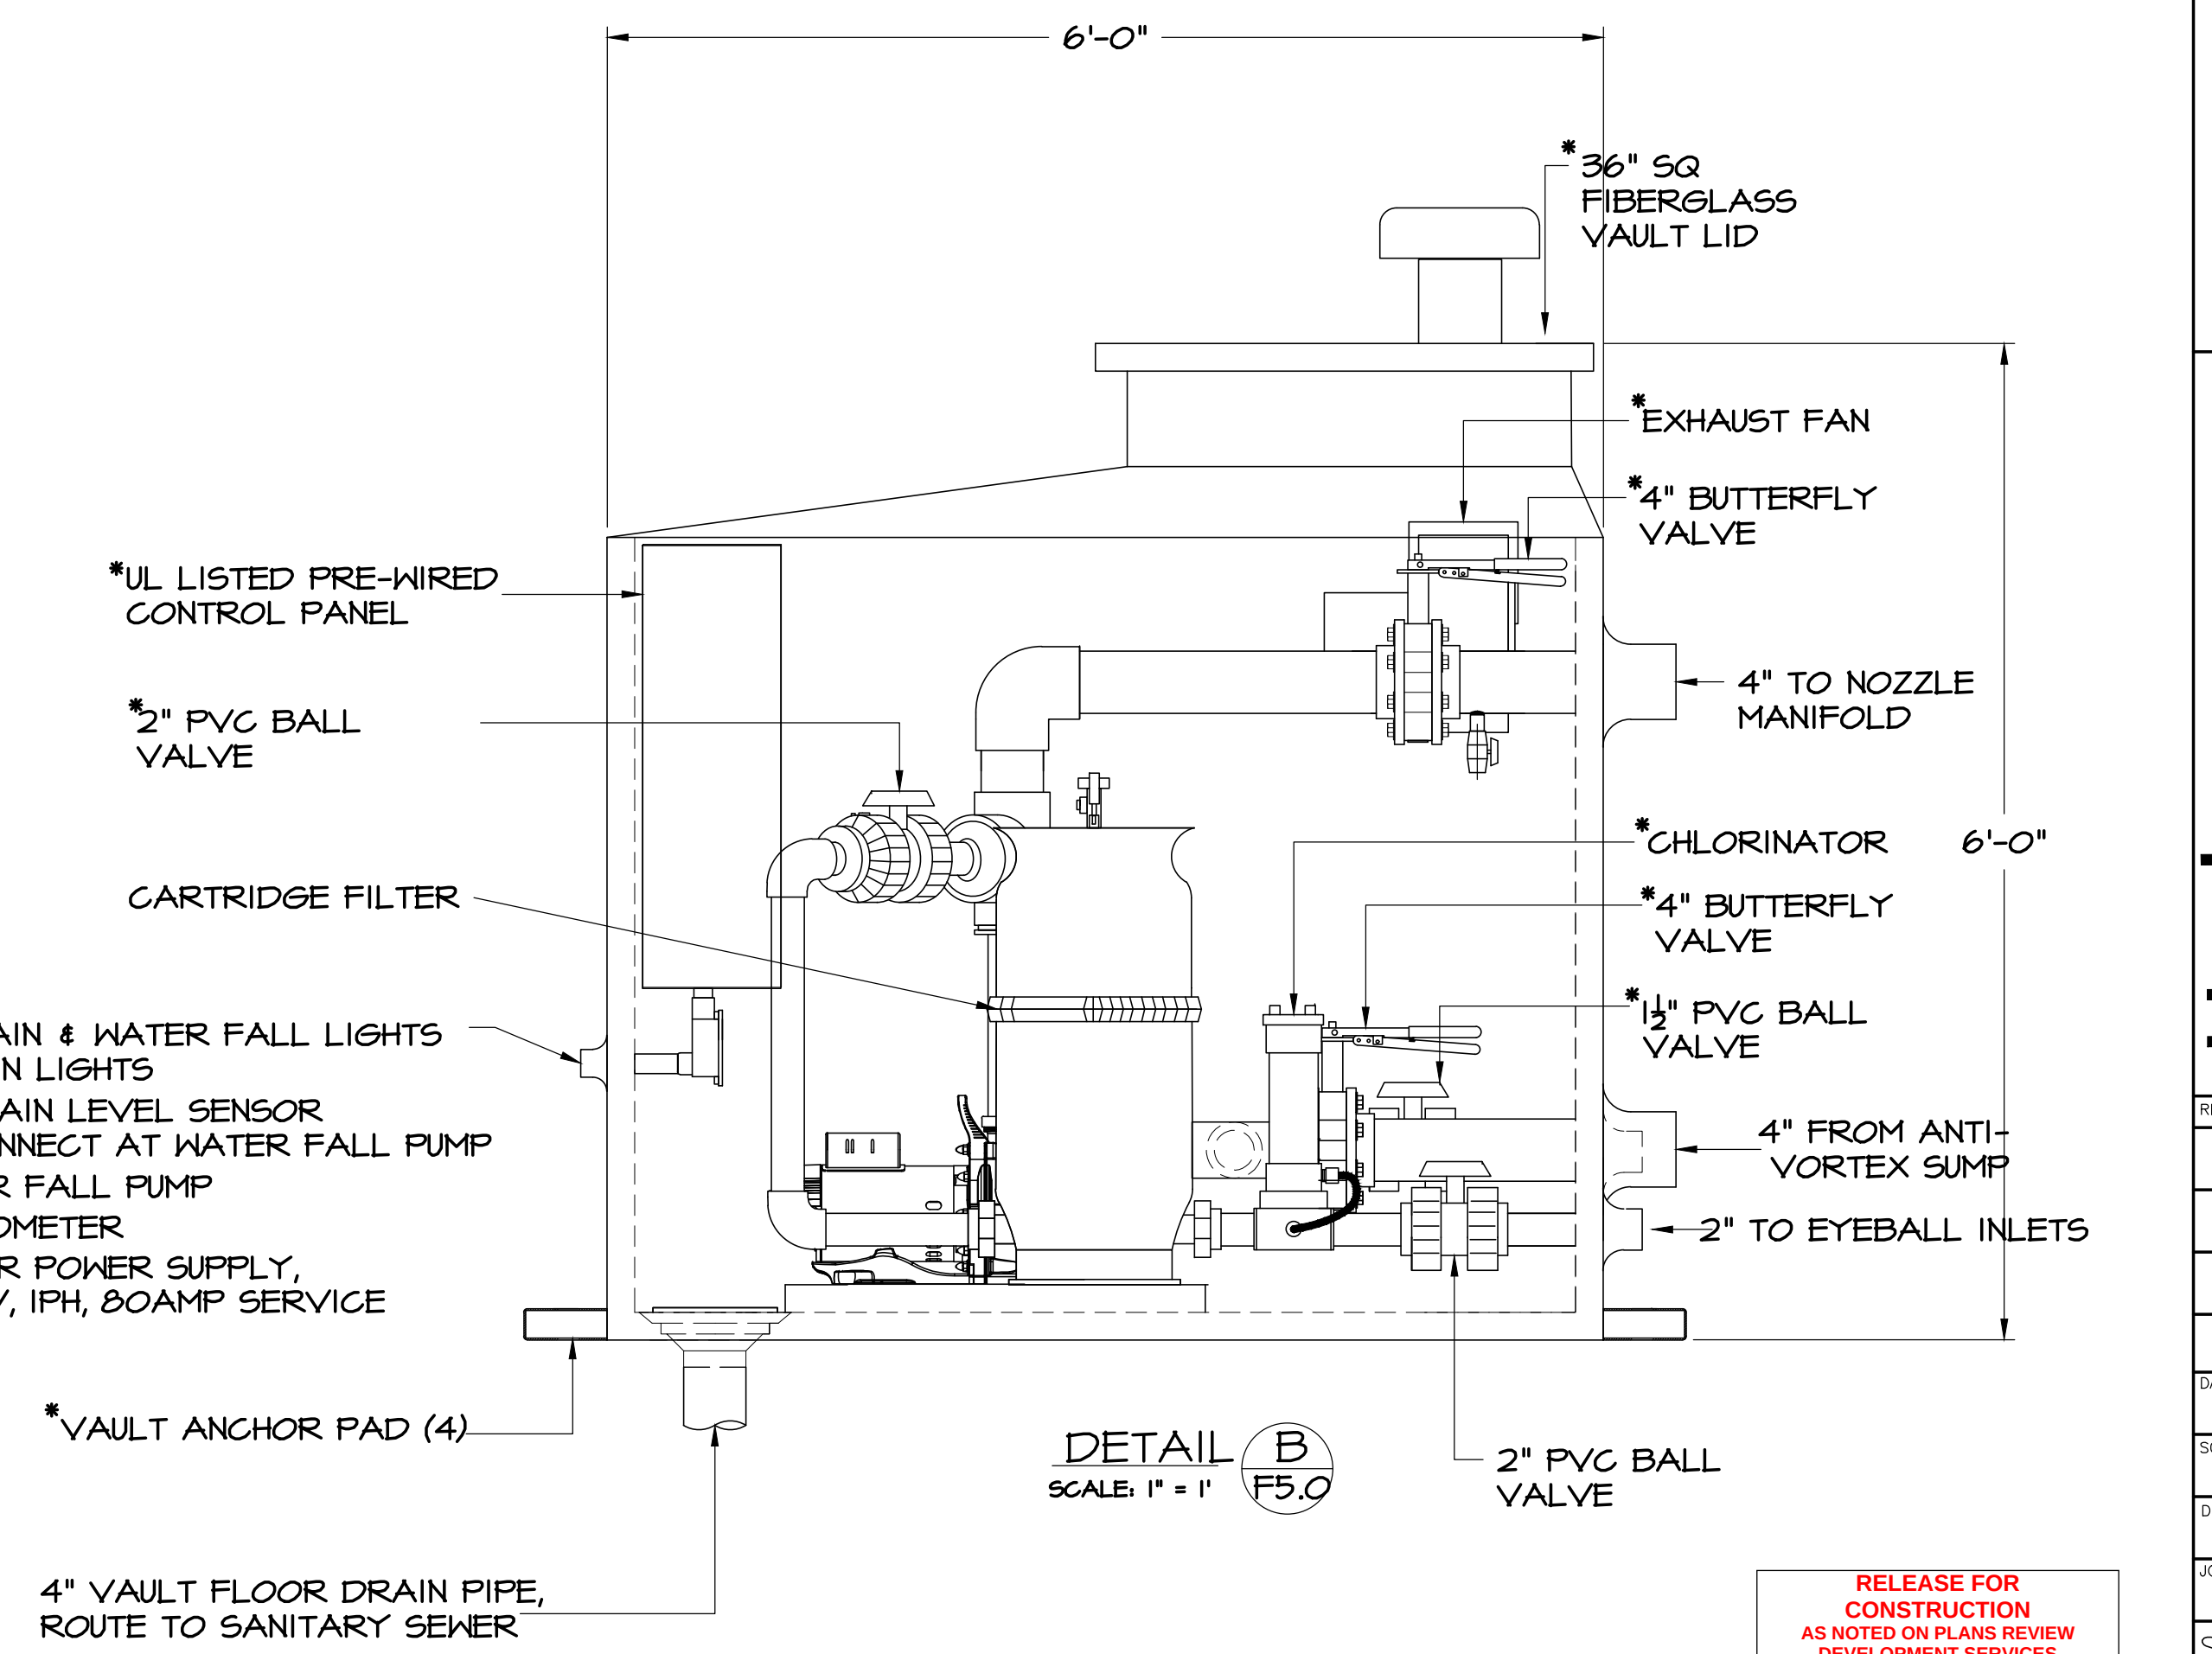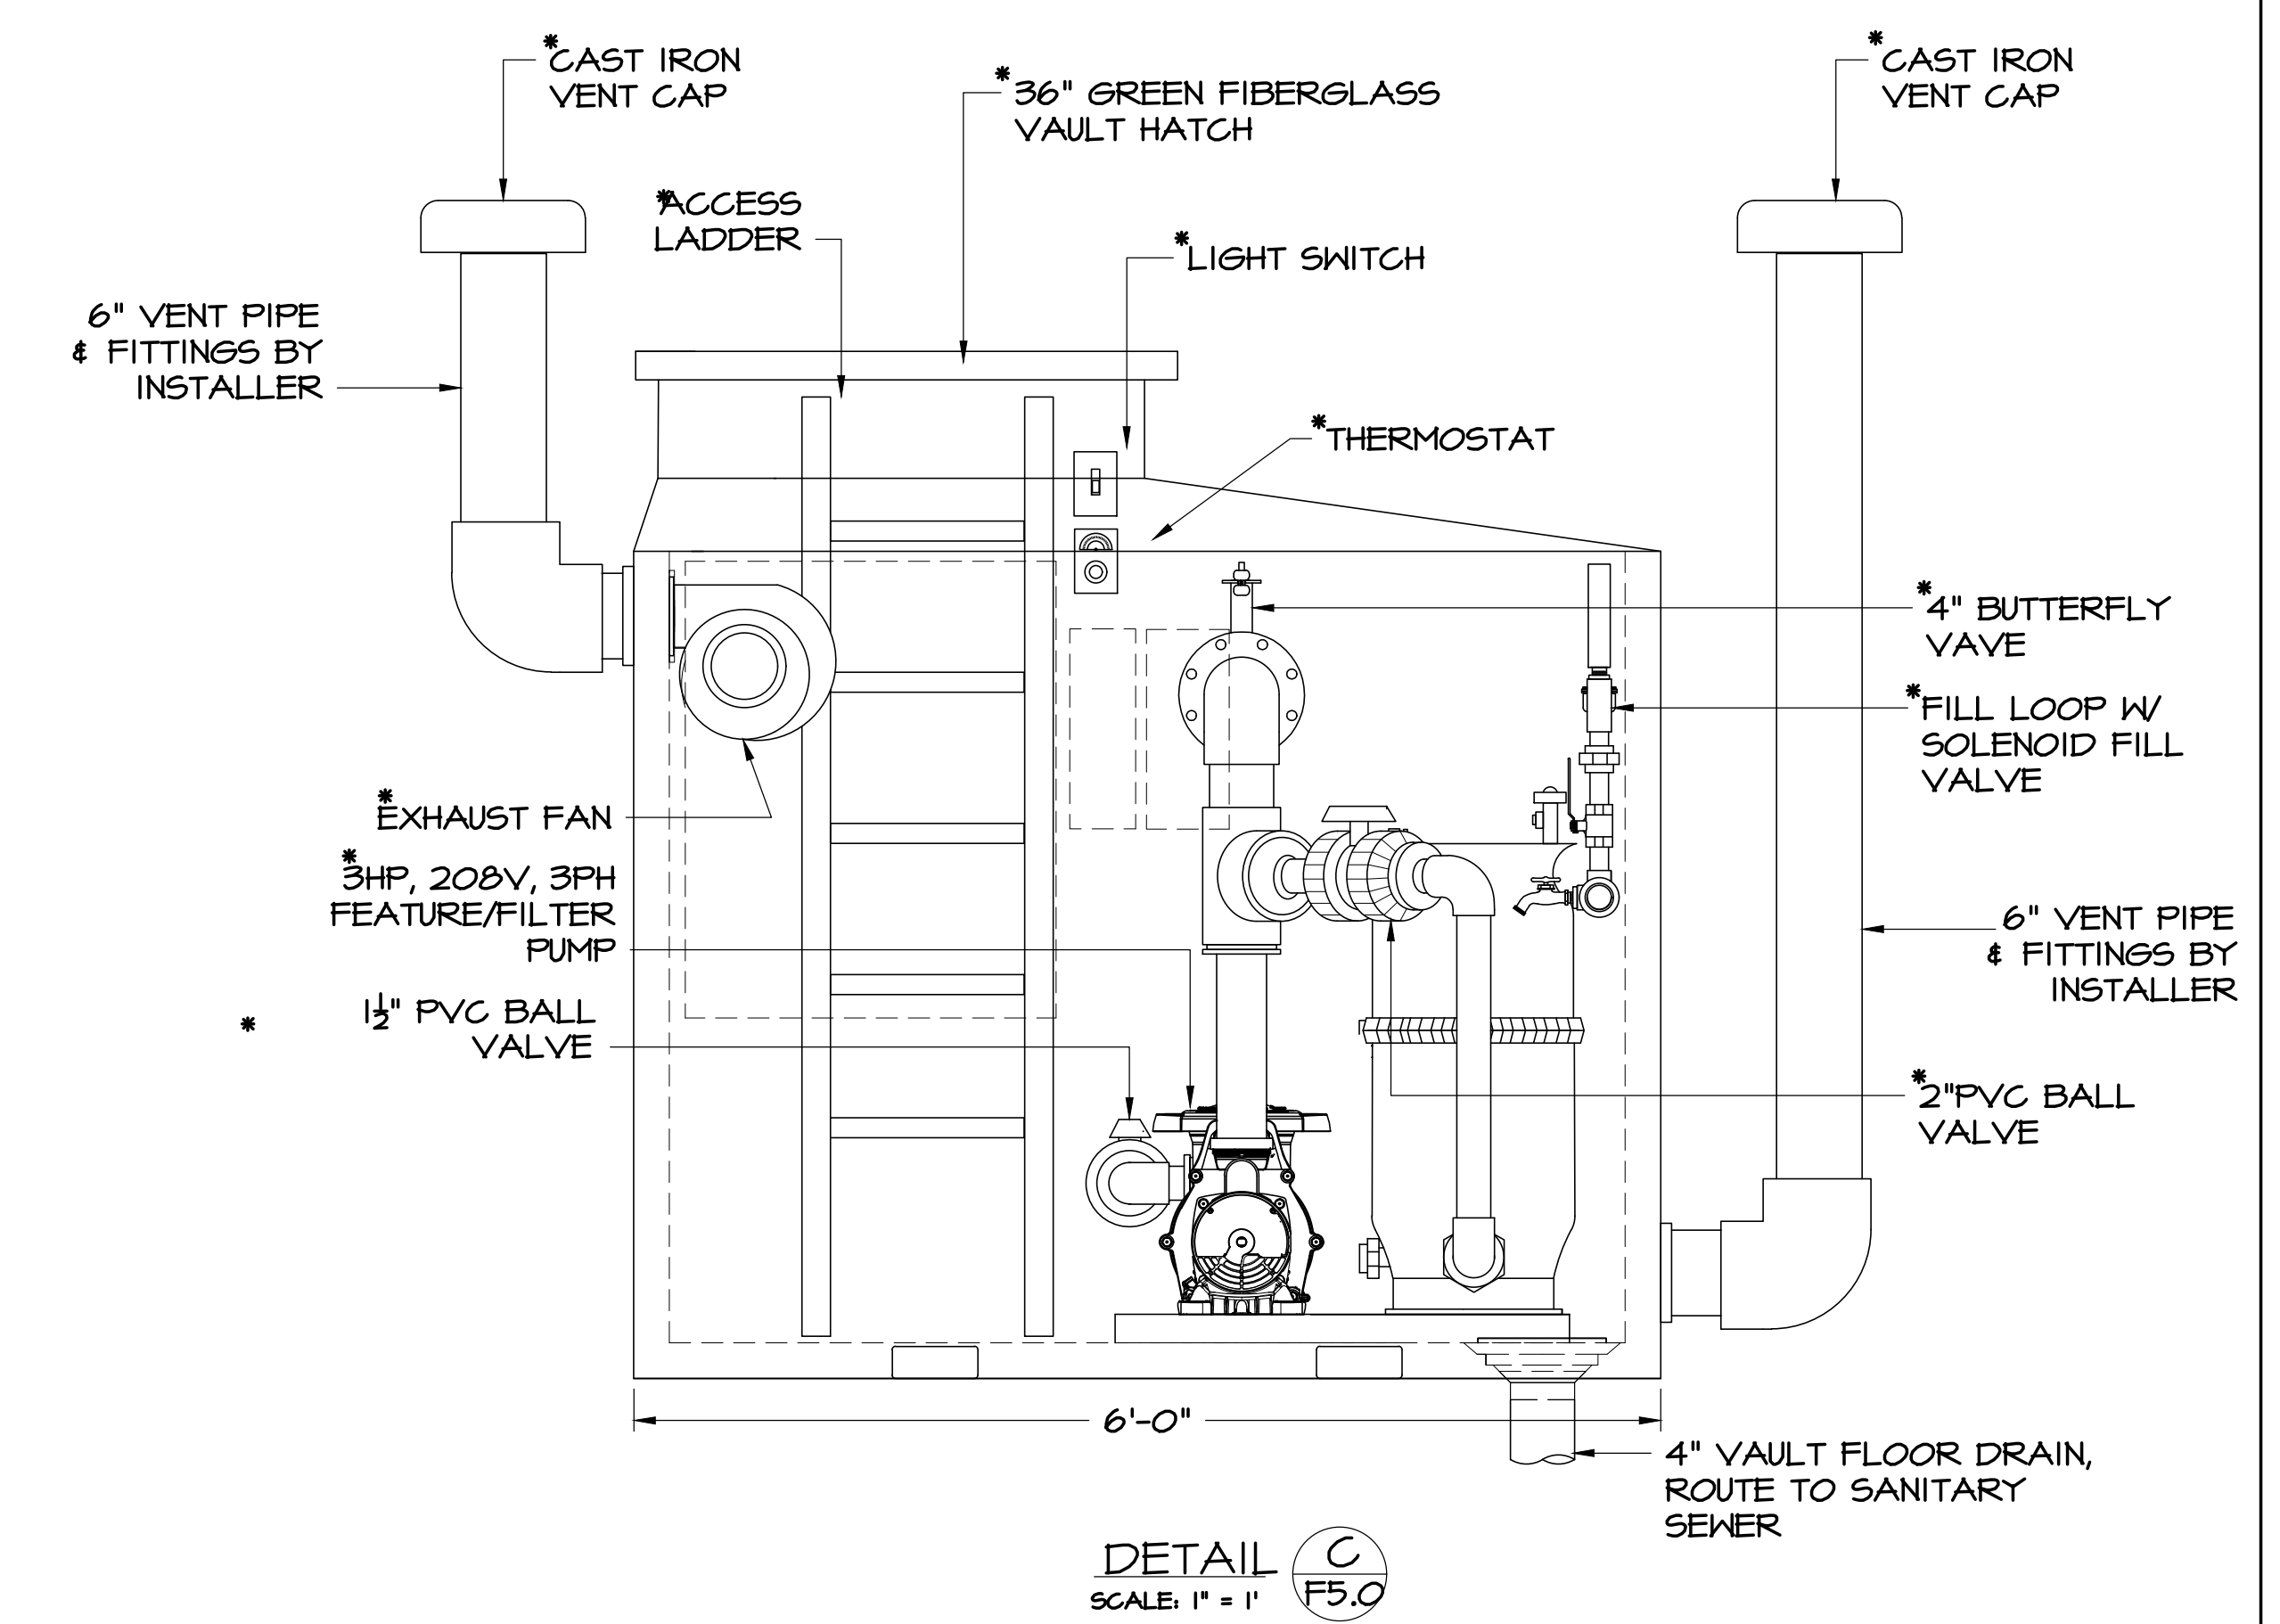


RELEASE FOR CONSTRUCTION
 AS NOTED ON PLANS REVIEW
 DEVELOPMENT SERVICES
 LEE'S SUMMIT, MISSOURI
 08/13/2020

WEST PRYOR
FOUNTAIN AND WATERFALL



REVISION DATE:	BY:
DATE:	04-06-2020
SCALE:	SHOWN
DRAWN:	D.E.H.
JOB:	15239
SHEET:	F5.00
OF 6 SHEETS	

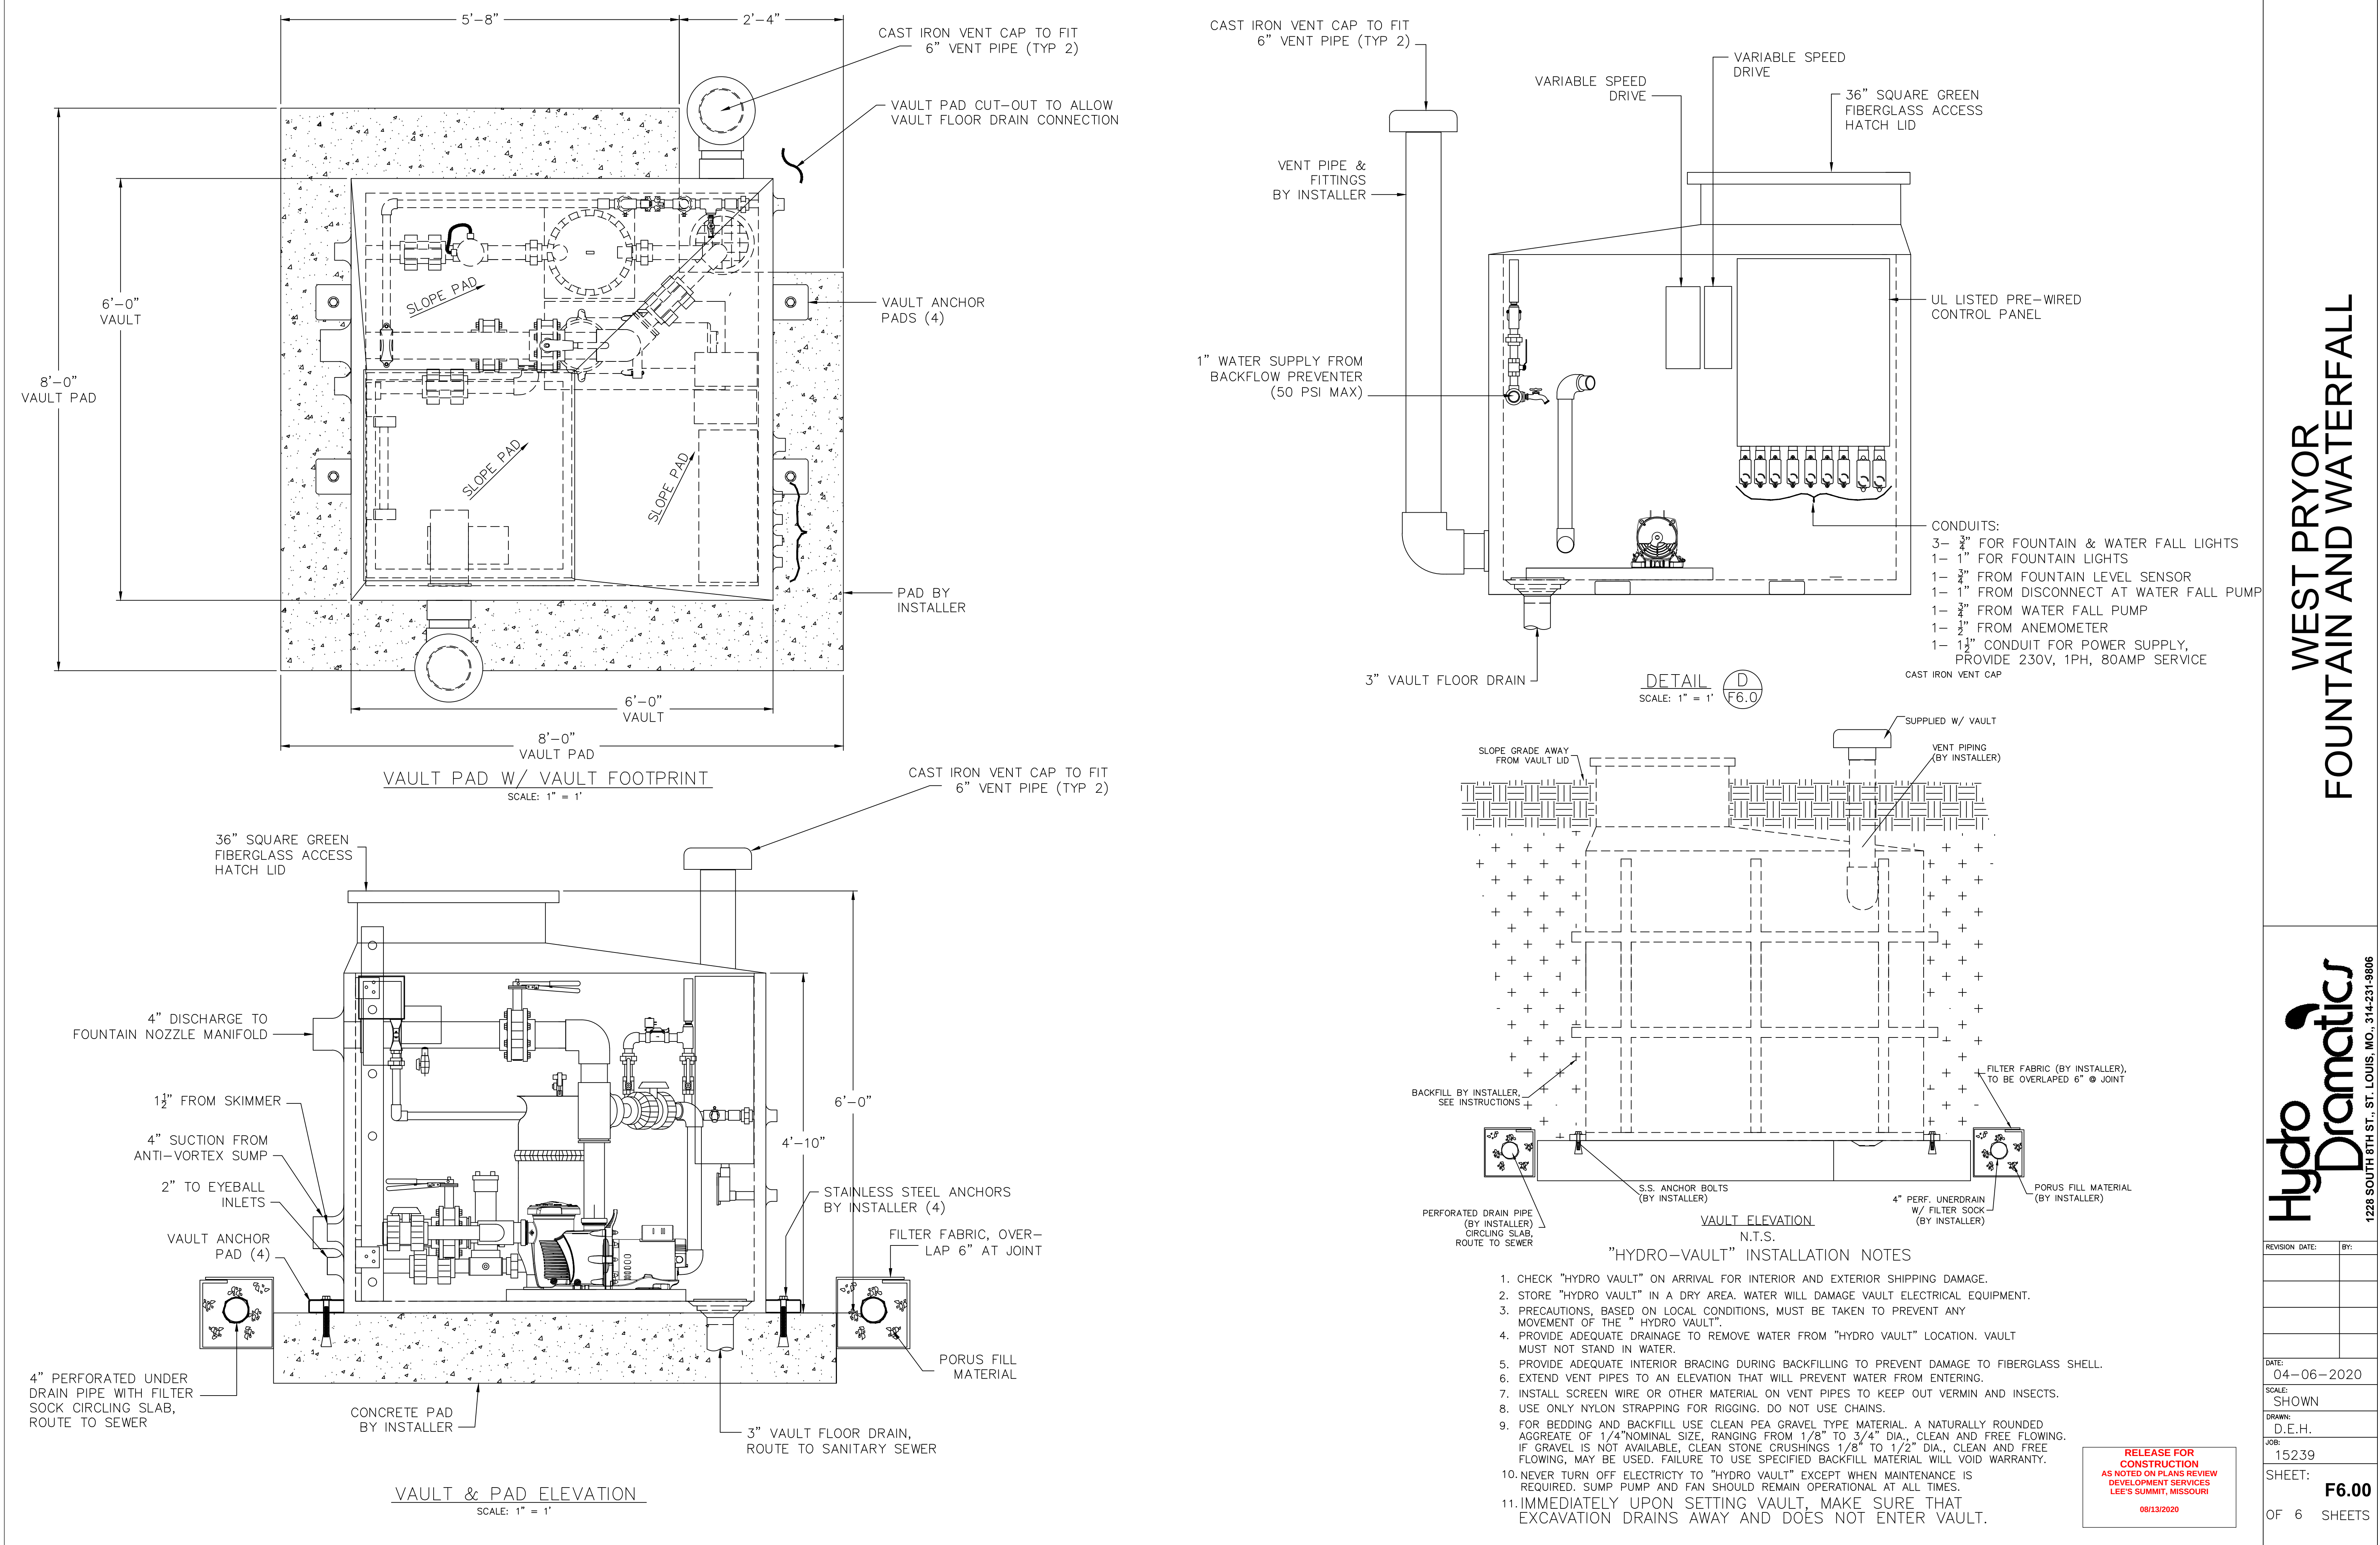

WEST PRYOR
FOUNTAIN AND WATERFALL




REVISION DATE:	BY:
DATE:	04-06-2020
SCALE:	SHOWN
DRAWN:	D.E.H.
JOB:	15239
SHEET:	F6.00
OF 6 SHEETS	



SUITABLE FOR USE ON A CIRCUIT OF DELIVERING NOT MORE THAN 5000 RMS SYMMETRICAL AMPERES, 600 VOLTS MAXIMUM

08/13/2020

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
84

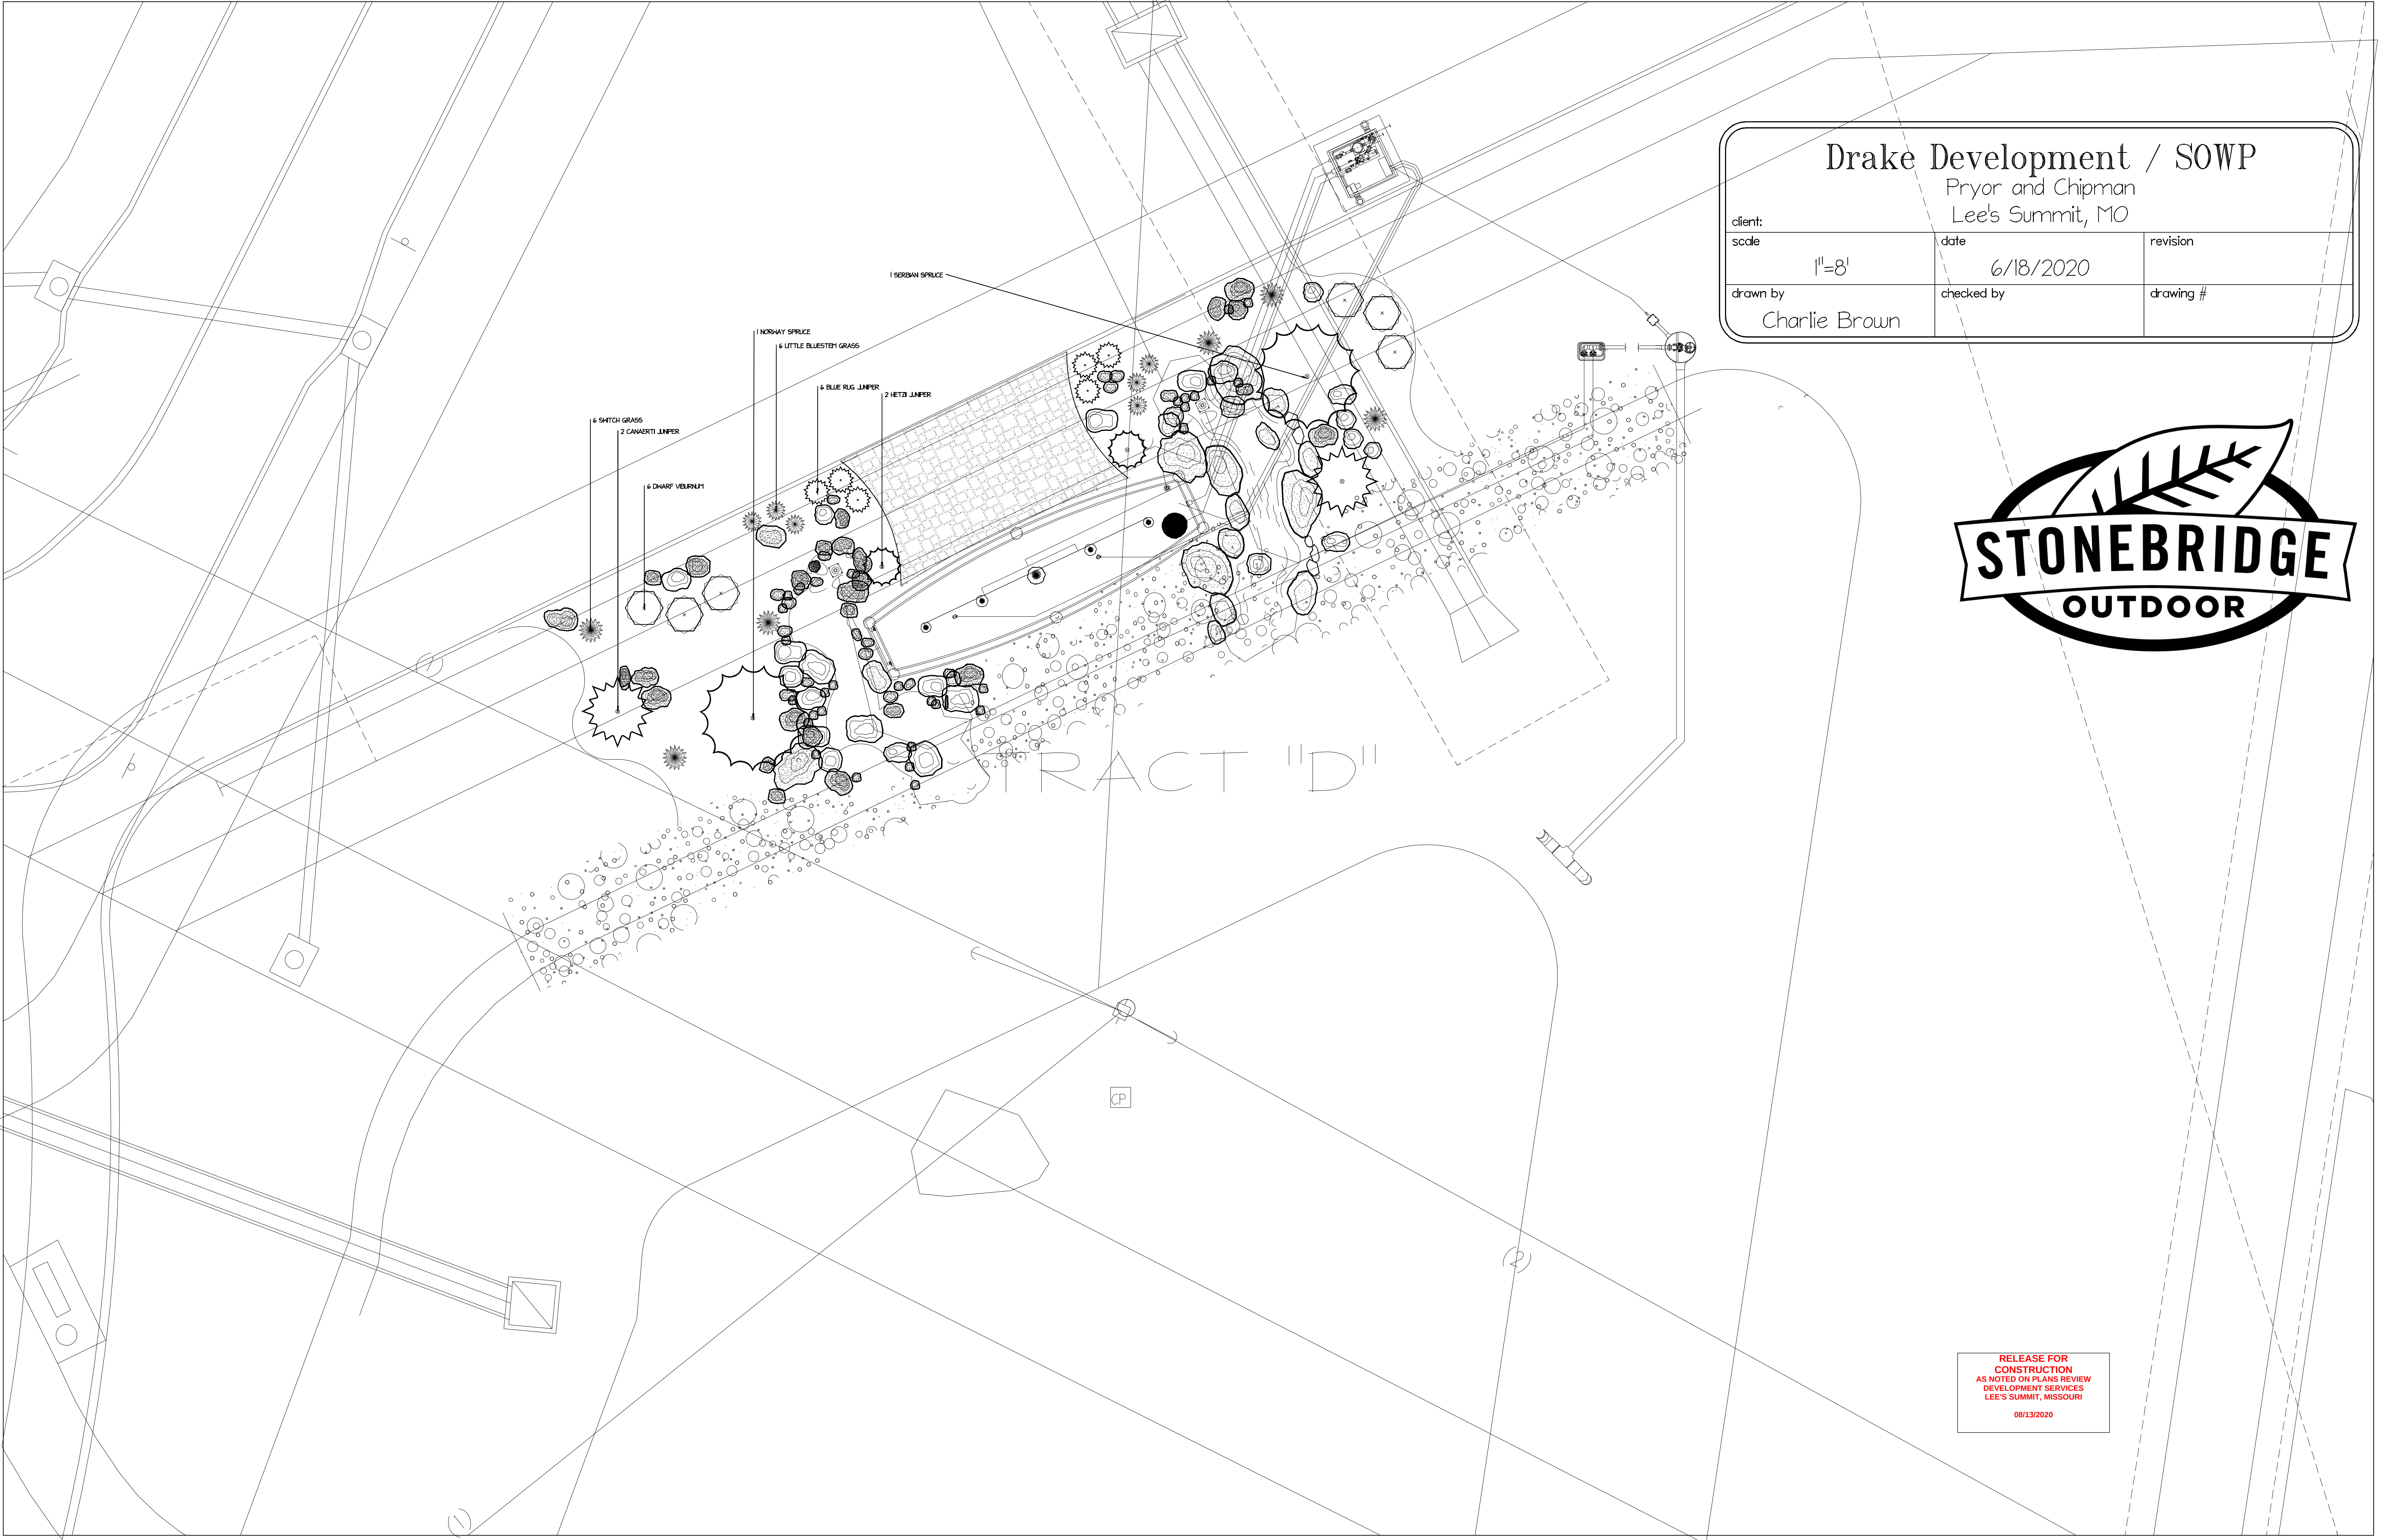

Drake Development / SOWP		
Pryor and Chipman Lee's Summit, MO		
client:		
scale	1"=8'	date 6/18/2020
drawn by	Charlie Brown	checked by
		revision
		drawing #



RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
08/13/2020