












RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
09/05/2024 2:12:58

HANGER SCHEDULE		Quantity
	LUS24	0
	LUS26	0
	HUS26	24
	HHUS26-2	0
	HGUS26-2	0
	HGUS28-3	0
	LTHJA26	0
	TJC37	0
	TJC57	0
	HTS20	0

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified
by Engineer Of Record,
Wheeler Lumber, LLC
recommends an uplift
connection at each bearing
point per the following:

(1) SDWC15600 screw for each ply of truss at wall bearing location.
Allowable uplifts per bearing location:
1 ply truss - 505 lbs
2 ply truss - 910 lbs
3 ply or more - 1410 lbs

Installation per Simpson
Strong-Tie guidelines.


For Reactions greater than
shown above, refer to EOR.

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of Wood Trusses" available from the Truss Plate Institute, 383 Donlin Drive, Madison, WI 53719.

Shop Drawing Approval

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

*Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871*

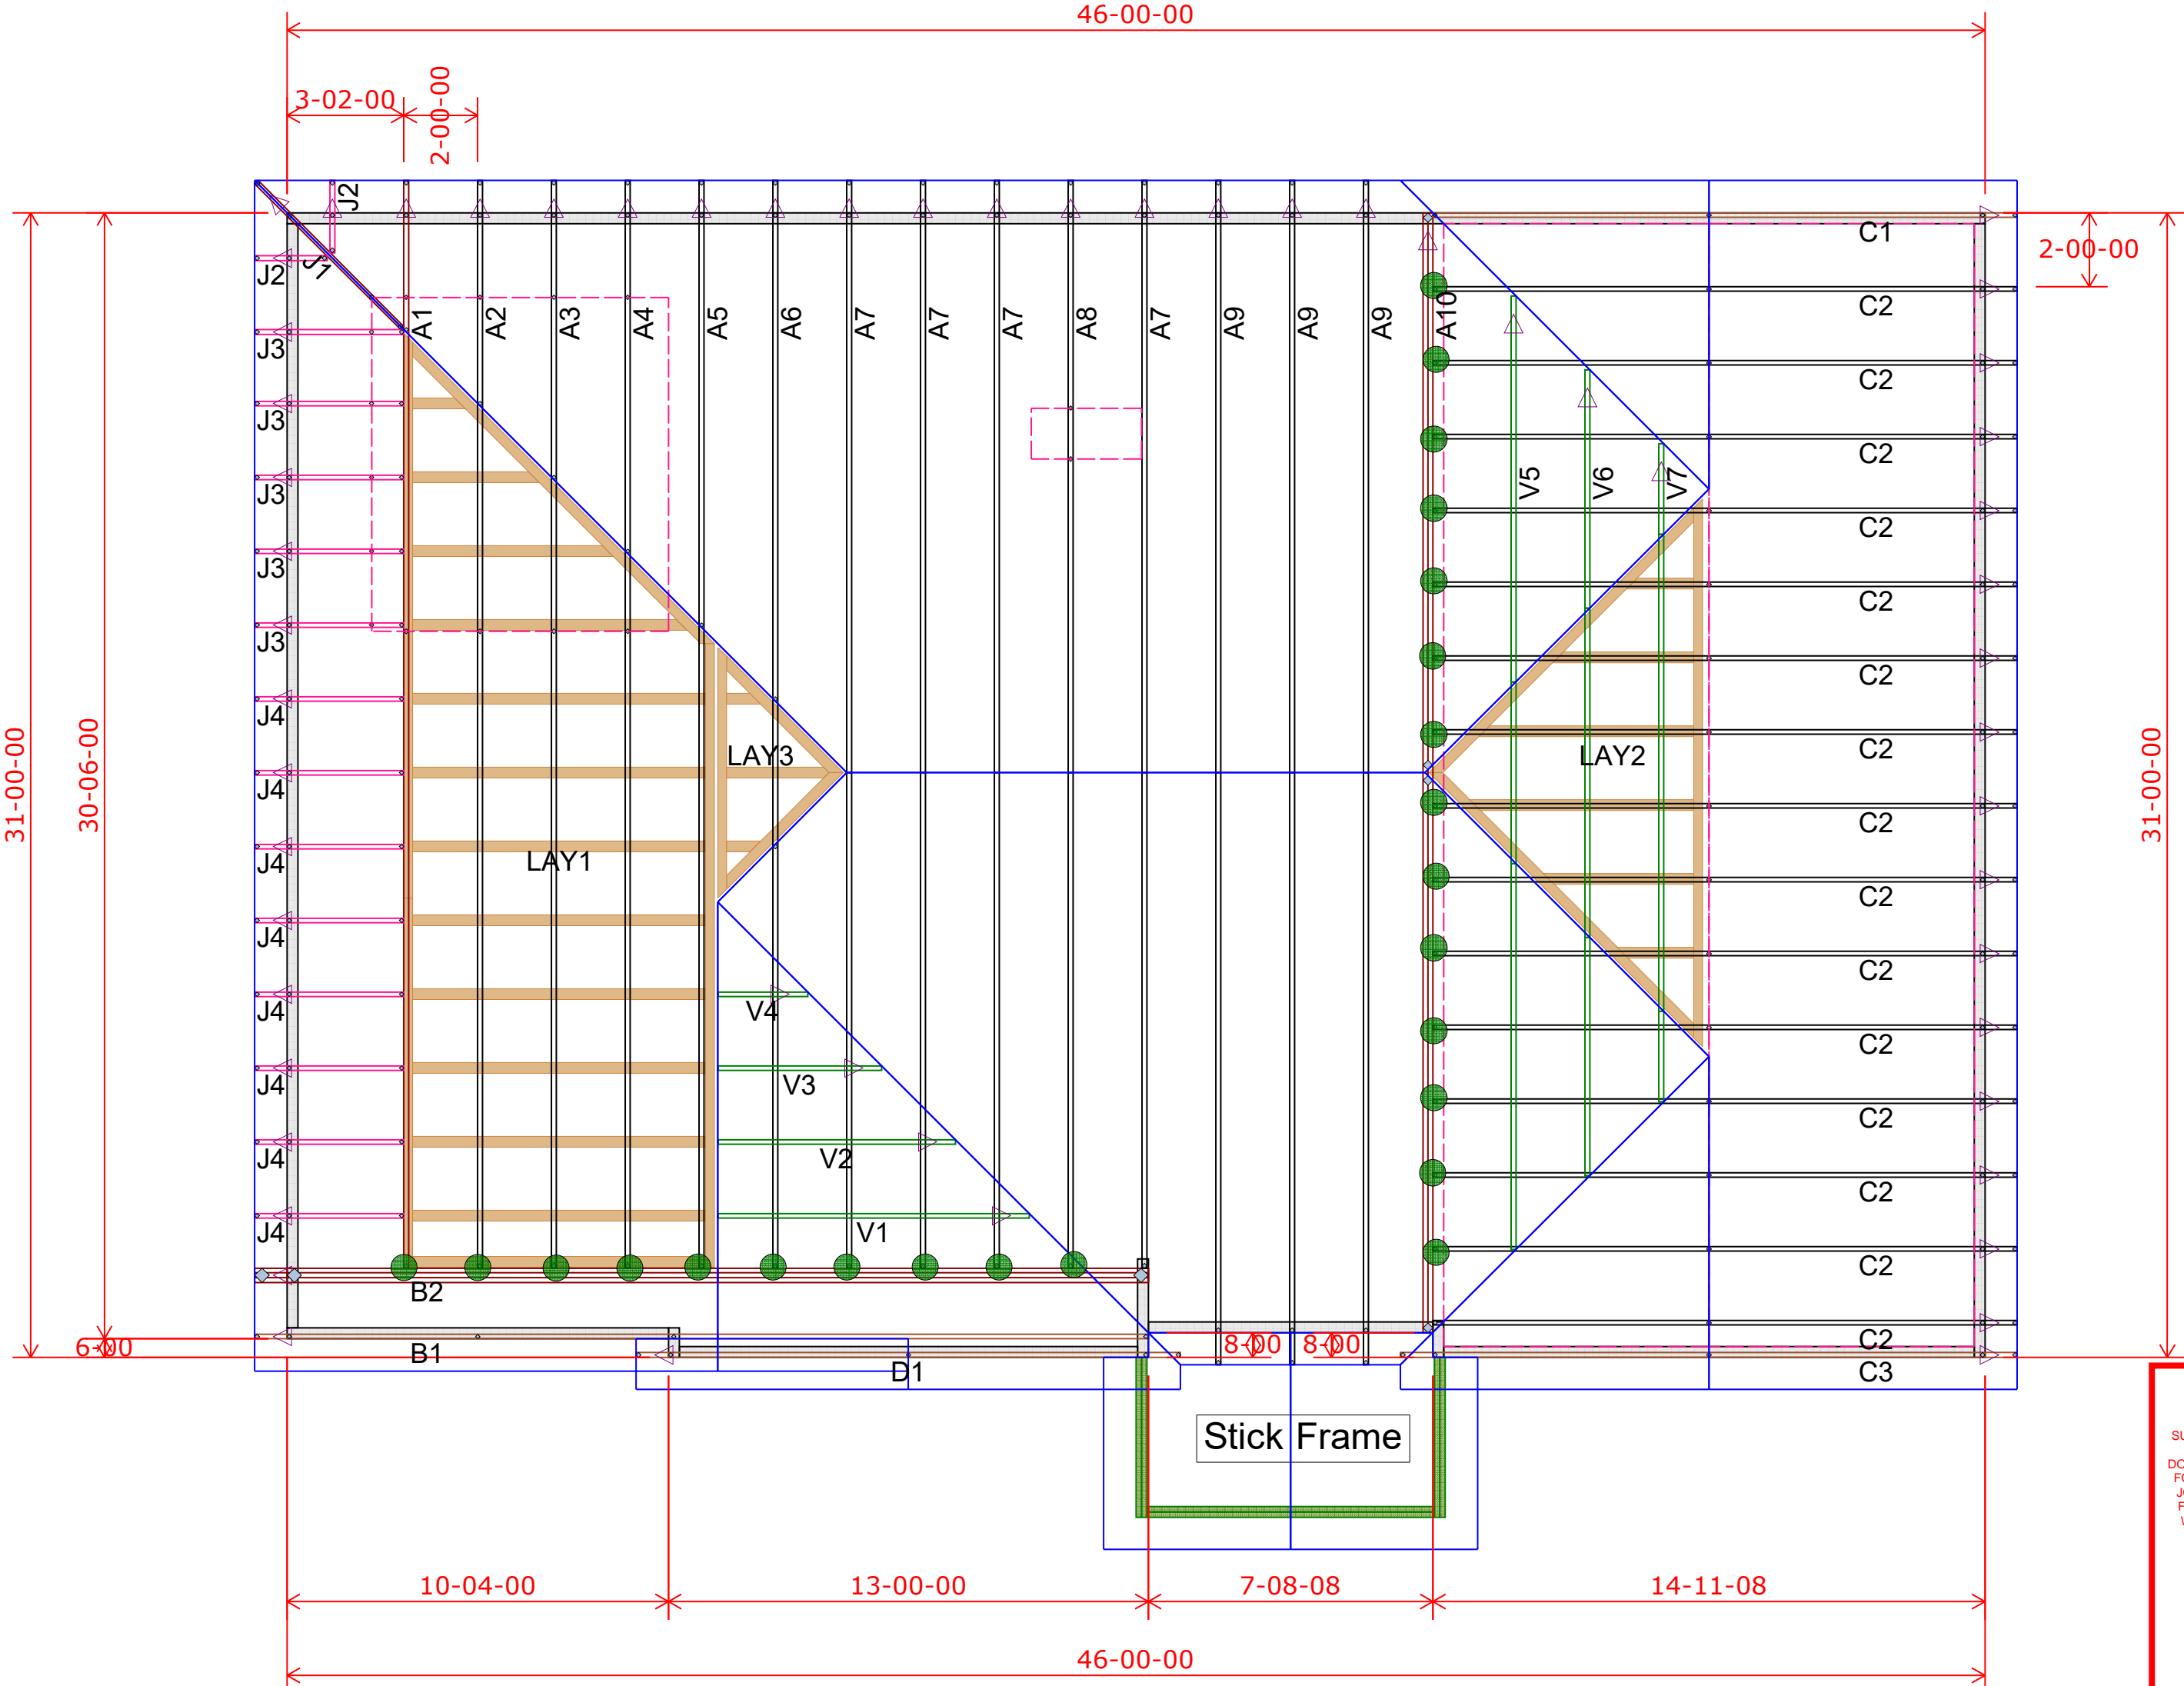

EVERSTEAD
SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORM AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS, JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITY, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.

STATUS:
APPROVED

08/28/202

REVIEWED BY
HCJ

ENGINEER, EVERSTEAD ENGINEERING & DESIGN LL

Roof Truss Layout

Scale: 1/4" = 1'