


10/07/2024

Roof Truss Layout

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.

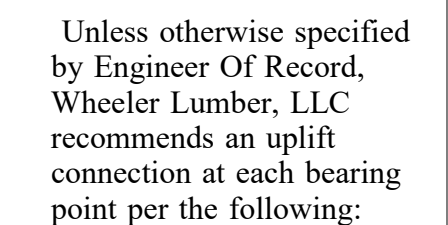

<u># of Uplift</u>	<u>Connector</u>
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson
Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Customer	Lunner One		
Job Name	Lot 33 Orchard Woods		
Job Site Address	4005 NE Apple Grove Dr.		
City,	State	Lee's Summit	MO
Designer	Taylor Everhart (785) 746-4239		
6/6/2024	Job # B230468		

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses. The building designer is responsible for the design of the trusses, including the design of the connections to the walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, 585 D'Oroville Drive, Madison, WI 53179.	Shop Drawing Approval	THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALTH PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.
Approved By: _____	Date: _____	

*Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871*

