




Hook Farms Second Plat
 Project No.: B19-4061
 02/08/2021
 For: Hunt Midwest

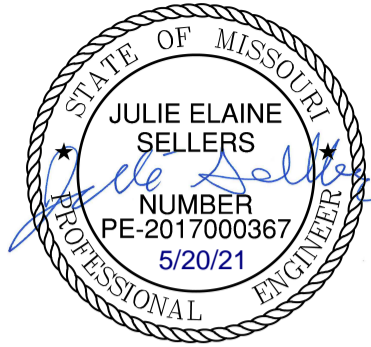

Opinion of Probable Cost Sanitary Sewer Based on Final Plans

ITEM OF WORK	QUANTITY	UNIT	UNIT COST	COST
SANITARY SEWERS				
Mains (0' - 16' deep)				
8" PVC (SDR-26)	2618.31	L.F.	\$35.00	\$91,640.85
Laterals				
6" Pipe	2348.88	L.F.	\$32.00	\$75,164.16
Service Line Connections (Wyes, Bends, Risers)				
8" Mains	58.00	Ea.	\$125.00	\$7,250.00
Manholes				
4' dia. (0'-12' deep)	10.00	Ea.	\$3,750.00	\$37,500.00
Adjust Existing Manhole (2' - 12')	21.18	V.F.	\$400.00	\$8,472.00
Extra Depth on 4' dia.	14.86	V.F.	\$120.00	\$1,783.20
Connect to Existing Manhole	3.00	Ea.	\$2,000.00	\$6,000.00
			Subtotal	\$227,810.21
TOTAL OF CONSTRUCTION COSTS				\$227,810.21