




Hook Farms Second Plat
 Project No.: B19-4061
 01/05/2021
 For: Hunt Midwest

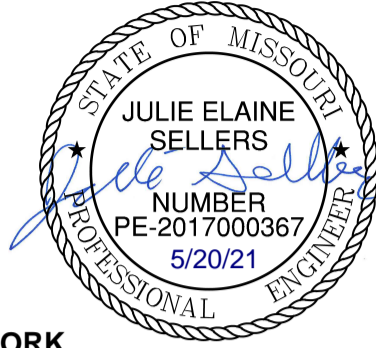

Opinion of Probable Cost Water Main Based on Final Plans

ITEM OF WORK	QUANTITY	UNIT	UNIT COST	COST
WATER LINES				
Mains				
8" DIP	80.00	L.F	\$54.00	\$4,320.00
6" C900 PVC	334.28	L.F.	\$36.00	\$12,034.08
8" C900 PVC	4243.71	L.F	\$44.00	\$186,723.24
Bends				
6" Mains	1.00	Ea.	\$206.00	\$206.00
8" Mains	19.00	Ea.	\$278.00	\$5,282.00
Tees / Crosses				
8" Mains	7.00	Ea.	\$430.00	\$3,010.00
6" Mains		Ea.	\$328.00	\$0.00
Reducers				
8" Mains	1.00	Ea.	\$223.00	\$223.00
Solid Sleeves				
8" Mains	2.00	Ea.	\$242.00	\$484.00
Gate Valves				
6" Mains	1.00	Ea.	\$755.00	\$755.00
8" Mains	13.00	Ea.	\$1,250.00	\$16,250.00
Miscellaneous				
Fire Hydrant Assemblies	11.00	Ea.	\$4,400.00	\$48,400.00
Chlorination and Connection to Existing	3.00	Ea.	\$3,000.00	\$9,000.00
			Subtotal	\$286,687.32
TOTAL OF CONSTRUCTION COSTS				\$286,687.32