H&R BLOCK



DES	IGN SIGN STATUS - MAIN	I ID WALL SIGNS		
SIGN #	LOCATION	SIGN TYPE	TECHNICALLY VERIFIED	
1	WEST ELEVATION	CHANNEL LETTERS - ILLUMINATED	Х	
DESIGN SIGN STATUS - EDEESTANDING SIGNS				

DESIGN SIGN STATUS - FREESTANDING SIGNS			
	2 NE RICE RD.	TENANT PANELS - D/F MONUMENT SIGN	Х

AERIAL VIE
SCALE: N.T.S

	REVISIONS
1)	
2)_ _	
3)_ 4)	
+/_	

It is the intent and purpose of this color rendering to provide a basic color representation of your sign finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors will vary from actual paint finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors will vary from actual paint finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors.

image national signs
...bringing your image to light!

16265 Star Rd., Nampa, ID 83687 - toll free: 800.592.8058 - tele: 208.345.4020 imagenational.com

U.S. & P.R. - All signs conform to UL-48/2161 (labeled accordingly) & must comply with UL-41.1 install procedures. Canada - all signs must be CAS compliant. This sign(s) is intended to be installed in coordinate with squirements of critics (2004). accordance with requirements of article 600 of the National Electrical Code and/or applicable local

Client: H & R BLOCK Site: Site # 24168

Date: 1/13/25 1127 NE Rice Rd. Designer: SO Reviewed by: XX Lee's Summit, MO 64086 Account Manager: CS | Engineer: XX

H&R BLOCK


File: HRB-24168-Lees Summit MO

2 of 4

EXISTING CONDITIONS

WILIDERTY TAX

PROPOSED CONDITIONS

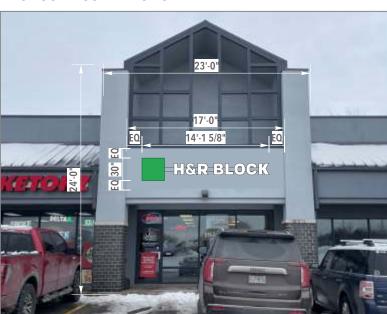


FRONT ELEVATION - WEST

SCALE: 3/32" = 1'-0"


EXISTING SQ. FT.:

ALLOWED SQ. FT.: 55.2 PROPOSED SQ. FT.: 35.3

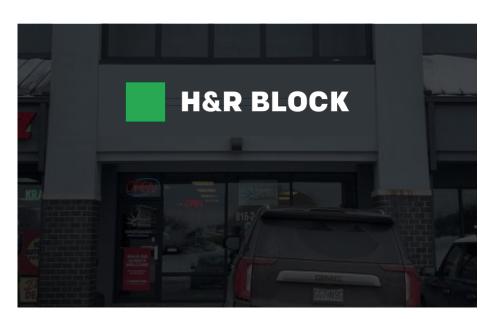

SIMULATED NIGHT VIEW

SCALE: N.T.S.

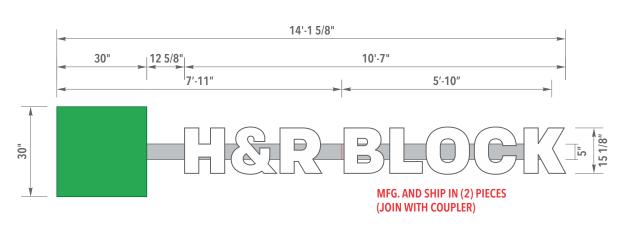

ILLUMINATED CHANNEL LETTERS - RACEWAY

SCALE: 3/8"=1'-0"

It is the intent and purpose of this color rendering to provide a basic color representation of your sign finish and color. Existing painted surfaces will have a perceptible difference in shade and sheen from your sign finish. Providing a sample of the paint you wish to match or a Matthews paint color formula will minimize the differences.



imagenational.com

UNDERWRITERS NAMPA PLANT - UL #433195-00

U.S. & P.R. - All signs conform to UL-48/2161 (labeled accordingly) & must comply with UL-41.1 install procedures. Canada - all signs must be CAS compliant. This sign(s) is intended to be installed in accordance with requirements of article 600 of the National Electrical Code and/or applicable local

Client: H & R BLOCK

Site: Site # 24168 1127 NE Rice Rd. Lee's Summit, MO 64086 Date: 1/13/25 Reviewed by: XX Designer: SO Account Manager: CS | Engineer: XX

H&R BLOCK

File: HRB-24168-Lees Summit MO

GENERAL NOTES

10% OF BLDG FAÇADE FOR WALL, AWNING OR CANOPY; 6SF FOR PROJECTING, OVER OR UNDER CANOPY

23' x 24' x 10% = 55.2 SF MAX

NEW CHANNEL LETTERS ON RACEWAY INSTALLED TO FRONT ELEVATION


CITY CODE & ALLOWANCES

3 of 4

EXISTING CONDITIONS

PROPOSED CONDITIONS



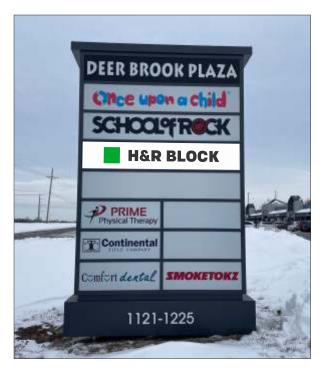

D/F MONUMENT/PYLON AT NE RICE RD.

SCALE: N.T.S.



SIMULATED NIGHT VIEW (H&R BLOCK PANEL ONLY)

SCALE: N.T.S.



REFACE EXISTING TENANT PANELS

SCALE: 3/4" = 1'-0"

	MAN	UFACTURING REVISIONS
	ECO#	DESCRIPTION - INITIALS
Α		
В		
С		

It is the intent and purpose of this color rendering to provide a basic color representation of your sign finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors will vary from actual paint finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors will vary from actual paint finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors.



imagenational.com

UNUEKMHITERS
NAMPA PLANT
UL #433195-00

UL #433195-001

U.S. & P.R. - All signs conform to UL-48/2161 labeled accordingly) & must comply with UL-41.1 install procedures. Canada - all signs must be CAS compliant. This sign(s) is intended to be installed in accordance with requirements of article 600 of the National Electrical Code and/or applicable local codes. This includes proper grounding and bonding

Client: H & R BLOCK

Site: Site # 24168 Date: 1/13/25 1127 NE Rice Rd. Reviewed by: XX Designer: SO Lee's Summit, MO 64086 Account Manager: CS | Engineer: XX

H&R BLOCK

File: HRB-24168-Lees Summit MO

1 FACE

INSTALLER NOTE

MATERIAL

VINYL COLOR

FIELD WORK

NOTES

COLOR KEY

SHIPPING LIST

EXISTING D/F PYLON SIGN.

VINYL ARLON 2500 - GREEN 2586

VINYL 3M BLACK VINYL

MATERIAL

MANUFACTURE & INSTALL (2) NEW POLYCARBONATE FACES FOR

NOTE: THE COLORS DEPICTED ON THIS RENDERING REPRESENT COLOR INTENT ONLY AND MAY NOT MATCH ACTUAL COLORS ON FINISHED PRODUCT. PLEASE REFER TO COLOR CALL-OUTS AND SPECIFIED VENDOR SAMPLES FOR APPROVED COLOR SPECIFICATIONS.

VINYL APPLICATION 1ST SURFACE

WHITE POLYCARBONATE FACE

INSTALLER IS RESPONSIBLE

ONLY VISUAL SIZE IN SURVEY

CUT SIZE IS APPROXIMATE, SOME TRIMMING MAY BE REQUIRED

PER COLOR KEY

FOR FINISHED SIZE.

4 of 4

Page No.

© 2025 Image National, Inc. This design is an original work of authorship dwork of authorship by Image end, until the use of this design is authorized by image and, until the use of this design is authorized by image and, until the use of this design is authorized by image and, until the use of this design in copies, in graphic form or as a sign; b) prepare derivative works based upon the design; c) distribute copies of the design by sale or other transfer of ownership; and d) display the design publicly.



REMOVE H&R BLOCK SIGNAGE AT: 987 NE RICE RD., LEES SUMMIT, MO 64086

It is the intent and purpose of this color rendering to provide a basic color representation of your sign finish and color. Existing painted surfaces will have a perceptible difference in shade and printed solors will vary from actual paint finish and color. Existing painted surfaces will have a perceptible differences.




imagenational.com

(labeled accordingly) & must comply with UL-41.1 install procedures. Canada - all signs must be CAS compliant. This sign(s) is intended to be installed in accordance with requirements of article 600 of the National Electrical Code and/or applicable local


	.,		· · · · · · · · · · · · · · · · · · ·	
lient: H & R BLOCK		A		
ite:	Site # 24168	Date: 1/13/25		
	1127 NE Rice Rd. Lee's Summit, MO 64086	Designer: SO	Reviewed by: XX	
		Account Manager: CS	Engineer: XX	

File: HRB-24168-Lees Summit MO	Page No.
H&R BLOCK	REMOVA

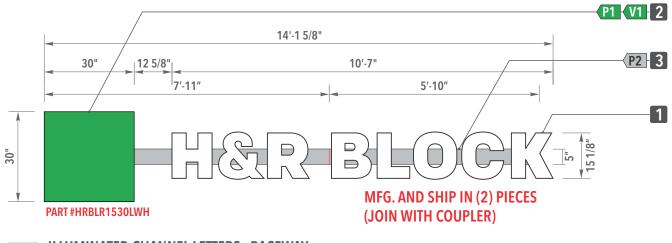


ILLUMINATED CHANNEL LETTERS - RACEWAY
SCALE: 3/8"=1'-0"


Principal PL-QM2-TW150-P (Qwik Mod 2) - (60 MODS) (1) Principal Sloan 12V 60W Power Supply- @ 0.80 Amps Each Electrical Wire 2-Wire 18ga Jacketed - 4' WHIP per Letter

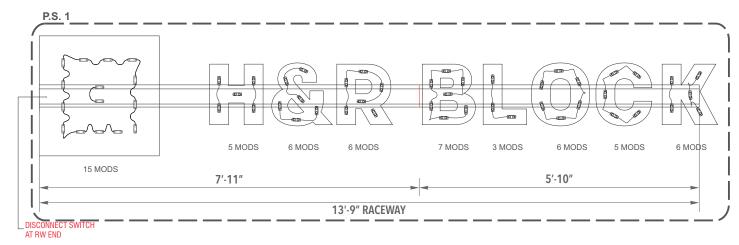

LED / RACEWAY LAYOUT

SCALE: 1/2"=1'-0"

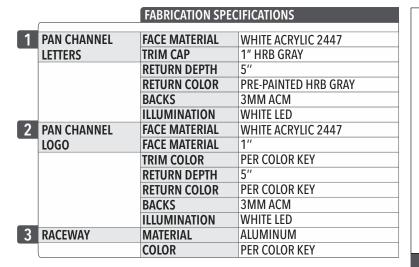




	COLOR KEY					
V1	VINYL (ARLON 2500 - GREEN 2586 TRANSLUCENT				
D1	PAINT	MP#84430 SMOOTH SATIN FINISH				
(PI	PAINI	MIF#64430 SMOOTH SATIN FINISH				
(P2	PAINT (SW 6254 LAZY GRAY				

NOTE: THE COLORS DEPICTED ON THIS RENDERING REPRESENT COLOR INTENT ONLY AND MAY NOT MATCH ACTUAL COLORS ON FINISHED PRODUCT. PLEASE REFER TO COLOR CALL-OUTS AND SPECIFIED VENDOR SAMPLES FOR APPROVED COLORS SPECIFICATIONS.

SHIPPING LIST	
MATERIAL	QTY.
1/2" FLEX CONDUIT	6′
1/2" FLEX CONNECTORS	2
TOUCH-UP PAINT	2
1/2 HD/COMM/GO/S	2
TOLICH UP PAINT	2
TV HOCOMMODIS	2
TOTOLOFFWAR	2
10"416100014101018	2

	ELECTRI	CAL REQUII	REMENTS		
VOLTS	120	AMP	0.80	CIRCUIT	1



INSTALL

- A. Non-Corrosive Securement Using Appropriate Mounting Hardware Painted to Match Background.
- B. Disconnect Switch at Left End of Raceway
- C. 1/4"Ø Drain Holes.
- D. Plastic Pass-Through
- E. 20 amp 120 V. Circuits Required (Brought to within 6' of sign BY OTHERS)
- F. Raceway

APPROVED FASTENER SCHEDULE				
#	3/8" - 1/2" LAG SCREW	FOR USE WITH WOOD OR EIFS WALL SYSTEMS. 1 1/2" MIN PENETRATION (EXCLUDING TIP)		
	1/4" - 3/8" THREADED ROD	FOR USE WITH WOOD, CONCRETE BLOCK OR EIFS WALL SYSTEMS		
	3/8" RED HEAD L.D.T. (LARGE DIAMETER TAPCON)	FOR USE WITH CONRETE BLOCK, BRICK OR CONCRETE. EMBED A MIN. OF 2 1/2".		
d in the	3/8" DIA. HILTI HIT ROD WITH HY150 MAX ADHESIVE	FOR USE WITH CONRETE. EMBED A MIN. OF 2"		
	3/8" DIA. HILTI HIT ROD WITH HY20 ADHESIVE	FOR USE WITH MASONRY AND BRICK. EMBED A MIN. OF 3 3/8"		
	3/8" DIA. HILTI HIT ROD WITH HY20 ADHESIVE	FOR USE WITH CONCRETE BLOCK. EMBED A MIN. OF 2"		
4 => -	3/8" DIA. HILTI HCL SLEEVE ANCHOR	FOR USE WITH CONCRETE, MASONRY AND BRICK. EMBED A MIN. OF 3 3/8".		
0.00000	3/8" DIA. LAG WITH 3/8" SHIELD & WASHER	FOR USE WITH CONCRETE, MASONRY AND BRICK - EMBED A MIN. OF 2"		
	#10 (3") HEX SCREW W/ FENDER WASHER INTO PLASTIC WALL ANCHOR	USE WITH CONCRETE, MASONRY & BRICK. FOR USE WITH SMALL/LIGHTWEIGHT LETTERS & CABINETS		

	MAN	UFACTURING REVISIONS
	ECO#	DESCRIPTION - INITIALS
Α		
В		
С		

It is the intent and purpose of this color representation of your sign finish and color. However, digital media and printed surfaces will have a perceptible difference in shade and printed surfaces will have a perceptible difference in shade and printed surfaces will have a perceptible difference in shade and printed surfaces.



imagenational.com

UNDERWHITEHS

NAMPA PLANT UL #433195-00 UL #433195-001

U.S. & P.R. - All signs conform to UL-48/2161 labeled accordingly) & must comply with UL-41.1 install procedures. Canada - all signs must be CAS compliant. This sign(s) is intended to be installed in accordance with requirements of article 600 of the National Electrical Code and/or applicable local codes. This includes proper grounding and bonding

Client: H & R BLOCK

Site # 24168 1127 NE Rice Rd. Lee's Summit, MO 64086 Date: 1/13/25 Reviewed by: XX Designer: SO

Account Manager: CS | Engineer: XX

File: HRB-24168-Lees Summit MO **H&R BLOCK**

DETAILS