

CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

Legend MCI137-E-LSM147-4

- AREA OF INTEREST
- CITY LIMITS

0 2,000 4,000 8,000 Feet




| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

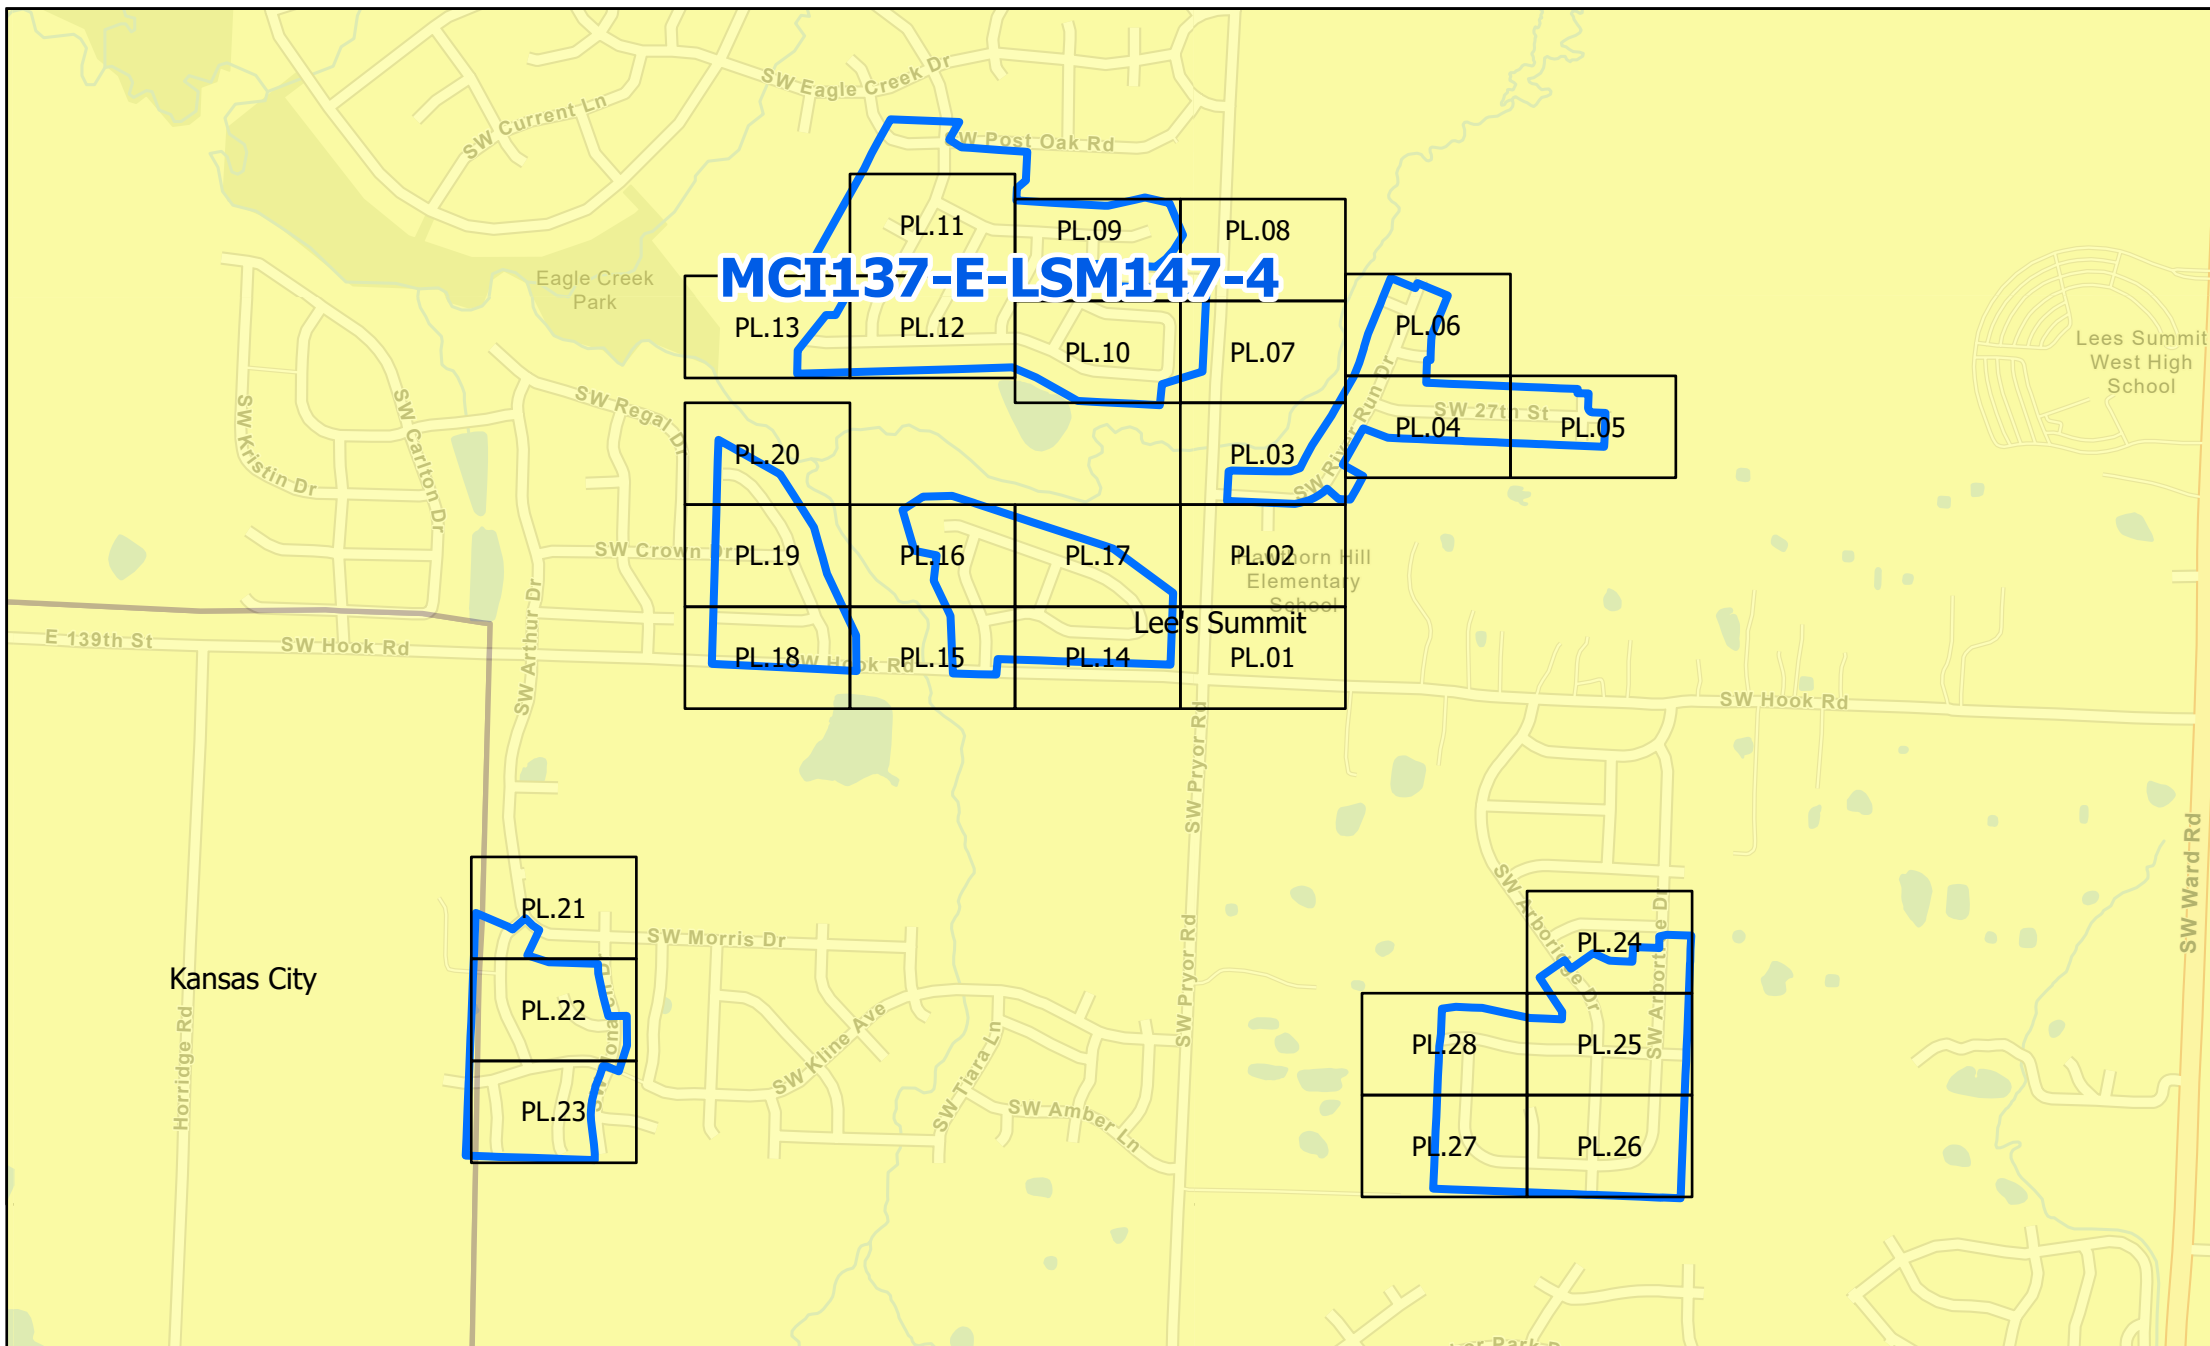

MCI137-E-LSM147-4



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

- GRIDS
- AREA OF INTEREST
- MO CITY LIMITS

0 412.5 825 1,650 Feet



| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

- AREA OF INTEREST
- V PROPOSED VAULT
- EXISTING VAULT
- - - PROPOSED UG CONDUIT

0 35 70 140 Feet




| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

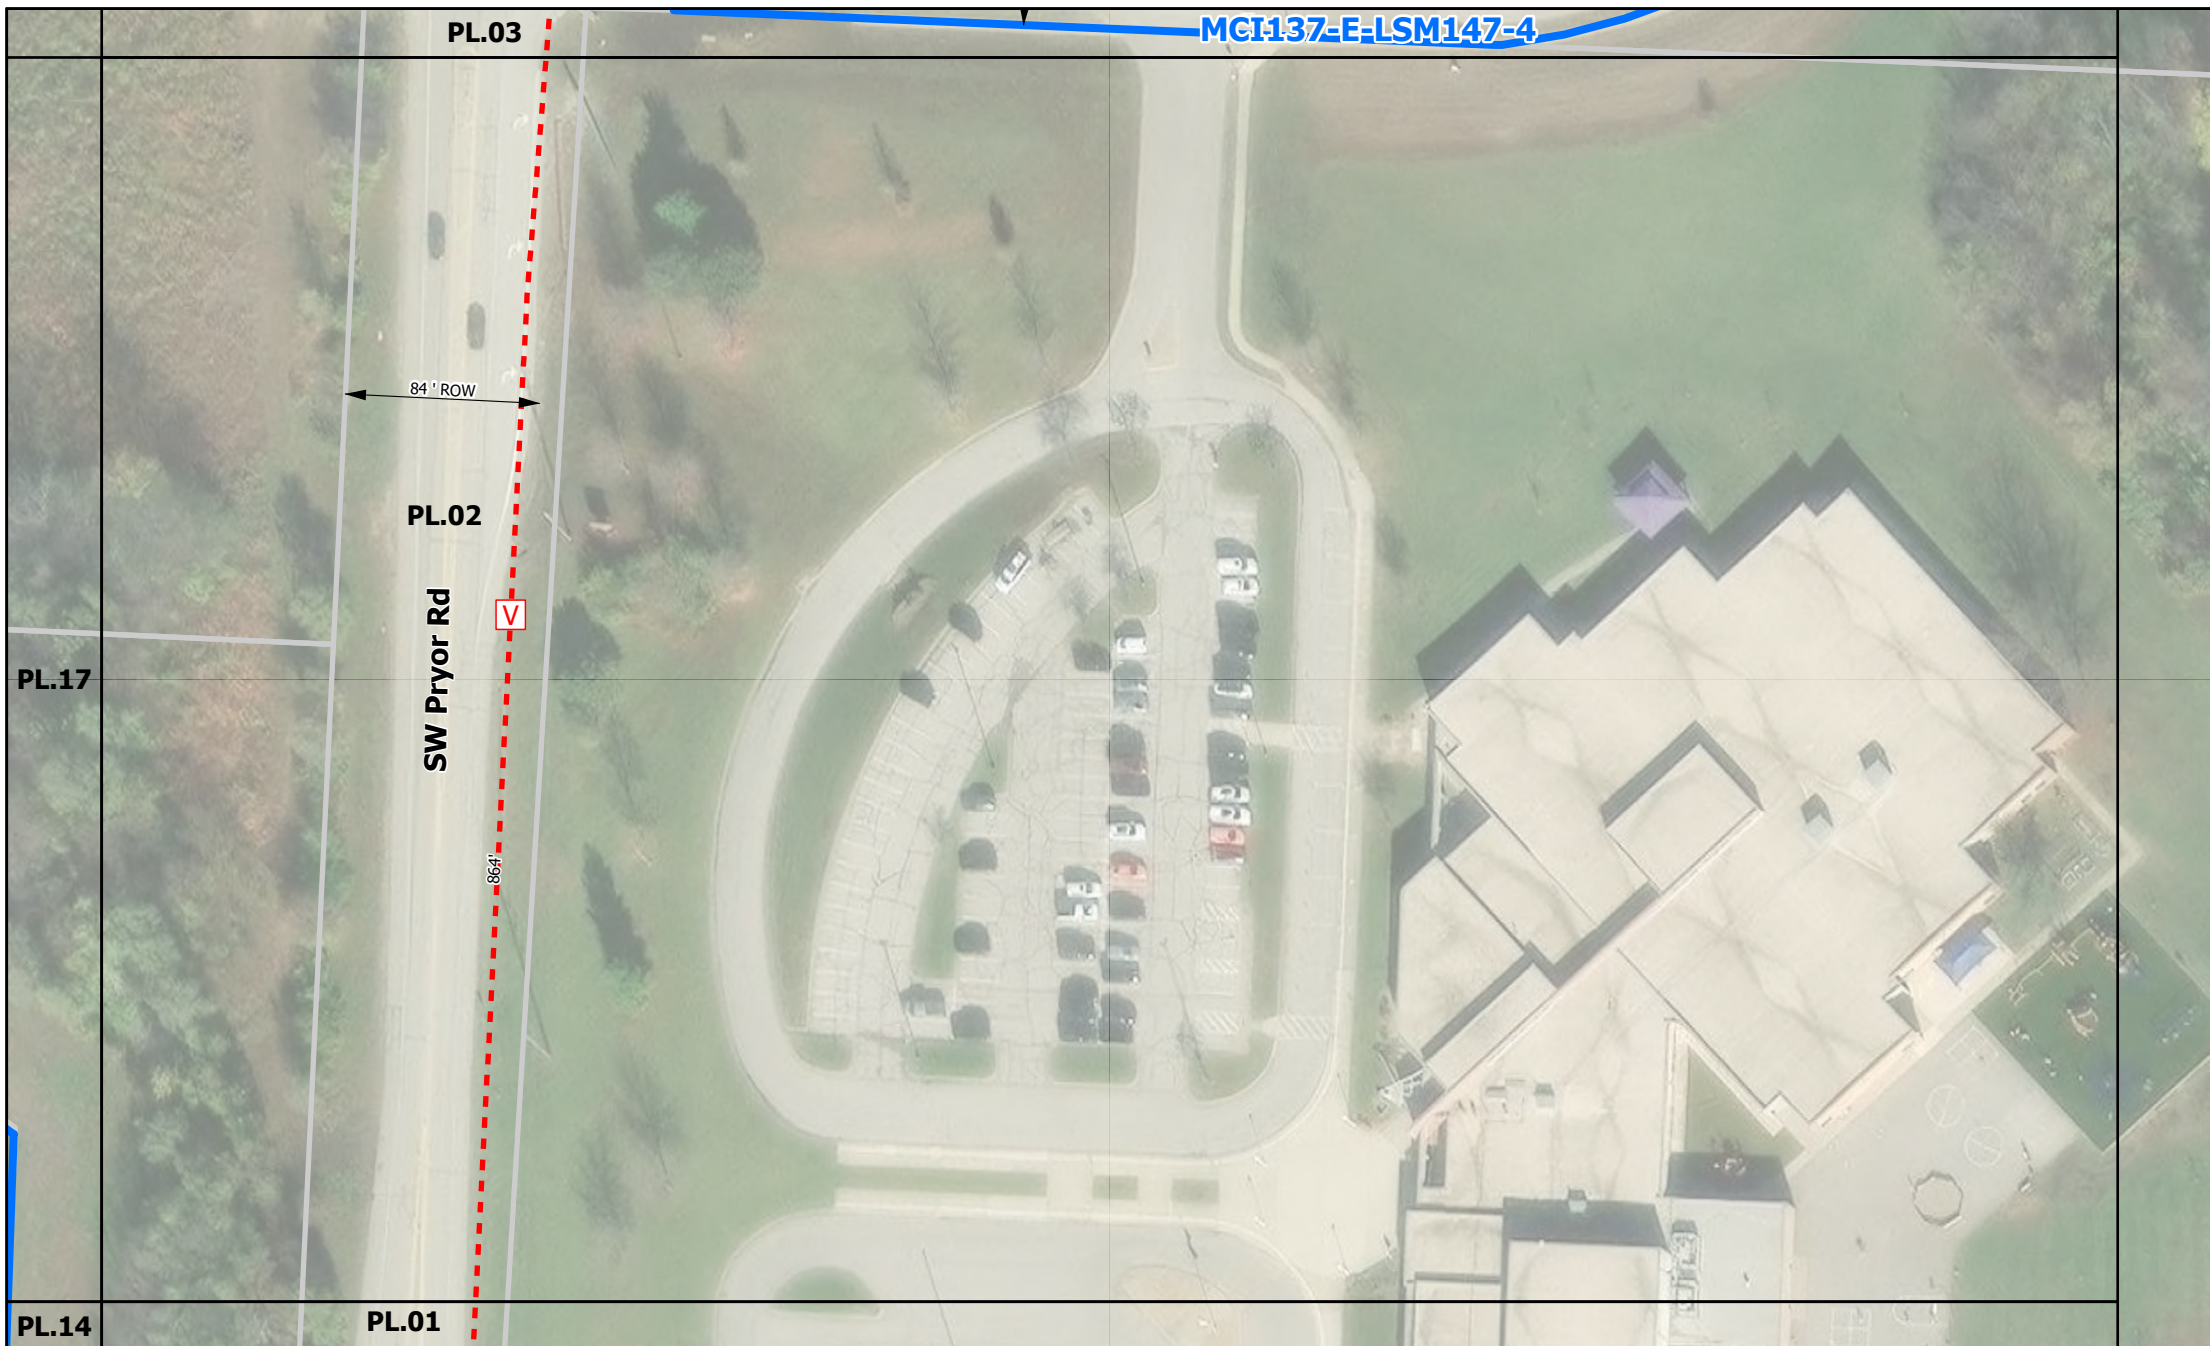


IBHC

CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

AREA OF INTEREST
 PROPOSED VAULT
 PROPOSED UG CONDUIT


0 35 70 140 Feet



| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Lee's Summit, MO
City Permit: Design View

ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

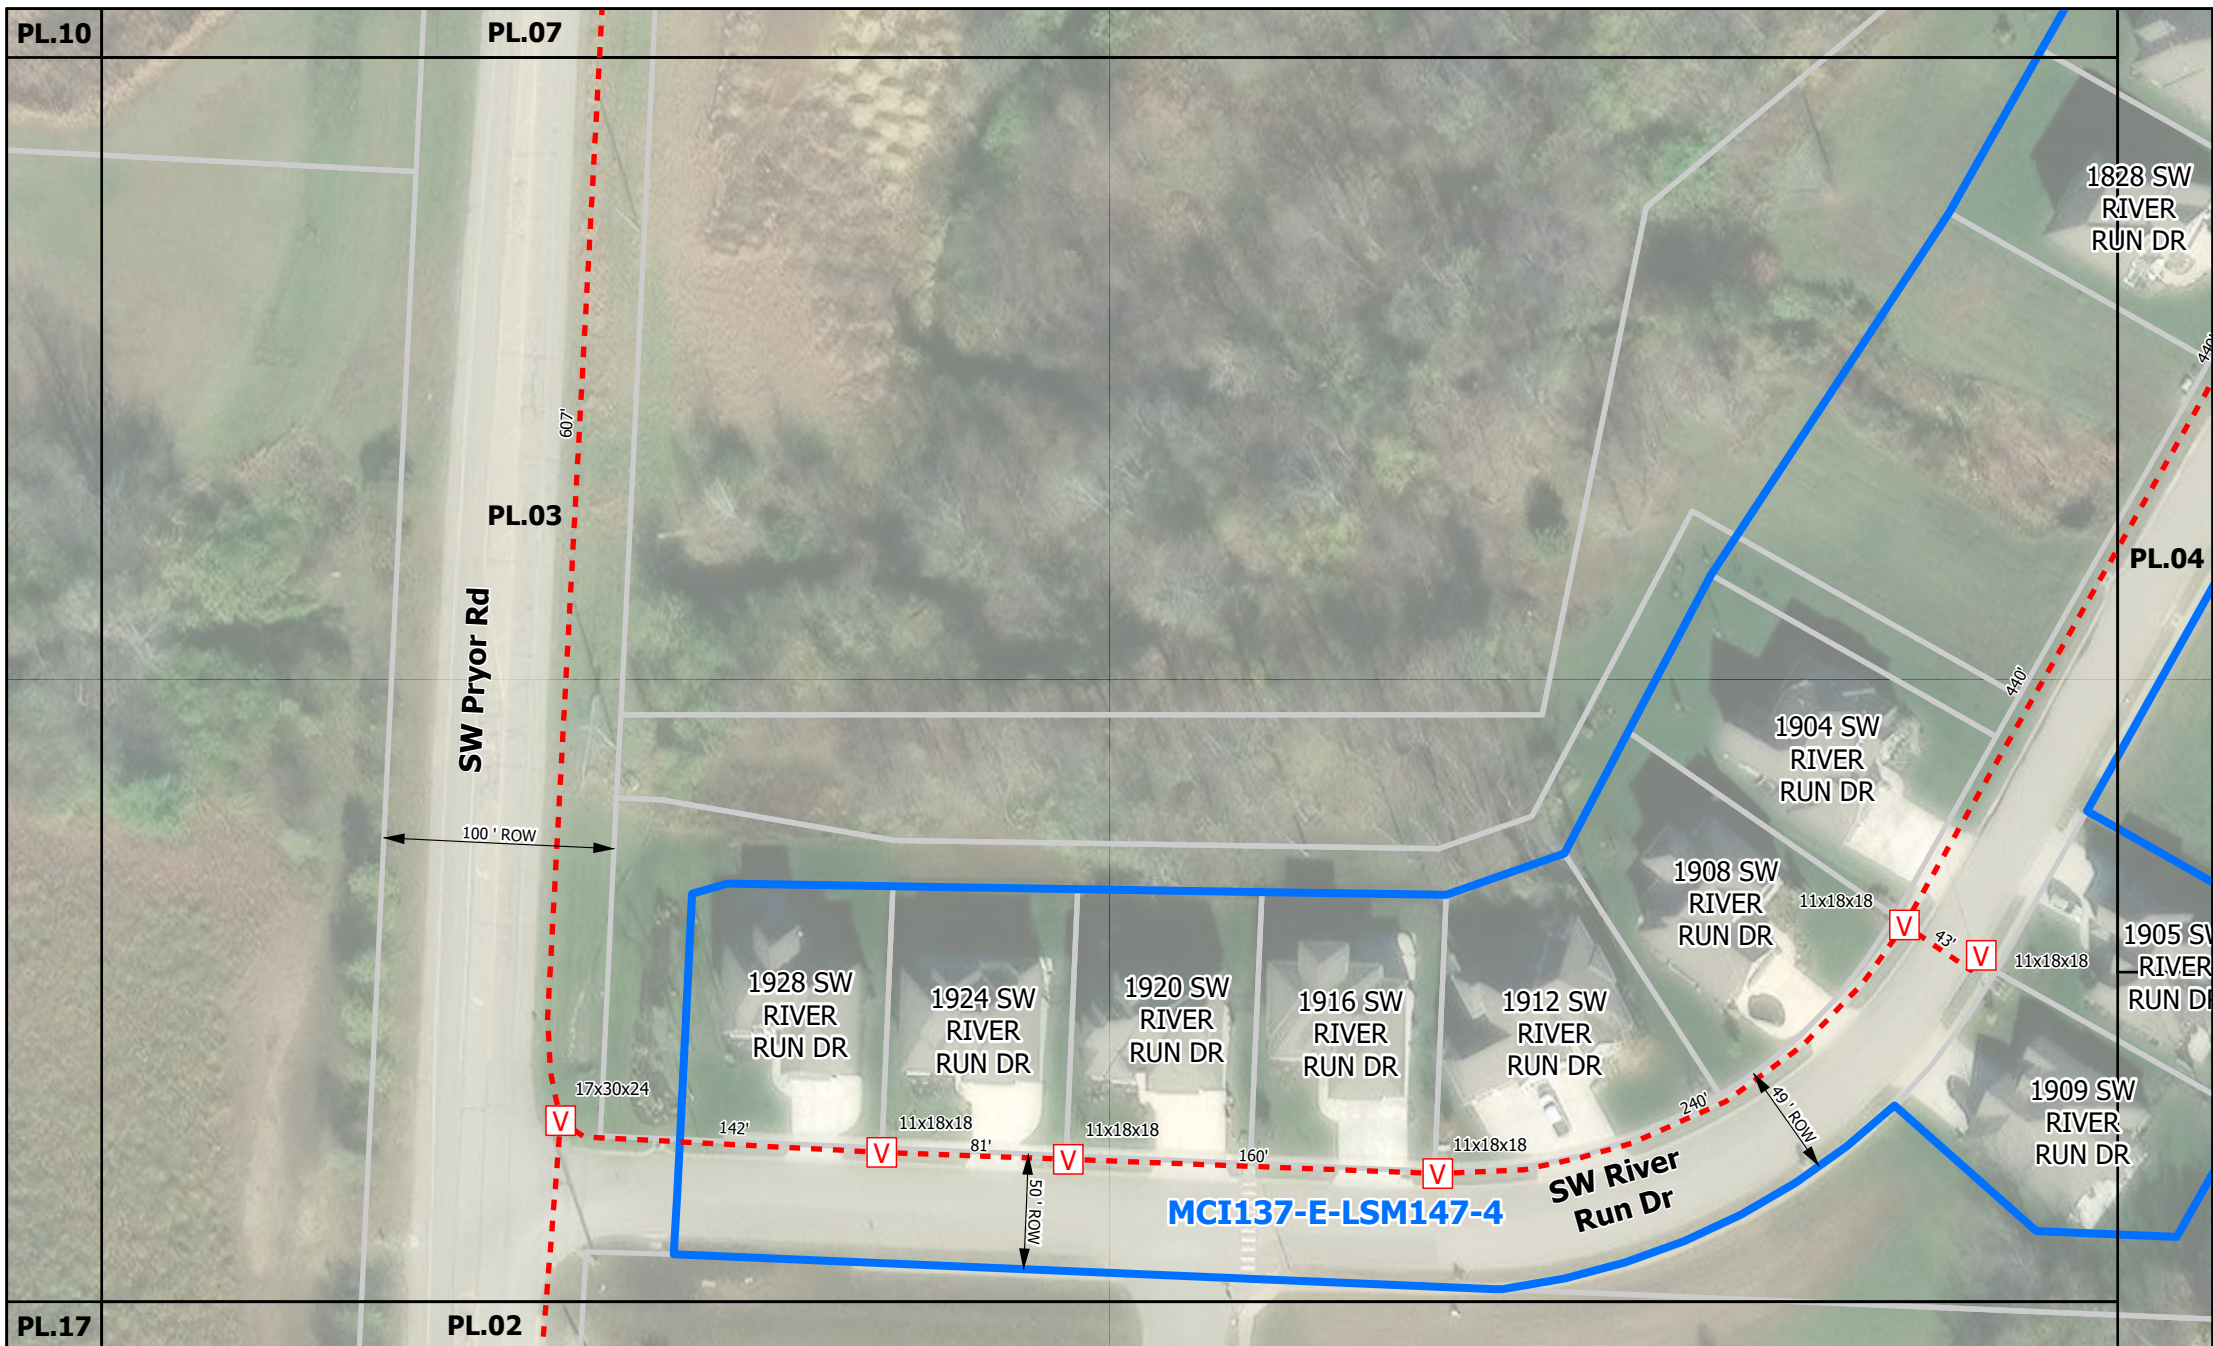

CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

- AREA OF INTEREST
- V PROPOSED VAULT
- PROPOSED UG CONDUIT

0 35 70 140 Feet



| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |




Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.






CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

AREA OF INTEREST


V PROPOSED VAULT

--- PROPOSED UG CONDUIT


0 35 70 140 Feet




N




| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |





Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

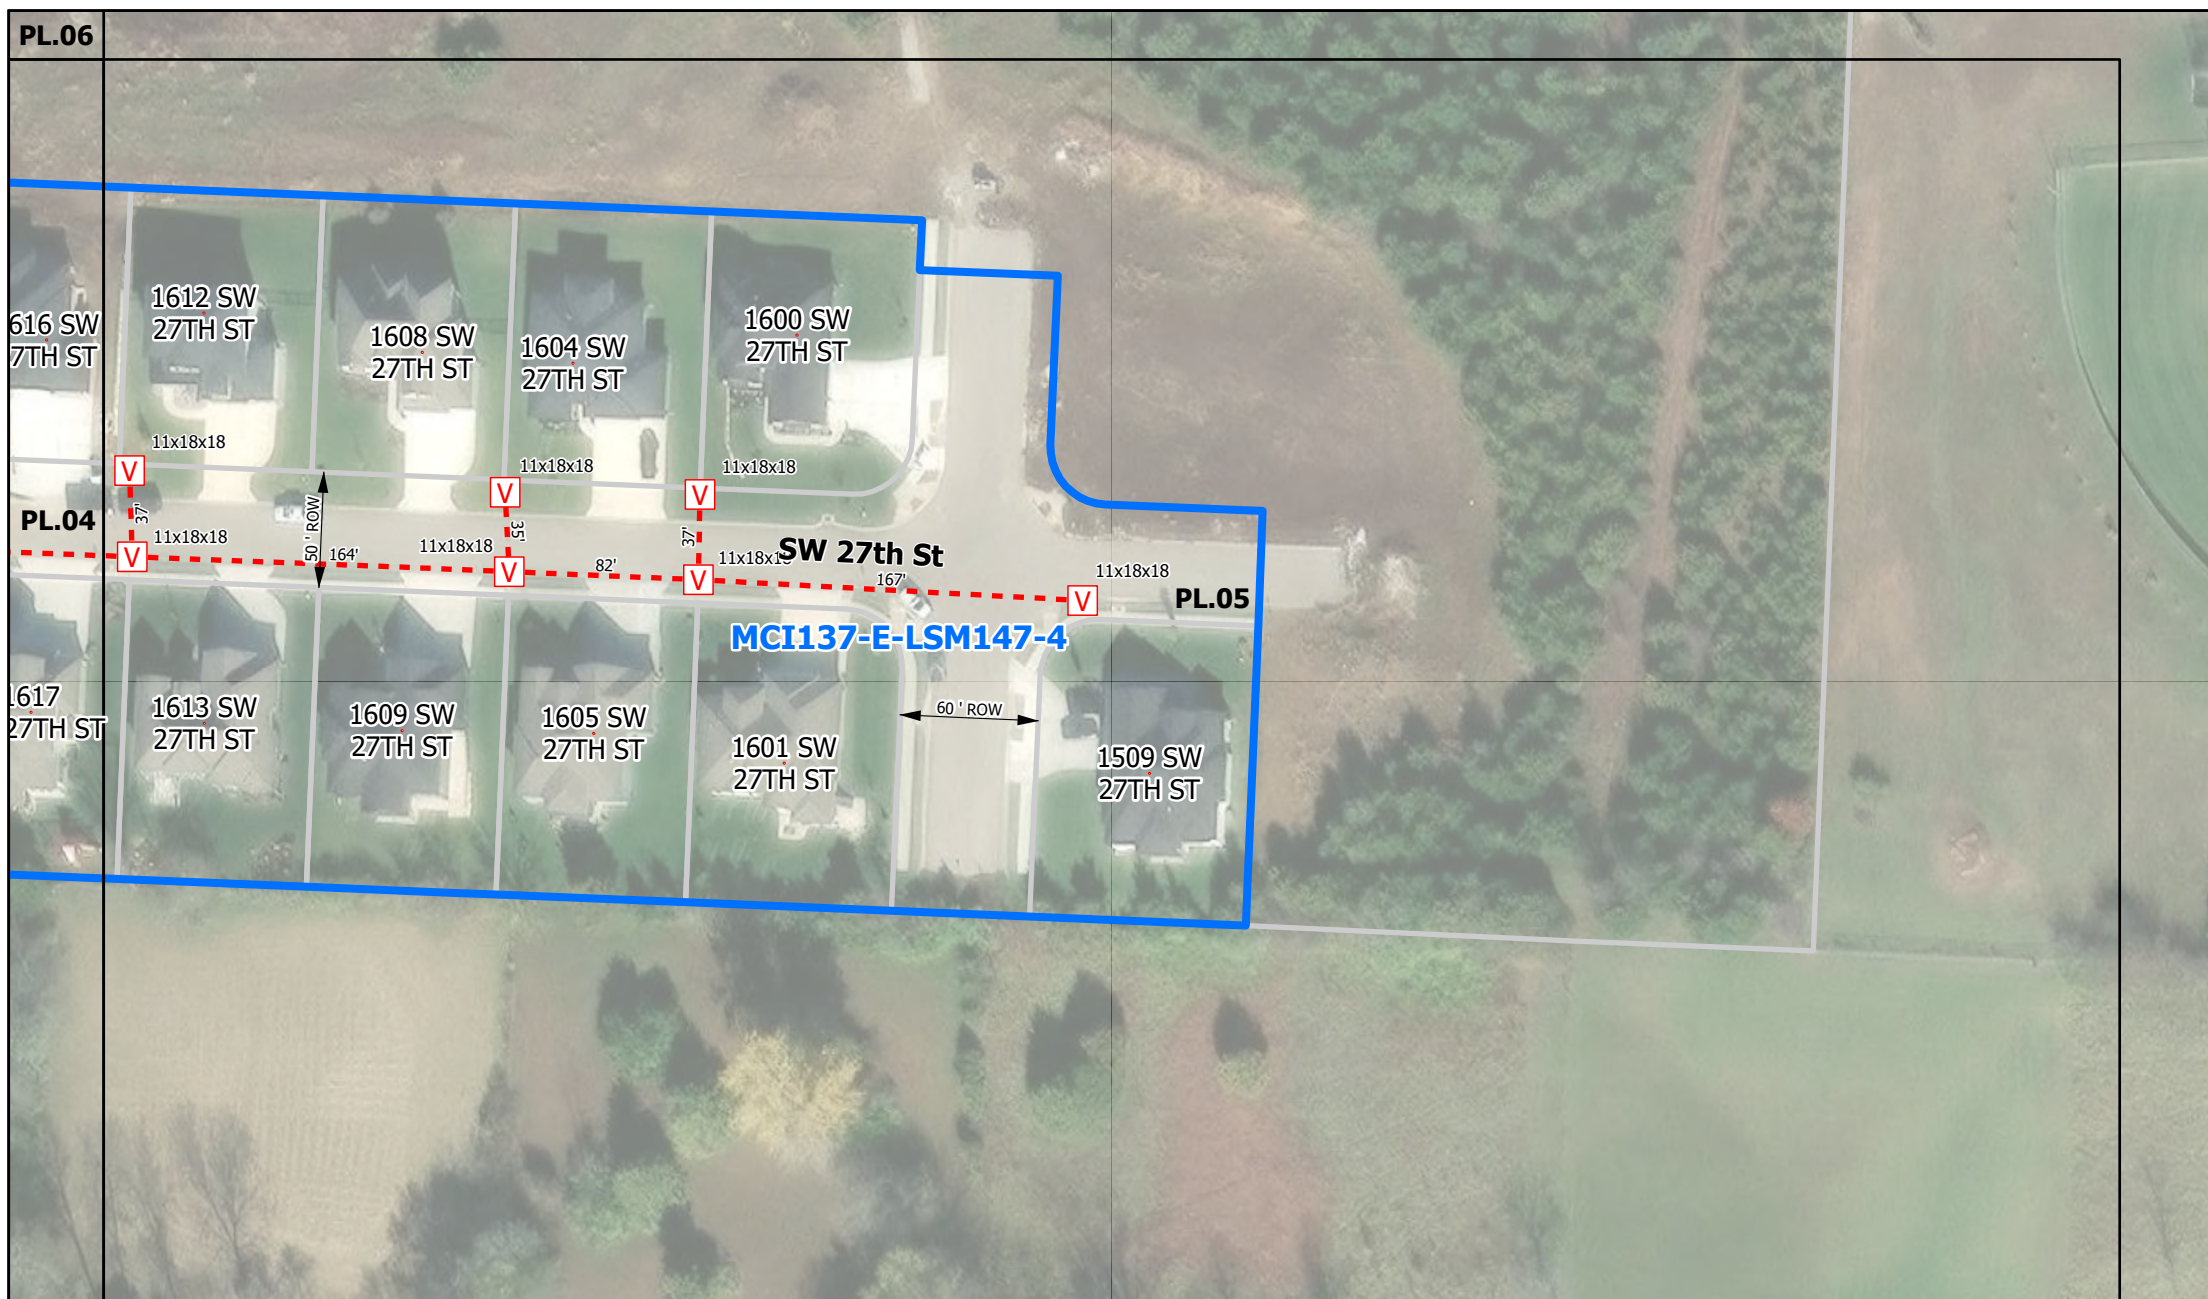

CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

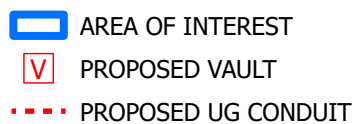[illegible]

Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

- AREA OF INTEREST
- V PROPOSED VAULT
- PROPOSED UG CONDUIT

0 35 70 140 Feet



| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Lee's Summit, MO
City Permit: Design View



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

Figure 6B-1. Component Parts of a Temporary Traffic Control Zone

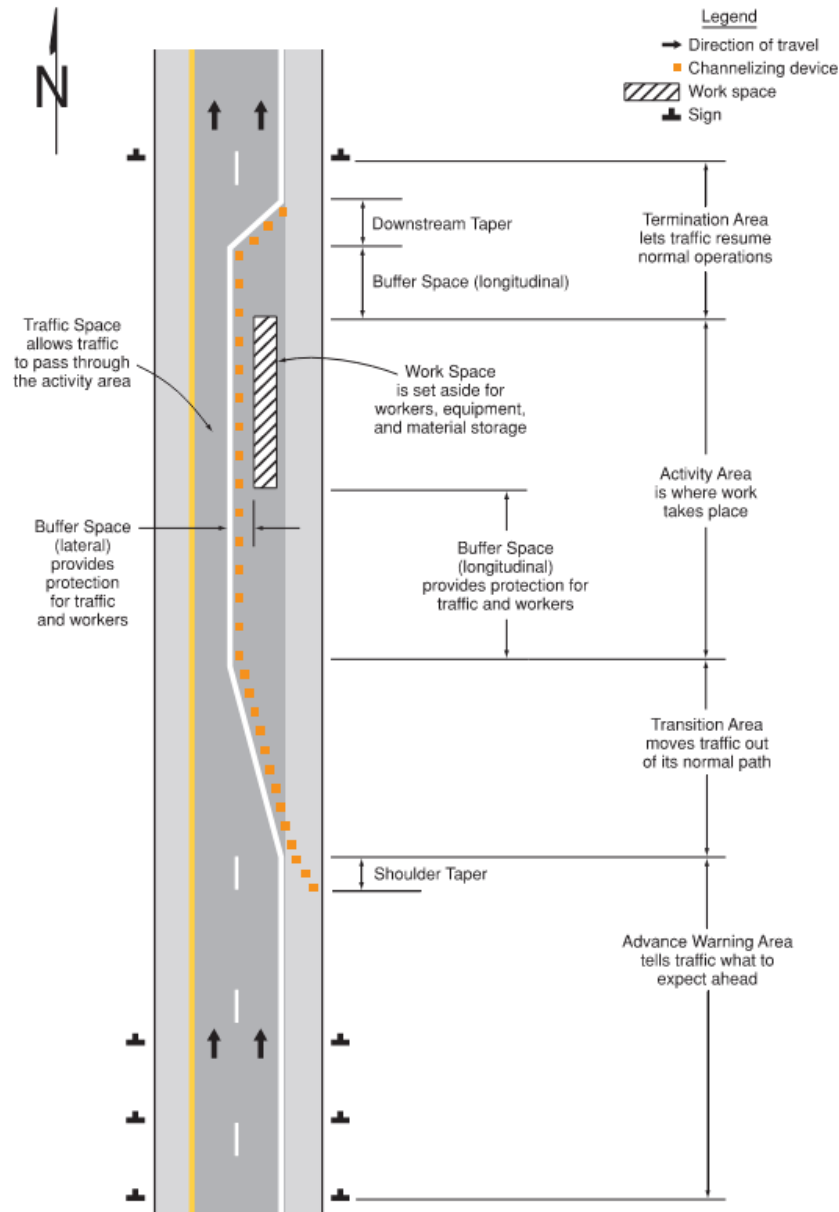


Table 6B-1. Recommended Advance Warning Sign Minimum Spacing

| Road Type | Distance between Signs** | | |
|----------------------|--------------------------|------------|------------|
| | A | B | C |
| Urban (low speed)* | 100 feet | 100 feet | 100 feet |
| Urban (high speed)* | 350 feet | 350 feet | 350 feet |
| Rural | 500 feet | 500 feet | 500 feet |
| Expressway / Freeway | 1,000 feet | 1,500 feet | 2,640 feet |

* Speed category to be determined by the highway agency or owner of site roadways open to public travel.

** The column headings A, B, and C are the dimensions shown in Figures 6P-1 through 6P-54. The A dimension is the distance from the transition or point of restriction to the first sign. The B dimension is the distance between the first and second signs. The C dimension is the distance between the second and third signs. (The "first sign" is the sign in a three-sign series that is closest to the TTC zone. The "third sign" is the sign that is furthest upstream from the TTC zone.)

Table 6P-2. Meaning of Symbols on Typical Application Diagrams

| | | | |
|--|--|--|--------------------------------------|
| | Arrow board | | Shadow vehicle |
| | Arrow board support or trailer (shown facing down) | | Sign (shown facing left) |
| | Changeable message sign or support trailer | | Surveyor |
| | Channelizing device | | Temporary barrier |
| | Crash cushion | | Temporary barrier with warning light |
| | Direction of temporary traffic detour | | Traffic or pedestrian signal |
| | Direction of travel | | Truck-mounted attenuator |
| | Flagger | | Type 3 barricade |
| | High-level warning device (Flag tree) | | Warning light |
| | Longitudinal channelizing device | | Work space |
| | Luminaire | | Work vehicle |
| | Pavement markings that should be removed for a long-term project | | |



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

NOTE:
ALL LANE CLOSURES REQUIRE A RIGHT-OF-WAY CONSTRUCTION PERMIT. TRAFFIC CONTROL MEASURES AND DETOUR ROUTES MUST BE CONFIRMED WITH THE RIGHT-OF-WAY INSPECTOR.

| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |


Google Fiber

TYPICAL TRAFFIC CONTROL



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

Figure 6P-11. Lane Closure on a Two-Lane Road with Low Traffic Volumes (TA-11)

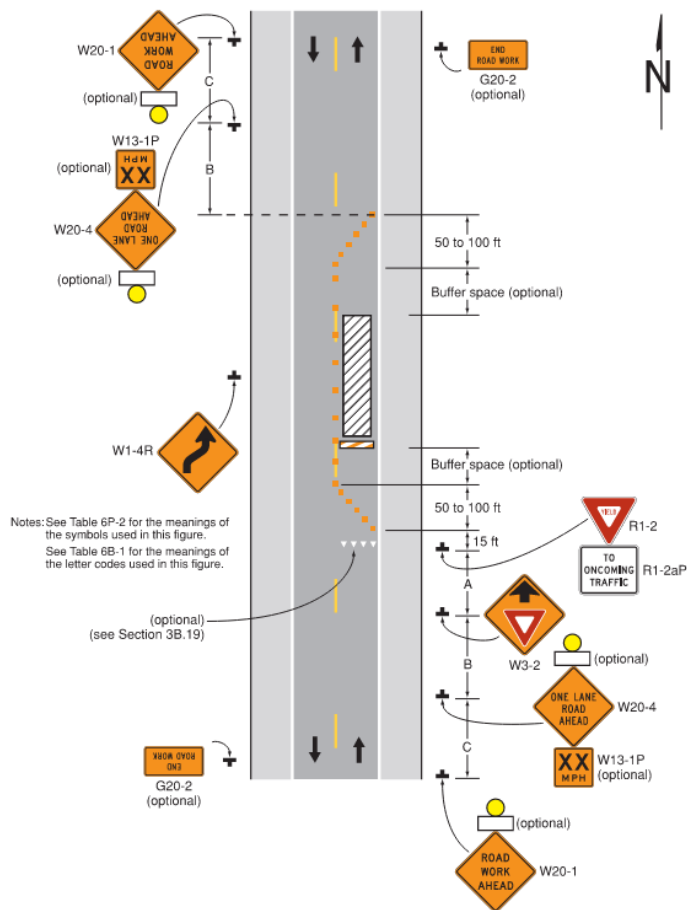


Notes for Figure 6P-11—Typical Application 11
Lane Closure on a Two-Lane Road with Low Traffic Volumes

Option:

1. Positive protection devices may be used per Section 6M.02.
2. This TTC zone application may be used as an alternate to the TTC application shown in Figure 6P-10 (using flaggers) when the following conditions exist:
 - a. Vehicular traffic volume is such that sufficient gaps exist for vehicular traffic that must yield.
 - b. Road users from both directions are able to see approaching vehicular traffic through and beyond the worksite and have sufficient visibility of approaching vehicles.
3. The Type B flashing warning lights may be placed on the ROAD WORK AHEAD and the ONE LANE ROAD AHEAD signs whenever a night lane closure is necessary.

Figure 6P-13. Temporary Road Closure (TA-13)

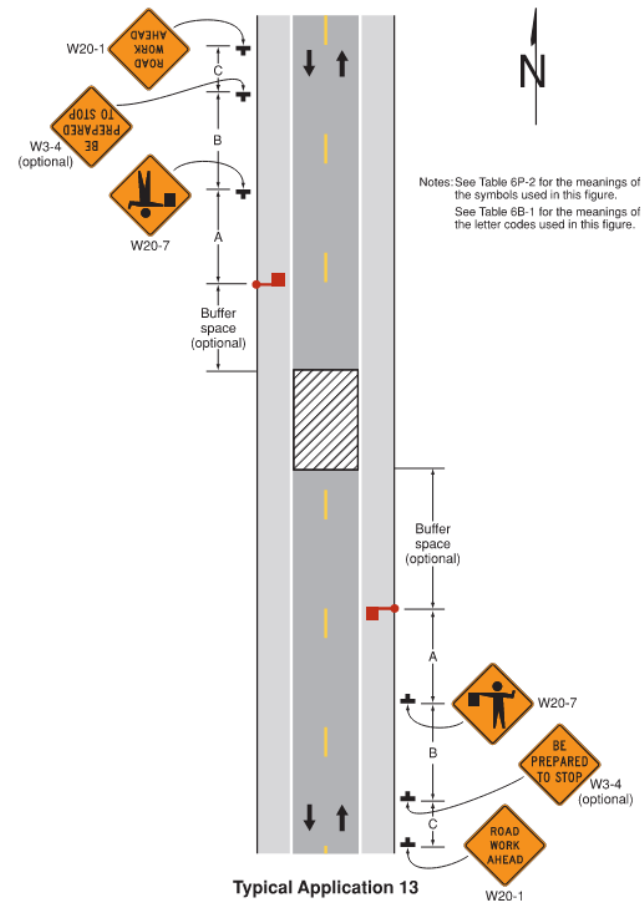

Notes for Figure 6P-13—Typical Application 13
Temporary Road Closure

Support:

1. Conditions represented are a planned closure not exceeding 20 minutes during the daytime.

Standard:

2. A flagger or uniformed law enforcement officer shall be used for this application. The flagger, if used for this application, shall follow the procedures provided in Sections 6D.05 and 6D.06.

Guidance:

3. The uniformed law enforcement officer, if used for this application, should follow the procedures provided in Sections 6D.05 and 6D.06.

Option:

4. A BE PREPARED TO STOP sign may be added to the sign series.
5. Positive protection devices may be used per Section 6M.02.
6. Automated Flagging Assistance Devices (see Section 6L.02) may be used in situations where there is only one lane of approaching traffic in the direction to be controlled.

Guidance:

7. When used, the BE PREPARED TO STOP sign should be located before the Flagger symbol sign.



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

NOTE:
ALL LANE CLOSURES REQUIRE A RIGHT-OF-WAY CONSTRUCTION PERMIT. TRAFFIC CONTROL MEASURES AND DETOUR ROUTES MUST BE CONFIRMED WITH THE RIGHT-OF-WAY INSPECTOR.

| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |




TYPICAL TRAFFIC CONTROL



ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

Figure 6P-18. Lane Closure on a Minor Street (TA-18)

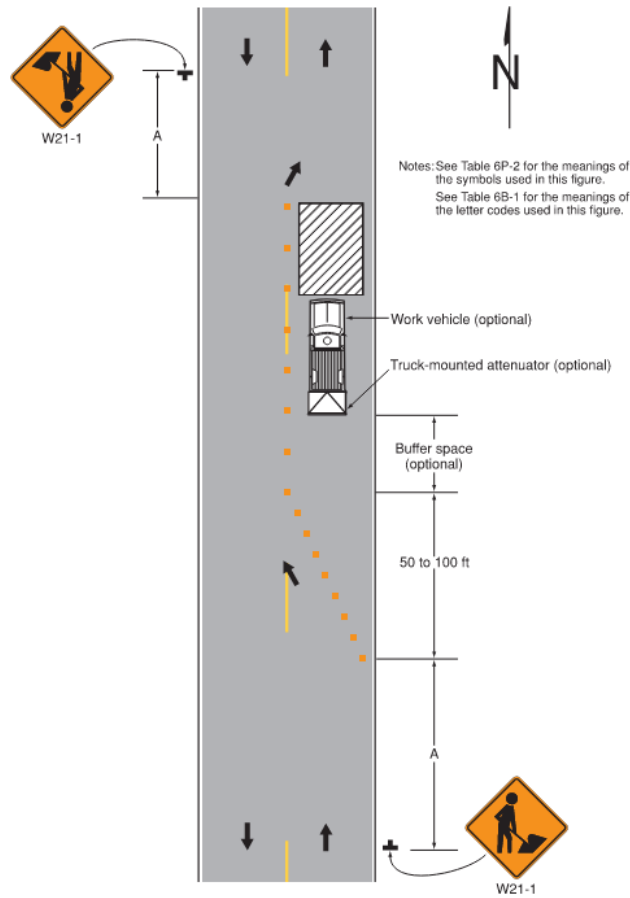

Typical Application 18

Notes for Figure 6P-18—Typical Application 18
Lane Closure on a Minor Street

Standard:

1. This TTC shall be used only for low-speed facilities having low traffic volumes.

Option:

2. Where the work space is short, where road users can see the roadway beyond, and where volume is low, vehicular traffic may be self-regulating.

Standard:

3. Where vehicular traffic cannot effectively self-regulate, one or two flaggers shall be used as illustrated in Figure 6P-10.

Option:

4. Flashing warning lights and/or flags may be used to call attention to the advance warning signs.
5. A truck-mounted attenuator may be used on the work vehicle and the shadow vehicle.
6. Positive protection devices may be used per Section 6M.02.



CREATED BY:
Amy Stack
EMAIL:
amy.stack@ibhc.com

NOTE:
ALL LANE CLOSURES REQUIRE A RIGHT-OF-WAY CONSTRUCTION PERMIT. TRAFFIC CONTROL MEASURES AND DETOUR ROUTES MUST BE CONFIRMED WITH THE RIGHT-OF-WAY INSPECTOR.



| INI | BY | DATE | DESCRIPTION |
|-----|----|------|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |





TYPICAL TRAFFIC CONTROL




ALL CONSTRUCTION IS PROPOSED AND SUBJECT TO RELOCATION WHEN OBJECTS ARE ENCOUNTERED THAT WILL INTERFERE WITH THE EXISTING INFRASTRUCTURE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD LOCATE ALL UNDERGROUND OBSTRUCTIONS AND UTILITIES PRIOR TO CONSTRUCTION. 2' CLEARANCE REQUIRED BETWEEN SUBSTRUCTURE AND BORE. COMPLETE REPAIR OF ANY AND ALL DAMAGES INCURRED SHALL BE AT THE EXPENSE OF THE CONTRACTOR.

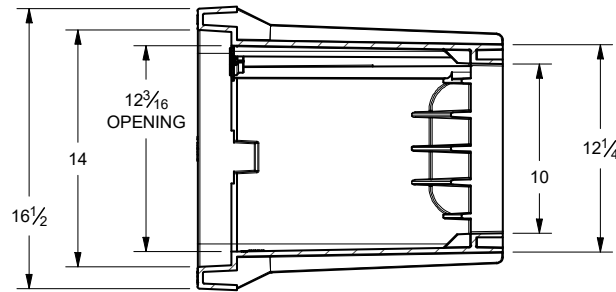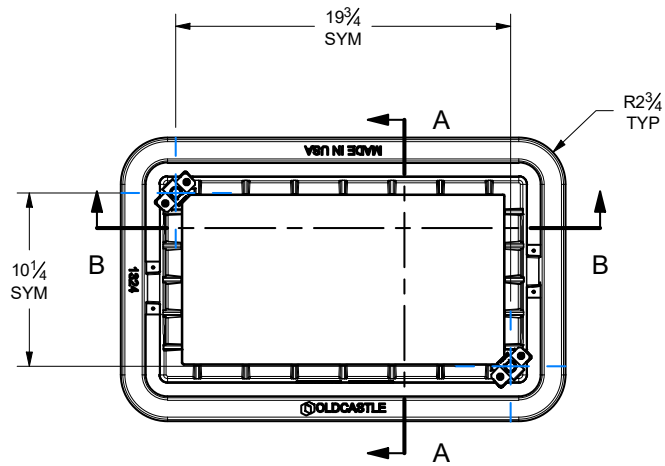

SECTION A-A

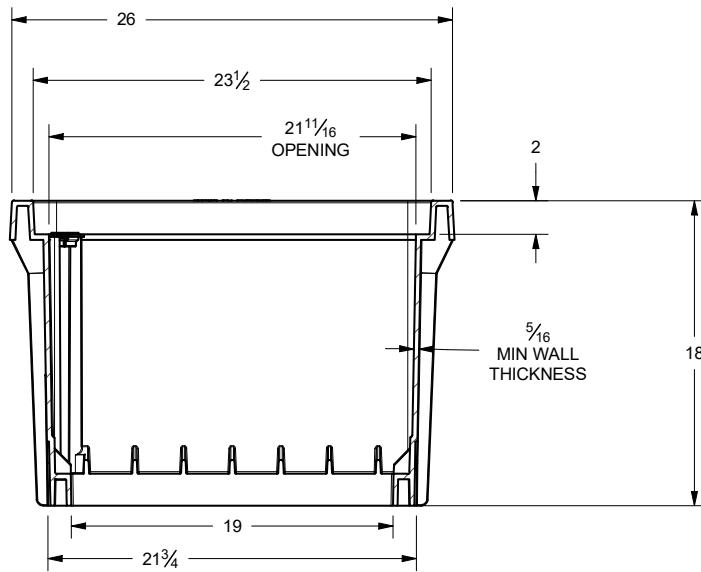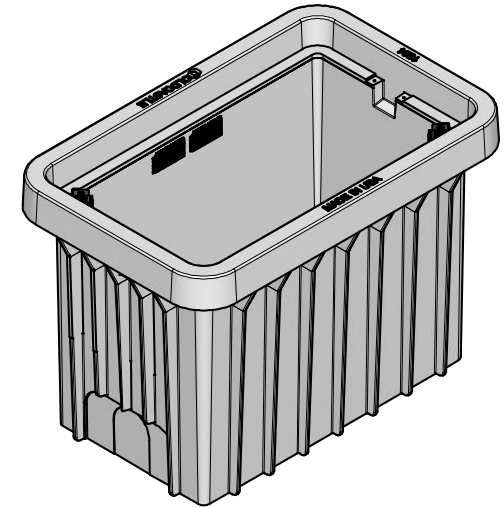



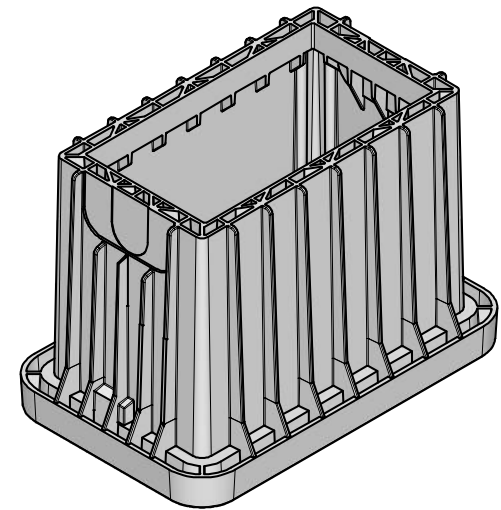

SECTION B-B





CUSTOMER FORMAT DRAWING

TOTAL EST. UNIT WEIGHT: 41.69 LBS
EST. LID WEIGHT: 15.79 LBS | EST. BODY WEIGHT: 25.9 LBS

| | | | | | | | |
|---|--|---|---|------------|---|---|----------------------|
| MATERIAL VARIES | | OES_PART_WEIGHT 41.69 LBS | THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE INFRASTRUCTURE. IT IS CONFIDENTIAL. SUBMITTED FOR REFERENCE PURPOSES ONLY, AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE INFRASTRUCTURE. COPYRIGHT © 2019 Oldcastle Infrastructure All Rights Reserved | |  | Oldcastle Infrastructure A CRH COMPANY | |
| OES_TREATMENT/COATING | | PROJECTION | | | | | |
| OES_DRAWING_UNITS | |  | | | | | |
| GENERAL TOLERANCES | | | OES_DESCRIPTION 1324-18 DL/LW UNIT, FLUSH COVER T15 GRAY, 2X 1/2-6 HEX AUGER CPBLT, 'GFBR' | | | | |
| IMPERIAL X.XXX = ± .005 X.XX = ± 0.01 XX = ± 1/16 X° = ± 1° | | METRIC X.XX = ± 0.10 X.X = ± 0.5 X = ± 1 X° = ± 1° | •ITEMS NOT DIMENSIONED CAN BE MANUFACTURED WITH 3D FILE USING THE FINER GENERAL TOLERANCE •DO NOT MEASURE OR CHANGE SCALE •REMOVE BURRS AND SHARP EDGES | | | | |
|  | |  | AUTHOR K LEITENBERGER | 11/20/2020 | SHEET SIZE A | OES_SKU 13246018 | REVISION NUMBER - |
| | | | CHECKED BY E LONG | 11/20/2020 | SCALE: 1/12 | FILE NAME: 0033599.idw | SHEET 2 OF 3 |



Oldcastle Infrastructure
A CRH COMPANY

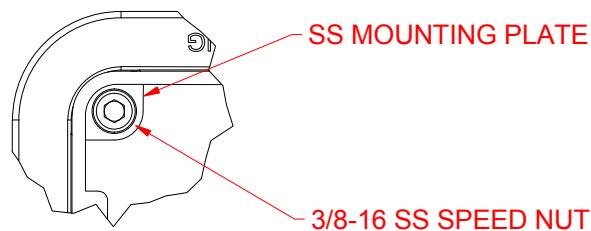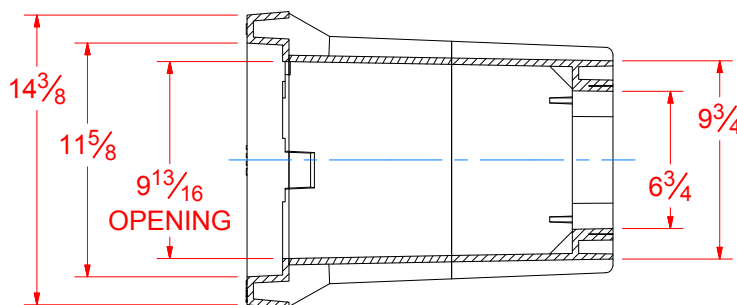

SKU SHOWN: 11182580





BODY EST. WEIGHT: 16.3 LBS



| | |
|----------|------------|
| DRAWN | |
| M MINCIN | 4/15/2015 |
| CHECKED | |
| E LONG | 12/24/2015 |
| QA | |
| MFG | |
| APPROVED | |

| | | | |
|--|--|----------|--------------|
| TITLE | | | |
| 1118-18 GRAY T15 "GFBF" CPBLT - HWPC111818T-T15 607 | | | |
| SIZE | | DWG NO | REV |
| C | | 11186120 | |
| SCALE | | | SHEET 2 OF 3 |


THIS BODY MEETS OR EXCEEDS THE REQUIREMENTS OF ANSI/SCTE 77-2013, TIER-15 PERFORMANCE.

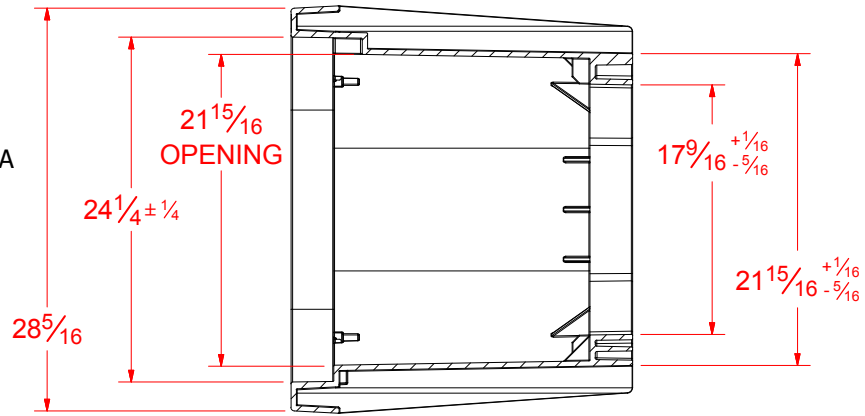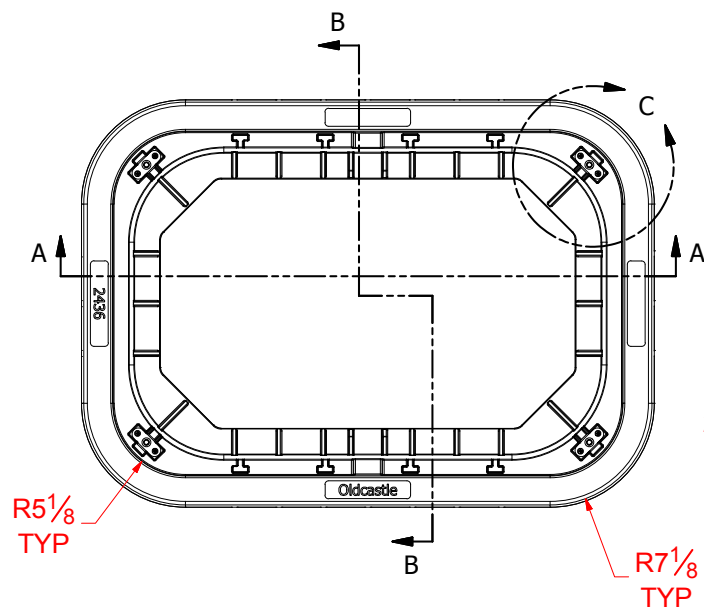


SECTION B-B

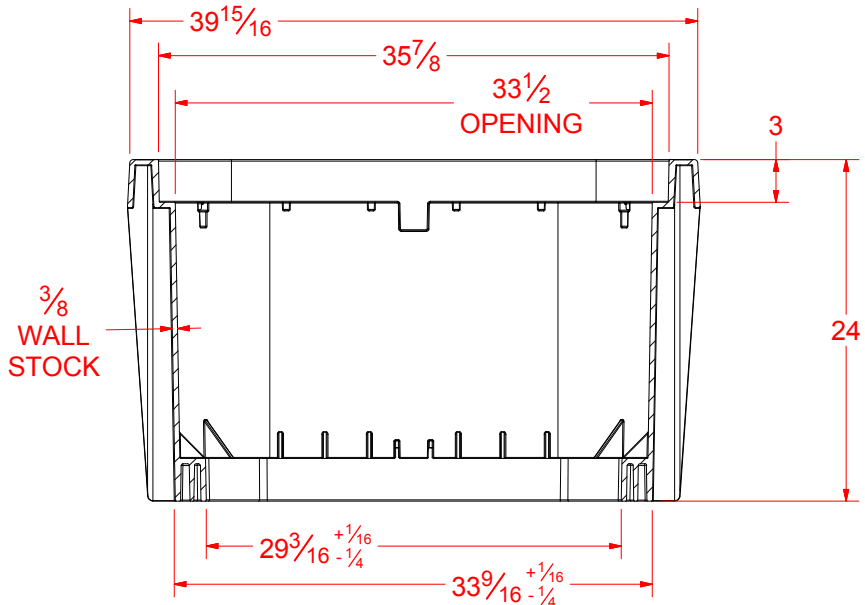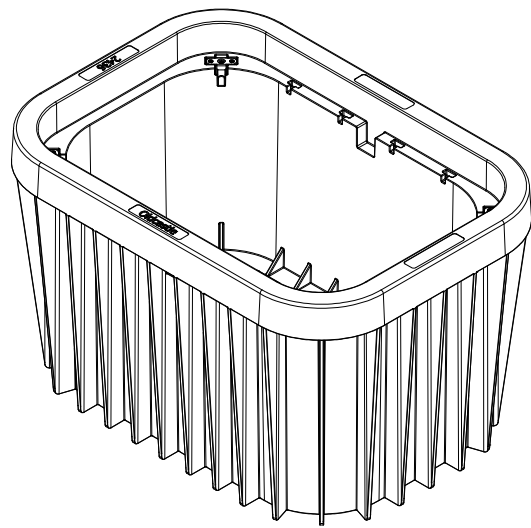

SECTION A-A

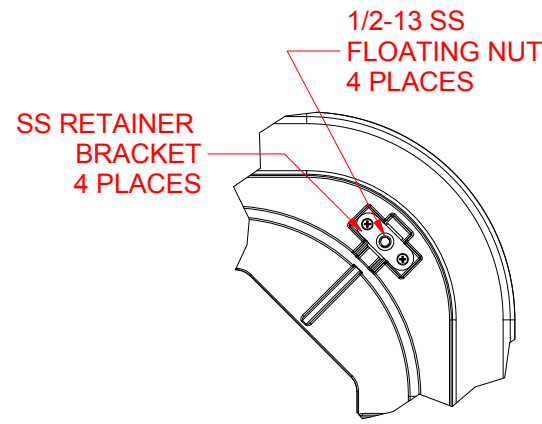

DETAIL C

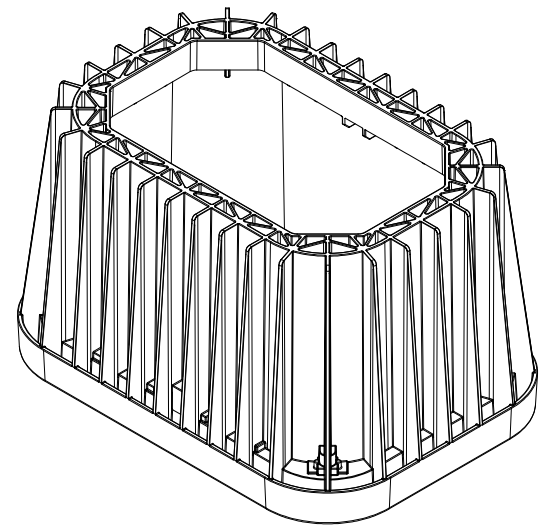

MATERIAL: GLASS FILLED POLYPROPYLENE, BLACK

SKU SHOWN: 24362070

CUSTOMER FORMAT DRAWING

BODY EST. WEIGHT: 70 LBS



THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE ENCLOSURE SOLUTIONS. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY, AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE ENCLOSURE SOLUTIONS. COPYRIGHT © 2012 Oldcastle Enclosure Solutions All Rights Reserved

Oldcastle® Enclosure Solutions
1675 INDUSTRIAL DR.
NAPOLEON, OH 43545
419-592-2309


| | | |
|----------|--------------|------------|
| DRAWN | M MINCIN | 4/26/2016 |
| CHECKED | E LONG | 4/29/2016 |
| QA | D LITTLE | 8/18/2016 |
| MFG | P MASTERLASO | 8/16/2016 |
| APPROVED | T DANG | 10/20/2016 |

| | | | |
|--------------------------------|---|---------------------------------|----------|
| TITLE | | 2436-24 DL-HSW BLACK-GRAY T15 0 | |
| MSHL GFBR - 243624T DL-HSW T15 | | FIBERG 607 | |
| SIZE | C | DWG NO | 24366095 |
| SCALE | | | |
| | | SHEET 2 OF 3 | |



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES TOLERANCE:
.XXX = ±.005
.XX = ±.010
.X = ±.030
FRACTION = ±1/16
ANGLE = ±1°

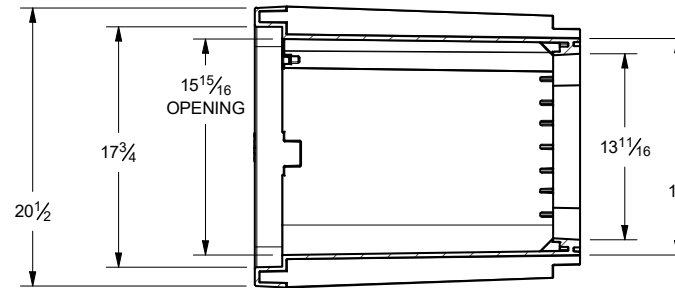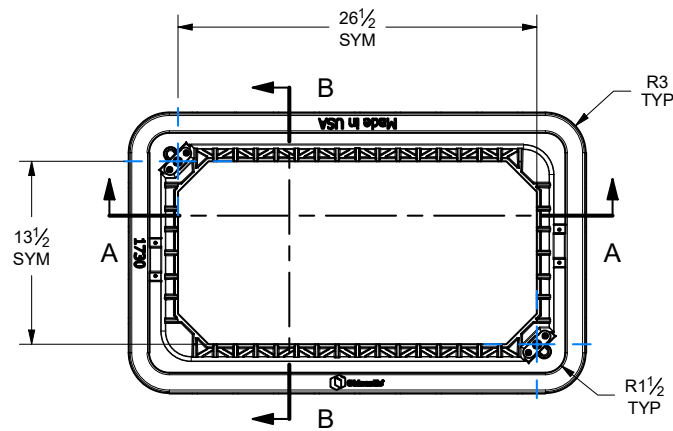

SECTION B-B

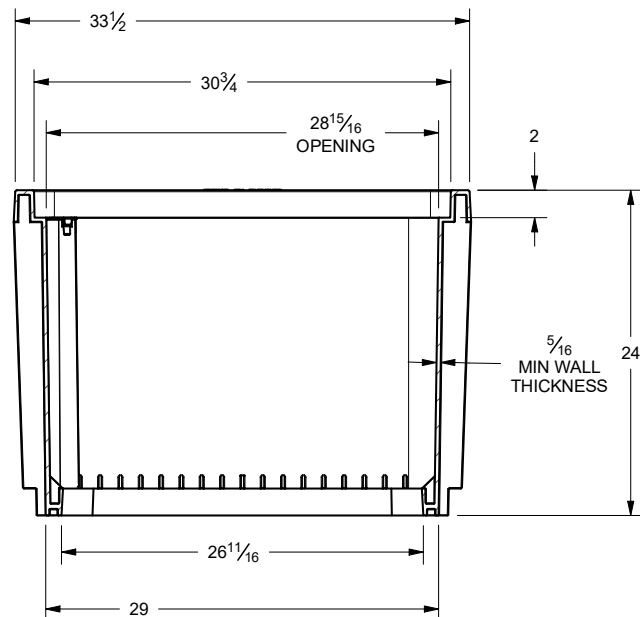

SECTION A-A

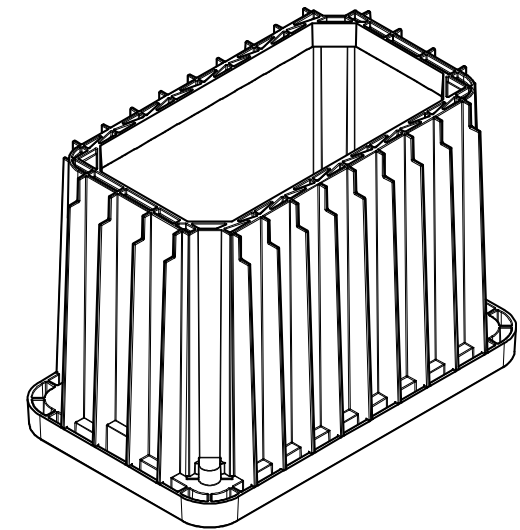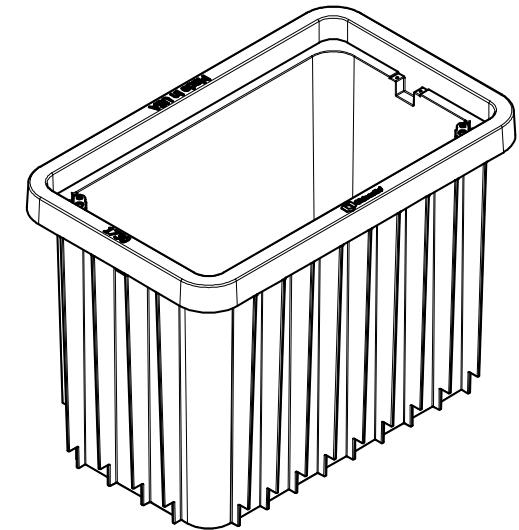

MATERIAL: BLENDED POLYPROPYLENE

CUSTOMER FORMAT DRAWING

TOTAL EST. UNIT WEIGHT: 62.17 LBS
EST. LID WEIGHT: 20.87 LBS | EST. BODY WEIGHT: 41.3 LBS

THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE INFRASTRUCTURE. IT IS CONFIDENTIAL. SUBMITTED FOR REFERENCE PURPOSES ONLY, AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE INFRASTRUCTURE.

COPYRIGHT© 2019 Oldcastle Infrastructure All Rights Reserved



Oldcastle Infrastructure
A CRH COMPANY


OES_DESCRIPTION

1730-24 DL/LW FLSH COVER, T15 - MULTI SKU

| | | | | |
|---------------------------------|-----------|------------------------|------------------------|-----------------|
| AUTHOR K LEITENBERGER | 4/30/2020 | SHEET SIZE A | OES_SKU N/A | REVISION NUMBER |
| CHECKED BY E LONG | 4/30/2020 | SCALE: 1/15 | FILE NAME: 0030984.idw | SHEET 5 OF 6 |

NOTES:

1. **GFIBER ISOLATION SWITCH = GPN 1154497-01.** INSTALL ISOLATION SWITCH IN EACH RN1, RN2 CLOSURE LOCATIONN IN HANDHOLES WHERE TRACER WIRE LEAVES IN 3 OR MORE DIRECTIONS & AT F1 OR F2 SLACK LOOP HANDHOLES NO FURTHER THAN 800' APART. NOT REQUIRED IN DROP VAULTS. CONNECT THE GROUND WIRE LEAD TO THE ISOLATION SWITCH GROUNDING LUG, & EACH OF THE TRACER WIRES TO A DIFFERENT ISOLATION LUG. OR;
AT PASS-THRU HANDHOLES WHERE TRACER WIRES LEAVE IN 1 OR 2 DIFFERENT DIRECTIONS AND IS LOCATED LESS THAN 800' FROM THE LAST ISOLATION SWITCH, CONNECT TRACER WIRES TO GROUND WIRE LEAD WITH A SPLIT BOLT.

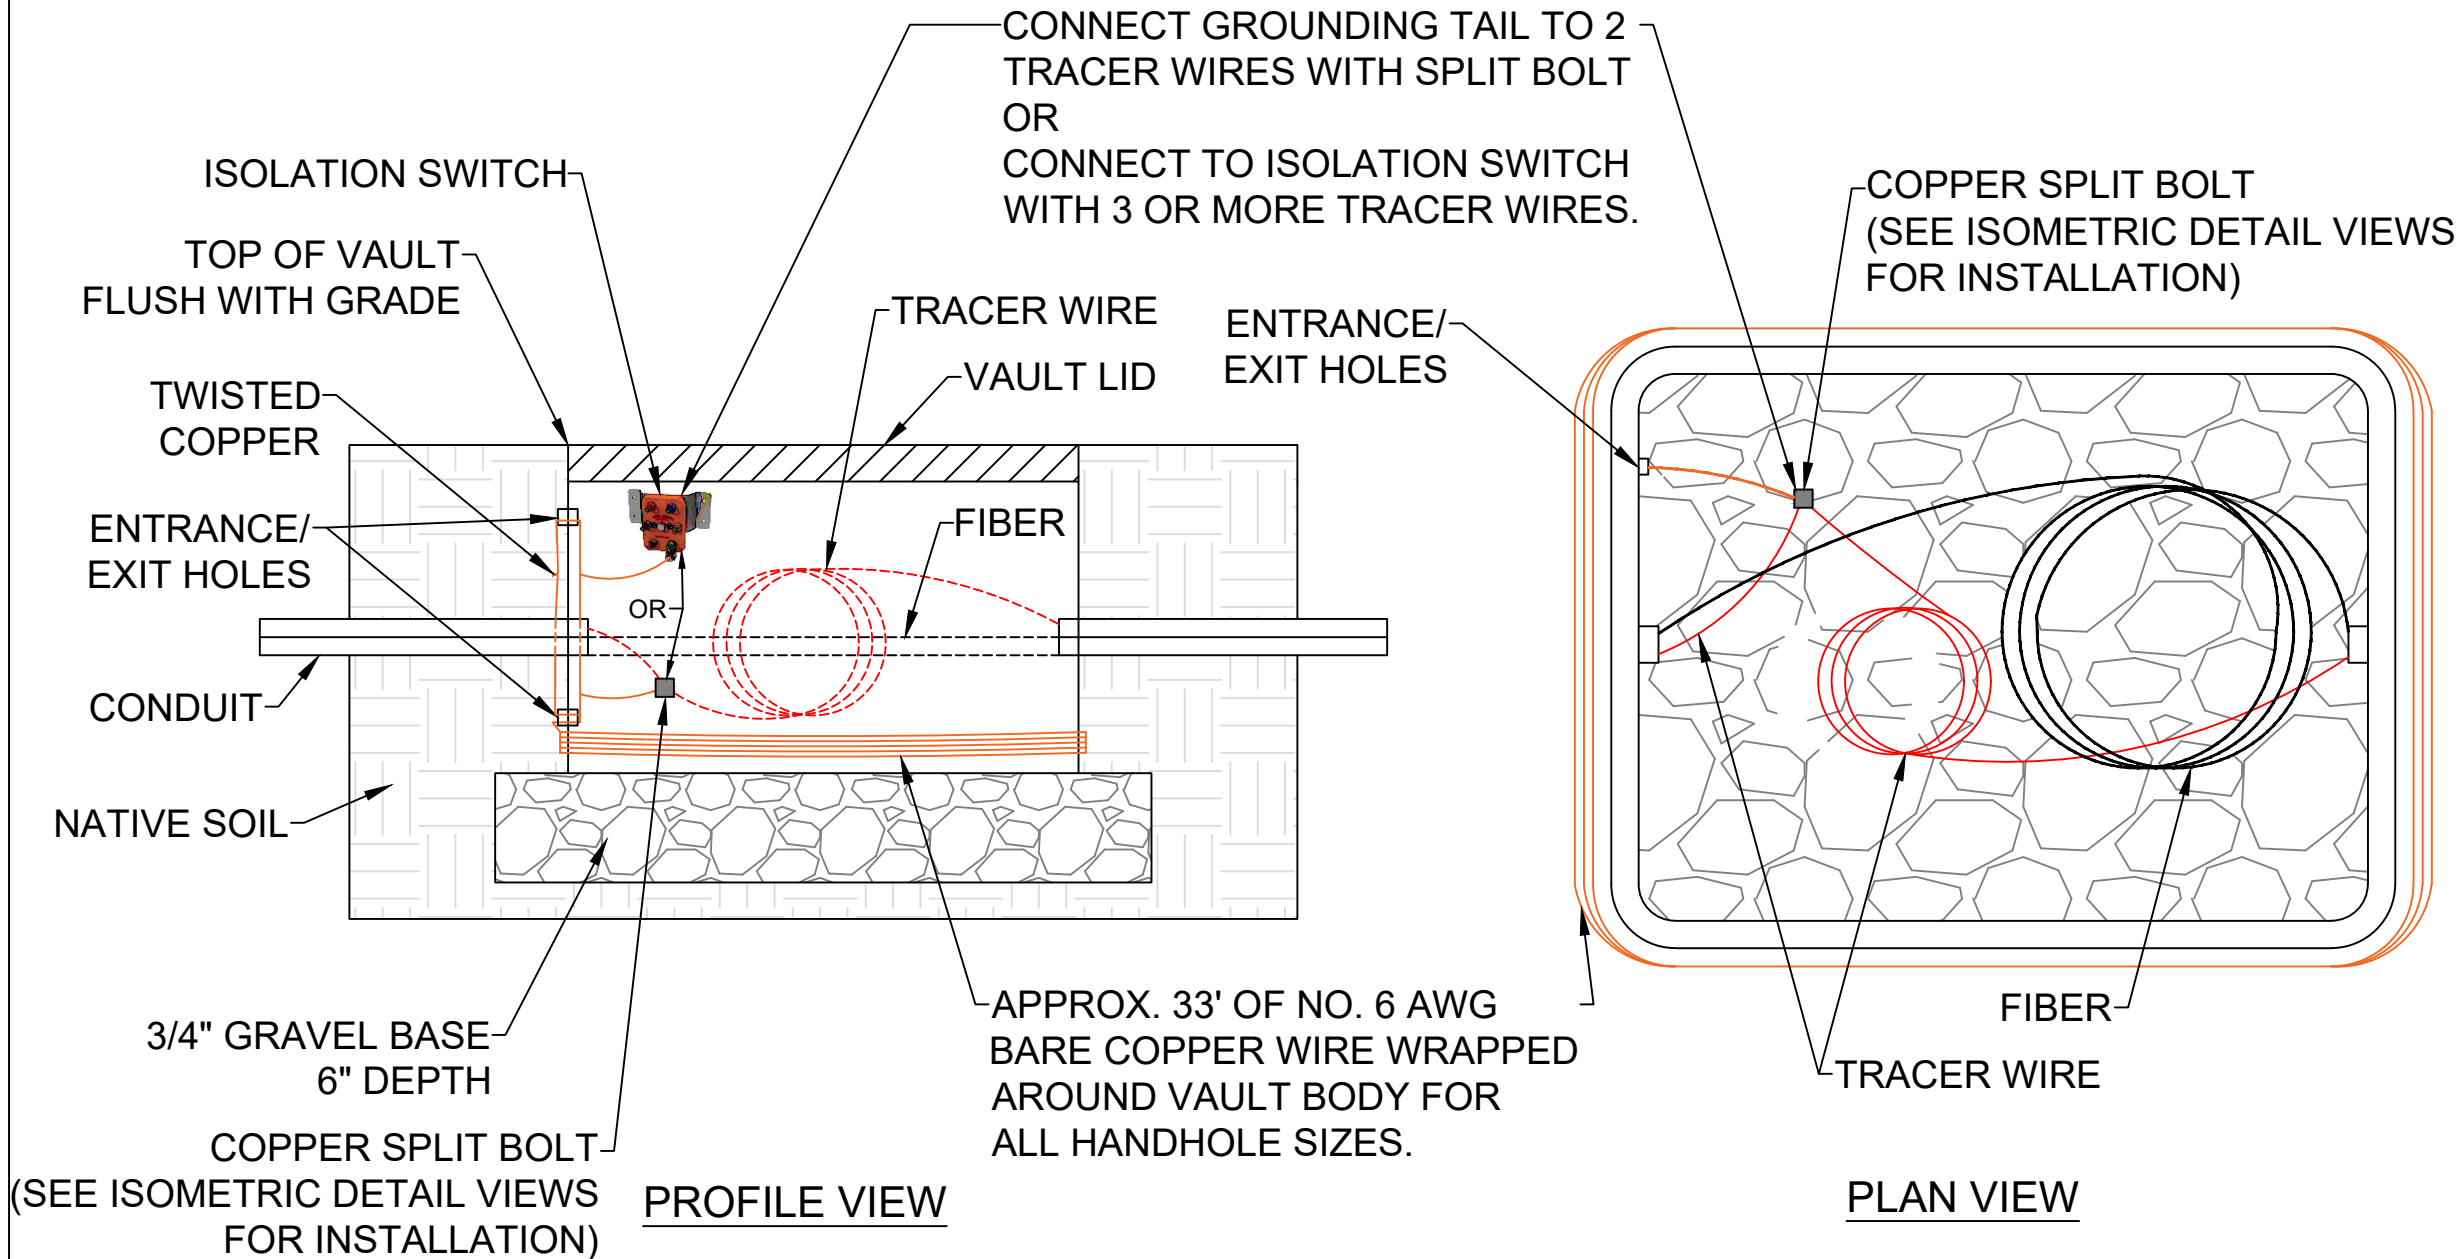

LEE'S SUMMIT, JACKSON COUNTY DETAIL - VAULT INSTALLATION -
ROCKY SOIL - GROUND WIRE WRAP (REV0 20241004)