

STORMWATER MANAGEMENT REPORT

Caliber Collision
710 SE 7th Terrace
Lee's Summit, Missouri 64063



Original Submittal: 07/23/2021

Prepared by
Freeland and Kauffman, Inc.
Engineers – Landscape Architects
209 West Stone Avenue
Greenville, SC 29609
864-233-5497

INDEX

Cover	1
Index	2
I. Project Description.....	3
Executive Summary	3
II. Pre-Development Conditions	4
III. Post-Development Conditions	4
Runoff Calculations	5
Runoff Curve Number	5
Time of Concentration	5
Rainfall	5
Rate of Runoff	6
IV. Underground Detention Design and Runoff Results	6
V. Water Quality Design and Calculations.....	7
VI. Pipe Sizing Calculations	7
Appendix A – Maps & Site Data	
GIS Aerial	
USGS Topographic Quad Map	
Post-Development Drainage Map	
Inlet Area Map	
FEMA Flood Plain Map	
Soils Map and Engineering Properties	
NOAA Atlas 14, Volume 8, Version 2 Rainfall - Intensity	
NOAA Atlas 14, Volume 8, Version 2 Rainfall - Depth	
Appendix B – Hydraflow	
Post-Development Hydraflow Calculations	
Appendix C – Hydraflow Storm Sewers	
Hydraflow Storm Sewers Pipe Calculations	
Appendix D – Underground Detention Information	

I. PROJECT DESCRIPTION

The following is the stormwater management report for the proposed Caliber Collision at 710 SE 7th Terrace in Lee's Summit, Missouri. This site is approximately 1.38 acres. Development will consist of the construction of a 11,500 square foot Caliber Collision automotive collision repair facility, all associated utilities, vehicle storage area, parking areas, grading, landscaping, and stormwater management facilities. As there is not enough surface area available due to site restraints and landscape requirements, a StormTech Underground Detention System is proposed for the developed site's stormwater runoff requirements. This underground detention system consists of 45" high MC-3500 Chambers with 9" of stone below and 12" of stone above it with total storage height of 66" from elev. 2008.5 to elev. 2014.0. The outfall of the underground detention system is to exit the site via a storm sewer to an existing catch basin storm structure located within the existing drainage easement at the northeast of the site in Lot 3 Chapman Plaza II. All of the runoff from the developed site (approximately 1.1 acres in total) is captured by/treated by the underground detention system. A storm sewer is provided along the north of site to by-pass the runoff from future development at west of the site. The construction activities for the Caliber Collision discussed above will disturb approximately 1.30 acres.

The property is bordered by SE 7th Terrace to the north, SE Blue Parkway to the south, Calvert's Express Auto Service & Tire to the east, and Classic paint & Collision, Inc. to the west.

As previously stated, *all* discharge from the site is ultimately routed to an offsite storm structure located in Lot 3, Chapman Plaza II which will be connected to storm system at SE 7th Terrace and ultimately directed to a tributary of the E. Fork Little Blue River.

Executive Summary

This hydraulic study will show the proposed site will be developed to meet all City of Lee's Summit Stormwater Management requirements. The on-site storm system has been designed to meet the requirements in Section 5608.4.C1 Comprehensive Control as outlined in APWA Section 5600 "Storm Drainage Systems & Facilities", which requires the design to "limit the two-year rate less than or equal to 0.5 cfs per site acre, ten-year rate less than or equal to 2.0 cfs per site acre, 100-yr rate less than or equal to 3.0 cfs per site acre and 40-hour extended detention of 1.37"/24 hour rainfall. The existing site has Hydrologic Soil group "C" soil. As previously mentioned, various site constraints prevent a traditional stormwater pond design. The provided system's design's primary method of attenuating the requirements will be via underground storage.

Flow Rate Summary Table

Developed Site Area Acre	Storm Event (24-hour duration)	Allowable Development Peak Flow Rate (cfs)	Post-Development Peak Flow Rates (cfs)
1.1	2-year	0.55	0.31
1.1	10-year	2.2	0.53
1.1	100-year	3.3	2.4

II. PRE-DEVELOPMENT CONDITIONS:

The proposed development is situated on an approximately 1.38-acre tract of land located at 710 SE 7th Terrace. The site is legally described as Lot 2, Chapman Plaza II.

Per topographic survey by Heideman Associates Inc. dated 05-04-21, the property was covered with gravel and grass and elevations varied from 2014 to 2018. The site generally slopes downward in direction from south side of the site to north side. The runoff from the site is collected and conveyed by the existing storm drain system at SE 7th Terrace. As the required stormwater Management does not take account of the existing condition, this report has not analyzed the existing hydrology parameters.

:

III. POST-DEVELOPMENT CONDITIONS:

An underground chamber detention system is proposed to be located at the north and east of the site within the open space and parking lot. The proposed underground detention system is a MC-3500 StormTech Chamber System, an open bottomed chamber. Reference the Site Development Plans for Caliber Collision for additional information of the underground detention system. Outflow from the detention system will be routed through an outlet riser structure and conveyed through a proposed storm pipe system to an existing catch basin storm structure located within the existing drainage easement at the northeast of the site in Lot 3 Chapman Plaza II. The outflow from detention system will be connected to the by-pass line from Lot 1 before connecting it to the existing catch basin structure. This piped system drains eventually to the tributary of E. Fork Little Blue River through the storm drain system at SE 7th Terrace.

The detention system is designed to store and release the majority of runoff generated by the proposed development.

The area analyzed in the Post-Development condition comprises of 1.1 acres of developed site from total of 1.38 acres. Visual representations of these areas and their layout configuration have been provided in Appendix A of this report and is titled the "Post Development Map". This area contains the majority of the proposed Caliber Collision

development including the building all the paved parking and curbed areas. Utilizing proposed curb and gutters, roof leaders, inlets, vegetated swales and the proposed storm sewer system by Caliber Collision, Post-Development Area will be routed to the proposed underground detention system.

Runoff Calculations:

Runoff calculations are performed for Post-Development drainage area as per SCS unit Hydrograph method using Hydraflow and TR-55.

A. Runoff Curve Number:

Land use curve number is used based upon Section 5602.3, Table 5602-3 APWA "Storm Drainage Systems & Facilities".

Post - Development Area

Business: Neighborhood Areas Hydrologic Soil Group C
CN = 94

Total Land Area = 1.1 Acres

Weighted Runoff Curve Number = 94

B. Time of Concentration:

Shortest time of concentration of 0.10 hour is assumed.

C. Rainfall:

The 24-hour precipitation amounts for the site as provided by SCS Tr-55 for Jackson County are as follows:

2-year storm event:	3.8 inches
10-year storm event:	5.5 inches
100-year storm event:	8.3 inches

D. Rate of Runoff:

Above curve numbers and times of concentration were used to determine rate of runoff using the SCS hydrograph method. A hydrograph for the post-development conditions of the site under study can be generated showing rate of flow versus time. These hydrographs are included in Appendix B. Following are the computed peak rates of runoff for the drainage basins:

Post-Development Area (to Underground Detention System)

Storm Event (24-hour duration)	Peak Flow Rate, Q (cfs)
2-year	5.3
10-year	8.0
100-year	12.3

Post-Development Area (Out of the Underground Detention System)

Storm Event (24-hour duration)	Peak Flow Rate, Q (cfs)	WS elev (Top of Storage el. 2014.0)
2-year	0.31	1010.4
10-year	0.53	1011.3
100-year	2.4	1013.0

Developed Site Area Acre	Storm Event (24-hour duration)	Allowable Development Peak Flow Rate (cfs)	Post-Development Peak Flow Rates (cfs)
1.1	2-year	0.55	0.31
1.1	10-year	2.2	0.53
1.1	100-year	3.3	2.4

As can be seen in the table above, the underground detention system acts to reduce the developed peak discharges from the 2-year, 10-year, and 100-year, 24-hour storm events. This is aided by the by the open bottomed design of the MC-3500 StormTech Chamber System proposed for this development.

IV. WATER QUALITY DESIGN AND CALCULATIONS:

Water Quality for the project was designed per the City of Lee's Summit's ordinances which requires the 40-hour extended detention of 1.37"/24 hour rainfall.

The Water Quality Volume (WQ_v) that is to be detained for 40 hour is calculated as per APWA/MARC-BMP Manual, 6.2:

- o WQ_v = P x Rv x (43560/12) where:
 - o P = Rainfall event in inches = 1.37"
 - o Rv = Volumetric runoff coefficient = 0.05 + 0.009 (I)
 - o I = Percent Site Impervious
I = 85%
Rv = .05 + .009 x 85 = 0.815
- o WQ_v = (1.37) x (0.815) x (43560/12)
= 4053 Cu. Ft
Use storage at elev. 1009.83, Storage available = 4199 Cu. Ft
Release it in 40 hours
- Release rate :4199 cu ft x (1/40x 3600 sec) = 0.029 cf/sec
- Using a 1.0" Orifice
- $Q_{\text{Release}} = C_d A_o (\text{SQRT}(2 * G * H))$
= 0.6 * 0.055 * SQRT(2 * 32.2 * 1.33/2)
= 0.022 cf/sec < 0.029 cf/sec, therefore orifice meets 40 hour minimum

Water Quality Storage is provided from elev. 1008.5 to elev. 1009.83 and is released by 1" orifice at elev. 1008.5.

Next opening is 4" orifice at 1009.83

V. PIPE SIZING CALCULATIONS:

Included in this report in Appendix C are the pipe sizing calculations for the on-site pipes and catch basins. These are generated by the rational method, and are based on the 100-year intensity for all storm drain structures flowing to the detention system. These calculations show the total flow for each pipe section, velocity, hydraulic grade elevations, and spreads at each inlet. Reference the Inlet Area Map in Appendix A for clarification of the drainage areas discharging to each inlet and pipe.


Drainage areas for each structure were delineated (see Inlet Area Map in Appendix A) and flow to each catch basin was determined. The drainage to each structure was determined using the Rational Method form of storm analysis where weighted Runoff Coefficients were determined based on each area's coverage. In addition to each structure's added

stormwater from their respective drainage area, the discharge from the underground detention system was added to the pipe's directly "downstream" of the underground detention system.

An analysis of the proposed storm system along SE Blue Parkway was performed to ensure the discharge to the proposed pipe under the proposed driveway is adequately sized when combined with the discharge from the upstream pipes. Also, a storm sewer stub is proposed from the adjacent property to the west of the Caliber Collision property. Inlet "1B" in the plans is proposed to provide connection to an existing storm structure for the adjacent site should it be developed in the future. Per the City of Lee's Summit Code, the maximum allowed discharge from a developed site is 3 cfs per developed acre. Assuming the 1.70 acres delineated in the Inlet Area Map (in Appendix A) is developed, the maximum discharge allowed from the adjacent site would be approximately 5.1 cfs. This runoff value is less than the existing conditions site runoff calculated the Rational Method. Reference should once again be made to the Inlet Area Map provided in Appendix A for calculations and delineations of the drainage areas. To be conservative in the design, the runoff values generated from the existing conditions (the higher value) are used for adequately sizing the storm sewer pipe for the adjacent property's connection to Inlet 1B, and ultimately to the existing storm structure connection point.

Storm profiles of the storm sewer pipe network were created and the Hydraulic Grade Lines resulting from the 100-year, 24-hour storm event discharge was mapped to each pipe. Having each pipe's HGL remain within the pipe proves that each storm pipe is sufficiently sized to accommodate the storm runoff from each structure and development. In the analysis performed for this project, each pipe's 100-year storm event HGL remained within their respective pipes. Reference the Storm Profiles Sheets within the Site Development Plans prepared by Freeland and Kauffman, Inc.

Appendix A

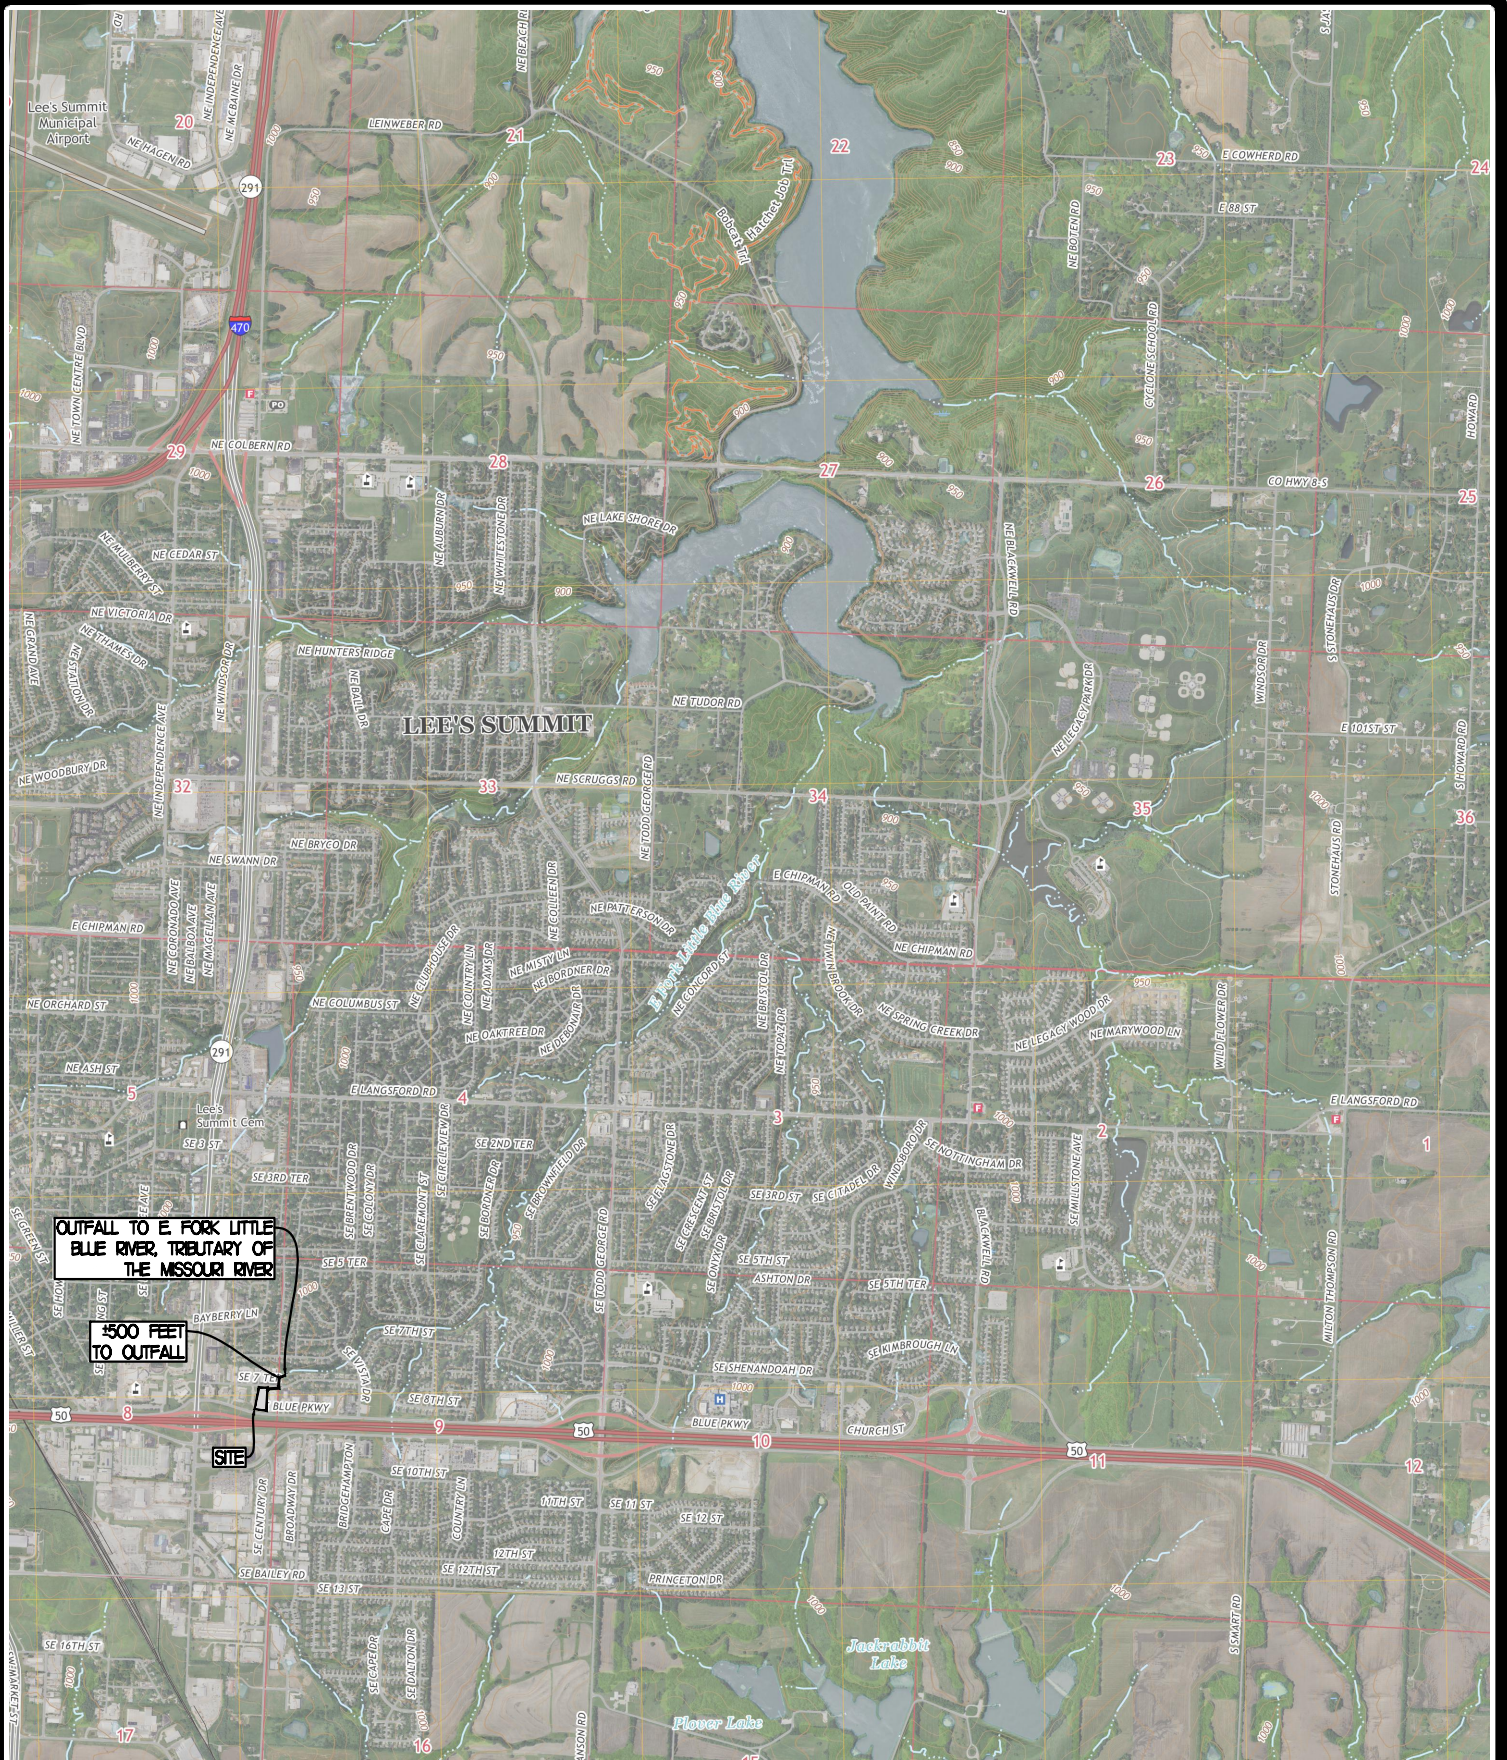

FREELAND and KAUFFMAN, INC.

Engineers * Landscape Architects
 209 West Stone Avenue
 Greenville, South Carolina 29609
 864-233-5497
 fax 864-233-8915

CALIBER COLLISION
710 SE 7TH TERRACE
LEE'S SUMMIT, MO 64063



USGS
QUAD MAP

[illegible]

National Flood Hazard Layer FIRMette

94°21'53"W 38°54'26"N



Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS

Without Base Flood Elevation (BFE)
Zone A, V, AE, AH, VE, AR
With BFE or Depth Zone AE, AO, AH, VE, AR
Regulatory Floodway

0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X

Future Conditions 1% Annual Chance Flood Hazard Zone X

Area with Reduced Flood Risk due to Levee. See Notes. Zone X

Area with Flood Risk due to Levee Zone D

OTHER AREAS OF FLOOD HAZARD

NO SCREEN Area of Minimal Flood Hazard Zone X

Effective LOMRs

Area of Undetermined Flood Hazard Zone D

OTHER AREAS

GENERAL STRUCTURES
Channel, Culvert, or Storm Sewer
Levee, Dike, or Floodwall

Cross Sections with 1% Annual Chance Water Surface Elevation
20.2
17.5
8

Coastal Transect
Base Flood Elevation Line (BFE)
Limit of Study

Jurisdiction Boundary
Coastal Transect Baseline
Profile Baseline
Hydrographic Feature

OTHER FEATURES

Digital Data Available
No Digital Data Available
Unmapped

MAP PANELS




The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards.

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on **7/1/2021 at 11:23 AM** and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

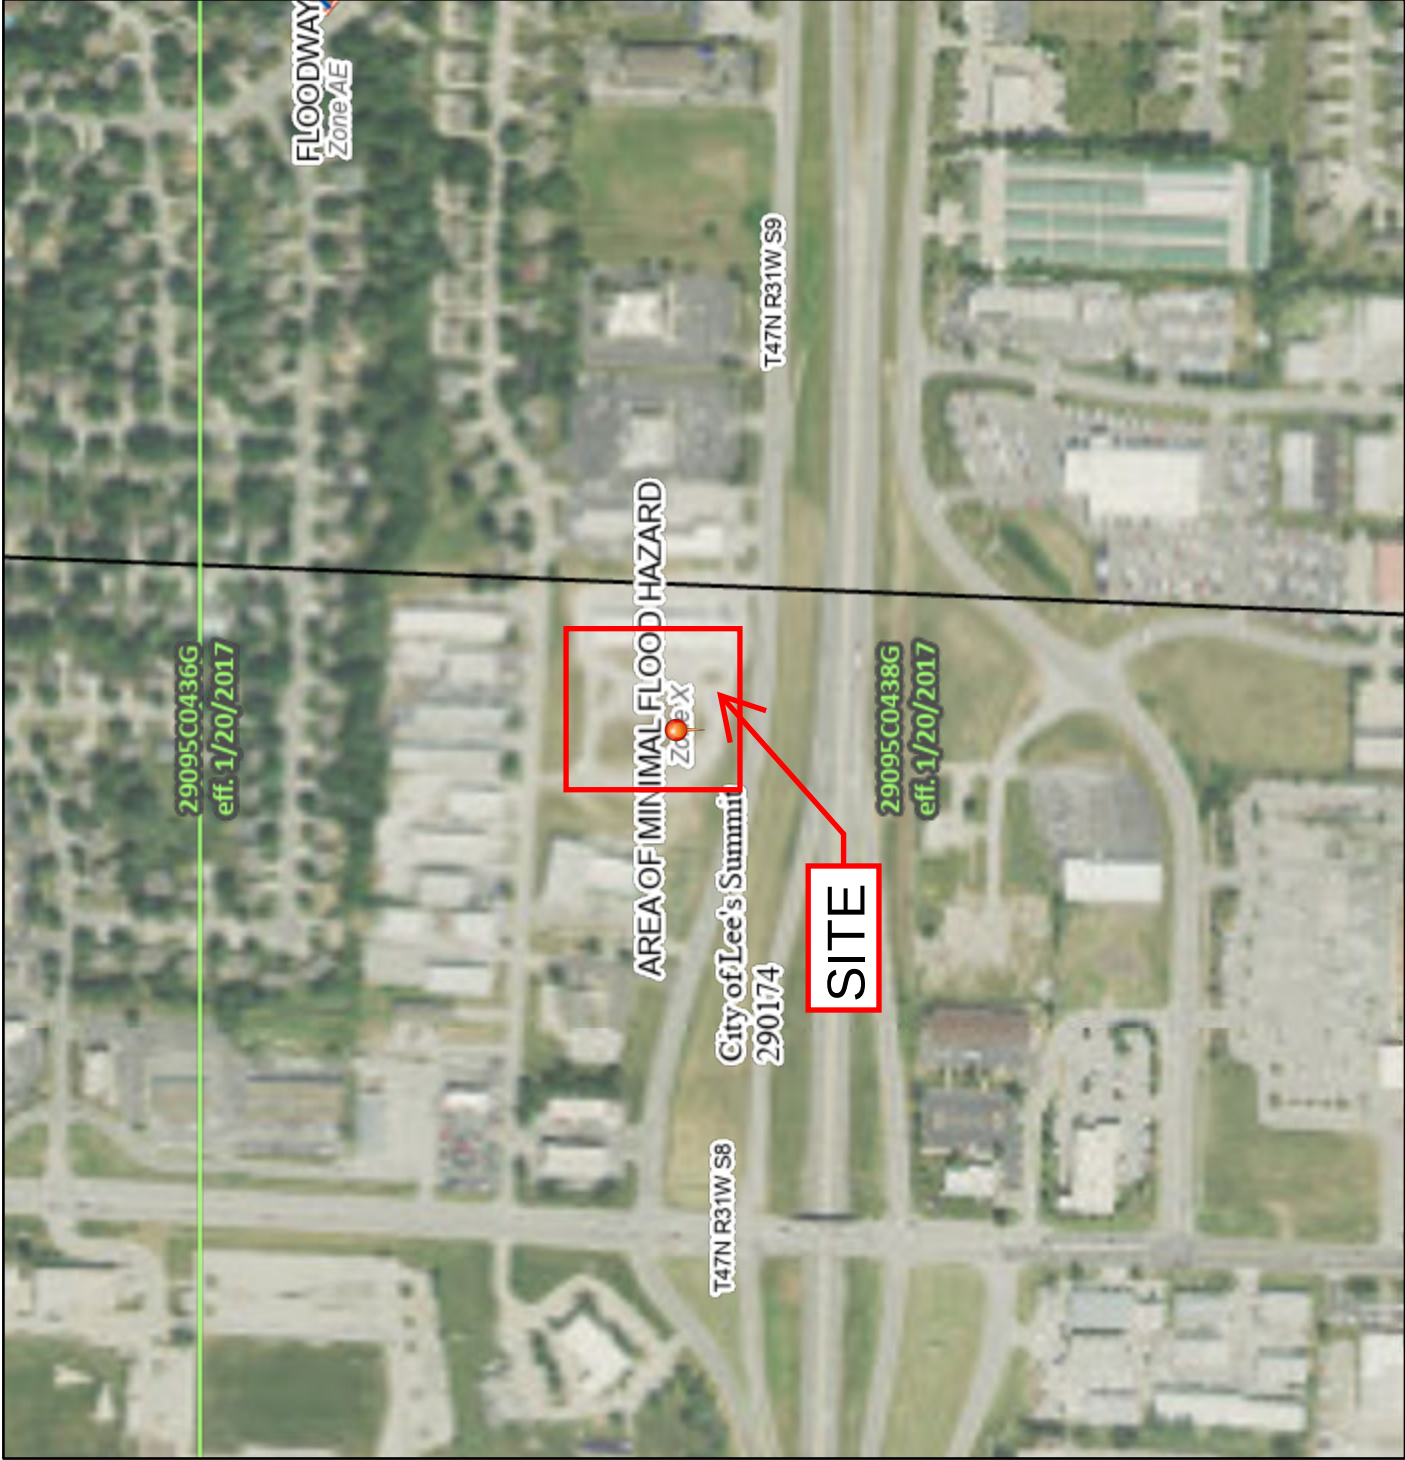


94°21'15"W 38°53'58"N

0 250 500 1,000 1,500 2,000 Feet 1:6,000

Basemap: USGS National Map: Orthoimagery: Data refreshed October, 2020

Hydrologic Soil Group—Jackson County, Missouri

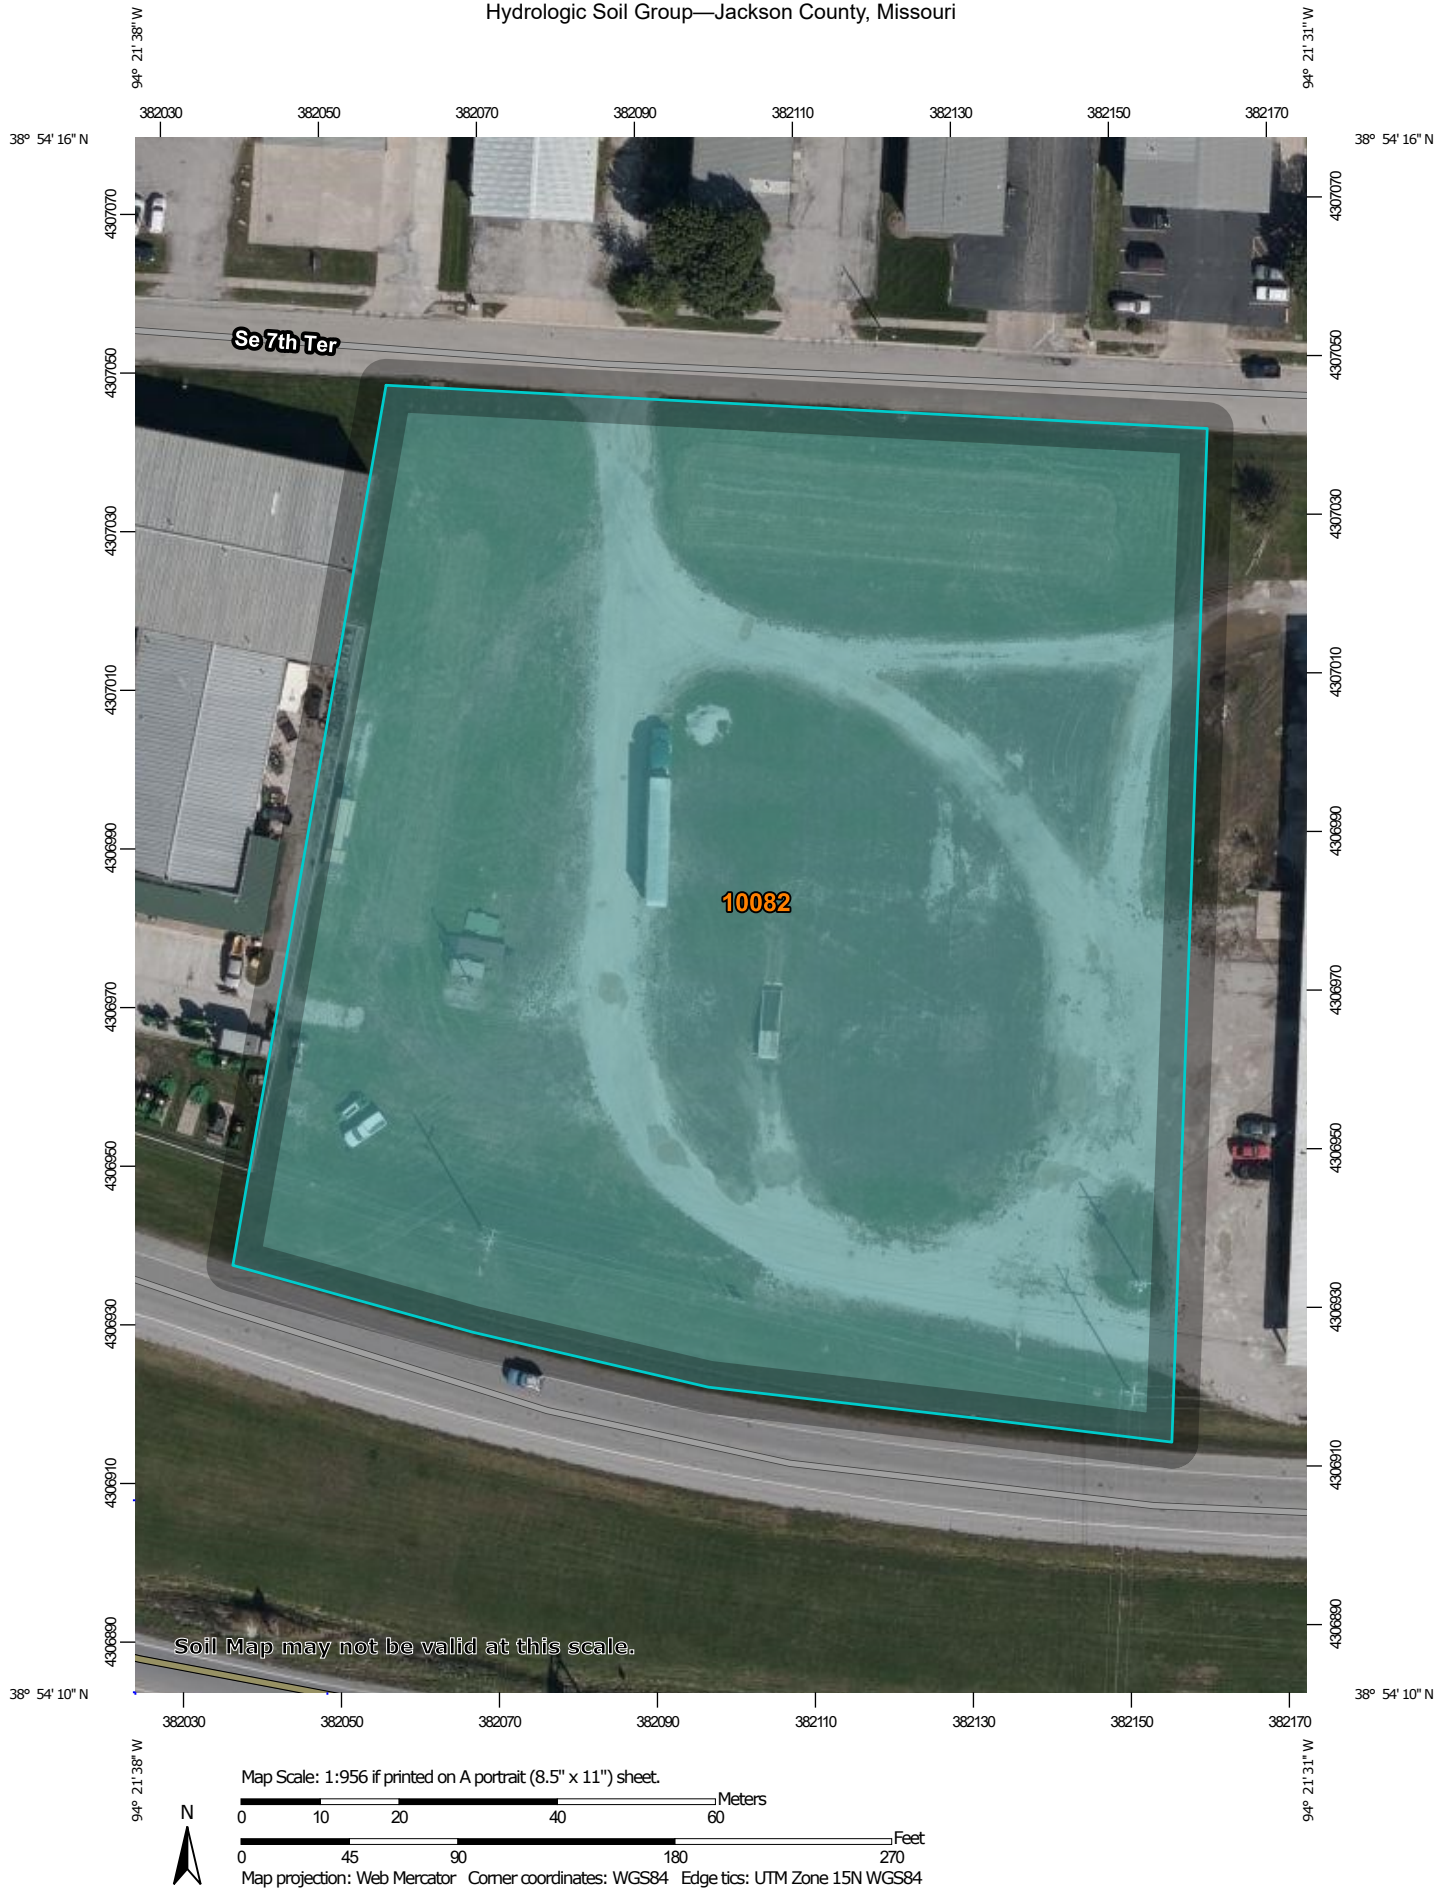

MAP LEGEND

Area of Interest (AOI)

Area of Interest (AOI)

Soils

Soil Rating Polygons

A

A/D

B

B/D

C

C/D

D

Not rated or not available

Water Features

Streams and Canals

Transportation

Rails

Interstate Highways

US Routes

Major Roads

Local Roads

Background

Aerial Photography

Soil Rating Lines

A

A/D

B

B/D

C

C/D

D

Not rated or not available

Soil Rating Points

A

A/D

B

B/D

C

C/D

D

Not rated or not available

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL:
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri
Survey Area Data: Version 22, May 29, 2020

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 6, 2019—Nov 16, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
10082	Arisburg-Urban land complex, 1 to 5 percent slopes	C	3.4	100.0%
Totals for Area of Interest			3.4	100.0%

Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

Rating Options

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher



NOAA Atlas 14, Volume 8, Version 2
Location name: Lees Summit, Missouri, USA*
Latitude: 38.9038°, Longitude: -94.3595°
Elevation: 1016.38 ft**
 * source: ESRI Maps
 ** source: USGS



POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Deborah Martin, Sandra Pavlovic, Ishani Roy, Michael St. Laurent, Carl Trypaluk, Dale Unruh, Michael Yekta, Geoffrey Bonnin

NOAA, National Weather Service, Silver Spring, Maryland

[PF_tabular](#) | [PF_graphical](#) | [Maps & aeriels](#)

PF tabular

PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches/hour) ¹										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	4.97 (3.92-6.28)	5.81 (4.57-7.33)	7.19 (5.65-9.10)	8.35 (6.53-10.6)	9.98 (7.57-13.1)	11.3 (8.36-14.9)	12.6 (9.05-17.0)	13.9 (9.64-19.3)	15.7 (10.5-22.3)	17.1 (11.2-24.6)
10-min	3.64 (2.87-4.60)	4.25 (3.35-5.37)	5.26 (4.13-6.66)	6.11 (4.78-7.77)	7.31 (5.54-9.56)	8.25 (6.13-10.9)	9.20 (6.62-12.4)	10.2 (7.05-14.1)	11.5 (7.69-16.3)	12.5 (8.17-18.0)
15-min	2.96 (2.34-3.74)	3.46 (2.72-4.36)	4.28 (3.36-5.42)	4.97 (3.89-6.32)	5.94 (4.51-7.78)	6.71 (4.98-8.88)	7.48 (5.38-10.1)	8.28 (5.73-11.5)	9.36 (6.25-13.3)	10.2 (6.64-14.6)
30-min	2.05 (1.62-2.59)	2.41 (1.90-3.04)	2.99 (2.35-3.79)	3.49 (2.73-4.43)	4.18 (3.17-5.46)	4.72 (3.50-6.24)	5.26 (3.78-7.11)	5.82 (4.03-8.06)	6.57 (4.39-9.32)	7.15 (4.66-10.3)
60-min	1.34 (1.06-1.69)	1.57 (1.24-1.99)	1.96 (1.54-2.49)	2.29 (1.79-2.92)	2.76 (2.10-3.62)	3.13 (2.33-4.15)	3.51 (2.53-4.75)	3.90 (2.70-5.41)	4.43 (2.96-6.29)	4.84 (3.16-6.96)
2-hr	0.827 (0.657-1.04)	0.972 (0.771-1.22)	1.21 (0.960-1.53)	1.42 (1.12-1.79)	1.72 (1.31-2.24)	1.95 (1.46-2.57)	2.19 (1.59-2.95)	2.44 (1.71-3.37)	2.79 (1.88-3.94)	3.06 (2.01-4.36)
3-hr	0.623 (0.497-0.777)	0.731 (0.583-0.913)	0.916 (0.728-1.15)	1.08 (0.850-1.35)	1.31 (1.00-1.70)	1.49 (1.12-1.96)	1.68 (1.23-2.26)	1.88 (1.32-2.59)	2.16 (1.46-3.04)	2.38 (1.57-3.39)
6-hr	0.376 (0.302-0.466)	0.444 (0.356-0.550)	0.561 (0.449-0.697)	0.664 (0.528-0.827)	0.813 (0.631-1.05)	0.934 (0.708-1.22)	1.06 (0.780-1.42)	1.20 (0.846-1.63)	1.38 (0.944-1.94)	1.53 (1.02-2.16)
12-hr	0.220 (0.178-0.270)	0.262 (0.212-0.323)	0.335 (0.270-0.413)	0.400 (0.320-0.494)	0.493 (0.386-0.634)	0.570 (0.435-0.740)	0.650 (0.481-0.862)	0.735 (0.524-0.998)	0.853 (0.587-1.19)	0.947 (0.635-1.33)
24-hr	0.129 (0.105-0.158)	0.154 (0.126-0.188)	0.198 (0.160-0.242)	0.236 (0.190-0.290)	0.292 (0.230-0.372)	0.337 (0.260-0.435)	0.385 (0.287-0.507)	0.436 (0.313-0.588)	0.507 (0.352-0.701)	0.563 (0.380-0.786)
2-day	0.076 (0.062-0.092)	0.090 (0.073-0.108)	0.113 (0.092-0.137)	0.134 (0.109-0.163)	0.164 (0.130-0.208)	0.189 (0.147-0.242)	0.215 (0.162-0.282)	0.243 (0.176-0.326)	0.282 (0.197-0.388)	0.313 (0.213-0.434)
3-day	0.056 (0.046-0.068)	0.065 (0.054-0.079)	0.081 (0.066-0.098)	0.095 (0.077-0.115)	0.115 (0.092-0.145)	0.132 (0.103-0.168)	0.150 (0.113-0.195)	0.169 (0.123-0.225)	0.195 (0.137-0.267)	0.217 (0.148-0.299)
4-day	0.046 (0.038-0.055)	0.052 (0.043-0.063)	0.064 (0.053-0.077)	0.075 (0.061-0.090)	0.090 (0.072-0.113)	0.102 (0.080-0.130)	0.116 (0.088-0.150)	0.130 (0.095-0.173)	0.150 (0.105-0.204)	0.165 (0.113-0.228)
7-day	0.031 (0.026-0.037)	0.035 (0.029-0.042)	0.042 (0.035-0.050)	0.048 (0.039-0.058)	0.057 (0.045-0.070)	0.064 (0.050-0.080)	0.071 (0.054-0.091)	0.079 (0.058-0.104)	0.089 (0.063-0.121)	0.098 (0.068-0.134)
10-day	0.025 (0.020-0.029)	0.028 (0.023-0.033)	0.033 (0.027-0.039)	0.037 (0.031-0.045)	0.044 (0.035-0.054)	0.049 (0.038-0.061)	0.054 (0.041-0.069)	0.059 (0.043-0.077)	0.066 (0.047-0.089)	0.072 (0.050-0.098)
20-day	0.016 (0.014-0.019)	0.018 (0.016-0.022)	0.022 (0.018-0.026)	0.025 (0.021-0.029)	0.028 (0.023-0.035)	0.031 (0.025-0.039)	0.034 (0.026-0.043)	0.037 (0.027-0.048)	0.040 (0.029-0.054)	0.043 (0.030-0.058)
30-day	0.013 (0.011-0.015)	0.015 (0.013-0.017)	0.018 (0.015-0.021)	0.020 (0.017-0.023)	0.023 (0.018-0.027)	0.025 (0.020-0.030)	0.027 (0.021-0.034)	0.029 (0.021-0.037)	0.031 (0.022-0.041)	0.033 (0.023-0.044)
45-day	0.011 (0.009-0.013)	0.012 (0.010-0.014)	0.014 (0.012-0.017)	0.016 (0.013-0.019)	0.018 (0.015-0.022)	0.020 (0.016-0.024)	0.021 (0.016-0.026)	0.023 (0.017-0.029)	0.024 (0.017-0.032)	0.025 (0.018-0.034)
60-day	0.009 (0.008-0.011)	0.010 (0.009-0.012)	0.012 (0.010-0.014)	0.014 (0.012-0.016)	0.016 (0.013-0.019)	0.017 (0.013-0.020)	0.018 (0.014-0.022)	0.019 (0.014-0.024)	0.020 (0.015-0.027)	0.021 (0.015-0.028)


¹ Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)


PF graphical

PDS-based intensity-duration-frequency (IDF) curves

Latitude: 38.9038°, Longitude: -94.3595°

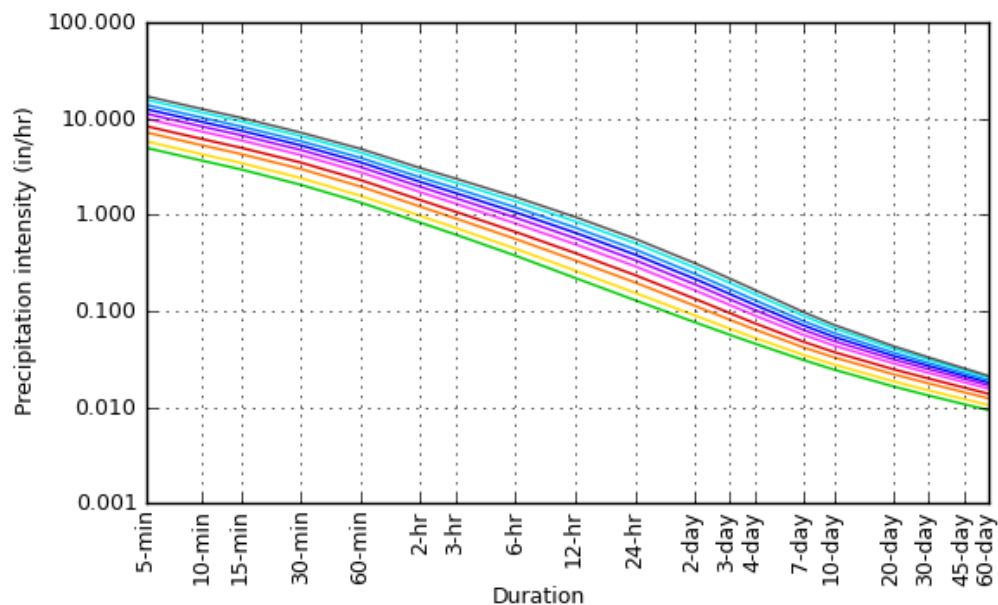

Average recurrence interval (years)
1
2
5
10
25
50
100
200
500
1000

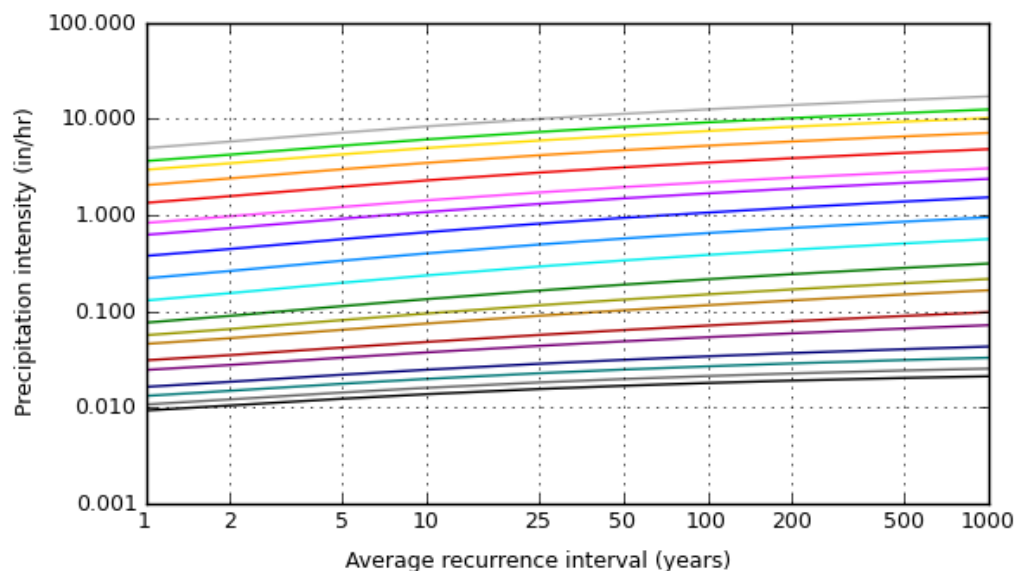


Duration
5-min
10-min
15-min
30-min
60-min
2-hr
3-hr
6-hr
12-hr
24-hr
2-day
3-day
4-day
7-day
10-day
20-day
30-day
45-day
60-day


NOAA Atlas 14, Volume 8, Version 2

Created (GMT): Thu Jul 15 13:49:29 2021


[Back to Top](#)**Maps & arials****Small scale terrain**

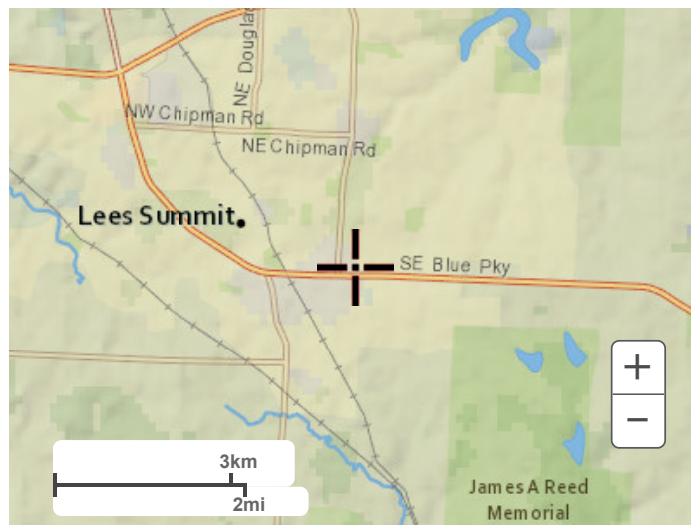


Large scale terrain

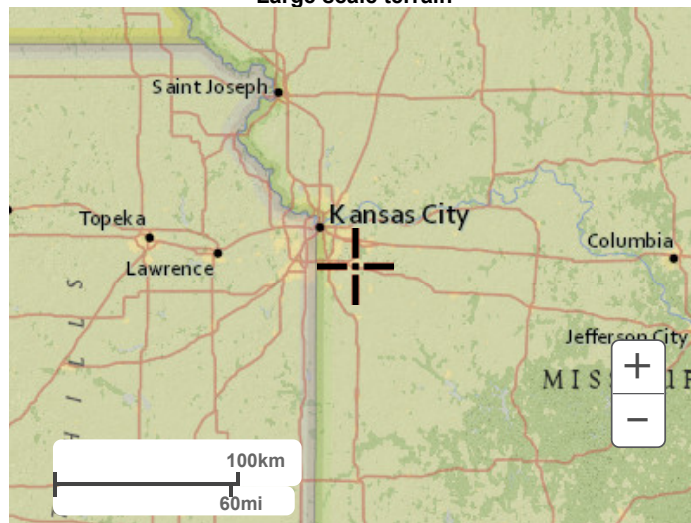

Large scale map

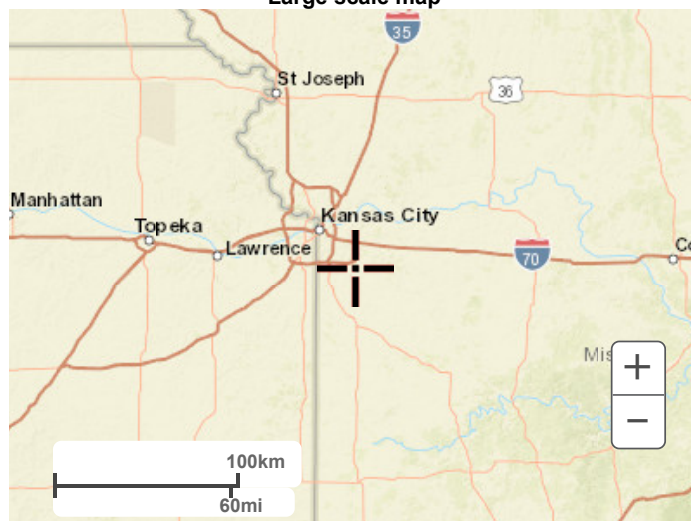

Large scale aerial

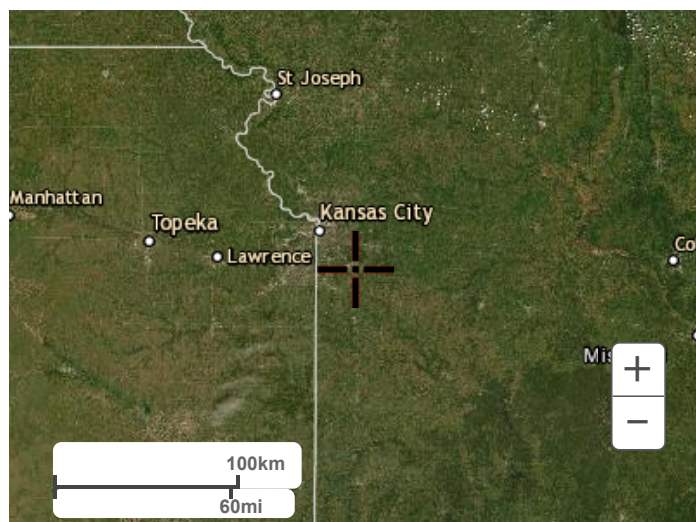

[Back to Top](#)

[US Department of Commerce](#)
[National Oceanic and Atmospheric Administration](#)
[National Weather Service](#)
[National Water Center](#)
1325 East West Highway
Silver Spring, MD 20910
Questions?: HDSC.Questions@noaa.gov

[Disclaimer](#)



NOAA Atlas 14, Volume 8, Version 2
Location name: Lees Summit, Missouri, USA*
Latitude: 38.9038°, Longitude: -94.3595°
Elevation: 1016.38 ft**
 * source: ESRI Maps
 ** source: USGS



POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Deborah Martin, Sandra Pavlovic, Ishani Roy, Michael St. Laurent, Carl Trypaluk, Dale Unruh, Michael Yekta, Geoffrey Bonnin

NOAA, National Weather Service, Silver Spring, Maryland

[PF_tabular](#) | [PF_graphical](#) | [Maps & aerals](#)

PF tabular



PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches) ¹										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	0.414 (0.327-0.523)	0.484 (0.381-0.611)	0.599 (0.471-0.758)	0.696 (0.544-0.885)	0.832 (0.631-1.09)	0.939 (0.697-1.24)	1.05 (0.754-1.42)	1.16 (0.803-1.61)	1.31 (0.875-1.86)	1.43 (0.930-2.05)
10-min	0.607 (0.479-0.766)	0.708 (0.558-0.895)	0.877 (0.689-1.11)	1.02 (0.797-1.30)	1.22 (0.924-1.59)	1.38 (1.02-1.82)	1.53 (1.10-2.07)	1.70 (1.18-2.35)	1.92 (1.28-2.72)	2.09 (1.36-3.00)
15-min	0.740 (0.584-0.934)	0.864 (0.681-1.09)	1.07 (0.840-1.35)	1.24 (0.972-1.58)	1.49 (1.13-1.94)	1.68 (1.25-2.22)	1.87 (1.35-2.53)	2.07 (1.43-2.87)	2.34 (1.56-3.32)	2.55 (1.66-3.66)
30-min	1.02 (0.808-1.29)	1.20 (0.948-1.52)	1.50 (1.18-1.90)	1.75 (1.36-2.22)	2.09 (1.58-2.73)	2.36 (1.75-3.12)	2.63 (1.89-3.56)	2.91 (2.02-4.03)	3.29 (2.19-4.66)	3.57 (2.33-5.14)
60-min	1.34 (1.06-1.69)	1.57 (1.24-1.99)	1.96 (1.54-2.49)	2.29 (1.79-2.92)	2.76 (2.10-3.62)	3.13 (2.33-4.15)	3.51 (2.53-4.75)	3.90 (2.70-5.41)	4.43 (2.96-6.29)	4.84 (3.16-6.96)
2-hr	1.65 (1.31-2.07)	1.94 (1.54-2.44)	2.43 (1.92-3.05)	2.84 (2.24-3.59)	3.43 (2.63-4.47)	3.90 (2.92-5.14)	4.39 (3.18-5.90)	4.89 (3.41-6.74)	5.58 (3.76-7.87)	6.11 (4.01-8.73)
3-hr	1.87 (1.49-2.33)	2.20 (1.75-2.74)	2.75 (2.19-3.44)	3.23 (2.55-4.06)	3.92 (3.02-5.10)	4.48 (3.37-5.88)	5.05 (3.68-6.78)	5.66 (3.97-7.77)	6.49 (4.39-9.14)	7.14 (4.71-10.2)
6-hr	2.25 (1.81-2.79)	2.66 (2.13-3.30)	3.36 (2.69-4.17)	3.98 (3.16-4.95)	4.87 (3.78-6.30)	5.60 (4.24-7.31)	6.36 (4.67-8.48)	7.16 (5.07-9.79)	8.28 (5.65-11.6)	9.16 (6.09-12.9)
12-hr	2.65 (2.14-3.26)	3.16 (2.55-3.89)	4.04 (3.26-4.98)	4.82 (3.86-5.96)	5.94 (4.65-7.64)	6.87 (5.24-8.91)	7.83 (5.80-10.4)	8.86 (6.32-12.0)	10.3 (7.08-14.3)	11.4 (7.65-16.0)
24-hr	3.10 (2.53-3.78)	3.71 (3.01-4.52)	4.75 (3.85-5.80)	5.66 (4.57-6.95)	7.00 (5.51-8.93)	8.10 (6.23-10.4)	9.24 (6.90-12.2)	10.5 (7.52-14.1)	12.2 (8.44-16.8)	13.5 (9.13-18.9)
2-day	3.66 (3.00-4.42)	4.30 (3.53-5.21)	5.43 (4.43-6.58)	6.42 (5.22-7.82)	7.88 (6.25-9.98)	9.07 (7.04-11.6)	10.3 (7.77-13.5)	11.7 (8.46-15.6)	13.5 (9.47-18.6)	15.0 (10.2-20.8)
3-day	4.06 (3.34-4.89)	4.71 (3.87-5.67)	5.83 (4.78-7.04)	6.83 (5.57-8.28)	8.30 (6.62-10.5)	9.51 (7.41-12.1)	10.8 (8.15-14.1)	12.2 (8.85-16.2)	14.1 (9.89-19.2)	15.6 (10.7-21.5)
4-day	4.39 (3.63-5.27)	5.04 (4.16-6.05)	6.16 (5.07-7.41)	7.16 (5.85-8.65)	8.62 (6.89-10.8)	9.83 (7.68-12.5)	11.1 (8.41-14.4)	12.5 (9.10-16.6)	14.4 (10.1-19.6)	15.9 (10.9-21.9)
7-day	5.20 (4.32-6.20)	5.88 (4.88-7.02)	7.05 (5.83-8.43)	8.06 (6.63-9.68)	9.52 (7.64-11.8)	10.7 (8.40-13.5)	11.9 (9.09-15.4)	13.2 (9.71-17.5)	15.0 (10.6-20.3)	16.4 (11.3-22.5)
10-day	5.89 (4.91-7.00)	6.65 (5.53-7.90)	7.90 (6.56-9.41)	8.97 (7.41-10.7)	10.5 (8.43-12.9)	11.7 (9.19-14.6)	12.9 (9.85-16.5)	14.2 (10.4-18.6)	15.9 (11.3-21.4)	17.2 (11.9-23.5)
20-day	7.86 (6.60-9.25)	8.88 (7.45-10.5)	10.5 (8.80-12.4)	11.9 (9.86-14.1)	13.7 (11.0-16.6)	15.0 (11.9-18.5)	16.3 (12.5-20.6)	17.7 (13.1-22.9)	19.4 (13.8-25.8)	20.6 (14.4-28.0)
30-day	9.50 (8.01-11.1)	10.7 (9.05-12.6)	12.7 (10.7-14.9)	14.3 (11.9-16.9)	16.3 (13.2-19.7)	17.9 (14.1-21.9)	19.3 (14.8-24.2)	20.7 (15.4-26.6)	22.4 (16.1-29.7)	23.7 (16.6-32.0)
45-day	11.6 (9.82-13.5)	13.1 (11.1-15.3)	15.5 (13.0-18.1)	17.3 (14.5-20.3)	19.7 (15.9-23.5)	21.3 (17.0-26.0)	22.9 (17.7-28.5)	24.4 (18.2-31.2)	26.2 (18.8-34.4)	27.4 (19.3-36.8)
60-day	13.4 (11.4-15.6)	15.1 (12.8-17.6)	17.8 (15.0-20.7)	19.8 (16.7-23.2)	22.4 (18.2-26.7)	24.2 (19.3-29.3)	25.9 (20.0-32.1)	27.4 (20.5-34.9)	29.2 (21.1-38.2)	30.4 (21.5-40.7)

¹ Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)

PF graphical


PDS-based depth-duration-frequency (DDF) curves
Latitude: 38.9038°, Longitude: -94.3595°

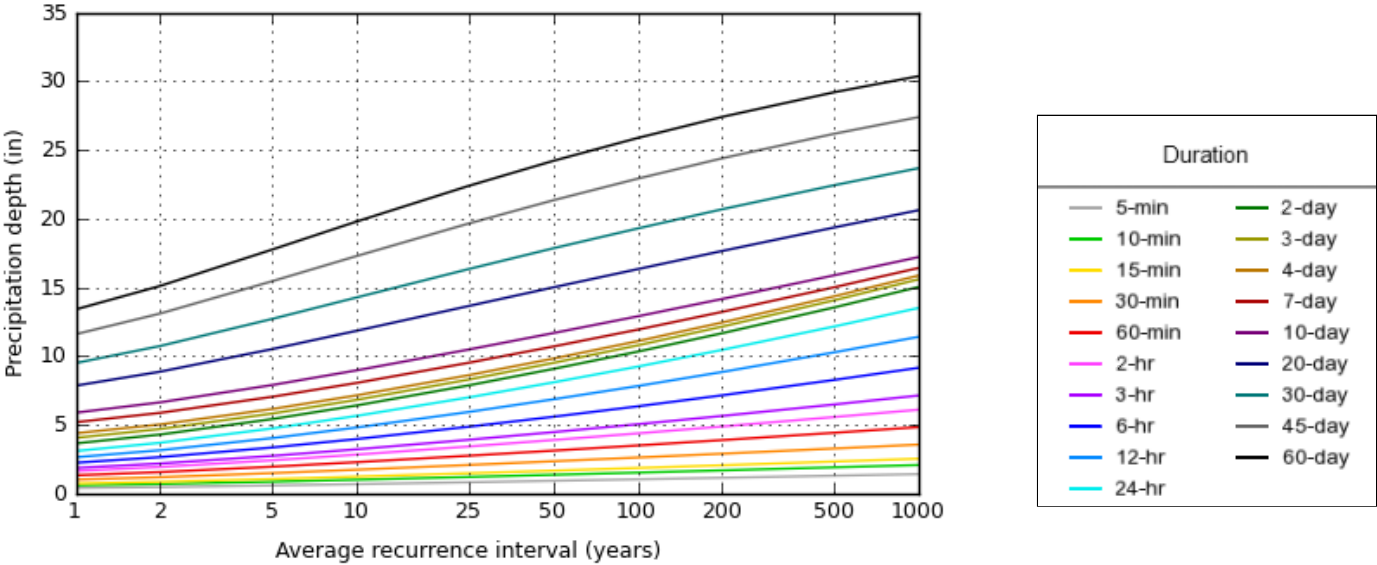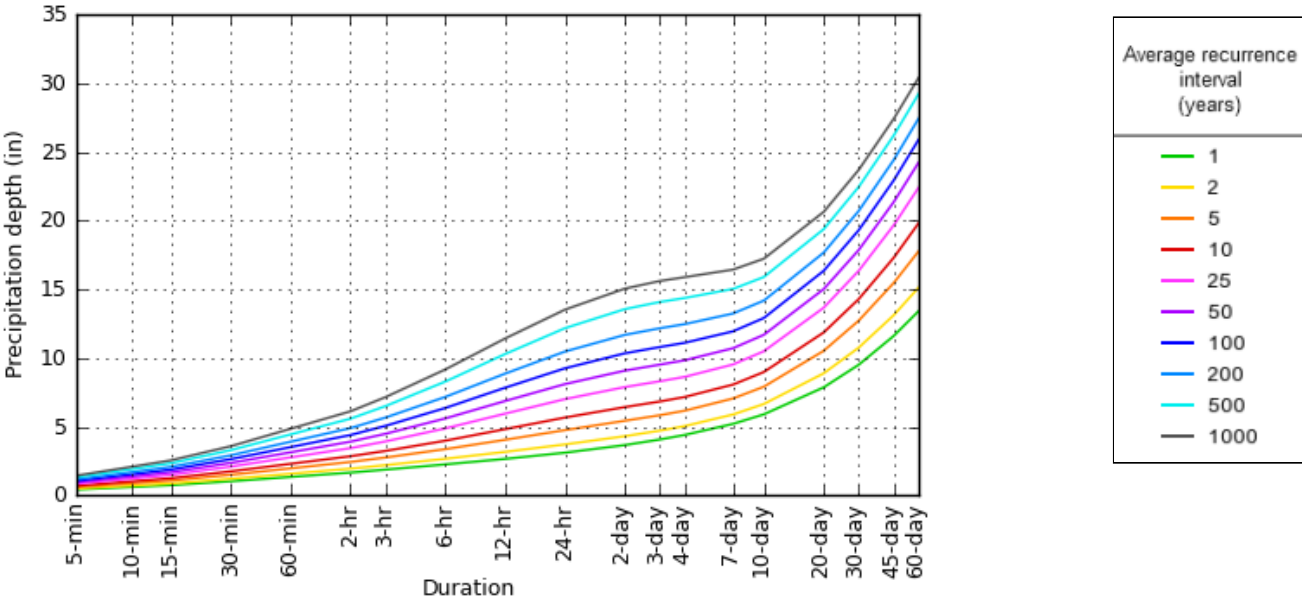


[Back to Top](#)

Maps & aerals


Small scale terrain

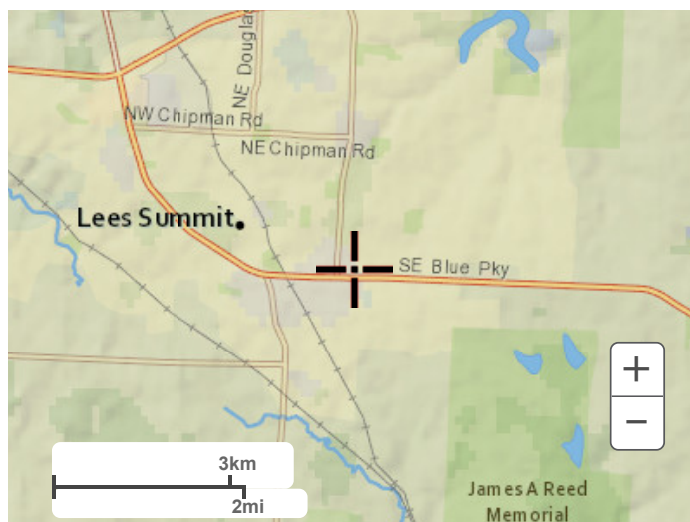


Large scale terrain

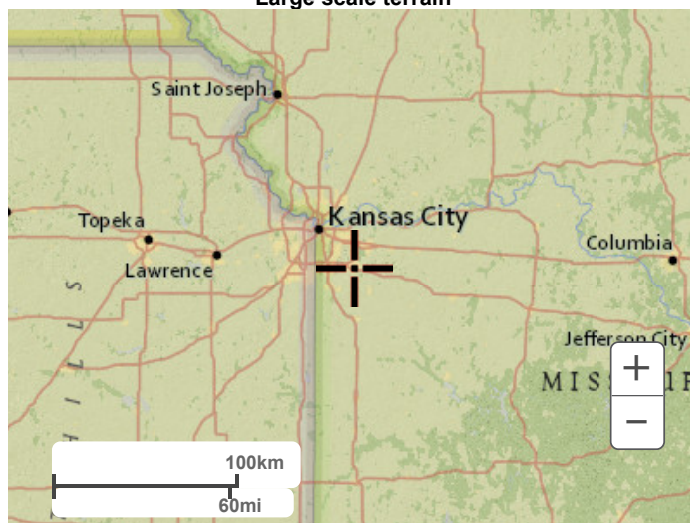

Large scale map

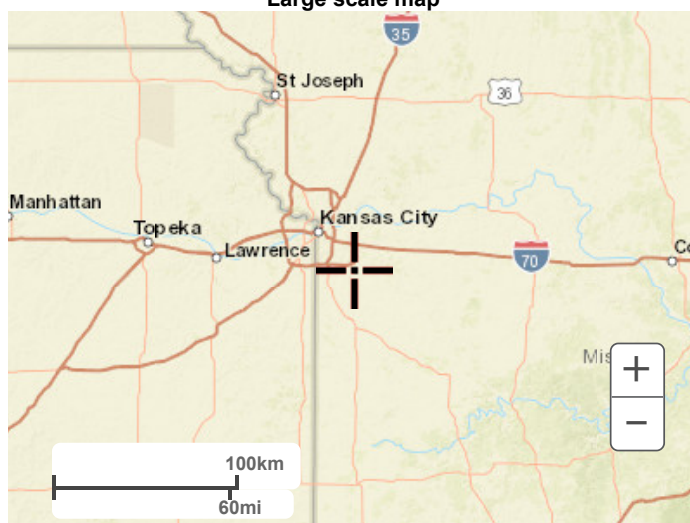

Large scale aerial

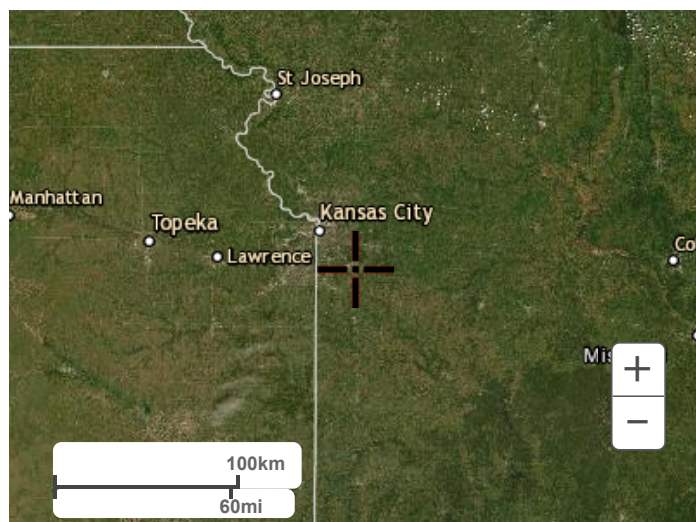[Back to Top](#)

[US Department of Commerce](#)
[National Oceanic and Atmospheric Administration](#)
[National Weather Service](#)
[National Water Center](#)
1325 East West Highway
Silver Spring, MD 20910
Questions?: HDSC.Questions@noaa.gov

[Disclaimer](#)

Appendix B

Watershed Model Schematic

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022



Legend

Hyd.	Origin	Description
1	SCS Runoff	Developed Area
2	Reservoir	<no description>

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5.340	2	716	11,712	-----	-----	-----	Developed Area
2	Reservoir	0.312	2	760	11,706	1	1010.43	6,950	<no description>
Pond.gpw					Return Period: 2 Year			Tuesday, 07 / 20 / 2021	

Hydrograph Report

Hyd. No. 1

Developed Area

Hydrograph type	=	SCS Runoff	Peak discharge	=	5.340 cfs
Storm frequency	=	2 yrs	Time to peak	=	716 min
Time interval	=	2 min	Hyd. volume	=	11,712 cuft
Drainage area	=	1.100 ac	Curve number	=	94
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	6.00 min
Total precip.	=	3.80 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

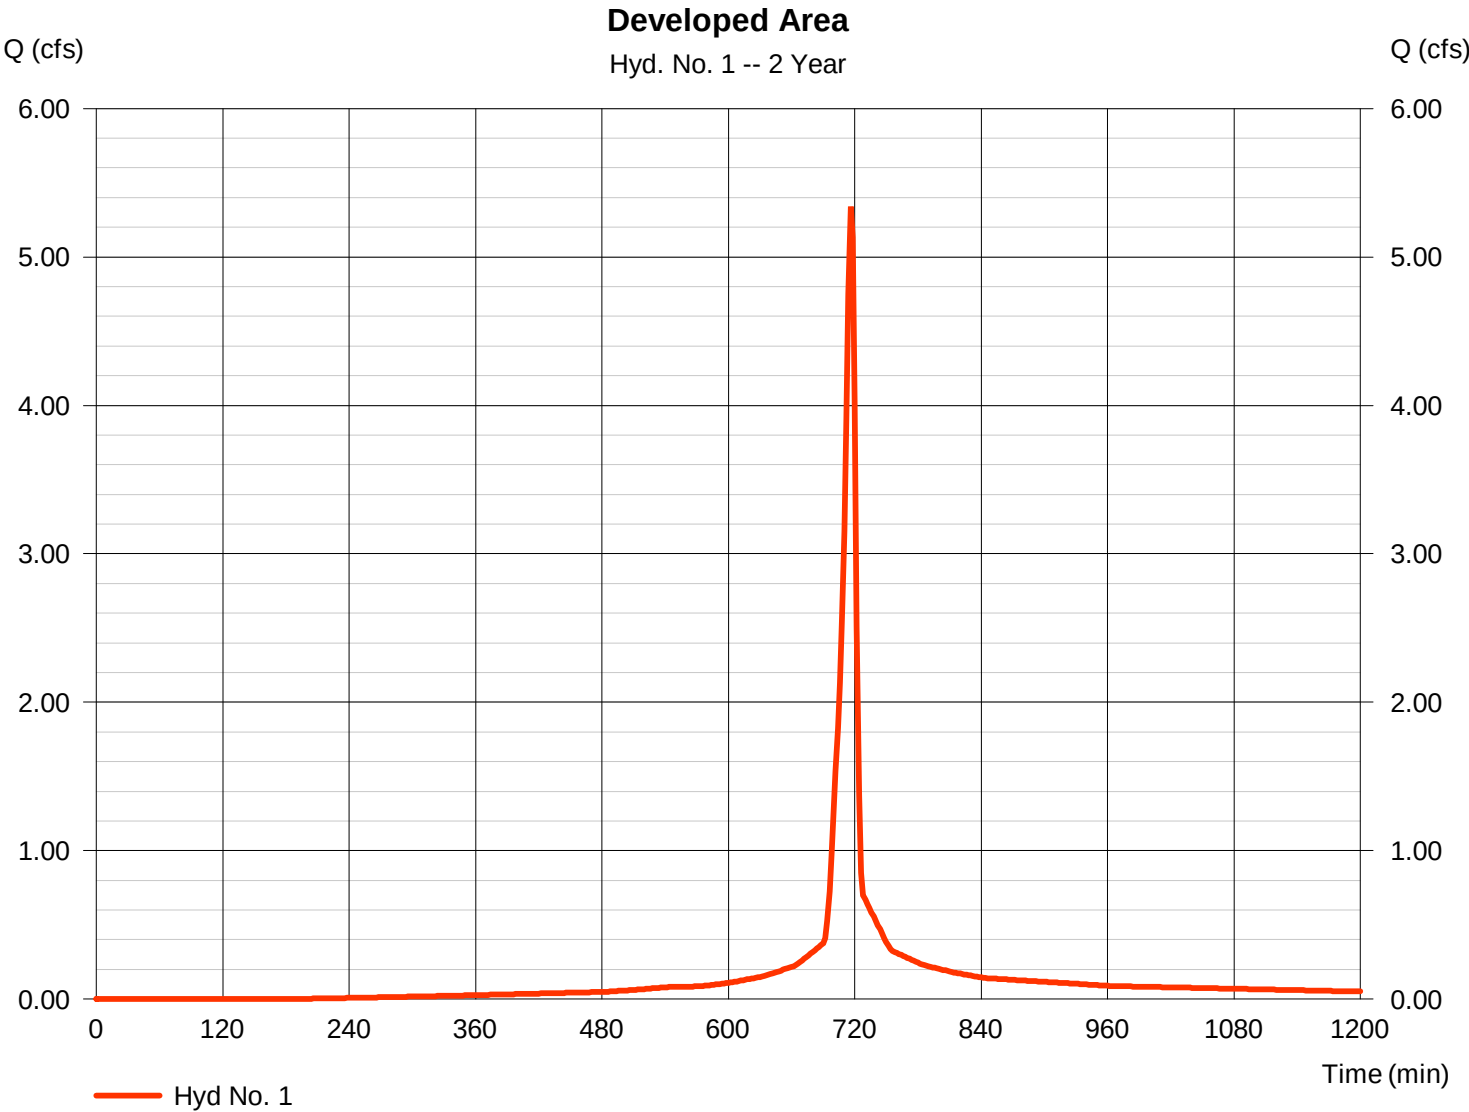

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Tuesday, 07 / 20 / 2021

Hyd. No. 2

<no description>

Hydrograph type	= Reservoir	Peak discharge	= 0.312 cfs
Storm frequency	= 2 yrs	Time to peak	= 760 min
Time interval	= 2 min	Hyd. volume	= 11,706 cuft
Inflow hyd. No.	= 1 - Developed Area	Max. Elevation	= 1010.43 ft
Reservoir name	= Pond	Max. Storage	= 6,950 cuft

Storage Indication method used.

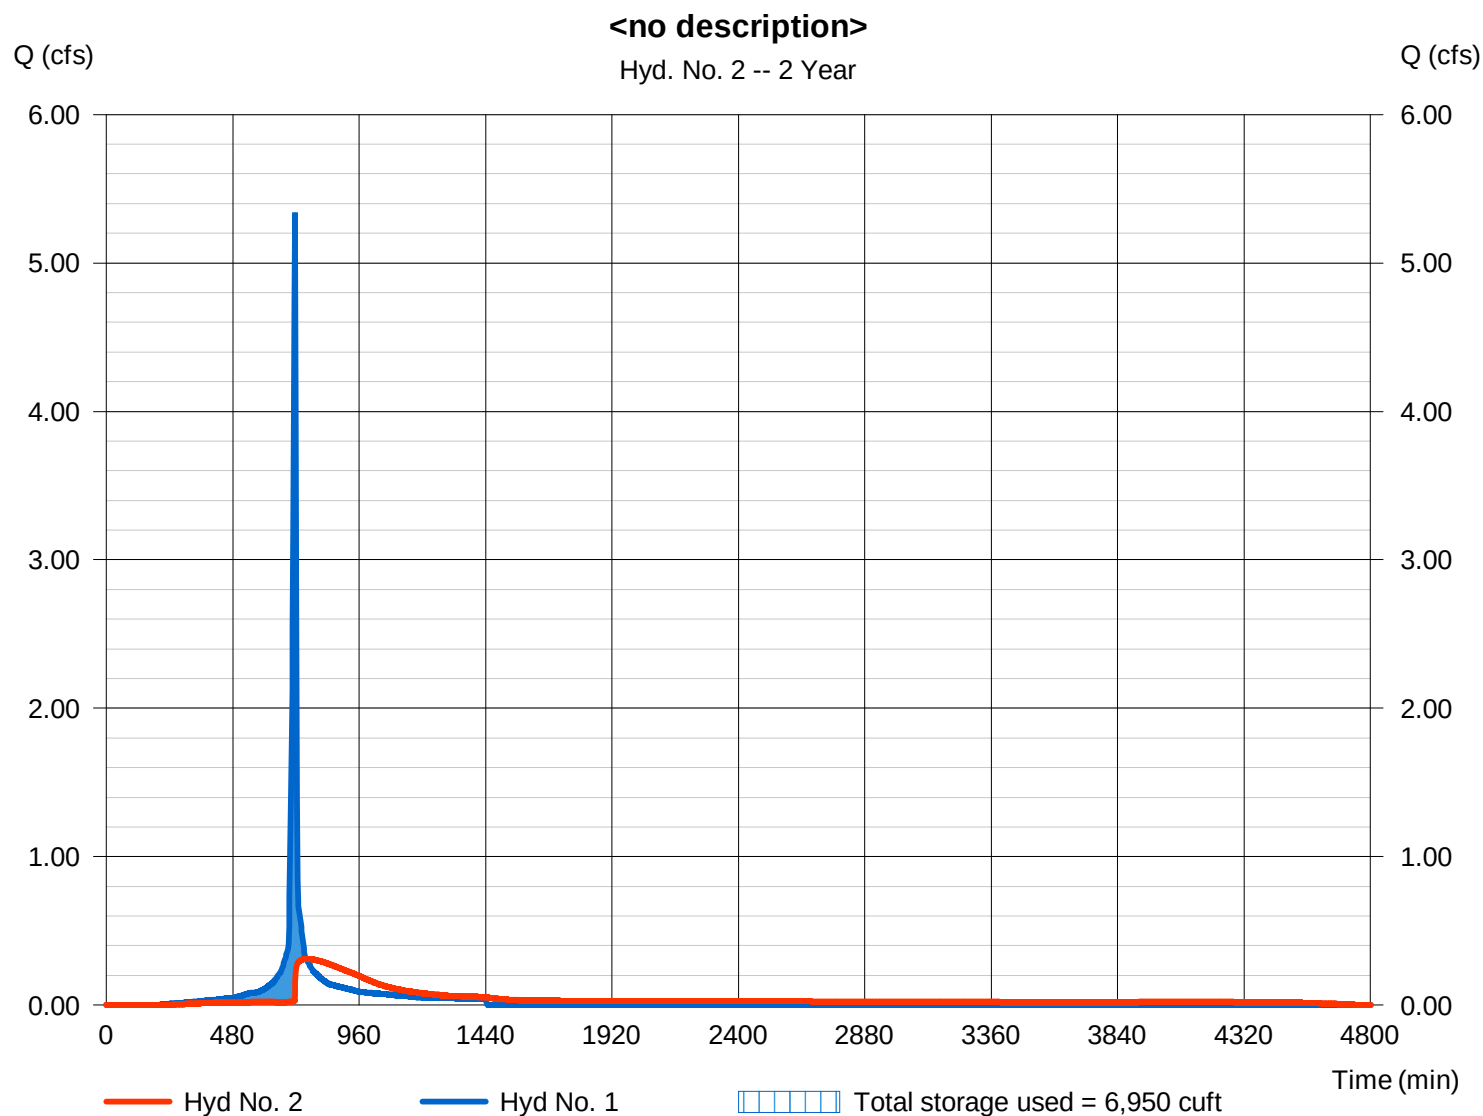

Pond No. 1 - Pond

Pond Data

Pond storage is based on user-defined values.

Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	1008.50	n/a	0	0
0.50	1009.00	n/a	155	155
1.00	1009.00	n/a	798	953
1.50	1009.50	n/a	1,673	2,626
2.00	1010.00	n/a	2,349	4,975
2.50	1010.50	n/a	2,279	7,254
3.00	1011.00	n/a	2,183	9,437
3.50	1011.50	n/a	2,054	11,491
4.00	1012.00	n/a	1,878	13,369
4.50	1012.50	n/a	1,613	14,982
5.00	1013.00	n/a	1,134	16,116
5.50	1013.50	n/a	953	17,068
6.00	1014.00	n/a	953	18,021


Culvert / Orifice Structures

	[A]	[B]	[C]	[PrfRsr]
Rise (in)	= 18.00	1.00	4.00	0.00
Span (in)	= 18.00	1.00	4.00	0.00
No. Barrels	= 1	1	1	0
Invert El. (ft)	= 1008.50	1008.50	1009.83	8.00
Length (ft)	= 20.00	0.00	0.00	0.00
Slope (%)	= 1.00	0.00	0.00	n/a
N-Value	= .013	.013	.013	n/a
Orifice Coeff.	= 0.60	0.60	0.60	0.60
Multi-Stage	= n/a	Yes	Yes	No

Weir Structures

	[A]	[B]	[C]	[D]
Crest Len (ft)	= 0.00	1.50	0.00	0.00
Crest El. (ft)	= 0.00	1012.50	0.00	0.00
Weir Coeff.	= 3.33	3.33	3.33	3.33
Weir Type	= 1	Rect	---	---
Multi-Stage	= Yes	Yes	No	No
Exfil.(in/hr)	= 0.000 (by Wet area)			
TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

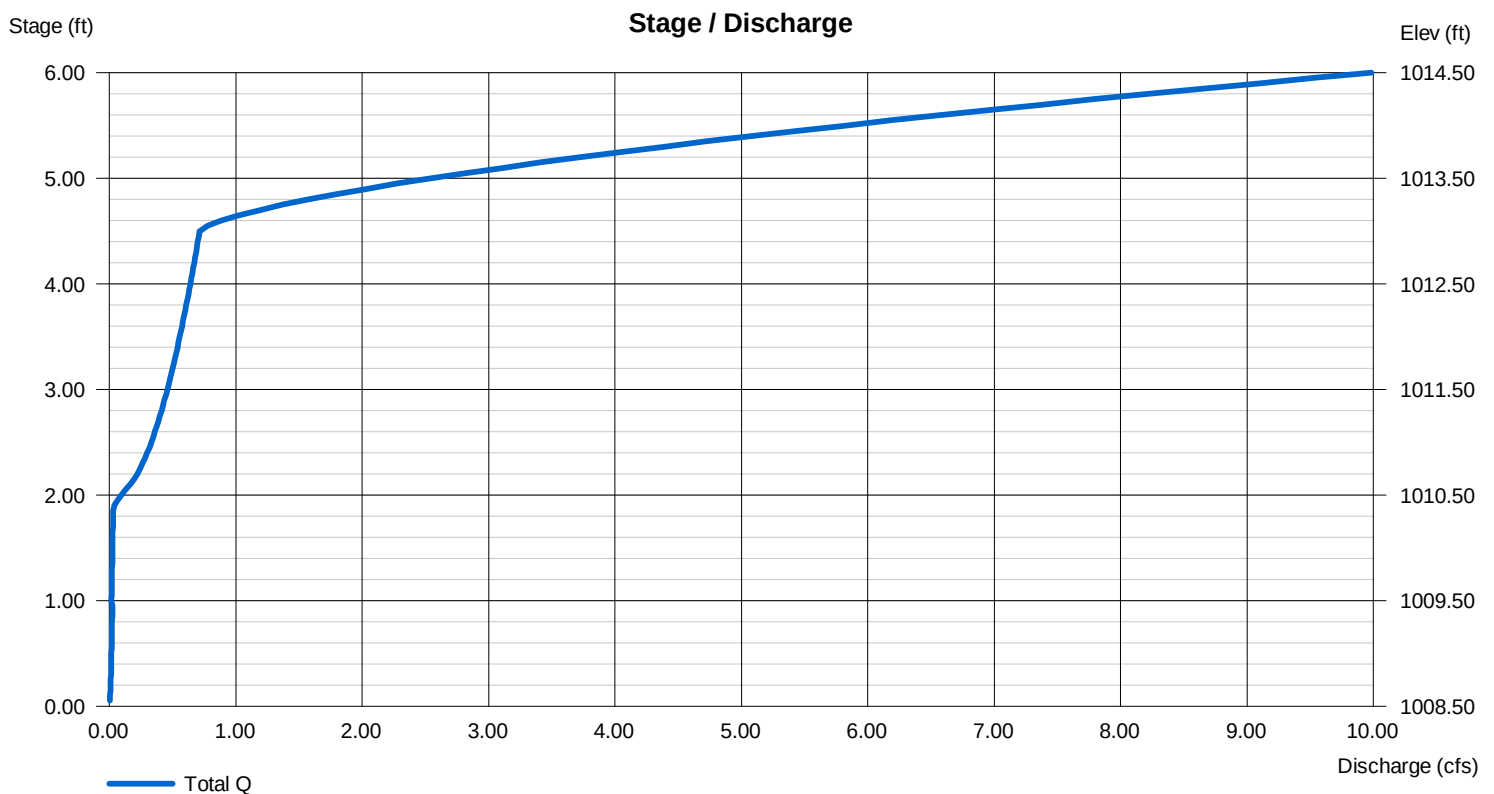

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	7.974	2	716	17,975	-----	-----	-----	Developed Area
2	Reservoir	0.525	2	752	17,969	1	1011.32	10,758	<no description>
Pond.gpw					Return Period: 10 Year			Tuesday, 07 / 20 / 2021	

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Tuesday, 07 / 20 / 2021

Hyd. No. 1

Developed Area

Hydrograph type	= SCS Runoff	Peak discharge	= 7.974 cfs
Storm frequency	= 10 yrs	Time to peak	= 716 min
Time interval	= 2 min	Hyd. volume	= 17,975 cuft
Drainage area	= 1.100 ac	Curve number	= 94
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 6.00 min
Total precip.	= 5.50 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

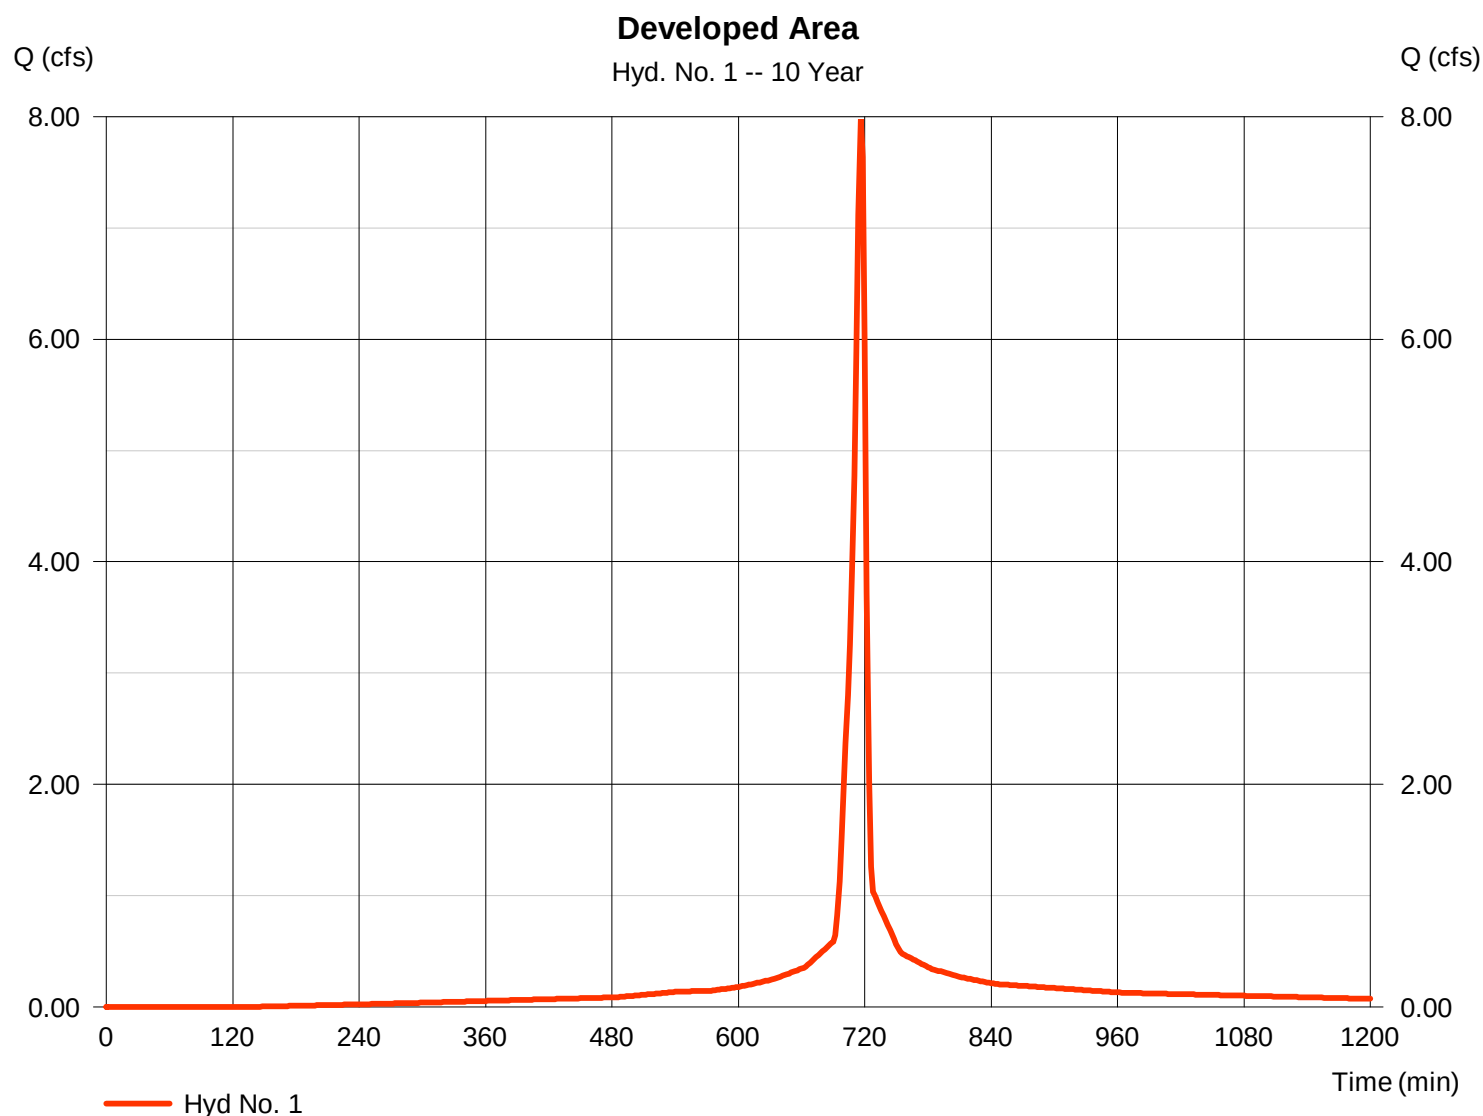


Hydrograph Report

Hyd. No. 2

<no description>

Hydrograph type	= Reservoir	Peak discharge	= 0.525 cfs
Storm frequency	= 10 yrs	Time to peak	= 752 min
Time interval	= 2 min	Hyd. volume	= 17,969 cuft
Inflow hyd. No.	= 1 - Developed Area	Max. Elevation	= 1011.32 ft
Reservoir name	= Pond	Max. Storage	= 10,758 cuft

Storage Indication method used.

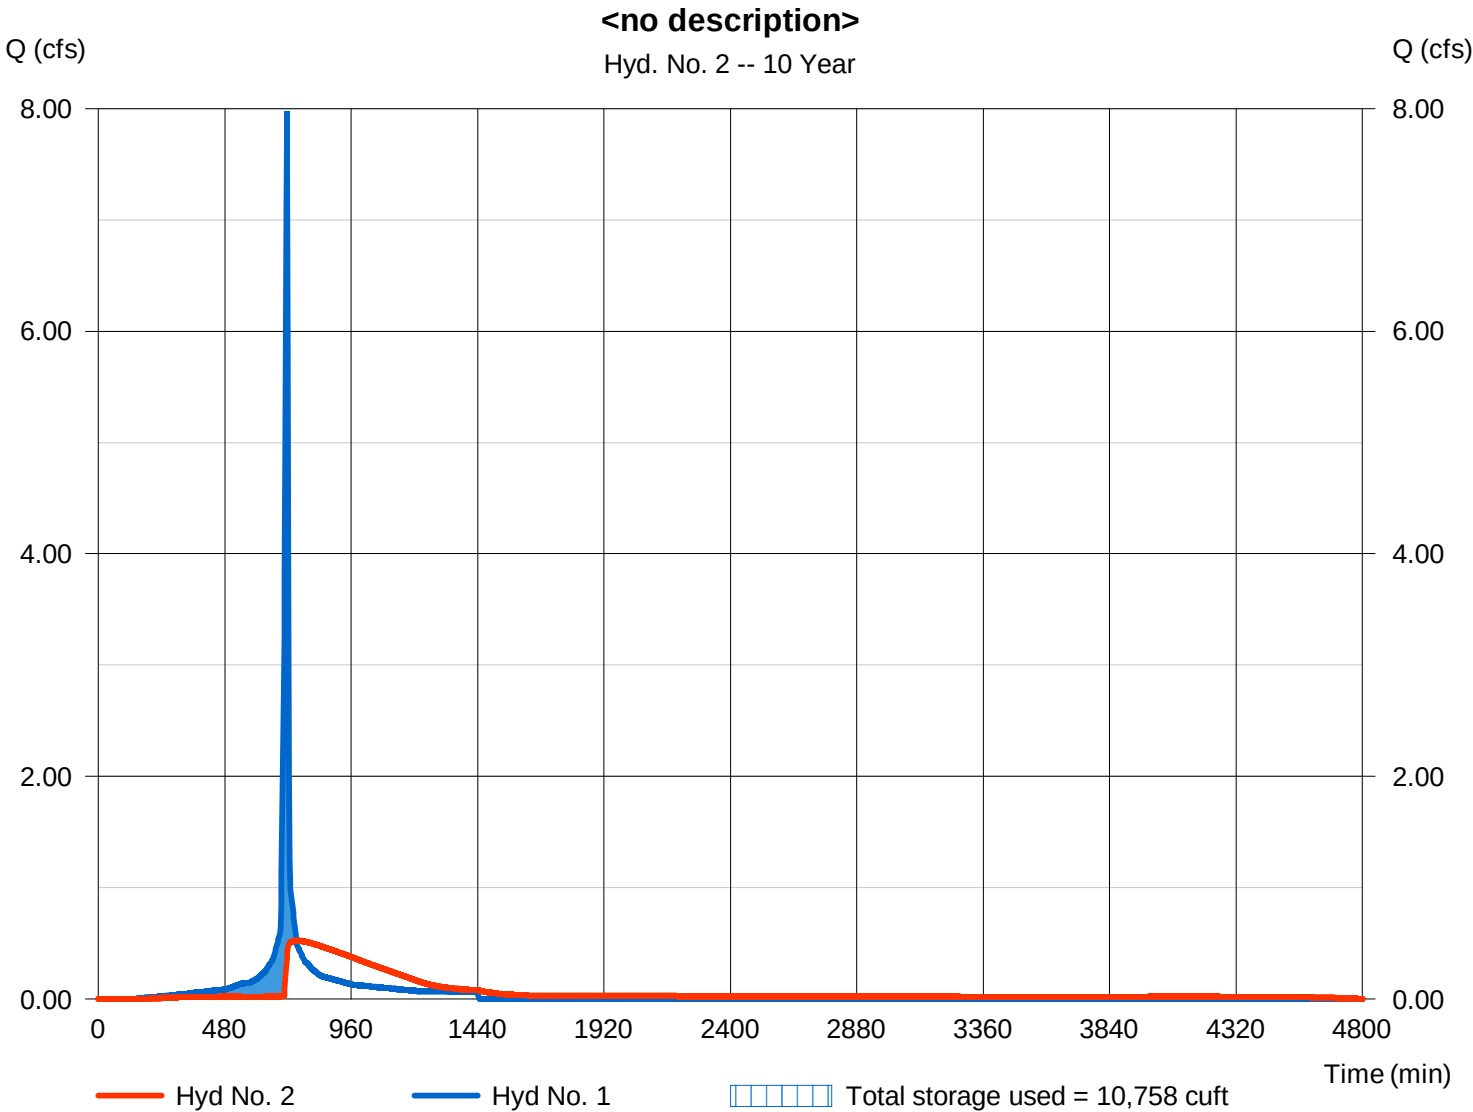

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	9.970	2	716	22,797	-----	-----	-----	Developed Area
2	Reservoir	0.660	2	752	22,791	1	1012.12	13,754	<no description>
Pond.gpw					Return Period: 25 Year			Tuesday, 07 / 20 / 2021	

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Tuesday, 07 / 20 / 2021

Hyd. No. 1

Developed Area

Hydrograph type	=	SCS Runoff	Peak discharge	=	9.970 cfs
Storm frequency	=	25 yrs	Time to peak	=	716 min
Time interval	=	2 min	Hyd. volume	=	22,797 cuft
Drainage area	=	1.100 ac	Curve number	=	94
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	6.00 min
Total precip.	=	6.80 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

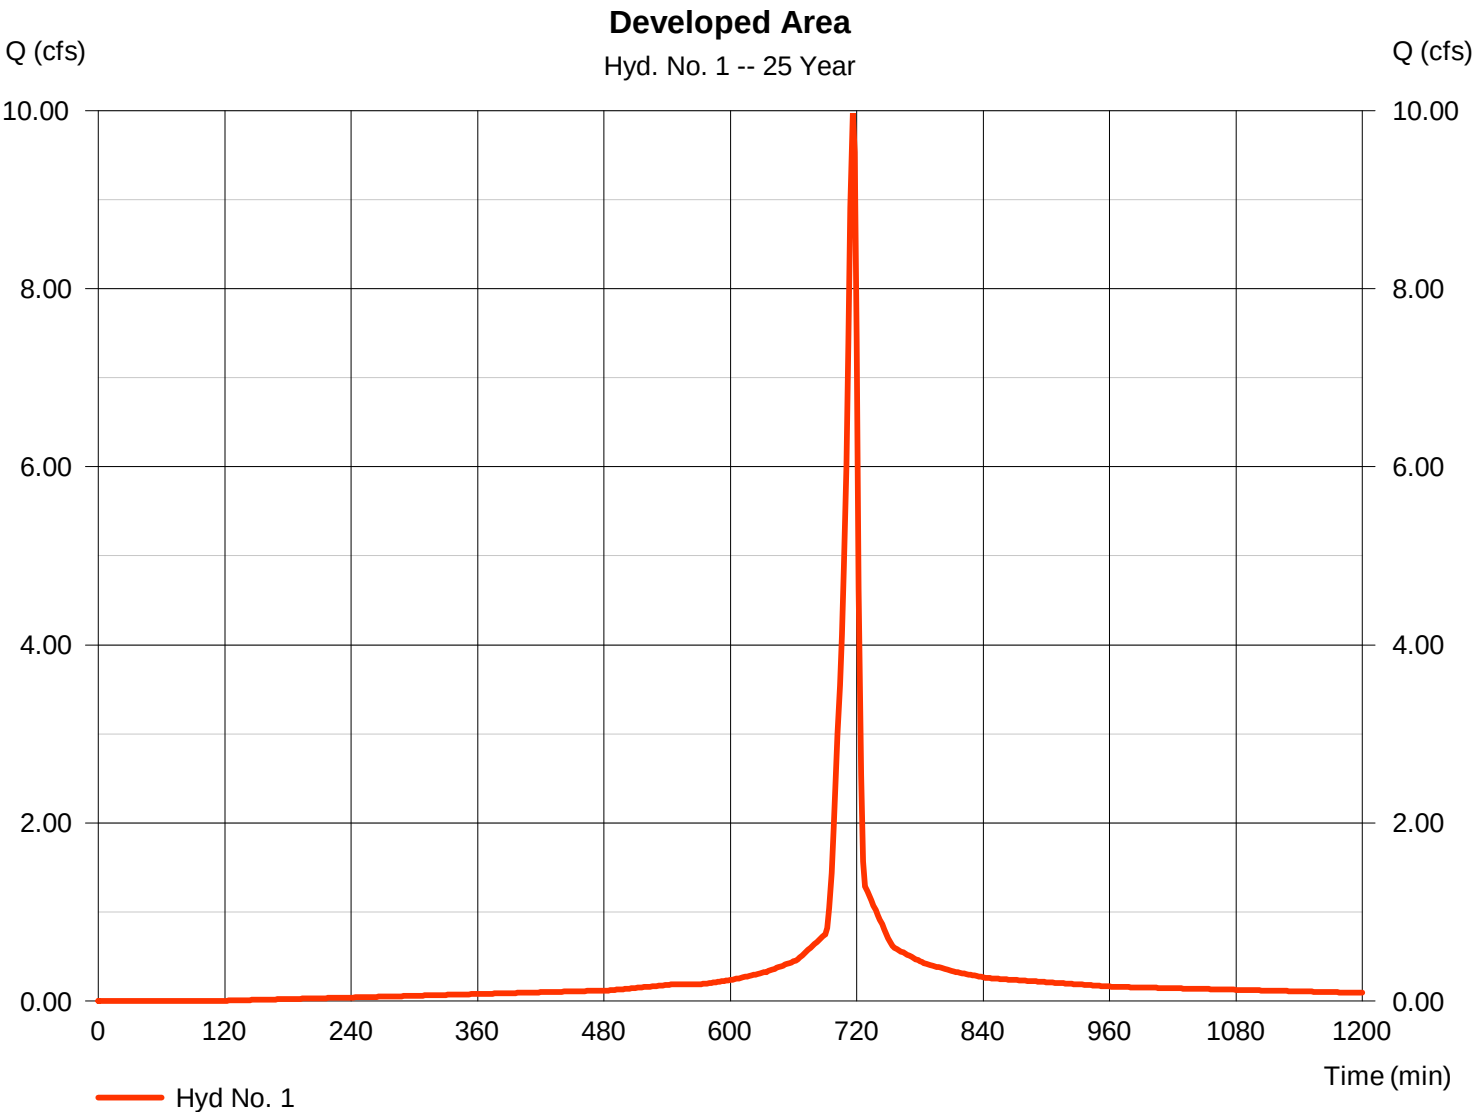

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Tuesday, 07 / 20 / 2021

Hyd. No. 2

<no description>

Hydrograph type	= Reservoir	Peak discharge	= 0.660 cfs
Storm frequency	= 25 yrs	Time to peak	= 752 min
Time interval	= 2 min	Hyd. volume	= 22,791 cuft
Inflow hyd. No.	= 1 - Developed Area	Max. Elevation	= 1012.12 ft
Reservoir name	= Pond	Max. Storage	= 13,754 cuft

Storage Indication method used.

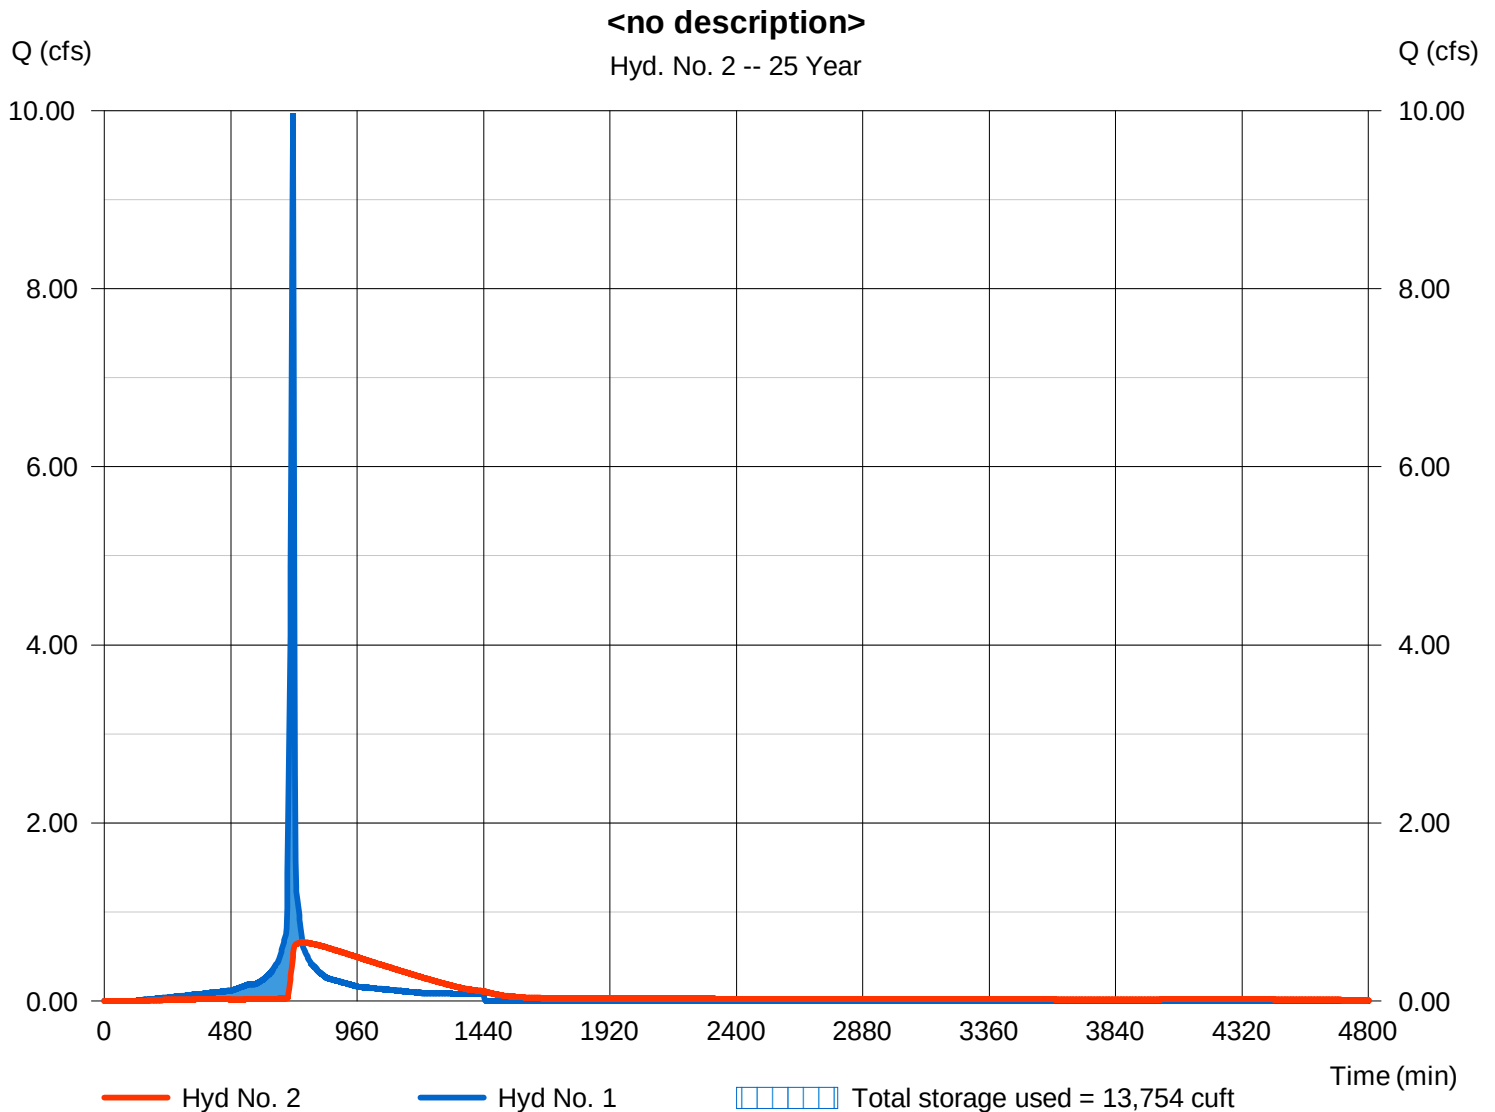

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	11.65	2	716	26,887	-----	-----	-----	Developed Area
2	Reservoir	1.405	2	732	26,881	1	1012.76	15,567	<no description>
Pond.gpw					Return Period: 50 Year			Tuesday, 07 / 20 / 2021	

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022

Tuesday, 07 / 20 / 2021

Hyd. No. 1

Developed Area

Hydrograph type	= SCS Runoff	Peak discharge	= 11.65 cfs
Storm frequency	= 50 yrs	Time to peak	= 716 min
Time interval	= 2 min	Hyd. volume	= 26,887 cuft
Drainage area	= 1.100 ac	Curve number	= 94
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 6.00 min
Total precip.	= 7.90 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

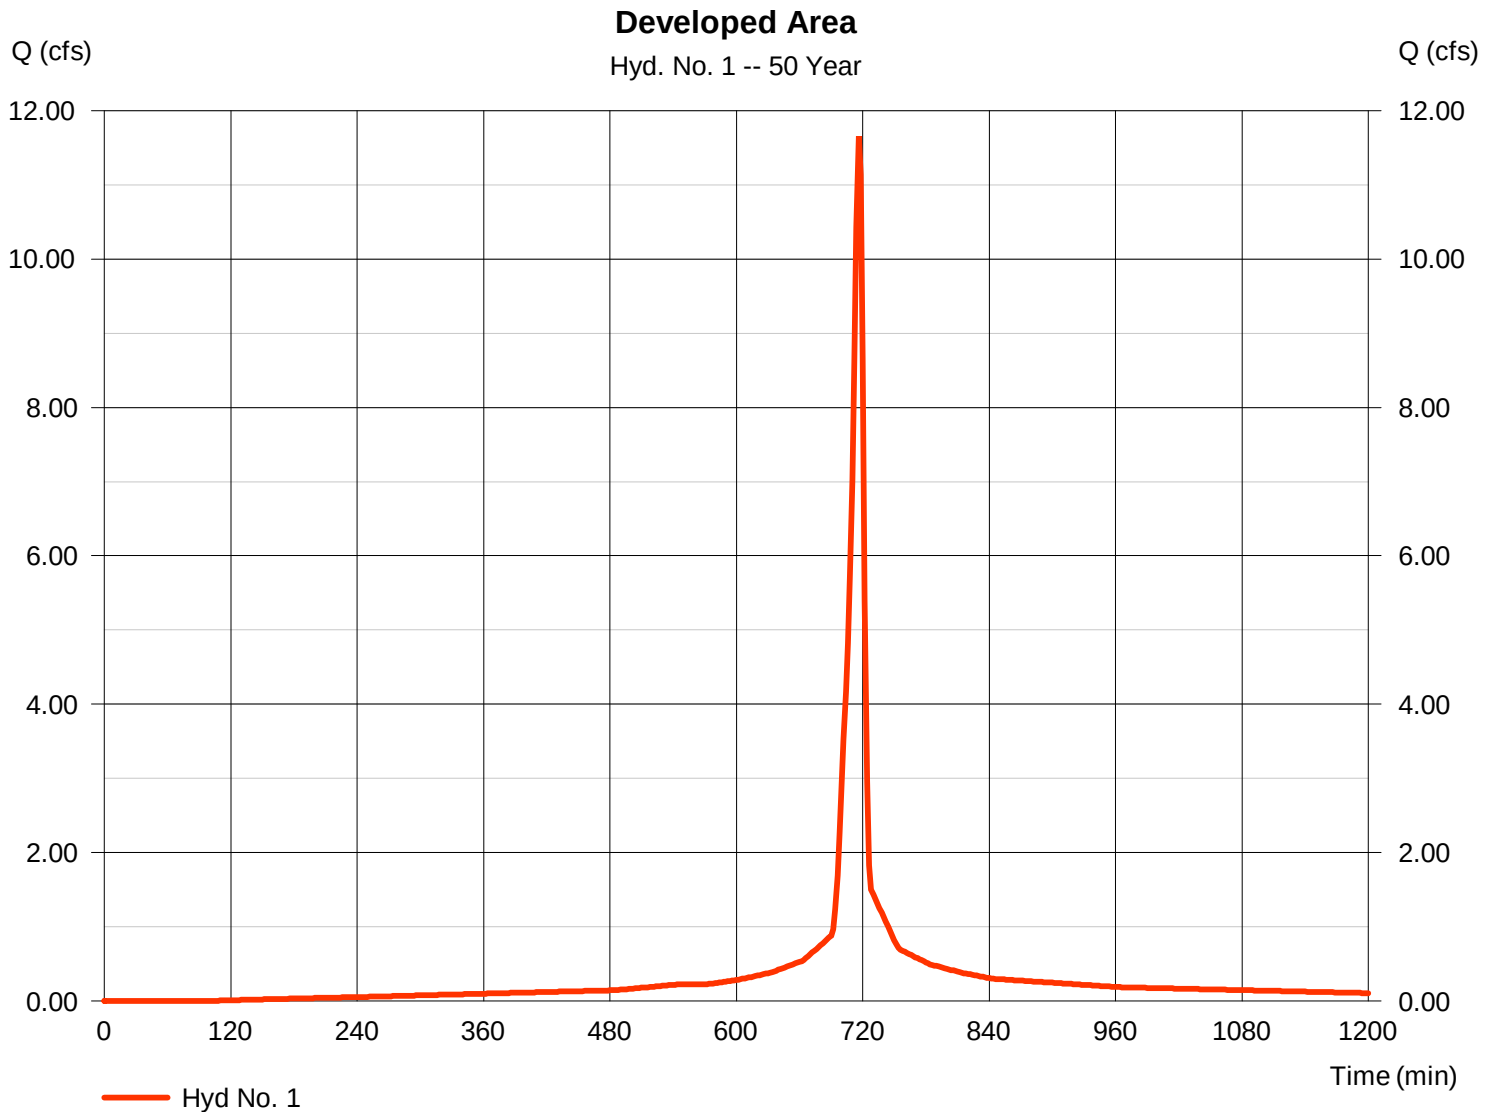

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Tuesday, 07 / 20 / 2021

Hyd. No. 2

<no description>

Hydrograph type	= Reservoir	Peak discharge	= 1.405 cfs
Storm frequency	= 50 yrs	Time to peak	= 732 min
Time interval	= 2 min	Hyd. volume	= 26,881 cuft
Inflow hyd. No.	= 1 - Developed Area	Max. Elevation	= 1012.76 ft
Reservoir name	= Pond	Max. Storage	= 15,567 cuft

Storage Indication method used.

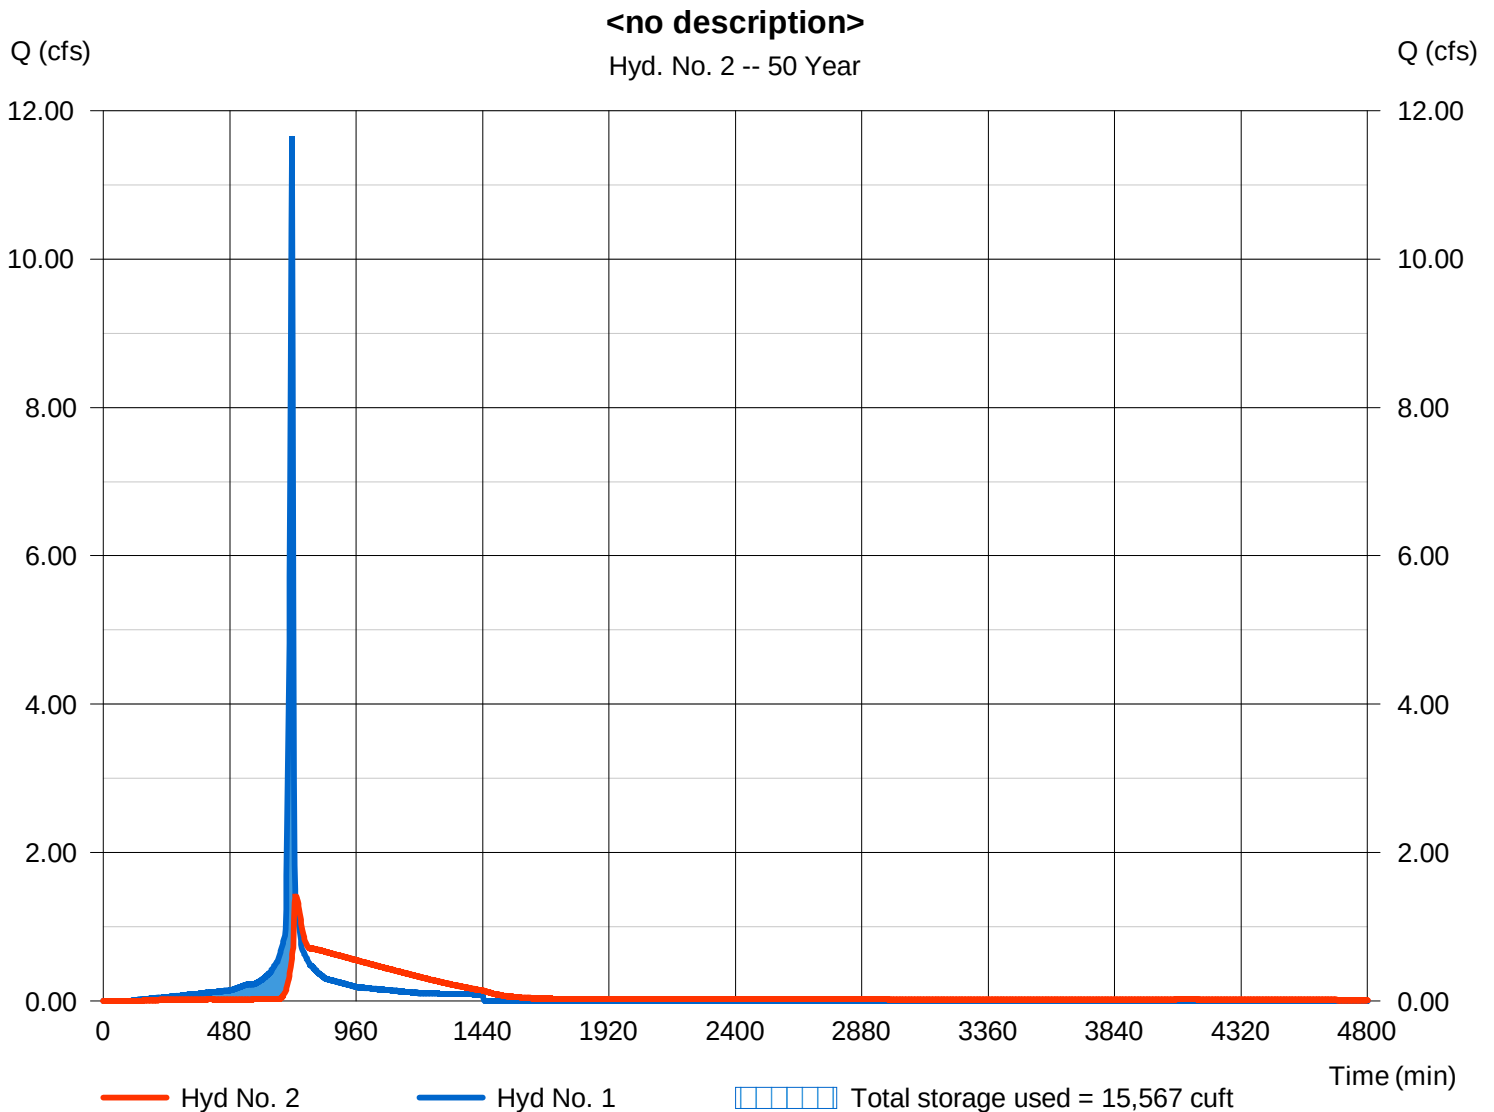

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	12.26	2	716	28,376	-----	-----	-----	Developed Area
2	Reservoir	2.384	2	726	28,370	1	1012.97	16,047	<no description>
Pond.gpw					Return Period: 100 Year			Tuesday, 07 / 20 / 2021	

Hydrograph Report

Hyd. No. 1

Developed Area

Hydrograph type	= SCS Runoff	Peak discharge	= 12.26 cfs
Storm frequency	= 100 yrs	Time to peak	= 716 min
Time interval	= 2 min	Hyd. volume	= 28,376 cuft
Drainage area	= 1.100 ac	Curve number	= 94
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 6.00 min
Total precip.	= 8.30 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

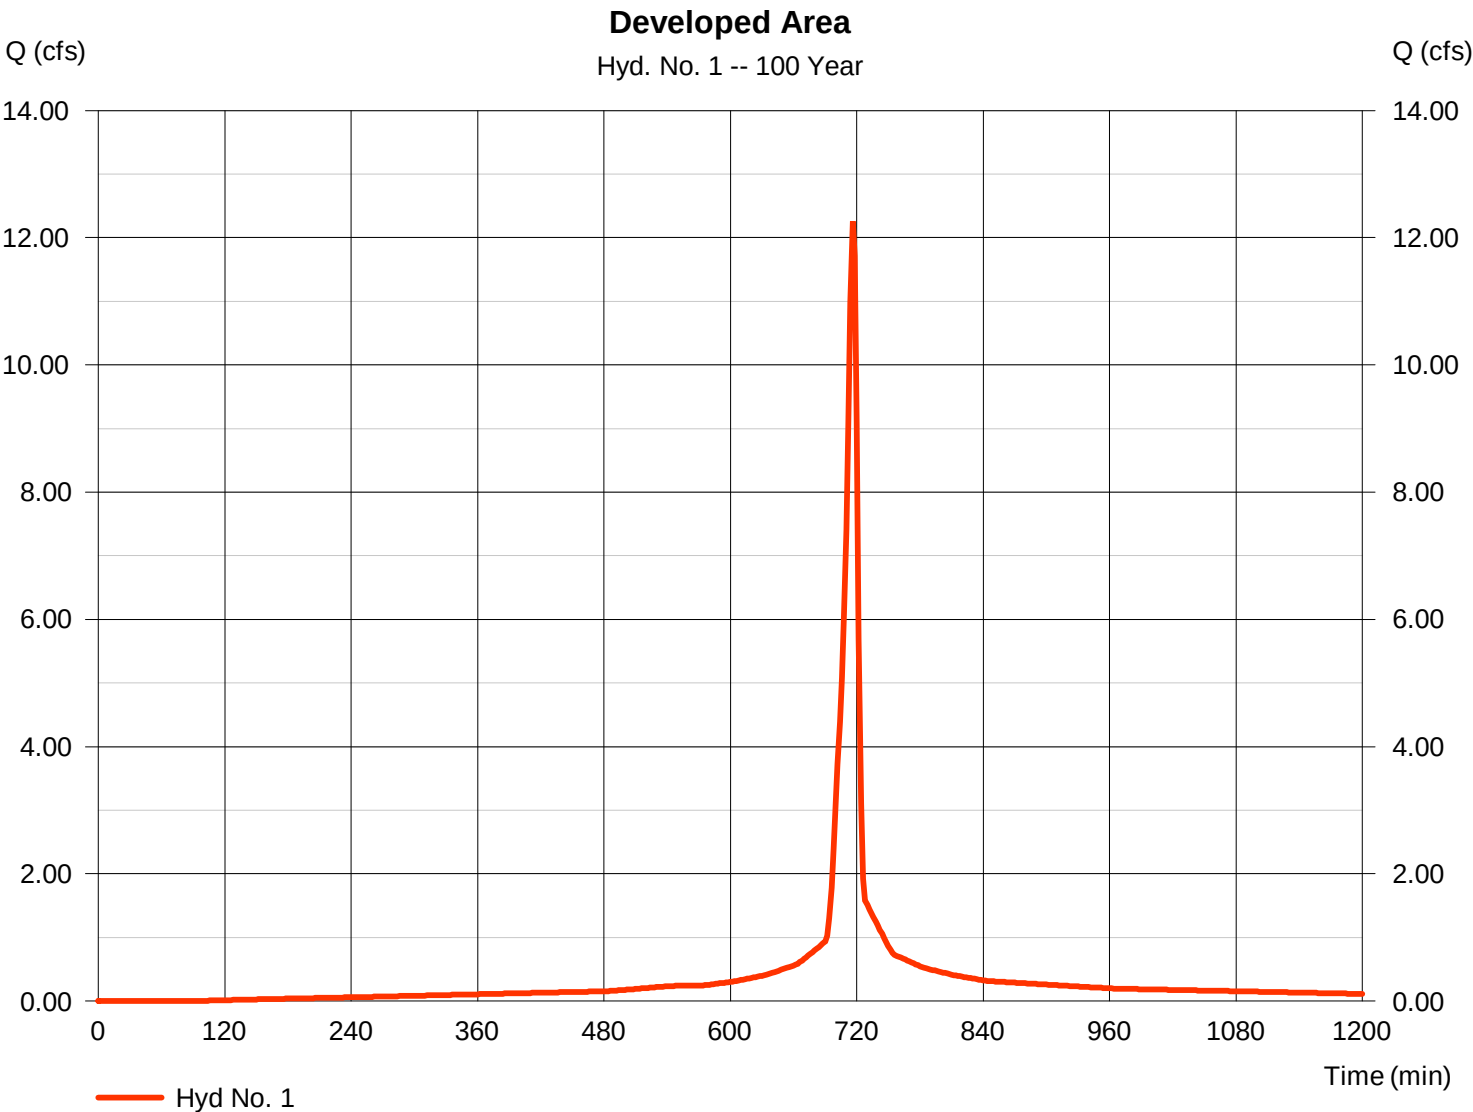

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2022


Tuesday, 07 / 20 / 2021

Hyd. No. 2

<no description>




Hydrograph type	= Reservoir	Peak discharge	= 2.384 cfs
Storm frequency	= 100 yrs	Time to peak	= 726 min
Time interval	= 2 min	Hyd. volume	= 28,370 cuft
Inflow hyd. No.	= 1 - Developed Area	Max. Elevation	= 1012.97 ft
Reservoir name	= Pond	Max. Storage	= 16,047 cuft

Storage Indication method used.

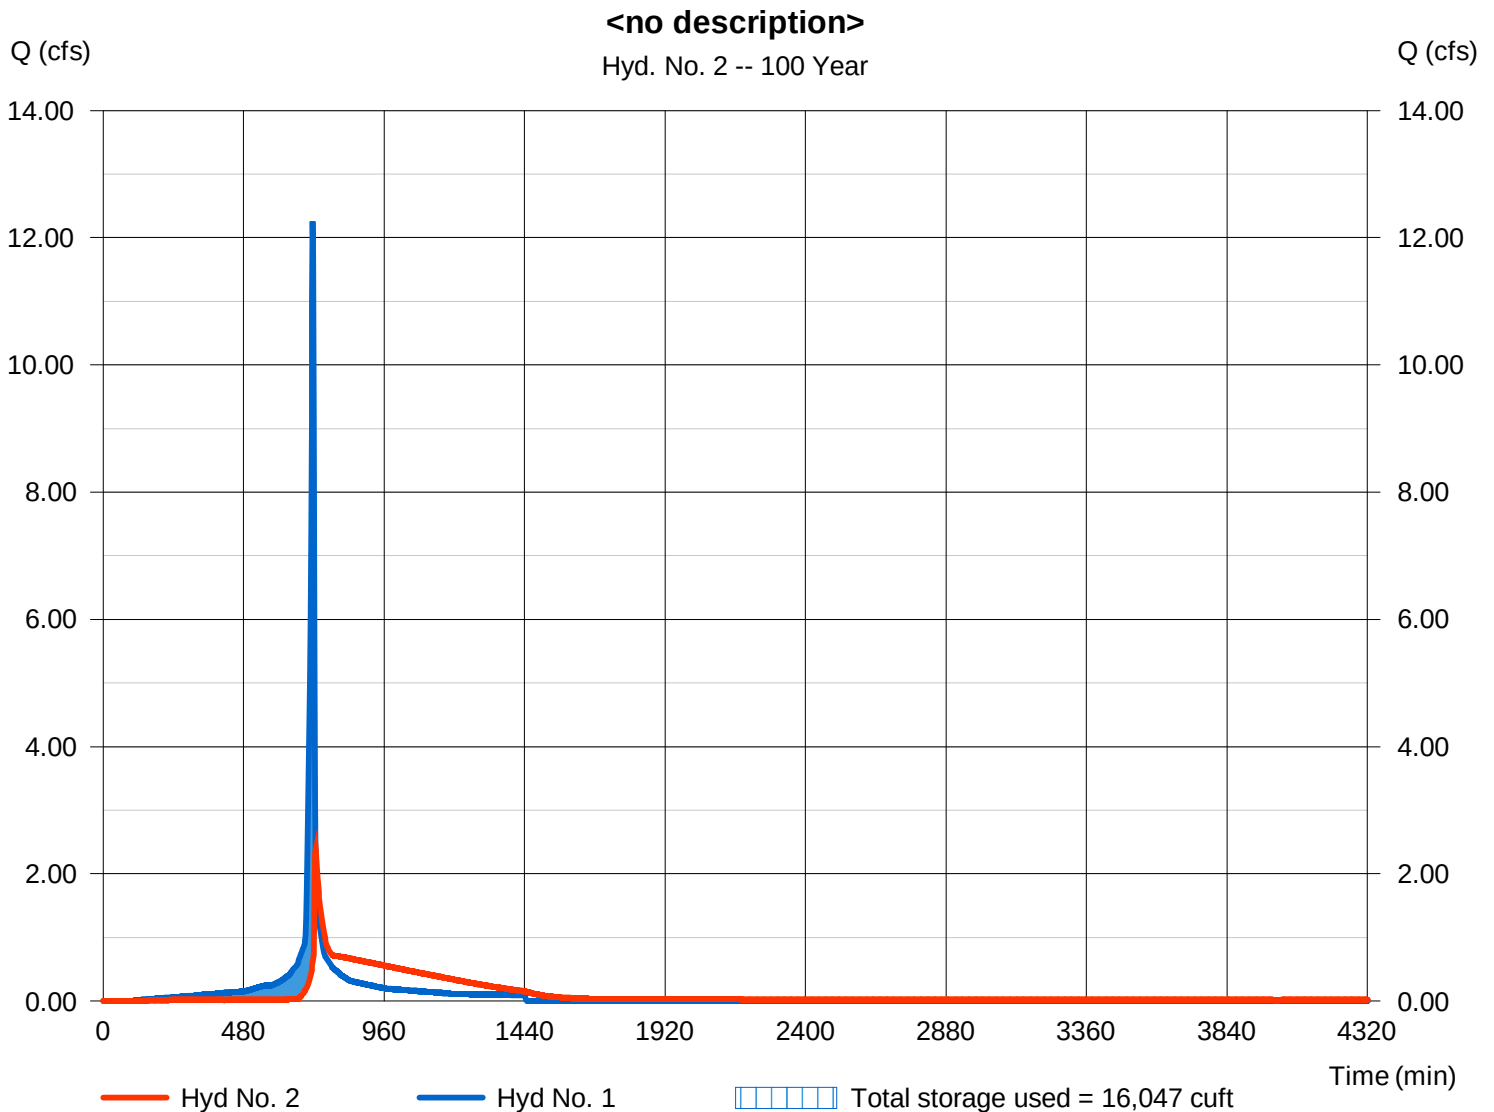

Appendix C

Hydraflow Storm Sewers Extension for Autodesk® Civil 3D® Plan

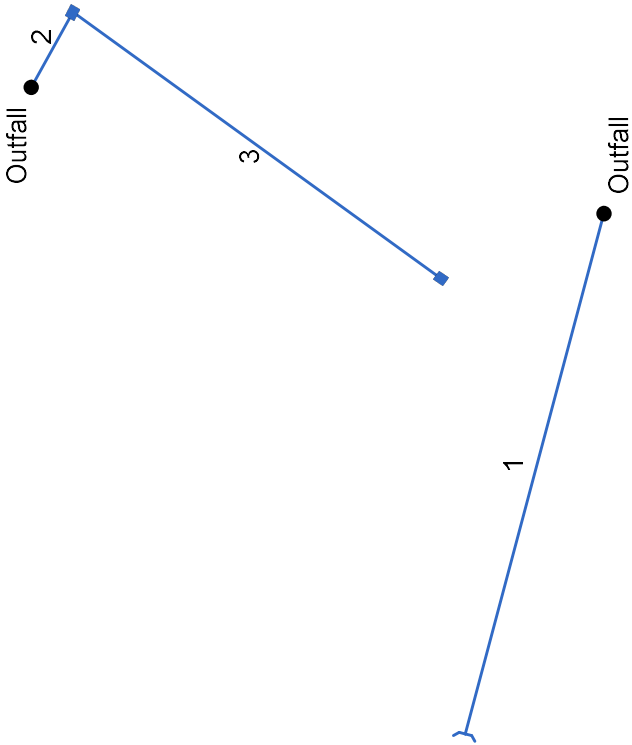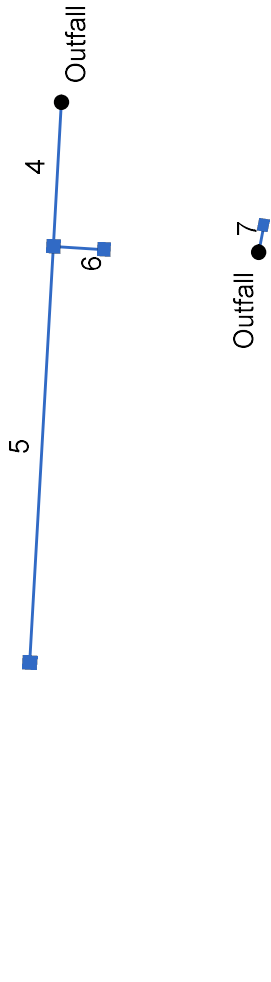

Project File: CC Lees Summit MO Storm Sewers (2021 - 0722).stm	Number of lines: 7	Date: 7/22/2021
--	--------------------	-----------------

Storm Sewer Summary Report

Line No.	Line ID	Flow rate (cfs)	Line Size (in)	Line shape	Line length (ft)	Invert EL Dn (ft)	Invert EL Up (ft)	Line Slope (%)	HGL Down (ft)	HGL Up (ft)	Minor loss (ft)	HGL Junct (ft)	Dns Line No.	Junction Type
1	R1-R2	9.26	18	Cir	164.400	1015.15	1016.00	0.517	1016.33*	1017.64*	0.43	1018.07	End	OpenHeadwall
2	UGD-4	7.33	18	Cir	26.209	1009.20	1009.50	1.145	1010.25	1010.55	n/a	1010.55 j	End	Combination
3	4-5	6.00	18	Cir	138.832	1009.70	1011.00	0.936	1010.55	1011.95	n/a	1011.95	2	Combination
4	1-1A	9.72	18	Cir	44.108	1007.60	1008.10	1.134	1008.80	1009.30	n/a	1009.30	End	Manhole
5	1A-1B	7.69	18	Cir	127.189	1008.30	1009.60	1.022	1009.30	1010.67	n/a	1010.67	4	DropCurb
6	1A-2	2.30	18	Cir	15.501	1008.30	1008.50	1.290	1009.30	1009.07	n/a	1009.07	4	Manhole
7	UGD-3	2.94	18	Cir	8.339	1007.80	1007.90	1.200	1008.45	1008.55	n/a	1008.55	End	Combination
Project File: CC Lees Summit MO Storm Sewers (2021 - 0722).stm										Number of lines: 7			Run Date: 7/22/2021	
NOTES: Return period = 100 Yrs. ; *Surcharged (HGL above crown). ; j - Line contains hyd. jump.														

Storm Sewer Tabulation

Station		Len (ft)	Drng Area		Rnoff coeff (C)	Area x C		Tc		Rain (l) (in/hr)	Total flow (cfs)	Cap full (cfs)	Vel (ft/s)	Pipe		Invert Elev		HGL Elev		Grnd / Rim Elev		Line ID
Line	To Line		Incr (ac)	Total (ac)		Incr	Total	Inlet (min)	Syst (min)					Size (in)	Slope (%)	Dn (ft)	Up (ft)	Dn (ft)	Up (ft)	Dn (ft)	Up (ft)	
1	End	164.400	0.94	0.94	0.52	0.49	0.49	5.0	5.0	12.6	9.26	8.18	5.73	18	0.52	1015.15	1016.00	1016.33	1017.64	1017.36	1018.21	R1-R2
2	End	26.209	0.15	0.77	0.90	0.14	0.61	5.0	5.7	12.0	7.33	12.17	5.55	18	1.14	1009.20	1009.50	1010.25	1010.55	1016.04	1015.60	UGD-4
3	2	138.832	0.62	0.62	0.77	0.48	0.48	5.0	5.0	12.6	6.00	11.01	5.47	18	0.94	1009.70	1011.00	1010.55	1011.95	1015.60	1015.00	4-5
4	End	44.108	0.00	1.70	0.90	0.00	0.61	5.0	5.5	12.1	9.72	12.11	6.41	18	1.13	1007.60	1008.10	1008.80	1009.30	1012.91	1016.00	1-1A
5	4	127.189	1.70	1.70	0.36	0.61	0.61	5.0	5.0	12.6	7.69	11.50	5.91	18	1.02	1008.30	1009.60	1009.30	1010.67	1016.00	1013.50	1A-1B
6	4	15.501	0.00	0.00	0.90	0.00	0.00	5.0	5.0	0.0	2.30	12.92	2.77	18	1.29	1008.30	1008.50	1009.30	1009.07	1016.00	1016.20	1A-2
7	End	8.339	0.26	0.26	0.90	0.23	0.23	5.0	5.0	12.6	2.94	12.46	4.00	18	1.20	1007.80	1007.90	1008.45	1008.55	1015.60	1015.40	UGD-3
Project File: CC Lees Summit MO Storm Sewers (2021 - 0722).stm														Number of lines: 7		Run Date: 7/22/2021						
NOTES: Intensity = 48.16 / (Inlet time + 3.40) ^ 0.63; Return period =Yrs. 100 ; c = cir e = ellip b = box																						

Page 1

Appendix D

PROJECT INFORMATION	
ENGINEERED PRODUCT MANAGER:	DIRK HUDSON 816-802-4201 DIRK.HUDSON@ADS-PIPE.COM
ADS SALES REP:	DUSTIN KETCHUM 316-201-7032 DUSTIN.KETCHUM@ADS-PIPE.COM
PROJECT NO:	S248764



CALIBER COLLISION

LEE'S SUMMIT, MO

MC-3500 STORMTECH CHAMBER SPECIFICATIONS

1. CHAMBERS SHALL BE STORMTECH MC-3500.
2. CHAMBERS SHALL BE ARCH-SHAPED AND SHALL BE MANUFACTURED FROM VIRGIN, IMPACT-MODIFIED POLYPROPYLENE COPOLYMERS.
3. CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418-18a, "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" CHAMBER CLASSIFICATION 45x76 DESIGNATION SS.
4. CHAMBER ROWS SHALL PROVIDE CONTINUOUS, UNOBSTRUCTED INTERNAL SPACE WITH NO INTERNAL SUPPORTS THAT WOULD IMPEDE FLOW OR LIMIT ACCESS FOR INSPECTION.
5. THE STRUCTURAL DESIGN OF THE CHAMBERS, THE STRUCTURAL BACKFILL, AND THE INSTALLATION REQUIREMENTS SHALL ENSURE THAT THE LOAD FACTORS SPECIFIED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, SECTION 12.12, ARE MET FOR: 1) LONG-DURATION DEAD LOADS AND 2) SHORT-DURATION LIVE LOADS, BASED ON THE AASHTO DESIGN TRUCK WITH CONSIDERATION FOR IMPACT AND MULTIPLE VEHICLE PRESENCES.
6. CHAMBERS SHALL BE DESIGNED, TESTED AND ALLOWABLE LOAD CONFIGURATIONS DETERMINED IN ACCORDANCE WITH ASTM F2787, "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". LOAD CONFIGURATIONS SHALL INCLUDE: 1) INSTANTANEOUS (<1 MIN) AASHTO DESIGN TRUCK LIVE LOAD ON MINIMUM COVER 2) MAXIMUM PERMANENT (75-YR) COVER LOAD AND 3) ALLOWABLE COVER WITH PARKED (1-WEEK) AASHTO DESIGN TRUCK.
7. REQUIREMENTS FOR HANDLING AND INSTALLATION:
 - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
 - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 3".
 - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2418 SHALL BE GREATER THAN OR EQUAL TO 450 LBS/IN/IN. AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.
8. ONLY CHAMBERS THAT ARE APPROVED BY THE SITE DESIGN ENGINEER WILL BE ALLOWED. UPON REQUEST BY THE SITE DESIGN ENGINEER OR OWNER, THE CHAMBER MANUFACTURER SHALL SUBMIT A STRUCTURAL EVALUATION FOR APPROVAL BEFORE DELIVERING CHAMBERS TO THE PROJECT SITE AS FOLLOWS:
 - THE STRUCTURAL EVALUATION SHALL BE SEALED BY A REGISTERED PROFESSIONAL ENGINEER.
 - DEAD LOAD AND 1.75 FOR LIVE LOAD, THE MINIMUM REQUIRED BY ASTM F2787, AND BY SECTIONS 3 AND 12.12 OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS FOR THERMOPLASTIC PIPE.
 - THE TEST DERIVED CREEP MODULUS AS SPECIFIED IN ASTM F2418 SHALL BE USED FOR PERMANENT DEAD LOAD DESIGN EXCEPT THAT IT SHALL BE THE 75-YEAR MODULUS USED FOR DESIGN.
9. CHAMBERS AND END CAPS SHALL BE PRODUCED AT AN ISO 9001 CERTIFIED MANUFACTURING FACILITY.

IMPORTANT - NOTES FOR THE BIDDING AND INSTALLATION OF MC-3500 CHAMBER SYSTEM

1. STORMTECH MC-3500 CHAMBERS SHALL NOT BE INSTALLED UNTIL THE MANUFACTURER'S REPRESENTATIVE HAS COMPLETED A PRE-CONSTRUCTION MEETING WITH THE INSTALLERS.
2. STORMTECH MC-3500 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH MC-3500/MC-4500 CONSTRUCTION GUIDE".
3. CHAMBERS ARE NOT TO BE BACKFILLED WITH A DOZER OR AN EXCAVATOR SITUATED OVER THE CHAMBERS. STORMTECH RECOMMENDS BACKFILL METHODS:
 - STONES/COOTER LOCATED OFF THE CHAMBER BED.
 - BACKFILL AS ROWS ARE BUILT USING AN EXCAVATOR ON THE FOUNDATION STONE OR SUBGRADE.
 - BACKFILL FROM OUTSIDE THE EXCAVATION USING A LONG BOOM HOE OR EXCAVATOR.
4. THE FOUNDATION STONE SHALL BE LEVELED AND COMPACTED PRIOR TO PLACING CHAMBERS.
5. JOINTS BETWEEN CHAMBERS SHALL BE PROPERLY SEATED PRIOR TO PLACING STONE.
6. MAINTAIN MINIMUM - 6" (150 mm) SPACING BETWEEN THE CHAMBER ROWS.
7. INLET AND OUTLET MANIFOLDS MUST BE INSERTED A MINIMUM OF 12" (300 mm) INTO CHAMBER END CAPS.
8. EMBEDMENT STONE SURROUNDING CHAMBERS MUST BE A CLEAN, CRUSHED, ANGULAR STONE MEETING THE AASHTO M43 DESIGNATION OF #3 OR #4.
9. STONE MUST BE PLACED ON THE TOP CENTER OF THE CHAMBER TO ANCHOR THE CHAMBERS IN PLACE AND PRESERVE ROW SPACING.
10. THE CONTRACTOR MUST REPORT ANY DISCREPANCIES WITH CHAMBER FOUNDATION MATERIALS BEARING CAPACITIES TO THE SITE DESIGN ENGINEER.
11. ADS RECOMMENDS THE USE OF "FLEXSTORM CATCH IT" INSERTS DURING CONSTRUCTION FOR ALL INLETS TO PROTECT THE SUBSURFACE STORMWATER MANAGEMENT SYSTEM FROM CONSTRUCTION SITE RUNOFF.

NOTES FOR CONSTRUCTION EQUIPMENT


1. STORMTECH MC-3500 CHAMBERS SHALL BE INSTALLED IN ACCORDANCE WITH THE "STORMTECH MC-3500/MC-4500 CONSTRUCTION GUIDE".
 2. THE USE OF EQUIPMENT OVER MC-3500 CHAMBERS IS LIMITED:
 - NO EQUIPMENT IS ALLOWED ON BARE CHAMBERS.
 - NO RUBBER Tired LOADER, DUMP TRUCK, OR EXCAVATORS ARE ALLOWED UNTIL PROPER FILL DEPTHS ARE REACHED IN ACCORDANCE WITH THE "STORMTECH MC-3500/MC-4500 CONSTRUCTION GUIDE".
 - WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT CAN BE FOUND IN THE "STORMTECH MC-3500/MC-4500 CONSTRUCTION GUIDE".
 3. FULL 36" (900 mm) OF STABILIZED COVER MATERIALS OVER THE CHAMBERS IS REQUIRED FOR DUMP TRUCK TRAVEL OR DUMPING.
- USE OF A DOZER TO PUSH EMBEDMENT STONE BETWEEN THE ROWS OF CHAMBERS MAY CAUSE DAMAGE TO CHAMBERS AND IS NOT AN ACCEPTABLE BACKFILL METHOD. ANY CHAMBERS DAMAGED BY USING THE "DUMP AND PUSH" METHOD ARE NOT COVERED UNDER THE STORMTECH STANDARD WARRANTY.

CONTACT STORMTECH AT 1-888-892-2694 WITH ANY QUESTIONS ON INSTALLATION REQUIREMENTS OR WEIGHT LIMITS FOR CONSTRUCTION EQUIPMENT.

PROPOSED LAYOUT	
95	STORMTECH MC-3500 CHAMBERS
22	STORMTECH MC-3500 END CAPS
12	STONE ABOVE (in)
9	STONE BELOW (in)
30	% STONE VOID
18,021	INSTALLED SYSTEM VOLUME (CF) (PERIMETER STONE INCLUDED)
6351	SYSTEM AREA (ft ²)
749	SYSTEM PERIMETER (ft)
PROPOSED ELEVATIONS	
1021.00	MAXIMUM ALLOWABLE GRADE (TOP OF PAVEMENT/UNPAVED)
1015.00	MINIMUM ALLOWABLE GRADE (UNPAVED WITH TRAFFIC)
1014.50	MINIMUM ALLOWABLE GRADE (UNPAVED NO TRAFFIC)
1014.50	MINIMUM ALLOWABLE GRADE (BASE OF FLEXIBLE PAVEMENT)
1014.50	MINIMUM ALLOWABLE GRADE (TOP OF RIGID PAVEMENT)
1014.00	TOP OF STONE
1013.00	TOP OF MC-3500 CHAMBER
1011.37	15" TOP MANIFOLD INVERT
1009.42	24" ISOLATOR ROW PLUS CONNECTION INVERT
1009.38	15" BOTTOM CONNECTION INVERT
1009.25	BOTTOM OF MC-3500 CHAMBER
1008.50	UNDERDRAIN INVERT
1008.50	BOTTOM OF STONE

NOTES

- MANIFOLD SIZE TO BE DETERMINED BY SITE DESIGN ENGINEER. SEE TECHNICAL NOTE 6.32 FOR MANIFOLD SIZING GUIDANCE.
- DUE TO THE ADAPTATION OF THIS CHAMBER SYSTEM TO SPECIFIC SITE AND DESIGN CONSTRAINTS, IT MAY BE NECESSARY TO CUT AND COUPLE ADDITIONAL PIPE TO STANDARD MANIFOLD COMPONENTS IN THE FIELD. THIS CHAMBER SYSTEM WAS DESIGNED WITHOUT SITE-SPECIFIC INFORMATION ON SOIL CONDITIONS OR BEARING CAPACITY. THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR DETERMINING THE SUITABILITY OF THE SOIL AND PROVIDING THE BEARING CAPACITY OF THE INSITU SOILS. THE BASE STONE DEPTH MAY BE INCREASED OR DECREASED ONCE THIS INFORMATION IS PROVIDED.

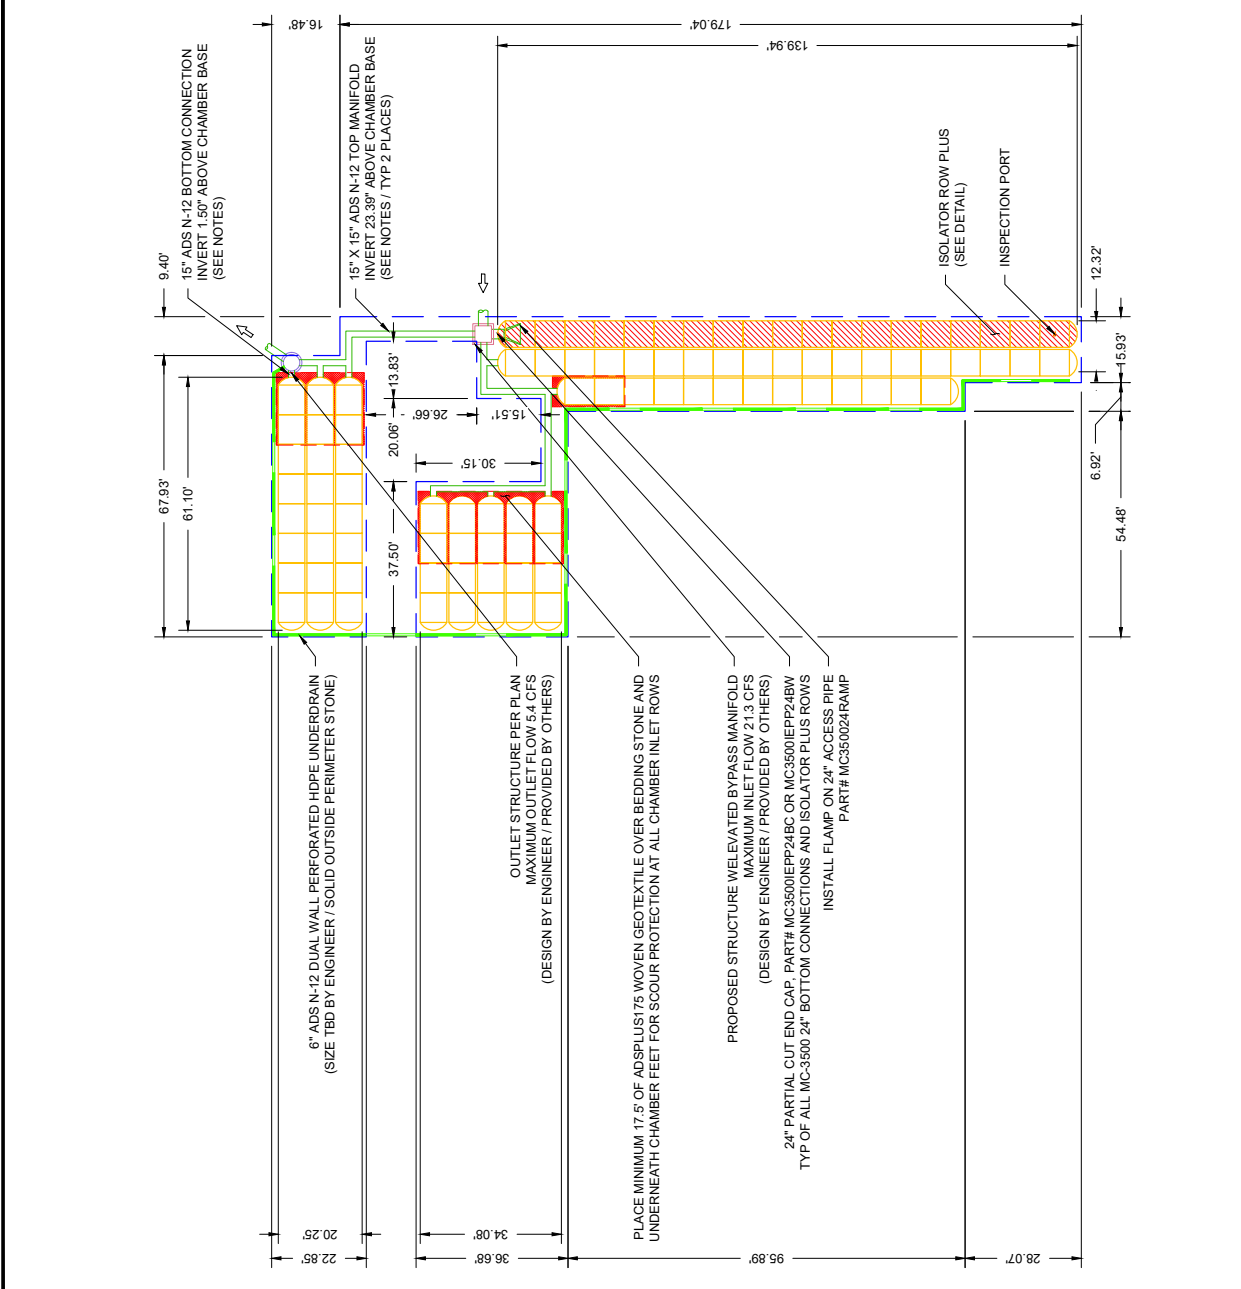

StormTech®
Chamber System
888-892-2694 | WWW.STORMTECH.COM

DATE	DRAWN	CHECK	DESCRIPTION
07-21-21	RSG	AGC	REMOVED SECOND WA STRUCTURE

4640 TRUEMAN BLVD
HILLIARD, OH 43026

PROJECT #: S248764
CHECKED: AGC
DATE: 07-16-21
DRAWN: RSG

LEE'S SUMMIT, MO

CALIBER COLLISION

THIS DRAWING HAS BEEN PREPARED BASED ON INFORMATION PROVIDED TO ADS UNDER THE DIRECTION OF THE SITE DESIGN ENGINEER OR OTHER PROJECT REPRESENTATIVE. THE SITE DESIGN ENGINEER SHALL REVIEW THIS DRAWING PRIOR TO CONSTRUCTION. IT IS THE ULTIMATE RESPONSIBILITY OF THE SITE DESIGN ENGINEER TO ENSURE THAT THE PRODUCT(S) UNDER THE DIRECTION OF THE SITE DESIGN ENGINEER MEET ALL APPLICABLE LAWS, REGULATIONS, AND PROJECT REQUIREMENTS.


SHEET
2 OF 5

ACCEPTABLE FILL MATERIALS: STORMTECH MC-3500 CHAMBER SYSTEMS

MATERIAL LOCATION		DESCRIPTION	AASHTO MATERIAL CLASSIFICATIONS	COMPACTION / DENSITY REQUIREMENT
D	FINAL FILL: FILL MATERIAL FOR LAYER 'D' STARTS FROM THE TOP OF THE 'C' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISHED GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THE 'D' LAYER	ANY SOIL/ROCK MATERIALS, NATIVE SOILS, OR PER ENGINEER'S PLANS. CHECK PLANS FOR PAVEMENT SUBGRADE REQUIREMENTS.	N/A	PREPARE PER SITE DESIGN ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS.
C	INITIAL FILL: FILL MATERIAL FOR LAYER 'C' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('B' LAYER) TO 24" (600 mm) ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THE 'C' LAYER.	GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, <35% FINES OR PROCESSED AGGREGATE. MOST PAVEMENT SUBBASE MATERIALS CAN BE USED IN LIEU OF THIS LAYER.	AASHTO M145 ¹ A-1, A-2.4, A-3 OR AASHTO M43 ¹ 3, 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10	BEGIN COMPACTIONS AFTER 24" (600 mm) OF MATERIAL OVER THE CHAMBERS IS REACHED. COMPACT ADDITIONAL LAYERS IN 12" (300 mm) MAX LIFTS TO A MIN. 95% PROCTOR DENSITY FOR WELL GRADED MATERIAL AND 95% RELATIVE DENSITY FOR PROCESSED AGGREGATE MATERIALS.
B	EMBEDMENT STONE: FILL SURROUNDING THE CHAMBERS FROM THE FOUNDATION STONE ('A' LAYER) TO THE 'C' LAYER ABOVE.	CLEAN, CRUSHED, ANGULAR STONE	AASHTO M43 ¹ 3, 4	NO COMPACTION REQUIRED.
A	FOUNDATION STONE: FILL BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF THE CHAMBER.	CLEAN, CRUSHED, ANGULAR STONE	AASHTO M43 ¹ 3, 4	PLATE COMPACT OR ROLL TO ACHIEVE A FLAT SURFACE. ^{2,3}

PLEASE NOTE:

- THE LISTED AASHTO DESIGNATIONS ARE FOR GRADATIONS ONLY. THE STONE MUST ALSO BE CLEAN, CRUSHED, ANGULAR. FOR EXAMPLE, A SPECIFICATION FOR #4 STONE WOULD STATE: "CLEAN, CRUSHED, ANGULAR NO. 4 (AASHTO M43) STONE".
- STORMTECH COMPACTION REQUIREMENTS ARE MET FOR 'A' LOCATION MATERIALS WHEN PLACED AND COMPACTED IN 9" (230 mm) (MAX) LIFTS USING TWO FULL COVERAGES WITH A VIBRATORY COMPACTOR.
- WHERE INFILTRATION SURFACES MAY BE COMPROMISED BY COMPACTION, FOR STANDARD DESIGN LOAD CONDITIONS, A FLAT SURFACE MAY BE ACHIEVED BY RAKING OR DRAGGING WITHOUT COMPACTION EQUIPMENT. FOR SPECIAL LOAD DESIGNS, CONTACT STORMTECH FOR COMPACTION REQUIREMENTS.
- ONCE LAYER 'C' IS PLACED, ANY SOIL/MATERIAL CAN BE PLACED IN LAYER 'D' UP TO THE FINISHED GRADE. MOST PAVEMENT SUBBASE SOILS CAN BE USED TO REPLACE THE MATERIAL REQUIREMENTS OF LAYER 'C' OR 'D' AT THE SITE DESIGN ENGINEER'S DISCRETION.

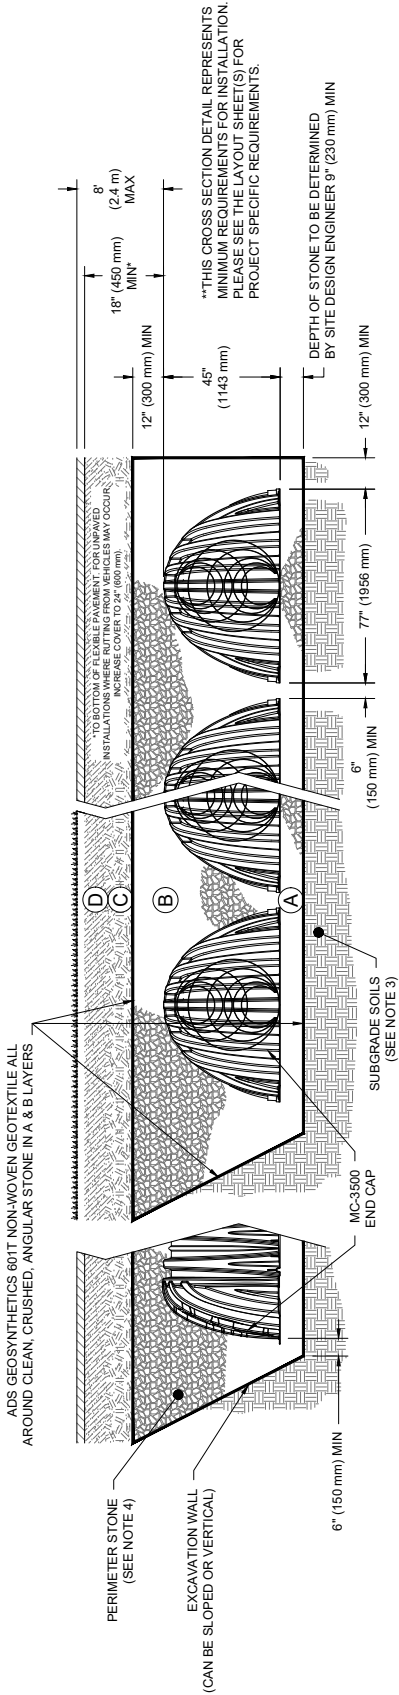

NOTES:

- CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418-16a, "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" CHAMBER CLASSIFICATION 45x76 DESIGNATION SS.
- MC-3500 CHAMBERS SHALL BE DESIGNED IN ACCORDANCE WITH ASTM F2787 "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
- THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR ASSESSING THE BEARING RESISTANCE (ALLOWABLE BEARING CAPACITY) OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION STONE WITH CONSIDERATION FOR THE RANGE OF EXPECTED SOIL MOISTURE CONDITIONS.
- PERIMETER STONE MUST BE EXTENDED HORIZONTALLY TO THE EXCAVATION WALL FOR BOTH VERTICAL AND SLOPED EXCAVATION WALLS.
- REQUIREMENTS FOR HANDLING AND INSTALLATION:
 - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
 - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 3".
 - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2418 SHALL BE GREATER THAN OR EQUAL TO 500 LBS/IN². AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.

RESPONSIBILITY OF THE SITE DESIGN ENGINEER TO ENSURE THAT THE PRODUCTS (AND ASSOCIATED DETAILS) MEET ALL APPLICABLE LAWS, REGULATIONS, AND PROJECT REQUIREMENTS. THE SITE DESIGN ENGINEER SHALL REVIEW THIS DRAWING PRIOR TO CONSTRUCTION. IT IS THE ULTIMATE RESPONSIBILITY OF THE SITE DESIGN ENGINEER TO ENSURE THAT THE PRODUCTS (AND ASSOCIATED DETAILS) MEET ALL APPLICABLE LAWS, REGULATIONS, AND PROJECT REQUIREMENTS.

4640 TRUEMAN BLVD
HILLIARD, OH 43026

StormTech®
Chamber System

888-892-2694 | WWW.STORMTECH.COM

DATE: 07-21-21	DRAWN: RSG	CHECK: AGC
REMOVED SECOND WO STRUCTURE		
DESCRIPTION		

DATE: 07-16-21
PROJECT #: S248764
CHECKED: AGC
DRAWN: RSG

LEE'S SUMMIT, MO


CALIBER COLLISION

3 OF 5

SHEET

MC-SERIES END CAP INSERTION DETAIL


NTS

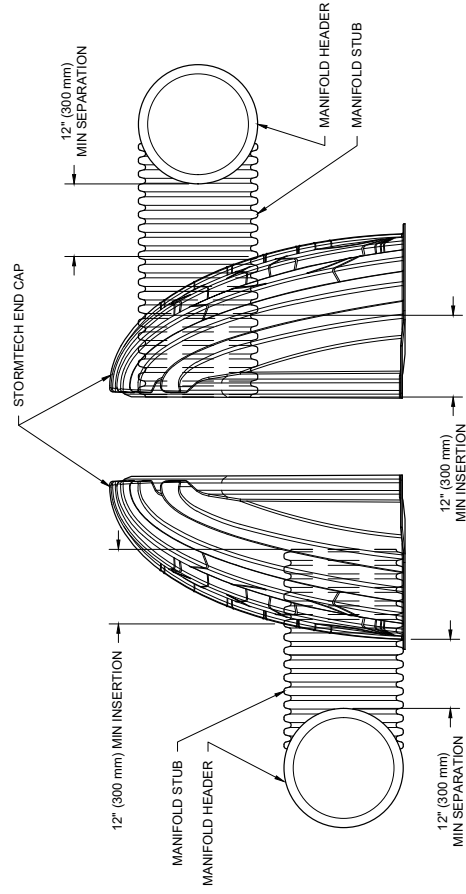

NOTE: MANIFOLD STUB MUST BE LAID HORIZONTAL FOR A PROPER FIT IN END CAP OPENING


UNDERDRAIN DETAIL

NTS:

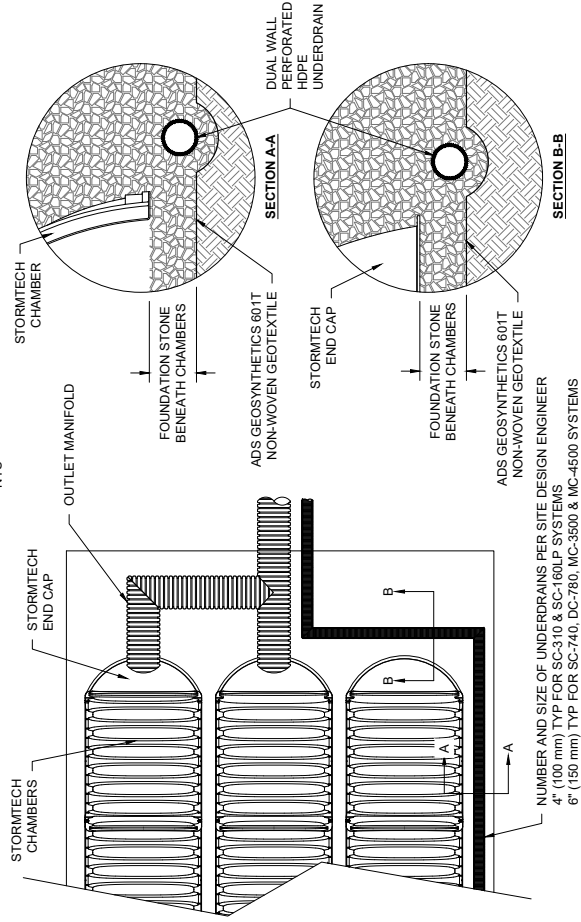

MC-3500 TECHNICAL SPECIFICATION

NTS

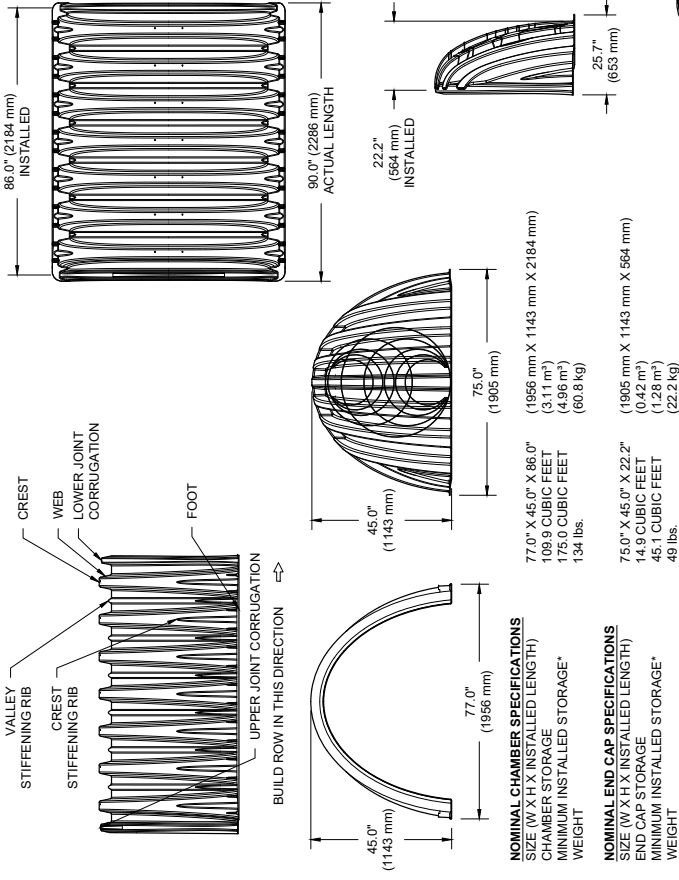

NOMINAL CHAMBER SPECIFICATIONS

SIZE (W X H X INSTALLED LENGTH)

CHAMBER STORAGE

MINIMUM INSTALLED STORAGE*

WEIGHT

NOMINAL END CAP SPECIFICATIONS

SIZE (W X H X INSTALLED LENGTH)

END CAP STORAGE

MINIMUM INSTALLED STORAGE*

WEIGHT

*ASSUMES 12" (305 mm) STONE ABOVE, 9" (229 mm) STONE FOUNDATION, 6" (152 mm) STONE BETWEEN CHAMBERS, 6" (152 mm) STONE PERIMETER IN FRONT OF END CAPS AND 40% STONE POROSITY.

PARTIAL CUT HOLES AT BOTTOM OF END CAP FOR PART NUMBERS ENDING WITH "B"

PARTIAL CUT HOLES AT TOP OF END CAP FOR PART NUMBERS ENDING WITH "T"

END CAPS WITH A PREFABRICATED WELDED STUB END WITH "W"

END CAPS WITH A WELDED CROWN PLATE END WITH "C"

Part #	STUB	B	C
MC3500/IEPP06T	6" (150 mm)	33.21" (844 mm)	---
MC3500/IEPP06B	---	---	0.66" (17 mm)
MC3500/IEPP08T	8" (200 mm)	31.16" (791 mm)	---
MC3500/IEPP08B	---	---	0.81" (21 mm)
MC3500/IEPP10T	10" (250 mm)	29.04" (738 mm)	---
MC3500/IEPP10B	---	---	0.93" (24 mm)
MC3500/IEPP12T	12" (300 mm)	26.36" (670 mm)	---
MC3500/IEPP12B	---	---	1.35" (34 mm)
MC3500/IEPP15T	15" (375 mm)	23.39" (594 mm)	---
MC3500/IEPP15B	---	---	1.50" (38 mm)
MC3500/IEPP18TC	---	---	---
MC3500/IEPP18TW	18" (450 mm)	20.03" (509 mm)	---
MC3500/IEPP18BC	---	---	---
MC3500/IEPP18BW	---	---	1.77" (45 mm)
MC3500/IEPP24TC	---	---	---
MC3500/IEPP24TW	24" (600 mm)	14.48" (368 mm)	---
MC3500/IEPP24BC	---	---	2.06" (52 mm)
MC3500/IEPP24BW	---	---	---
MC3500/IEPP30RC	30" (750 mm)	---	2.75" (70 mm)

NOTE: ALL DIMENSIONS ARE NOMINAL

CUSTOM PARTIAL CUT INVERTS ARE AVAILABLE UPON REQUEST. INVERTED MANIFOLDS INCLUDE 12-24" (300-600 mm) SIZE ON SIZE AND 15-48" (375-1200 mm) ECCENTRIC MANIFOLDS. CUSTOM INVERT LOCATIONS ON THE MC-3500 END CAP CUT IN THE FIELD ARE NOT RECOMMENDED FOR PIPE SIZES GREATER THAN 10" (250 mm). THE INVERT LOCATION IN COLUMN 'B' ARE THE HIGHEST POSSIBLE FOR THE PIPE SIZE.



Project: **Caliber Collision**



Chamber Model -
Units -
Number of Chambers -
Number of End Caps -
Voids in the stone (porosity) -
Base of Stone Elevation -
Amount of Stone Above Chambers -
Amount of Stone Below Chambers -
Amount of Stone Between Chambers -
Area of system -

MC-3500
Imperial
95
22
30
1008.50
12
9
6
6351

Click Here for Metric

Include Perimeter Stone in Calculations

sf Min. Area - 5067 sf min. area

StormTech MC-3500 Cumulative Storage Volumes

Height of System (inches)	Incremental Single Chamber (cubic feet)	Incremental Single End Cap (cubic feet)	Incremental Chambers (cubic feet)	Incremental End Cap (cubic feet)	Incremental Stone (cubic feet)	Incremental Ch, EC and Stone (cubic feet)	Cumulative System (cubic feet)	Elevation (feet)
66	0.00	0.00	0.00	0.00	158.78	158.78	18020.96	1014.00
65	0.00	0.00	0.00	0.00	158.78	158.78	17862.19	1013.92
64	0.00	0.00	0.00	0.00	158.78	158.78	17703.41	1013.83
63	0.00	0.00	0.00	0.00	158.78	158.78	17544.64	1013.75
62	0.00	0.00	0.00	0.00	158.78	158.78	17385.86	1013.67
61	0.00	0.00	0.00	0.00	158.78	158.78	17227.09	1013.58
60	0.00	0.00	0.00	0.00	158.78	158.78	17068.31	1013.50
59	0.00	0.00	0.00	0.00	158.78	158.78	16909.54	1013.42
58	0.00	0.00	0.00	0.00	158.78	158.78	16750.76	1013.33
57	0.00	0.00	0.00	0.00	158.78	158.78	16591.99	1013.25
56	0.00	0.00	0.00	0.00	158.78	158.78	16433.21	1013.17
55	0.00	0.00	0.00	0.00	158.78	158.78	16274.44	1013.08
54	0.06	0.00	5.52	0.00	157.12	162.64	16115.66	1013.00
53	0.19	0.02	18.44	0.53	153.09	172.05	15953.02	1012.92
52	0.29	0.04	27.93	0.83	150.15	178.90	15780.97	1012.83
51	0.40	0.05	38.35	1.13	146.93	186.41	15602.07	1012.75
50	0.69	0.07	65.28	1.49	138.74	205.51	15415.66	1012.67
49	1.03	0.09	97.69	1.94	128.89	228.52	15210.15	1012.58
48	1.25	0.11	118.71	2.36	122.46	243.52	14981.63	1012.50
47	1.42	0.13	135.11	2.78	117.41	255.30	14738.11	1012.42
46	1.57	0.14	149.45	3.18	112.99	265.61	14482.81	1012.33
45	1.71	0.16	162.18	3.58	109.05	274.81	14217.20	1012.25
44	1.83	0.18	173.71	4.00	105.46	283.17	13942.39	1012.17
43	1.94	0.20	184.09	4.41	102.23	290.72	13659.22	1012.08
42	2.04	0.22	193.88	4.80	99.17	297.85	13368.50	1012.00
41	2.13	0.23	202.80	5.17	96.39	304.35	13070.65	1011.92
40	2.22	0.25	211.30	5.51	93.73	310.54	12766.30	1011.83
39	2.31	0.27	219.15	5.84	91.28	316.27	12455.75	1011.75
38	2.38	0.28	226.55	6.16	88.96	321.67	12139.49	1011.67
37	2.46	0.29	233.61	6.47	86.75	326.83	11817.81	1011.58
36	2.53	0.31	240.18	6.77	84.69	331.64	11490.98	1011.50
35	2.59	0.32	246.41	7.07	82.73	336.21	11159.34	1011.42
34	2.66	0.33	252.33	7.36	80.87	340.55	10823.14	1011.33
33	2.72	0.35	257.93	7.63	79.10	344.67	10482.58	1011.25
32	2.77	0.36	263.27	7.92	77.42	348.61	10137.91	1011.17
31	2.82	0.37	268.34	8.19	75.82	352.35	9789.30	1011.08
30	2.88	0.38	273.17	8.45	74.29	355.91	9436.95	1011.00
29	2.92	0.40	277.79	8.71	72.82	359.33	9081.04	1010.92
28	2.97	0.41	282.14	8.97	71.44	362.55	8721.71	1010.83
27	3.01	0.42	286.18	9.21	70.16	365.55	8359.16	1010.75
26	3.05	0.43	290.06	9.45	68.92	368.43	7993.61	1010.67
25	3.09	0.44	293.96	9.69	67.68	371.33	7625.18	1010.58
24	3.13	0.45	297.40	9.92	66.58	373.90	7253.85	1010.50
23	3.17	0.46	300.74	10.14	65.51	376.39	6879.95	1010.42
22	3.20	0.47	303.95	10.35	64.48	378.79	6503.56	1010.33
21	3.23	0.48	306.96	10.56	63.52	381.04	6124.78	1010.25
20	3.26	0.49	309.83	10.76	62.60	383.19	5743.74	1010.17
19	3.29	0.50	312.57	10.96	61.72	385.25	5360.55	1010.08
18	3.32	0.51	315.21	11.14	60.87	387.22	4975.30	1010.00
17	3.34	0.51	317.69	11.32	60.07	389.08	4588.08	1009.92
16	3.37	0.52	320.02	11.49	59.32	390.83	4199.00	1009.83
15	3.39	0.53	322.29	11.65	58.59	392.53	3808.17	1009.75
14	3.41	0.54	324.38	11.80	57.92	394.10	3415.64	1009.67
13	3.44	0.54	326.52	11.95	57.24	395.70	3021.53	1009.58
12	3.46	0.55	328.48	12.09	56.60	397.17	2625.83	1009.50
11	3.48	0.56	330.48	12.21	55.97	398.66	2228.66	1009.42
10	3.51	0.59	332.98	13.09	54.95	401.03	1830.00	1009.33
9	0.00	0.00	0.00	0.00	158.78	158.78	1428.98	1009.25
8	0.00	0.00	0.00	0.00	158.78	158.78	1270.20	1009.17
7	0.00	0.00	0.00	0.00	158.78	158.78	1111.43	1009.08
6	0.00	0.00	0.00	0.00	158.78	158.78	952.65	1009.00
5	0.00	0.00	0.00	0.00	158.78	158.78	793.88	1008.92
4	0.00	0.00	0.00	0.00	158.78	158.78	635.10	1008.83
3	0.00	0.00	0.00	0.00	158.78	158.78	476.33	1008.75
2	0.00	0.00	0.00	0.00	158.78	158.78	317.55	1008.67
1	0.00	0.00	0.00	0.00	158.78	158.78	158.78	1008.58