



D-Series Size 0 LED Area Luminaire



d"series

Specifications




EPA: 0.95 ft²
(.09 m²)

Length: 26"
(66.0 cm)

Width: 13"
(33.0 cm)

Height: 7"
(17.8 cm)

Weight (max): 16 lbs
(7.25 kg)



Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL[®] controls marked by a **shaded background**. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM[®]X or XPoint[™] Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**¹

To learn more about A+,
visit www.acuitybrands.com/aplus.

- See ordering tree for details.
- A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately:
[Link to Roam](#); [Link to DTL DLL](#)

A+ Capable options indicated
by this color background.

Ordering Information

EXAMPLE: DSX0 LED 40C 1000 40K T3M MVOLT SPA DDBXD

Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting
DSX0 LED	Forward optics 20C 20 LEDs (one engine) 40C 40 LEDs (two engines) Rotated optics 30C 30 LEDs (one engine) ¹	530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted ²	T1S Type I short T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium TSVS Type V very short	T5S Type V short T5M Type V medium T5W Type V wide BLC Backlight control ^{2,3} LCCO Left corner cutoff ^{2,3} RCCO Right corner cutoff ^{2,3} 480 ^{5,6}	Shipped included SPA Square pole mounting RPA Round pole mounting WBA Wall bracket SPUMBA Square pole universal mounting adaptor ⁷ RPUMBA Round pole universal mounting adaptor ⁷ Shipped separately KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸

Control options	Other options	Finish (required)
Shipped installed PER NEMA twist-lock receptacle only (control ordered separately) ⁹ PERS Five-wire receptacle only (control ordered separately) ^{9,10} PER7 Seven-wire receptacle only (control ordered separately) ^{9,10} DMG 0-10V dimming extend out back of housing for external control (no controls) (leads exit fixture) ¹¹ PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ^{12,13} PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ^{12,13} PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ^{12,13} PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ^{12,13}	BL30 Bi-level switched dimming, 30% ^{14,15} BL50 Bi-level switched dimming, 50% ^{14,15} PNMTDD3 Part night, dim till dawn ¹⁶ PNMT5D3 Part night, dim 5 hrs ¹⁶ PNMT6D3 Part night, dim 6 hrs ¹⁶ PNMT7D3 Part night, dim 7 hrs ¹⁶ FAO Field adjustable output ¹⁷	Shipped installed HS House-side shield ¹⁸ SF Single fuse (120, 277, 347V) ⁵ DF Double fuse (208, 240, 480V) ⁵ L90 Left rotated optics ¹ R90 Right rotated optics ¹ DDL Diffused drop lens ¹⁸ BS Bird spikes DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2011-2017 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED
Rev. 08/23/17
Page 1 of 6

Ordering Information Cont.

Accessories

Ordered and shipped separately.



DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ¹²
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ¹³
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ¹⁴
DSHORT SBK U	Shorting cap ¹⁵
DSX0EGS DDBXD U	External glare shield
DSX0HS 20C U	House-side shield for 20 LED unit ¹⁶
DSX0HS 30C U	House-side shield for 30 LED unit ¹⁷
DSX0HS 40C U	House-side shield for 40 LED unit ¹⁸
DSX0DDL U	Diffused drop lens (polycarbonate) ¹⁹
PUMBA DDBXD U*	Square and round pole universal mounting bracket adaptor (specify finish) ²⁰
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ¹

For more control options, visit [DLI](#) and [ROAM](#) online.

NOTES


- 30 LEDs (30C option) and rotated options (L90 or R90) only available together.
- AMBPC is not available with BLC, LCCO or RCCO.
- Not available with HS or DDL.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in 20C or 30C at 530mA. Not available with BL30, BL50 or PNMT options.
- Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA mounting. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- H ROAM* node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Shorting Cap included.
- DMG option for 347V or 480V requires 1000mA.
- Reference Motion Sensor table on page 3.
- Reference PER Table on page 3 to see functionality.
- Requires (2) separately switched circuits.
- Not available with 347V, 480V; PNMT, PIR1FC3V or PIRH1FC3V. For PER5 or PER7 see PER Table on page 3.
- Not available with 347V, 480V; PNMT, PIR1FC3V or PIRH1FC3V. For PER5 or PER7 see PER Table on page 3. Separate Dusk to Dawn required.
- Not available with other controls options.
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Requires luminaire to be specified with PER option. See PER Table.
- For retrofit use only.

External Glare Shield

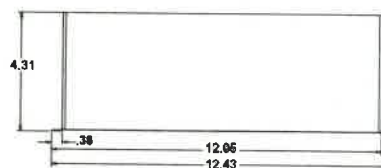

Drilling

HANDHOLE ORIENTATION




Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290			
2-7/8"	AST25-190	AST25-280	AST25-290			
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)

DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D

Note: Review luminaire spec sheet for specific nomenclature

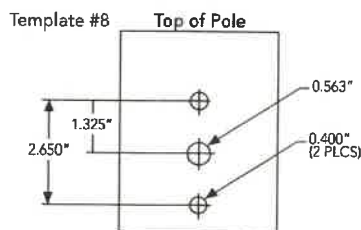

Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSK SPA	Y	Y	Y	N	-	-	-	-
DSK RPA	Y	Y	N	N	Y	Y	Y	Y
DSK SPUMBA	Y	N	N	N	-	-	-	-
DSK RPUMBA	N	N	N	N	Y	Y	Y	N


*3 fixtures @ 120° require round pole top/tenon.



Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 0 homepage](#).

Isofootcandle plots for the DSX0 LED 40C 1000 40K. Distances are in units of mounting height (20').

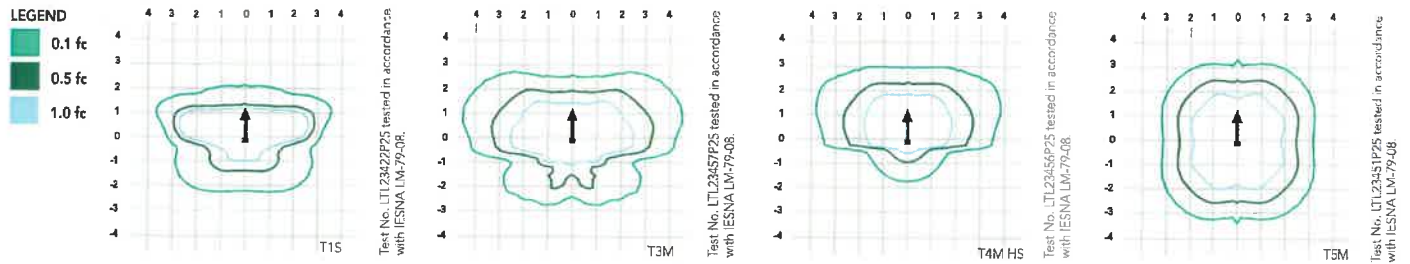

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C	1.02
10°C	1.01
20°C	1.00
25°C	1.00
30°C	1.00
40°C	0.99

Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
20C	530	35	0.34	0.22	0.21	0.20	—	—
	700	45	0.47	0.28	0.24	0.22	0.18	0.14
	1000	72	0.76	0.45	0.39	0.36	0.16	0.26
30C	530	52	0.51	0.31	0.28	0.25	—	—
	700	70	0.72	0.43	0.37	0.34	0.25	0.19
	1000	104	1.11	0.64	0.56	0.49	0.47	0.34
40C	530	68	0.71	0.41	0.36	0.33	0.25	0.19
	700	91	0.94	0.55	0.48	0.42	0.33	0.24
	1000	138	1.45	0.84	0.73	0.64	0.69	0.50

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor		DSX0 LED 20C 1000		
	1	0.98	0.96	0.93
		DSX0 LED 40C 1000		
	1	0.98	0.95	0.90
		DSX0 LED 40C 700		
	1	0.99	0.99	0.99

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use with Inline Dusk to Dawn or timer.

PER Table

Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)	
		Wire 4/Wire5	Wire 4/Wire5	Wire 4/Wire5	Wire 6/Wire7
Photocontrol Only (On/Off)	✓	Wired to dimming leads on driver	Wired to dimming leads on driver	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	✗	Wired to dimming leads on driver	Wired to dimming leads on driver	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	✗	Wires Capped inside fixture	Wires Capped inside fixture	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	✗	Wired to dimming leads on driver	Wired to dimming leads on driver	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	✗	Wires Capped inside fixture	Wires Capped inside fixture	Wires Capped inside fixture	Wires Capped inside fixture



*Future-proof means: Ability to change controls in the future.



Performance Data Cont.

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
20C (20 LEDs)	530 mA	35 W	T1S	4,079	1	0	1	117	4,380	1	0	1	125	4,408	1	0	1	126	2,541	1	0	1	73
			T2S	4,206	1	0	1	120	4,516	1	0	1	129	4,544	1	0	1	130	2,589	1	0	1	74
			T2M	4,109	1	0	1	117	4,413	1	0	1	126	4,440	1	0	1	127	2,539	1	0	1	73
			T3S	4,104	1	0	1	117	4,407	1	0	1	126	4,435	1	0	1	127	2,558	1	0	1	73
			T3M	4,142	1	0	1	118	4,447	1	0	2	127	4,475	1	0	2	128	2,583	1	0	1	74
			T4M	4,198	1	0	1	120	4,508	1	0	2	129	4,536	1	0	1	130	2,570	1	0	1	73
			TFIM	4,135	1	0	1	118	4,440	1	0	1	127	4,468	1	0	1	128	2,540	1	0	1	73
			TSVS	4,368	2	0	0	125	4,691	2	0	0	134	4,720	2	0	0	135	2,650	1	0	0	76
			TSS	4,401	2	0	2	126	4,725	2	0	0	135	4,755	2	0	0	136	2,690	1	0	0	77
			TSM	4,408	2	0	1	126	4,734	3	0	1	135	4,763	3	0	1	136	2,658	2	0	0	76
			TSW	4,344	3	0	1	124	4,664	3	0	1	133	4,693	3	0	1	134	2,663	2	0	1	76
			BLC	3,071	1	0	1	88	3,297	1	0	1	94	3,318	1	0	1	95					
			LCCO	2,983	1	0	1	85	3,204	1	0	1	92	3,224	1	0	1	92					
			RCCO	2,983	1	0	1	85	3,204	1	0	1	92	3,224	1	0	1	92					
	700 mA	45 W	T1S	5,181	1	0	1	115	5,563	1	0	1	124	5,598	1	0	1	124	3,144	1	0	1	70
			T2S	5,342	1	0	1	119	5,736	1	0	1	127	5,772	1	0	1	128	3,203	1	0	1	71
			T2M	5,219	1	0	2	116	5,605	1	0	2	125	5,640	1	0	2	125	3,141	1	0	1	70
			T3S	5,213	1	0	1	116	5,598	1	0	1	124	5,633	1	0	1	125	3,165	1	0	1	70
			T3M	5,260	1	0	2	117	5,649	1	0	2	126	5,684	1	0	2	126	3,196	1	0	1	71
			T4M	5,332	1	0	2	118	5,725	1	0	2	127	5,761	1	0	2	128	3,179	1	0	1	71
			TFIM	5,252	1	0	2	117	5,640	1	0	2	125	5,675	1	0	2	126	3,143	1	0	1	70
			TSVS	5,548	2	0	0	123	5,958	2	0	0	132	5,995	2	0	0	133	3,278	2	0	0	73
			TSS	5,589	2	0	0	124	6,002	2	0	0	133	6,039	2	0	0	134	3,328	2	0	0	74
			TSM	5,599	3	0	1	124	6,012	3	0	1	134	6,050	3	0	1	134	3,288	2	0	1	73
			TSW	5,517	3	0	1	123	5,924	3	0	1	132	5,961	3	0	2	132	3,295	2	0	1	73
			BLC	3,909	1	0	1	87	4,198	1	0	1	93	4,224	1	0	1	94					
			LCCO	3,798	1	0	1	84	4,078	1	0	1	91	4,104	1	0	1	91					
			RCCO	3,798	1	0	1	84	4,078	1	0	1	91	4,104	1	0	1	91					
	1000 mA	72 W	T1S	7,085	2	0	2	98	7,608	2	0	2	106	7,656	2	0	2	106					
			T2S	7,305	2	0	2	101	7,845	2	0	2	109	7,894	2	0	2	110					
			T2M	7,138	2	0	2	99	7,665	2	0	2	106	7,713	2	0	2	107					
			T3S	7,129	1	0	2	99	7,656	2	0	2	106	7,704	2	0	2	107					
			T3M	7,194	2	0	2	100	7,725	2	0	2	107	7,773	2	0	2	108					
			T4M	7,292	2	0	2	101	7,830	2	0	2	109	7,879	2	0	2	109					
			TFIM	7,183	1	0	2	100	7,713	2	0	2	107	7,761	2	0	2	108					
			TSVS	7,588	3	0	0	105	8,148	3	0	0	113	8,199	3	0	0	114					
			TSS	7,644	3	0	0	106	8,208	3	0	0	114	8,259	3	0	0	115					
			TSM	7,657	3	0	2	106	8,222	3	0	2	114	8,274	3	0	2	115					
			TSW	7,545	3	0	2	105	8,102	3	0	2	113	8,153	3	0	2	113					
			BLC	5,162	1	0	1	72	5,543	1	0	1	77	5,578	1	0	1	77					
			LCCO	5,015	1	0	2	70	5,386	1	0	2	75	5,419	1	0	2	75					
			RCCO	5,015	1	0	2	70	5,386	1	0	2	75	5,419	1	0	2	75					

Performance Data Cont.

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40C (40 LEDs)	530 mA	68 W	T1S	7,926	2	0	2	117	8,511	2	0	2	125	8,564	2	0	2	126	4,878	1	0	1	72
			T2S	8,172	2	0	2	120	8,775	2	0	2	129	8,830	2	0	2	130	4,969	1	0	1	73
			T2M	7,985	2	0	2	117	8,574	2	0	2	126	8,628	2	0	2	127	4,874	1	0	1	72
			T3S	7,975	2	0	2	117	8,564	2	0	2	126	8,617	2	0	2	127	4,910	1	0	1	72
			T3M	8,047	2	0	2	118	8,642	2	0	3	127	8,696	2	0	3	128	4,958	1	0	2	73
			T4M	8,157	2	0	2	120	8,759	2	0	2	129	8,813	2	0	2	130	4,932	1	0	2	73
			TFTM	8,035	2	0	2	118	8,628	2	0	2	127	8,682	2	0	2	128	4,876	1	0	2	72
			TSVS	8,488	3	0	0	125	9,115	3	0	1	134	9,172	3	0	1	135	5,086	2	0	0	75
			TSS	8,550	3	0	1	126	9,182	4	0	2	135	9,239	3	0	1	136	5,163	2	0	0	76
			TSM	8,565	3	0	2	126	9,198	3	0	2	135	9,255	3	0	2	136	5,102	3	0	1	75
			TSW	8,440	4	0	2	124	9,063	3	0	2	133	9,120	4	0	2	134	5,112	3	0	1	75
			BLC	6,142	1	0	2	90	6,595	1	0	2	97	6,636	1	0	2	98					
			LCCO	5,967	1	0	2	88	6,407	1	0	2	94	6,447	1	0	2	95					
			RCCO	5,967	1	0	2	88	6,407	1	0	2	94	6,447	1	0	2	95					
	700 mA	91 W	T1S	10,066	2	0	2	111	10,810	2	0	2	119	10,877	2	0	2	120	6,206	2	0	2	68
			T2S	10,379	2	0	2	114	11,145	2	0	2	122	11,215	2	0	2	123	6,322	2	0	2	69
			T2M	10,141	2	0	2	111	10,890	2	0	2	120	10,958	2	0	2	120	6,201	2	0	2	68
			T3S	10,129	2	0	2	111	10,877	2	0	2	120	10,945	2	0	2	120	6,247	1	0	2	69
			T3M	10,221	2	0	3	112	10,975	2	0	3	121	11,044	2	0	3	121	6,308	2	0	2	69
			T4M	10,359	2	0	3	114	11,124	2	0	3	122	11,194	2	0	3	123	6,275	1	0	2	69
			TFTM	10,205	2	0	2	112	10,958	2	0	2	120	11,027	2	0	2	121	6,203	1	0	2	68
			TSVS	10,781	3	0	1	118	11,576	3	0	1	127	11,649	3	0	1	128	6,671	2	0	0	73
			TSS	10,860	3	0	1	119	11,662	3	0	1	128	11,734	3	0	1	129	6,569	2	0	0	72
			TSM	10,879	4	0	2	120	11,682	4	0	2	128	11,755	4	0	2	129	6,491	3	0	1	71
			TSW	10,719	4	0	2	118	11,511	4	0	2	126	11,583	4	0	2	127	6,504	3	0	2	71
			BLC	7,819	1	0	2	86	8,396	1	0	2	92	8,448	1	0	2	93					
			LCCO	7,596	1	0	2	83	8,157	1	0	2	90	8,208	1	0	2	90					
			RCCO	7,596	1	0	2	83	8,157	1	0	2	90	8,208	1	0	2	90					
	1000 mA	138 W	T1S	13,767	3	0	3	100	14,783	3	0	3	107	14,876	3	0	3	108					
			T2S	14,194	3	0	3	103	15,242	3	0	3	110	15,338	3	0	3	111					
			T2M	13,869	3	0	3	101	14,893	3	0	3	108	14,986	3	0	3	109					
			T3S	13,852	2	0	2	100	14,875	3	0	3	108	14,968	3	0	3	108					
			T3M	13,978	3	0	3	101	15,028	3	0	3	109	15,104	3	0	3	109					
			T4M	14,168	3	0	3	103	15,214	3	0	3	110	15,309	3	0	3	111					
			TFTM	13,956	2	0	3	101	14,987	2	0	3	109	15,080	2	0	3	109					
			TSVS	14,744	4	0	1	107	15,832	4	0	1	115	15,931	4	0	1	115					
			TSS	14,852	4	0	1	108	15,948	4	0	1	116	16,048	4	0	1	116					
			TSM	14,878	4	0	2	108	15,976	4	0	2	116	16,076	4	0	2	116					
			TSW	14,660	4	0	2	106	15,742	4	0	2	114	15,840	4	0	2	115					
			BLC	10,325	1	0	2	75	11,087	1	0	2	80	11,156	1	0	2	81					
			LCCO	10,031	2	0	2	73	10,771	2	0	3	78	10,839	2	0	3	79					
			RCCO	10,031	2	0	2	73	10,771	2	0	3	78	10,839	2	0	3	79					

Performance Data Cont.

L90 and R90 Rotated Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	530 mA	52 W	T1S	6,130	2	0	2	118	6,583	2	0	2	127	6,624	2	0	2	127	3,841	2	0	2	74
			T2S	6,321	2	0	2	122	6,787	2	0	2	131	6,830	2	0	2	131	3,912	2	0	2	75
			T2M	6,176	3	0	3	119	6,632	3	0	3	128	6,673	3	0	3	128	3,837	2	0	2	74
			T3S	6,168	3	0	3	119	6,624	3	0	3	127	6,665	3	0	3	128	3,866	2	0	2	74
			T3M	6,224	3	0	3	120	6,684	3	0	3	129	6,726	3	0	3	129	3,904	2	0	2	75
			T4M	6,309	3	0	3	121	6,775	3	0	3	130	6,817	3	0	3	131	3,884	2	0	2	75
			TFTM	6,215	3	0	3	120	6,673	3	0	3	128	6,715	3	0	3	129	3,839	2	0	2	74
			TSVS	6,565	2	0	0	126	7,050	3	0	0	136	7,094	3	0	0	136	4,005	2	0	0	77
			TSS	6,613	2	0	0	127	7,102	2	0	0	137	7,146	2	0	0	137	4,065	2	0	0	78
			TSM	6,625	3	0	1	127	7,114	3	0	1	137	7,159	3	0	1	138	4,017	2	0	1	77
			TSW	6,528	3	0	2	126	7,010	3	0	2	135	7,054	3	0	2	136	4,025	3	0	1	77
			BLC	4,747	2	0	2	91	5,098	2	0	2	98	5,130	2	0	2	99					
			LCCO	4,612	1	0	2	89	4,953	1	0	2	95	4,984	1	0	2	96					
			RCCO	4,612	1	0	2	89	4,953	1	0	2	95	4,984	1	0	2	96					
	700 mA	70 W	T1S	7,786	3	0	3	111	8,361	3	0	3	119	8,413	3	0	3	120	4,783	2	0	2	68
			T2S	8,028	3	0	3	115	8,620	3	0	3	123	8,674	3	0	3	124	4,873	2	0	2	70
			T2M	7,844	3	0	3	112	8,423	3	0	3	120	8,476	3	0	3	121	4,779	2	0	2	68
			T3S	7,834	3	0	3	112	8,413	3	0	3	120	8,465	3	0	3	121	4,815	2	0	2	69
			T3M	7,905	3	0	3	113	8,489	3	0	3	121	8,542	3	0	3	122	4,862	3	0	3	69
			T4M	8,013	3	0	3	114	8,604	3	0	3	123	8,658	3	0	3	124	4,837	3	0	3	69
			TFTM	7,893	3	0	3	113	8,476	3	0	3	121	8,529	3	0	3	122	4,781	3	0	3	68
			TSVS	8,338	3	0	0	119	8,954	3	0	0	128	9,010	3	0	0	129	4,988	2	0	0	71
			TSS	8,400	3	0	0	120	9,020	3	0	1	129	9,076	3	0	1	130	5,063	2	0	0	72
			TSM	8,414	3	0	2	120	9,036	3	0	2	129	9,092	3	0	2	130	5,003	3	0	1	71
			TSW	8,291	4	0	2	118	8,903	4	0	2	127	8,959	4	0	2	128	5,013	3	0	1	72
			BLC	6,044	2	0	2	86	6,490	3	0	3	93	6,530	3	0	3	93					
			LCCO	5,872	1	0	2	84	6,305	1	0	2	90	6,345	1	0	2	91					
			RCCO	5,872	1	0	2	84	6,305	1	0	2	90	6,345	1	0	2	91					
	1000 mA	104 W	T1S	10,648	3	0	3	102	11,434	3	0	3	110	11,506	3	0	3	111					
			T2S	10,979	3	0	3	106	11,789	3	0	3	113	11,863	3	0	3	114					
			T2M	10,727	3	0	3	103	11,519	3	0	3	111	11,591	3	0	3	111					
			T3S	10,714	3	0	3	103	11,505	3	0	3	111	11,577	3	0	3	111					
			T3M	10,812	3	0	3	104	11,610	4	0	4	112	11,682	4	0	4	112					
			T4M	10,958	4	0	4	105	11,767	4	0	4	113	11,841	4	0	4	114					
			TFTM	10,795	3	0	3	104	11,592	4	0	4	111	11,664	4	0	4	112					
			TSVS	11,404	3	0	0	110	12,245	3	0	1	118	12,322	3	0	1	118					
			TSS	11,487	3	0	1	110	12,336	3	0	1	119	12,413	3	0	1	119					
			TSM	11,508	4	0	2	111	12,357	4	0	2	119	12,434	4	0	2	120					
			TSW	11,339	4	0	2	109	12,176	4	0	2	117	12,252	4	0	2	118					
			BLC	7,981	3	0	3	77	8,570	3	0	3	82	8,624	3	0	3	83					
			LCCO	7,754	1	0	2	75	8,326	2	0	2	80	8,378	2	0	2	81					
			RCCO	7,754	1	0	2	75	8,326	2	0	2	80	8,378	2	0	2	81					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (0.95 ft³) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) or optional 3000 K (70 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine(s) configurations consist of 20, 30 or 40 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L99/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an

expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 0 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 0 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

