



# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN APPLICATION

1. PROJECT NAME: Artisan Point Apartments
2. PROPERTY LOCATION/ADDRESS: SE Lee's Summit - East of Blackwell Rd, North of Blue Parkway
3. ZONING OF PROPERTY: Planned Mixed Use Development
4. LEGAL DESCRIPTION (attach if description is metes and bounds description): (Attached)
5. Size of Building(s) (sq. ft): 580,962 sf Lot Area (acres): 35.36 Acres
6. APPLICANT (DEVELOPER) Case Development LLC PHONE (918) 492-1983  
CONTACT PERSON Justin W Dixon FAX \_\_\_\_\_  
ADDRESS 4200 E Skelly Drive Suite #800 CITY/STATE/ZIP Tulsa, OK 74135  
E-MAIL jdixon@caseusa.com
7. PROPERTY OWNER Robbins Trust Partners, LLC / FHSU Foundation PHONE (913) 402-7257  
CONTACT PERSON W.R. Robbins FAX (913) 402-7261  
ADDRESS 14231 Metcalf Ave. CITY/STATE/ZIP Overland Park, KS 66223  
E-MAIL wrobbins@farmersbankks.com
8. ENGINEER/SURVEYOR Tanner Consulting, LLC PHONE (918) 745-9929  
CONTACT PERSON Dan Tanner FAX \_\_\_\_\_  
ADDRESS 5323 South Lewis Avenue CITY/STATE/ZIP Tulsa, OK 74105  
E-MAIL dan@tannerbaitshop.com
9. OTHER CONTACTS Architect's Collective PHONE (918) 492-2987  
CONTACT PERSON Larry Kester FAX \_\_\_\_\_  
ADDRESS 4200 E Skelly Drive Suite #750 CITY/STATE/ZIP Tulsa, OK 74135  
E-MAIL lckester@apid.net

All applications require the signature of the owner on the application and on the ownership affidavit. Applications without the proper signatures will be deemed incomplete and will not be processed.

W.R. Robbins  
PROPERTY OWNER *Majority*

R. Scott Case  
APPLICANT

Print name: Robbins Trust Partners, LLC - W.R. Robbins Case Development LLC - R. Scott Case

Receipt #: \_\_\_\_\_ Date Filed: \_\_\_\_\_ Processed by: \_\_\_\_\_ Application # \_\_\_\_\_

REVISED MARCH 2013

## OWNERSHIP AFFIDAVIT

STATE OF KANSAS )  
COUNTY OF JOHNSON ) SS.  
~~JACKSON~~

Comes now Robbins Trust Partners, LLC

*majority*  
(owner)

who being duly sworn upon his/her oath, does state that he/she is the owner of the  
property legally described as (legal description attached)

in the application for rezoning (planned mix use development)  
type of application (e.g., rezoning, special use permit, etc.)

Owner acknowledges the submission of said application and understands that upon  
approval of the application the proposed use specified in the application will be a  
permitted use upon the subject property under the City of Lee's Summit Unified  
Development Ordinance.

Dated this 3 day of May, 20 18




Signature of Owner

W R Robbins

Printed Name

Subscribed and sworn to before me this 3 day of May, 20 18





Notary Public

9/17/20

My Commission Expires

TRACT DESCRIPTION:

A TRACT OF LAND THAT IS PART OF THE EAST HALF OF THE NORTHWEST QUARTER (E/2 NW/4) OF SECTION 11, TOWNSHIP 47 NORTH, RANGE 31 WEST OF THE FIFTH PRINCIPAL MERIDIAN, CITY OF LEE'S SUMMIT, JACKSON COUNTY, STATE OF MISSOURI; BEING MORE PARTICULARLY DESCRIBED AS FOLLOWS:

BEGINNING AT THE NORTHEAST CORNER OF THE NORTHWEST QUARTER OF SAID SECTION 11; THENCE SOUTH 2°19'29" WEST AND ALONG THE EAST LINE OF SAID NORTHWEST QUARTER FOR A DISTANCE OF 2514.22 FEET TO A POINT ON THE NORTHERLY RIGHT OF WAY LINE OF "NORTH OUTER ROAD OF EXISTING EAST BOUND HIGHWAY NO. 50 AS DESCRIBED IN GENERAL WARRANTY DEED, RECORDED AUGUST 14, 2014 AT INSTRUMENT NO. 2014E0067092, COUNTY OF JACKSON RECORDS; THENCE ALONG SAID RIGHT OF WAY FOR THE FOLLOWING FOUR (4) COURSES; ALONG A 708.42 FOOT RADIUS CURVE TO THE RIGHT, HAVING AN INITIAL TANGENT BEARING OF NORTH 80°20'23 WEST, A CENTRAL ANGLE OF 47°23'52", A CHORD BEARING AND DISTANCE OF NORTH 56°38'27" WEST FOR 569.47 FEET, FOR AN ARC DISTANCE OF 586.04 FEET; THENCE SOUTH 57°03'29" WEST FOR A DISTANCE OF 31.00 FEET; THENCE ALONG A 739.42 FOOT RADIUS CURVE TO THE RIGHT, HAVING AN INITIAL TANGENT BEARING OF NORTH 32°56'31" WEST, A CENTRAL ANGLE OF 13°17'26", A CHORD BEARING AND DISTANCE OF NORTH 26°17'48" WEST FOR 171.14 FEET, FOR AN ARC DISTANCE OF 171.52 FEET; THENCE ALONG A 784.43 FOOT RADIUS CURVE TO THE LEFT, HAVING A CENTRAL ANGLE OF 10°21'18", A CHORD BEARING AND DISTANCE OF NORTH 24°49'44" WEST FOR 141.58 FEET, FOR AN ARC DISTANCE OF 141.77 FEET; THENCE NORTH 2°22'33" EAST AN DEPARTING SAID RIGHT OF WAY LINE FOR A DISTANCE OF 1959.46 FEET TO A POINT ON THE NORTH LINE OF SAID NORTHWEST QUARTER; THENCE SOUTH 87°55'32" EAST FOR A DISTANCE OF 658.12 FEET TO THE POINT OF BEGINNING.

SAID TRACT CONTAINING 1,540,331 SQUARE FEET OR 35.361 ACRES.



# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Submittal Requirements	Yes	No*
Completed application form with signatures	X	
Ownership affidavit form	X	
Legal description	X	
Technical Studies, if required	X	
Filing fee – <b>Residential 0-5 acres</b> \$1600 + 2 legal notice publishing charges (\$165 each); <b>Residential over 5 acres</b> \$2000 + 2 legal notice publishing charges (\$165 each); <b>Commercial 0-5 acres</b> \$1800 + 2 legal notice publishing charges (\$165 each); <b>Commercial over 5 acres</b> \$2400 + 2 legal notice publishing charges (\$165 each)	X	
Number of folded sets of final development plans – <b>Initial submittal (4) full size &amp; 1 CD/digital, resubmittal (4) full size &amp; 1 CD/digital</b> (including site plan, landscape plan, building elevations, civil engineering), collated, stapled (seals required for engineering plans)	X	
Checklist for Plan Submission Requirements	X	
Checklist for Final Development Plan	X	
Checklist for Zoning District Regulations – <b>Separate document</b>	X	
Checklist for Design Standards (See Article 7) – <b>Separate document</b>	X	
Checklist for Other Ordinance Requirements		X

Table 1. General Application Requirements Plan Submission Requirements				
UDO Article 4., Sec. 4.040	Ordinance Requirement	Met	Not Met	N/A
A.1. Date Prepared	Date prepared	X		
B.2. Name & address	Name, address and telephone number of the person who prepared, or person responsible for preparing, the plan;	X		
B.3. Scale	Graphic, engineering scale not to exceed 1:100. All plans shall be drawn to a standard engineer's scale of 1:50 or 1:100', unless a different scale is specifically approved by the Director.	X		
B.4. Plan Size	Plan size maximum of 24" x 36" with one inch border	X		
B.5. North Arrow	North Arrow; plan shall be oriented so north is to the top or to the right side of the sheet.	X		
B.6. Vicinity Map	Vicinity map with north arrow indicating the location of the property within the City.	X		



**Table 2. Design Standards  
Planned Residential Districts**

<b>UDO Article 7</b>	<b>Ordinance Requirement</b>	<b>Met</b>	<b>Not Met</b>	<b>N/A</b>
Sec. 7.040.A.1. Front setback	Setback from front property line (or street facing line for corner lot) in planned residential: - 20 feet for living areas and side entry garages - 25 feet for front entry garages. (See Sec. 5.270)	X		
Sec. 7.040.A.2. Front yard encroachments	Bay windows and front porches may encroach 5 feet into front yard. Front porches within the encroachment area must be of useable dimensions – minimum 5 feet deep and 15 feet long.	X		
Sec. 7.040.A.3. Garage offset	Additional garage doors beyond 2, facing the street, must be set back a minimum of 18 inches from the other garage doors. Roof planes must be designed with a similar offset.	X		
Sec. 7.040.B. Arterial street setback	Residences shall be set back at least 50 feet from any arterial street. (Applies to front setback, see 5.270)			X
Sec. 7.040.C. Side setback	"Zero lot line" side yard setbacks shall be permitted on one side of a lot when shown on an approved final plat; provided that the side yard of the adjoining lot must be at least 15 feet. To maintain privacy for both the house and the adjoining side yard, only transom windows are permitted on the zero-lot-line side of the residence at least 6 feet above the inside floor levels. Below six feet, only translucent windows shall be allowed. (Article 5 allows 5 foot side yards, for a total of 10 feet between houses.)			X
Sec. 7.040.D. Alley-facing garage setback	Setbacks for alley-facing garages: - 4 feet from the rear property line - 4 feet from the side property line. (Article 8, Table 8-1 requires 10 foot side setback)			X
Sec. 7.050.A. Laterally attached units	The number of single-family laterally attached residences shall be limited to 6 units.			X
Sec. 7.050.B. Units per floor	The number of dwelling units in multi-family structures shall be limited to 8 units per floor.	X		
Sec. 7.050.C. Building separation	Separations between multifamily structures shall be at least 20 feet, unless fully sprinklered for fire safety and further approved through the development process, then the separation may be reduced per the allowances of the building code.	X		
Sec. 7.050.C. Exterior appearance	All exterior sides of three or more laterally attached single-family residences and all multi-family residence buildings shall be designed with 4 sided architecture. Building materials, window size and placement, and general façade composition shall be compatible on all 4 sides.	X		
Sec. 7.060.A. Impervious coverage	Maximum impervious surfaces (including building footprints and driveways) = 60% of lot area.	X		
Sec. 7.070.A. Open space	Minimum open/green space = 10% of total land area.	X		

**Table 2. Design Standards  
Planned Residential Districts**

<b>UDO Article 7</b>	<b>Ordinance Requirement</b>	<b>Met</b>	<b>Not Met</b>	<b>N/A</b>
Sec. 7.090.B. Pedestrian lighting	Pedestrian-oriented lighting standards: - metal halide preferred - 12 foot poles - 82.5 foot or less spacing - light intensity and spread patterns to be determined by City Council. Pedestrian-oriented lighting may supplement or substitute for standard street lighting.	X		
Sec. 7.100.B. On-Street Parking	On-street parallel parking is permitted on all residential streets, subject to minimum street width requirements.			X
Sec. 7.100.C. Parking lot screening	Residential parking lots must be located internal to the development or out of view from external streets by a landscaped berm of at least 2.5 feet in height creating a visual screen. (See buffering provisions in Article 14.)	X		
Sec. 7.100.D. Parking lots for Churches, Schools, and similar	Setback for parking lots for churches, schools and similar uses in residential district = 20 feet from street and adjoining property lines.	X		
Sec. 7.110 Residential Traffic Calming	In planned residential district developments, one of the following traffic calming devices is encouraged at the intersection of each residential street with another residential street, and for a residential street at its intersection with a collector or arterial street, subject to a determination of safety and effectiveness by the City Engineer. Midblock locations may be required on blocks longer than 500 feet between intersecting street centerlines.  A. Street width reduction to a maximum of 20 feet, for a length at least as long as the width of the intersecting right-of-way.  B. Intersection curb radius of 5 feet as projected from the curb along the side of a street where parking is permitted; 13 feet along the side of a traffic lane.			X



# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 3. Preliminary Development Plan				
UDO Article 4, Sec. 4.310	Ordinance Requirement	Met	Not Met	N/A
C.1. Legal Description	A legal description which accurately describes the limits of the property.	×		
C.2. Acreage	Approximate total acreage.	×		
C.3.	The plan shall include the following information on the existing conditions for the proposed site and within 185 feet.			
C.3.a. Floodplain	Location and limits of the 1% Annual Chance Flood, as set forth on the current FEMA maps with reference to the panel number. Elevations shall be provided if shown on the FEMA map.	×		
C.3.b. Bodies of Water	Existing streams, bodies of water, and surface drainage channels.	×		
C.3.c. Existing Vegetation	Location, massing and pattern of existing vegetation.	×		
C.3.d. Contours	Topography with contours at 2-foot intervals. In areas where grades are gentle, the Director may require a lesser contour interval.	×		
C.3.e. Oil & Gas Wells	Location of all oil and gas wells, whether active, inactive, or capped.	×		
C.3.f. Special Features	Special features (such as ponds, dams, steep slopes or unusual geology) or unusual historical features (such as former landfills, fill areas or lagoons) must be identified by the applicant. The applicant, at the Director's discretion, may be required to provide professional analysis of these conditions to address health, safety and general welfare questions related to the proposed subdivision.	×		
C.3.g. Drainage Structures	The location and size of retention basins, detention basins and drainage structures, such as culverts, paved or earthen ditches or storm water sewers and inlets.	×		
C.3.h. Streets	Location, width and name of any existing or platted street, alley or any other dedicated rights-of-way.	×		
C.3.i. Easements	Location, width and dimensions of existing utility easements, with document reference if dedicated by separate document;	×		
C.3.j. Structures	Existing and proposed buildings, which existing on plans on file with the City. Single and two-family buildings may be shown in approximate location and general size and shape.	×		
C.3.k. Utility Lines	Location and size of all existing utility lines and storm water management/detention facilities;	×		
C.3.l. Abutting Subdivisions	Names of abutting subdivisions and owners of abutting parcels of unsubdivided land;	×		
C.3.m. Surrounding Land Uses	Surrounding land uses and zoning districts of adjacent properties.	×		
C.4.	The plan shall include the following information on the proposed development			



## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

<b>Table 3.</b> <b>Preliminary Development Plan</b>				
<b>UDO Article 4, Sec. 4.310</b>	<b>Ordinance Requirement</b>	<b>Met</b>	<b>Not Met</b>	<b>N/A</b>
C.4.a. Lot dimensions	Layout, number and approximate dimensions of lots and approximate lot areas.	X		
C.4.b. Streets	Name, location, width, radii, centerline, and grade of proposed streets and alleys, both public and private;			
C.4.c. Sidewalks	Location and width of proposed sidewalks and public walkways;	X		
C.4.d. Easements	Location and width of proposed easements;	X		
C.4.e. Setback Lines	Building setback lines from streets with dimensions.	X		
C.4.f. Culverts	Location and approximate dimensions of culverts and bridges;	X		
C.4.g. Driveways	Location of driveways, curb cuts, median breaks and turn lanes;	X		
C.4.h. Utility Lines	The general location and approximate size of all proposed utility lines, including water, storm water, and sanitary sewers.	X		
C.4.i. Sanitary Sewer	A sanitary sewer impact statement that will address the proposed discharge into the existing sanitary sewer receiving system, if required by the City Engineer.	X		
C.4.j. Water Service Demand Data	Appropriate water service demand data (including, but not limited to, planned land usage, densities of proposed development, pipe sizes, contours and fire hydrant layout) to allow for the preliminary analysis of the demand for water service if required by the City Engineer.	X		
C.4.k. Storm Water Report	Information (proposed size, nature and general location) on all proposed storm water management facilities and detention facilities. A preliminary storm water report shall be submitted unless the requirement is waived by the City Engineer. All preliminary storm water reports shall include:			
C.4.k.1.	Current and proposed land use assumptions,	X		
C.4.k.2.	Identification of the watershed in which the project is located,	X		
C.4.k.3.	Identification of offsite drainage areas,	X		
C.4.k.4.	Surrounding property information,	X		
C.4.k.5.	Any other pertinent information about the site which may influence storm water runoff,	X		
C.4.k.6.	Proposed storm water facilities,	X		
C.4.k.7.	The downstream effects of the development	X		
C.4.k.8.	Calculations for the 100%, 10%, and 1% storms. All calculations must be submitted with the report; a summary table is not acceptable.	X		
C.4.k.9.	If the storm water report indicates that detention is not required, supporting calculations evaluating the downstream effects must be provided.	X		





# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

<b>Table 3.</b> <b>Preliminary Development Plan</b>				
<b>UDO Article 4, Sec. 4.310</b>	<b>Ordinance Requirement</b>	<b>Met</b>	<b>Not Met</b>	<b>N/A</b>
C.4.k.10	All reports shall be signed and sealed by a Professional Engineer registered in the State of Missouri.	×		
C.4.l Open Space	Location and size of proposed open space for public use proposed to be dedicated or reserved and any conditions of such dedication or reservation; parks, playgrounds, churches, or school sites or other special uses of land to be considered for public use, or to be reserved by deed or covenant for the use of all property owners in the subdivision.			×
C.4.m. Buildings	Location, dimensions and area in square feet of all proposed buildings and structures.	×		
C.4.n. Parking	Location and dimensions of all parking spaces, accessible spaces, drive aisles, driveways, and curbs.	×		
C.4.o. Dimensions	Sufficient dimensions to indicate relationship between buildings, property lines, parking areas and other elements of the plan.	×		
C.4.p. Landscaping	General extent and character of proposed landscaping to include general species and size information.	×		
C.4.q. Topography	Proposed topography at two foot (2') intervals, including general drainage patterns.	×		
C.4.r. Lighting	Proposed exterior lighting, including parking lot lights and wall-mounted fixtures, including fixture type, location, height and intensity. Manufacturer's specification sheets shall be submitted.	×		
C.4.s. Phasing	Phasing of development	×		
C.4.t. Sight Triangle	Sight triangles (see Article 7)	×		
C.5.a. Building Elevations	Preliminary building elevations of all sides depicting the general style, size and exterior construction materials and color schedule of the building proposed. In the event of several building types, a minimum of one elevation of each building type is required.	×		
C.5.b. Building Height	Building height	×		
C.6.	A land use schedule shall include the following, as applicable:			
C.6.a.	Total floor area,	×		
C.6.b.	Number of dwelling units,	×		
C.6.c.	Land area,	×		
C.6.d.	Number of required and proposed parking spaces,	×		
C.6.e.	Impervious coverage,	×		
C.6.f.	Floor Area Ratio (FAR),	×		
C.6.g.	Dwelling units per acre, with and without common area;	×		



# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 3. Preliminary Development Plan				
UDO Article 4, Sec. 4.310	Ordinance Requirement	Met	Not Met	N/A
C.6.h.	The range of land uses to be permitted in each designated area of the development.	×		
C.7. Modification Statement	A narrative statement that explains the need for modification of the applicable zoning district regulations, as such modification is permitted pursuant to Article 5, shall be submitted in support of the application for the preliminary development plan approval.			×
C.8. Common Property Maintenance Plan	A written plan in such form as may be prescribed by the Director that demonstrates that all common property, if any, will be owned and maintained in accordance with Article 5, Division V, of this Chapter, shall be submitted with the application for preliminary with the application for preliminary development plan approval.			×

Table 4. Other Requirements				
	Ordinance Requirement	Met	Not Met	N/A
UDO Art. 14 Landscaping, Buffers & Tree Protection				
Sec. 14.020. Landscaping & buffer plans	Landscaping and buffer plans shall be submitted, and shall include information as listed in the ordinance.	×		
Sec. 14.050. Acceptable plant material	Acceptable plant materials and sizes for landscaping, buffers and tree replacement shall meet the ordinance requirements.	×		
Sec. 14.090.A.1. Street frontage trees	1 tree shall be planted for each 30 feet of street frontage. Such trees may be clustered or arranged within the setback if approved as part of the landscape plan. A minimum 20-foot landscape strip shall be provided along the full length of any street frontage, except where the building setback is less than 20 feet.	×		
Sec. 14.090.A.2. Front parking setback	In commercial and industrial districts, any parking or loading area visible from a street shall be separated from the street right-of way with a landscape strip at least 20 feet wide.			×
Sec. 14.090.A.3. Street frontage shrubs	1 shrub shall be provided for each 20 feet of street frontage, or portion thereof, with in the landscaped setback abutting such frontage. Such shrubs may be clustered or arranged within the setback.	×		
Sec. 14.090.B.1 Open yard shrub reqt.	The minimum of 2 shrubs per 5,000 square feet of total lot area, excludes single family and duplex developments. For schools, large sports/play fields and other areas specifically open to the public for use, i.e., tennis courts, paved play areas, paved parking lots etc. may be excluded in the calculation of this requirement.	×		
Sec. 14.090.B.2. Ground cover	Open areas not covered with other materials shall be covered with sod.	×		



## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 4. Other Requirements				
	Ordinance Requirement	Met	Not Met	N/A
Sec. 14.090.B.3. Open yard tree reqt.	In addition to the trees required based upon street frontage, additional trees shall be required at a ratio of 1 tree for every 5,000 square feet of total landscaped open space. For schools, large open sports/play fields may be excluded in the calculation of total landscaped open space. The remaining open space shall be applied to the ratio for tree planting as stated herein.	×		
Sec. 14.090.C. Trash enclosures	A detailed drawing of enclosure and screening methods to be used in connection with trash storage containers on the property shall be included with the landscaping plan. <i>(See Article 7 for requirements)</i>	×		
Sec. 14.110.A. Parking lot landscape islands	Landscape islands, strips or other planting areas shall be located within the parking lot and shall constitute at least 5% of the entire area devoted to parking spaces, aisles and driveways. <i>Every four rows of parking shall include a landscape island of at least ten feet in width.</i>	×		
Sec. 14.110.B. Landscape island placement	A landscaping island shall be located at the end of every parking bay between the last parking space and an adjacent travel aisle or driveway. The island shall be no less than 9 feet wide for at least one-half the length of the adjacent parking space. The island shall be planted in trees, shrubs, grass, or ground cover, except for those areas that are mulched.	×		
Sec. 14.110.C. Island width	Tree planting areas shall be no less than 10 feet in width. No tree shall be located less than 4 feet from the back of curb. All parking lot landscape islands, strips or other planting areas shall be curbed with minimum 6 inch high curbs.	×		
Sec. 14.120 Parking lot screening	Screening to a height of 2.5 feet must be provided along the edge of the parking lot or loading area closest to and parallel to the street. (See Sec. 14.120 for requirements).	×		
Sec. 14.170. Buffer/screen requirements	Buffer/screen between developments of differing land uses adjoining one another or separated from one another by only a street or alley shall comply with <b>Table 14.1</b> Typical buffers.	×		
UDO Art. 12 Vehicle Parking				
Sec. 12.030 Number of Parking spaces	See Table 12-1 for minimum required.	×		
Sec. 12.120.A. Head-in parking	All areas devoted to vehicle parking shall be so designed and be of such size that no vehicle is required to back into a public street to obtain access.	×		
Sec. 12.120.B.1. Parking setback	Parking lots shall be set back a minimum 20 feet from any public right-of-way or private street edge of pavement.	×		
Sec. 12.120.B.2. Parking setback	Parking lots shall be set back a minimum 20 feet from any residential use or district.	×		
Sec. 12.120.B.3. Parking setback	Parking lots shall be set back a minimum 6 feet from the side or rear property line when not part of shared parking and/or cross access.	×		



## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 4. Other Requirements				
	Ordinance Requirement	Met	Not Met	N/A
Sec. 12.120.C.1. Parking dimensions	9' wide x 19' deep, placed at the prescribed angle so that it lies between the curb and the aisle. 9' wide x 17' deep parking spaces shall be permitted when the parking space abuts a 6' wide sidewalk or when abutting a curbed open green/landscaped space. Parallel parking spaces shall not be less than 9' wide x 23' long.	×		
Sec. 12.120.F.1.e Curb blocks	The use of curb blocks in parking areas shall be prohibited, except at the head of accessible parking spaces when they are adjacent to a pedestrian walkway with no raised curb.	×		
Sec. 12.120.E.1 Aisle width	Adequate aisle width (per Table 12-4) for maneuvering into and out of each space.	×		
Sec. 12.120.E.4. Drive width	Minimum width (not including curb and gutter) is the same as aisle width (see Table 12-4).	×		
Sec. 12.120.E.5 Curb cut spacing	Distance of driveways from intersections and from other driveways shall conform to the Access Management Code.	×		
Sec. 7.280 Parking lot lighting	Any lights used to illuminate the parking area shall be arranged, located or screened so that light is directed away from and no light source is visible from a public street, a residentially-zoned area, or a residential use. (See Article 7).	×		
Sec. 12.120.F.1.a & b Improvement of Parking Area	Permanent surface, consisting of asphalt or concrete, per specifications.	×		
Sec. 12.120.F.1.d & f. Curbing	CG-1 concrete curbing required around all parking areas and access drives in office, commercial and industrial districts. Temporary asphalt curbs may be used in areas to be expanded only as shown and approved on the development plan.	×		
Sec. 12.080.B. Accessible Parking Space Size	Accessible parking spaces shall have an adjacent aisle 5 feet wide, and one in every 8 accessible spaces (but no less than one) shall be adjacent to an aisle 8 feet wide and the space shall be clearly marked with a sign indicating that the space is "van accessible." Accessible parking space aisles shall be clearly demarcated by lines painted on or otherwise applied to the parking lot surface. Access aisles shall be on the same level as the vehicle pull-up space they serve.	×		
Sec. 12.080.E. Accessible Parking Space Slope	Accessible parking spaces shall be located on a surface with a slope not exceeding 1 vertical foot in 50 horizontal feet.	×		
Sec. 12.080.H. Accessible Parking Space Clearance	Parking spaces for vans shall have a vertical clearance of 98 inches minimum at the space and along the vehicular route thereto. In cases of a loading zone, the vertical clearance of 114 inches minimum shall be provided at passenger loading zones and along vehicle access routes to such areas from site entrances.	×		
Sec. 12.080.C. No. of Accessible Parking Spaces	See Table 12-3	×		



# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 4. Other Requirements				
	Ordinance Requirement	Met	Not Met	N/A
Sec. 12.080.F. Accessible Parking Space Location	Accessible spaces shall be located at the nearest point to the front building entry and/or accessible ramp. Such spaces separated by a drive aisle shall have clearly discernable cross walks.	×		
Sec. 12.080.J. Accessible Parking Standards	All accessible parking shall comply with the requirements of the federal Americans with Disabilities Act.	×		
Sec. 12.080.I. Accessible Parking Sign	Every parking space required by this section shall be identified by a sign, mounted on a pole or other structure, located between 36 inches (3 feet) and 60 inches (5 feet) above the ground measured from the bottom of the sign, at the head of the parking space. The sign shall be at least 12" by 18" in area and meet the requirements set forth in the Manual on Uniform Traffic Control Devices, as referenced in Section 29-381 of the Lee's Summit General Code of Ordinances.	×		
UDO Art. 13 Signs				
Sec. 13.020.B Signs	All signs must comply with the sign requirements as outlined in the sign section of the ordinance	×		
UDO Art. 6. Div. I - Airport Overlay				
Sec. 6.030. Airport Zones	No structure shall be erected, altered, or maintained, and no tree shall be allowed to grow in any zone created by this District to a height in excess of the applicable height limit herein established for such zone. See Article 6	×		
Sec. 6.040 Use Restrictions	No use may be made of land or water within any zone established by this Article in such a manner as to create electrical interference with navigational signals or radio communication between the airport and aircraft, make it difficult for pilots to distinguish between airport lights and others, result in glare in the eyes of pilots using the airport, impair visibility in the vicinity of the airport, create bird strike hazards, or otherwise in any way endanger or interfere with the landing, takeoff, or maneuvering of aircraft intending to use the airport.	×		
	For any property within two miles of the airport, a Form 7460 shall be completed and submitted to the FAA, and comments received back prior to any construction.	×		
UDO Art. 6. Div. II - Flood Hazard and Zoning				
Misc.	Floodplain boundaries shall be shown, along with base flood elevations.	×		
Misc.	Any lots which contain floodplain shall have a note establishing the minimum floor elevation and/or minimum low opening for structures.	×		
UDO Art. 6. Div. III - Historic Preservation				
Misc.	Is the property in a local historic district?			×




# LEE'S SUMMIT MISSOURI

## PRELIMINARY DEVELOPMENT PLAN CHECKLIST

Table 4. Other Requirements				
	Ordinance Requirement	Met	Not Met	N/A
Misc.	Is the property or structure listed in the National Register of Historic Places?			×
UDO Article 16. Platting				
Sec. 16.010.G	Any division of land or unplatted piece of property requires platting prior to the issuance of building permits	×		



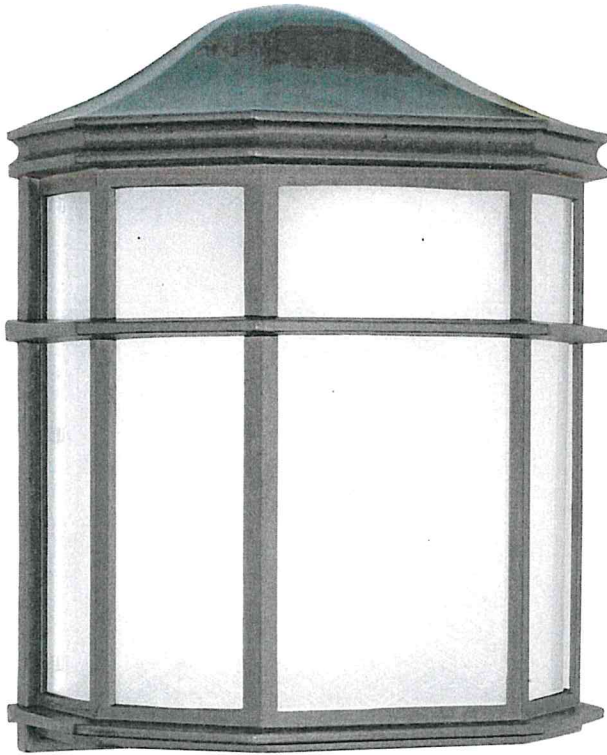

## NUVO 60-539

1-Light Die-Cast Caged Outdoor Wall Lantern in  
Textured Black Finish with Acrylic Lens

**Fixture Type**  
Outdoor Wall Light

**Collection**  
No

**Style**  
Transitional

**Finish**  
Textured Black

**Width**  
7.75"

**Height**  
9.75"

**Shade Description**  
White Linen

**Shade Material**  
Acrylic

**Extension**  
4.25"

**Number of Lights**  
1-Light

**Max Wattage**  
60 Watts

**Lamp Type**  
Incandescent

**Bulb Type**  
A19 Bulb

**Bulb Base**  
Medium Base

**Bulb Included**  
No

**Replaceable Light Source**  
Yes

**Certification**  
UL Listed

**Safety Rated**  
Wet Location

**Energy Saver**  
No


**Energy Star**  
No

**UPC**  
045923605390

**Warranty**  
1-Year Warranty

# NUVO 65-056R1

## 39W LED Wall Pack Security Flood Fixture

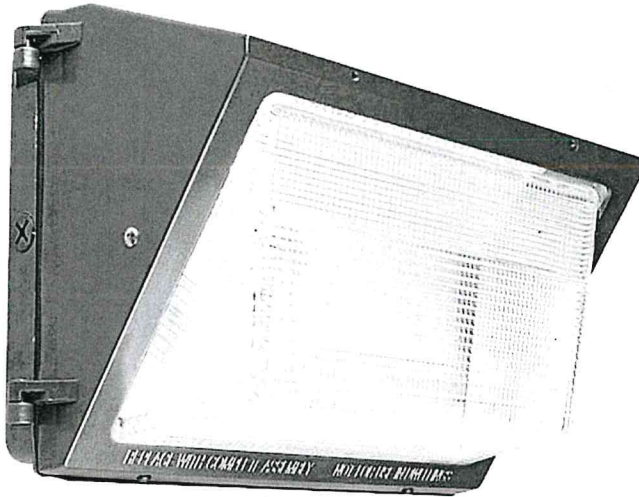

**Fixture Type**  
Outdoor Wall Light

**Collection**  
No

**Style**  
Utility

**Finish**  
Bronze

**Width**  
14.4"

**Height**  
9.29"

**Shade Material**  
Borosilicate Glass

**Extension**  
7.13"

**Number of Modules**  
1- Module

**Light Source**  
LED

**Lumen Output**  
4553

**Wattage**  
39 Watts

**Lamp Type**  
Wall Pack

**Bulb Type**  
LED

**Bulb Included**  
Yes

**Replaceable Light Source**  
No

**Certification**  
UL Listed

**Safety Rated**  
Wet Location

**Energy Saver**  
Yes

**Energy Star**  
No

**UPC**  
045923630569

**Warranty**  
5-Year Warranty

**Voltage**  
120-277 Volts

**Average Rated Hours**  
50000

**RoHS Compliant**  
Yes

**UL or ETL Listed**  
Yes

**Lamp Code**  
LED WALL PACK 39W DLC  
4.2

**Kelvin Temp**  
5000K

**CRI**  
75+

**Photocell**  
No