





1. CONCRETE FOR CURB AND GUTTER AND ANY CONCRETE STREET PAVEMENT SHALL CONFORM TO KCMMB 4K MIX.
2. CONCRETE PAVEMENT JOINTS AND JOINT LOCATIONS SHALL BE PER APWA DETAILS AS MODIFIED BY THE CITY OF LEE'S SUMMIT SPECIFICATIONS.
3. GEOGRID MUST MEET SPECIFICATIONS OF LEE'S SUMMIT SECTION 2200, TABLE 2201.6-1. ALTERNATE GEOGRID MUST BE SUBMITTED TO THE CITY FOR REVIEW AND APPROVAL.
4. MATERIAL DEPTHS PROVIDED ARE CITY'S ABSOLUTE MINIMUM ACCEPTABLE DEPTHS.
5. ALL SIDEWALK SHOWN ALONG TRACTS SHALL BE CONSTRUCTED DURING PUBLIC INFRASTRUCTURE CONSTRUCTION.

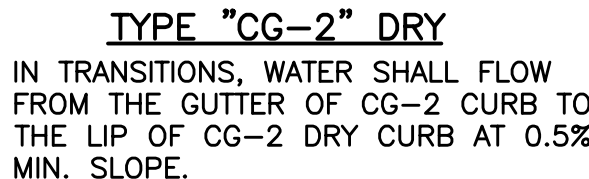

1. ONE-HALF INCH (1/2") EXPANSION JOINTS WITH FIVE-EIGHTHS INCH (5/8") DIAMETER SMOOTH DOWELS TWO FOOT (2') LONG, SPACED AS SHOWN, SHALL BE PLACED AT RADIUS POINTS AND AT ONE HUNDRED FEET (100') INTERVALS. THE DOWELS SHALL BE GREASED AND WRAPPED ON ONE END WITH EXPANSION TUBES. FIX DOWELS WITH BAR SUPPORTS.
2. ONE INCH (1") DEEP CONTRACTION JOINTS SHALL BE INSTALLED AT APPROXIMATELY TEN FEET (10') INTERVALS. THE CONTRACTION JOINTS SHALL PASS ACROSS THE ENTIRE CURB SECTION.
3. DEPTH OF CURB SHALL BE A MINIMUM OF EIGHT INCHES (8") THROUGH THE WHEELCHAIR ACCESS RAMPS.

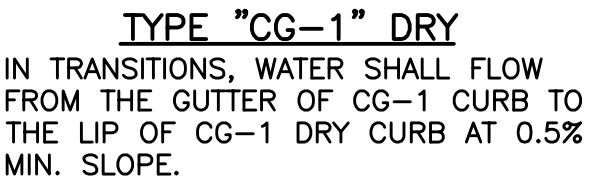

1. TYPE OM4-3 OBJECT MARKERS (SIZE 18"x18") ARE TO BE INSTALLED AT THE TERMINATION POINTS OF SW MONARCH DR., SW KLINE AVE. AND SW SERENA PL.
2. SIGN INSTALLATION AND MATERIALS TO CONFORM TO THE CITY OF LEE'S SUMMIT STANDARD DESIGN CRITERIA.

 **LARKIN**
LAMP RYNEARSON

SUMMIT VIEW FARMS 3RD PLAT
LEFF'S SUMMIT MISSOURI

PAVING, STORM AND SANITARY PLANS

TYPICAL STREET SECTION
AND DETAILS SHEET

LARKIN LAMP RYNEARSON - ENGINEERS
MO Certificate of Authority No. 2013011903

FOR REVIEW

NOT RELEASED FOR CONSTRUCTION

MARK DANIEL MCGHEE JR

SHEET