


# **PRELIMINARY STORMWATER DRAINAGE STUDY FOR LEE'S SUMMIT SENIOR LIVING COMMUNITY**

SE Oldham Parkway  
Lee Summit, Missouri

South Prairie Lee Watershed

## **Prepared for:**

**Lee's Summit Senior Community, LLC  
5051 S. National Avenue, Ste. 4-110  
Springfield, Missouri  
Phone: 417-893-6006**

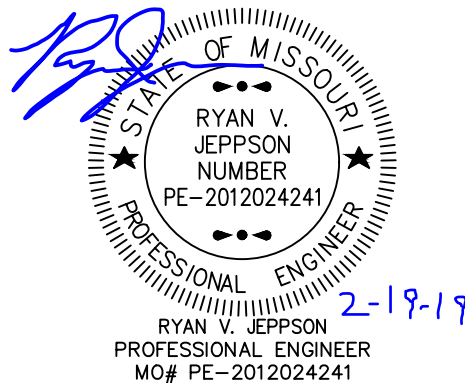

**Original Report Date: January 2019**

**2<sup>nd</sup> Submittal: February 19, 2019**

**Prepared By: Trevor Drake**

**Reviewed By: Ryan Jeppson, P.E.**

**Olsson, Inc.**

**550 St. Louis St.**

**Springfield, MO 65806**

**Missouri Engineering Certificate of Authority #001592**



## TABLE OF CONTENTS

1. General Information .....	1
2. Methodology.....	2
3. Existing Conditions Analysis .....	3
4. Proposed Conditions Analysis .....	4
5. Conclusions & Recommendations .....	7

## LIST OF FIGURES

Figure 1. EXISITING CONDITION DRAINAGE AREA MAP.....	8
Figure 2. PROPOSED CONDITION DRAINAGE AREA MAP .....	9

## LIST OF TABLES

Table 1. SITE SOIL CLASSIFICATION .....	2
Table 2. RAINFALL PRECIPITAION .....	2
Table 3A. EXISTING CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #1.....	3
Table 3B. EXISTING CONDITIONS ANALYSIS SUMMARY POINTOF INTEREST #2.....	4
Table 4A. DEVELOPED CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #1 .....	5
Table 4B. DEVELOPED CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #2 .....	5
Table 5A. DRY DETENTION SUMMARY .....	5
Table 5B. BIODETENTION #1 SUMMARY .....	6
Table 5C. BIODETENTION #2 SUMMARY .....	6
Table 6A. POINT OF INTEREST #1 SUMMARY .....	6
Table 6B. POINT OF INTEREST #2 SUMMARY .....	6

## APPENDICES

<b>APPENDIX A:</b>	Hydrology & Detention Calculations .....	10-82
<b>APPENDIX B:</b>	Water Quality Calculations .....	83-85
<b>APPENDIX C:</b>	APWA \ MARC BMP Level of Service Calculations.....	86-88

## 1. GENERAL INFORMATION

The following stormwater report is for the Lee's Summit Senior Living Community located on the south side of Oldham Parkway approximately 0.4 miles east of Todd George Parkway. The proposed 157,515-sqft facility will be on a 10.45 acre± site that is currently vacant pasture land. In the existing condition the site generally flows from south to the north towards Oldham Parkway. A subtle ridge line splits the site into two sub-drainage areas. The western onsite drainage area discharges to the Oldham Parkway drainage swale at the northwest corner of the site (POI #1). The swale drains to a 5'x5' RCB culvert that flows north underneath the Oldham Parkway, US Route 50, and Blue Parkway to the E. Fork Little Blue River through an unnamed tributary. The eastern onsite drainage area intercepts offsite runoff from approximately 5-acres of agricultural land from the east. Runoff continues to flow north and northeast to an existing 30" RCP culvert (POI #2) that discharges north underneath Oldham Parkway, US Route 50, and Blue Parkway. Storm water continues north to an existing wet detention facility located south of Shenandoah Drive.

Stormwater runoff from the proposed Lee's Summit Senior Living Community will be collected and conveyed through onsite storm sewer, that is routed to proposed bioretention and extended dry detention facilities. These facilities will discharge the water in compliance with the City of Lee Summit's design standards to the existing outfall locations previously discussed.

According the FEMA Flood Map Service Center the site is in an area of minimal flood hazard, Zone X, per map #29095C049G dated 01/20/2017. Zone X is the FEMA flood insurance rate zone that corresponds to "areas of 0.2% annual chance flood; areas of 1% chance flood with average depths less than 1 foot or within drainage areas of less than 1 square mile; and areas protected by levees from 1% annual chance flood." The FEMA FIRMette has been included in Appendix A.

Per the National Wetlands Inventory, the site has no "blue line" streams or wetlands located on site.

Soil data was taken from the USDA Natural Resources Conservation Service – Web Soil Survey of Jackson, County Missouri. The Web soil survey categorize soils on the proposed Lee's Summit Senior Living Community as:

**TABLE 1. SITE SOIL CLASSIFICATION**

Map Unit	Map Unit Name	Percent Slopes	Rating	Area in AOI (acres)	Percent of AOI
10000	<b>Arisburg Silt Loam</b>	1 to 5	C	15.9	85.9%
10082	<b>Arisburg-Urban land complex</b>	1 to 5	C	2.6	14.1%

\*see Web Soil Survey pdf located in Appendix A

## 2. METHODOLOGY

This Preliminary Stormwater Drainage Study has been prepared to evaluate the hydrologic impact generated by the development of the Lee's Summit Senior Living Community. The base data for models prepared for this report have been obtained through topographic surveys, online maps, and aerial imagery.

The following method was used to study and model existing and proposed conditions for stormwater runoff:

- TR-55 Unit Hydrograph Method
  - 2-year, 10-year, 100-year Return Frequency Storms
  - 24-Hour SCS Type II Rainfall Distribution
  - SCS Runoff Curve Numbers Per SCS TR-55
  - SCS TR-55 Methods for determining Time of Concentration and Travel Time

Rainfall depth & duration data were taken from the National Oceanic and Atmospheric Administration (NOAA). A summary of the rainfall data used in the calculations are presented in Table 2.

**TABLE 2. RAINFALL PRECIPITATION**

Annual Exceedance Probability (AEP)	Rainfall Depth (inches)
1-year	3.71
10-year	5.66
100-year	9.25

\*Preliminary Hydraflow reports have been provided in Appendix A

### 3. EXISTING CONDITIONS ANALYSIS

Existing conditions were modeled assuming pasture in good condition. This assumption was used to calculate existing condition flow rates and the level service required for proposed BMP implementation. Discharge from the proposed development will adhere to APWA and Lee's Summit discharge requirements. Refer to Figure 1 for existing condition sub-drainage area locations, runoff curve numbers, and sub-drainage area acreage.

In the existing condition the site generally flows from south to the north towards Oldham Parkway. A subtle ridge line splits the site into two sub-drainage areas. The western onsite drainage area (EX10) discharges to the Oldham Parkway drainage swale at the northwest corner of the site (POI #1). The swale drains to a 5'x5' RCB culvert that flows north underneath the Oldham Parkway, US Route 50, and Blue Parkway to the E. Fork Little Blue River through an unnamed tributary.

The eastern onsite drainage area (EX20) intercepts offsite runoff from approximately 5-acres of pasture land from the east (OFF20). Runoff continues to flow north and northeast to an existing 30" RCP culvert (POI #2) that discharges north underneath Oldham Parkway, US Route 50, and Blue Parkway. Storm water continues north to an existing wet detention facility located south of Shenandoah Drive.

The following table(s), Table 3A & 3B, summarizes the results of the existing conditions analysis:

**TABLE 3A. EXISTING CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #1**

Subarea	Drainage Area (acres)	Curve Number	Tc (Minutes)	Existing Q <sub>2-year</sub> (cfs)	Existing Q <sub>10-year</sub> (cfs)	Existing Q <sub>100-year</sub> (cfs)
EX 10 (POI #1)	<b>3.98</b>	75	26.3	5.46	11.58	23.85

**TABLE 3B. EXISTING CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #2**

<b>Subarea</b>	<b>Drainage Area (acres)</b>	<b>Curve Number</b>	<b>Tc (Minutes)</b>	<b>Existing Q<sub>2-year</sub> (cfs)</b>	<b>Existing Q<sub>10-year</sub> (cfs)</b>	<b>Existing Q<sub>100-year</sub> (cfs)</b>
EX 20	<b>8.27</b>	74	25.1	10.77	23.27	48.62
OFF 20	<b>4.94</b>	75	28.9	6.31	13.39	27.64
PO1 #2				17.04	36.54	75.69

## 4. PROPOSED CONDITIONS ANALYSIS

The proposed conditions section of this analysis assumes completion of the Lee's Summit Senior Living Community. As in the existing conditions, the proposed conditions stormwater runoff model was created and ran for the 2, 10, and 100-year storm events. The complete output for the Hydraflow model has been included in Appendix A. Refer to Figure 2 for developed sub-drainage area locations, runoff curve numbers, and sub-drainage area acreage.

In the developed condition drainage area DEV 10 flows into Bio Detention Facility #1 before flowing into the proposed dry detention basin. Drainage area DEV 30 is conveyed into the dry detention basin through an underground storm sewer system. The detention facility discharges to Point of Interest #1, along with some of the existing flow from SE Oldham Parkway.

Point of Interest #2 accepts flow from the eastern half of the site. Drainage area DEV 20 is routed through Bio Detention Facility #2 before it is discharged to the point of interest. While drainage area DEV 21, which is the proposed public roadway to be constructed on the eastern edge of the site, is collected in an underground storm sewer system and conveyed to Point of Interest #2.

The following tables contain input data and summarize the computed results of the developed conditions analysis:

**TABLE 4A. DEVELOPED CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #1**

Subarea	Drainage Area (acres)	Curve Number	Tc (Minutes)	Developed Q <sub>2-year</sub> (cfs)	Developed Q <sub>10-year</sub> (cfs)	Developed Q <sub>100-year</sub> (cfs)
DEV 10	<b>3.09</b>	92	5	13.97	22.55	38.09
DEV 30	<b>4.17</b>	88	5	16.89	28.62	49.83
ALLOWABLE DISCHARGE	<b>7.26</b>			1.197	3.14	18.68
DA 11 (R/W)	<b>1.06</b>	87	5	4.161	7.144	12.58

**TABLE 4B. DEVELOPED CONDITIONS ANALYSIS SUMMARY POINT OF INTEREST #2**

Subarea	Drainage Area (acres)	Curve Number	Tc (Minutes)	Developed Q <sub>2-year</sub> (cfs)	Developed Q <sub>10-year</sub> (cfs)	Developed Q <sub>100-year</sub> (cfs)
DEV 20	<b>2.53</b>	90	5	10.86	17.94	30.78
ALLOWABLE DISCHARGE	<b>2.53</b>			0.70	4.78	6.01
DA 21 (R/W)	<b>1.78</b>	86	5	6.763	11.77	20.92
OFF 22 (R/W)	<b>0.56</b>	87	5	2.198	3.774	6.646
OFF 20	<b>4.94</b>	75	28.9	6.31	13.39	27.64

**TABLE 5A. DRY DETENTION FACILITY SUMMARY**

Return Frequency	Developed Q <sub>DEV</sub> (cfs)	Detention Volume (cf)	WSE (ft)
2	1.197	33,040	1019.74
10	3.142	51,919	1020.48
100	18.68	67,289	1021.03



**TABLE 5B. BIO DETENTION #1 FACILITY SUMMARY**

Return Frequency	Developed $Q_{DEV}$ (cfs)	Detention Volume (cf)	WSE (ft)
2	2.326	11,278	1021.25
10	8.272	17,339	1021.90
100	10.22	30,074	1022.97

**TABLE 5C. BIO DETENTION #2 FACILITY SUMMARY**

Return Frequency	Developed $Q_{DEV}$ (cfs)	Detention Volume (cf)	WSE (ft)
2	0.702	11,652	1020.51
10	4.782	17,438	1021.11
100	6.010	30,379	1022.23

**TABLE 6A. POINT OF INTEREST #1 SUMMARY**

Return Frequency	Existing $Q_{pre}$ (cfs)	Developed $Q_{DEV}$ (cfs)
2	<b>5.462</b>	5.130
10	<b>11.58</b>	8.266
100	<b>23.85</b>	22.80

**TABLE 6B. POINT OF INTEREST #2 SUMMARY**

Return Frequency	Existing $Q_{pre}$ (cfs)	Developed $Q_{DEV}$ (cfs)
2	<b>17.04</b>	12.73
10	<b>36.54</b>	25.51
100	<b>75.69</b>	49.19

Water quality volume treatment calculations were determined using the 2012 APWA/MARC BMP manual level of surface calculations. The level of surface calculation considered all onsite development. Existing offsite right-of-way and proposed public right-of-way will not be

conveyed through onsite BMPs. Water quality level of service and water quality volume calculations are provided in Appendix B.

## **5. CONCLUSIONS & RECOMMENDATIONS**


The Lee's Summit Senior Living Community has been evaluated in this report to show that the stormwater discharge from the site will remain within the acceptable levels. A new detention basin and two new bioretention basins are to be constructed to handle the increased runoff created from the development.

In conclusion, all peak discharges for the points of interest for all events area at or below the established limits. See Appendix C for City of Lee's Summit BMP Level of Service Worksheet.

It is therefore requested that Lee's Summit, Missouri approve this "Lee's Summit Senior Living Community Preliminary Stormwater Drainage Study." This study will be verified with the final construction documents for the construction with the development.




DWG: F:\2018\1001-1500\018-1450\40-Design\AutoCAD\Preliminary Plans\C\_XHYDR\_81450.dwg  
DATE: Feb 15, 2019 6:39am XREFS: C\_PBASE\_81450 V\_XBOU\_81450 V\_TOPO\_81450 USER: rjeppson

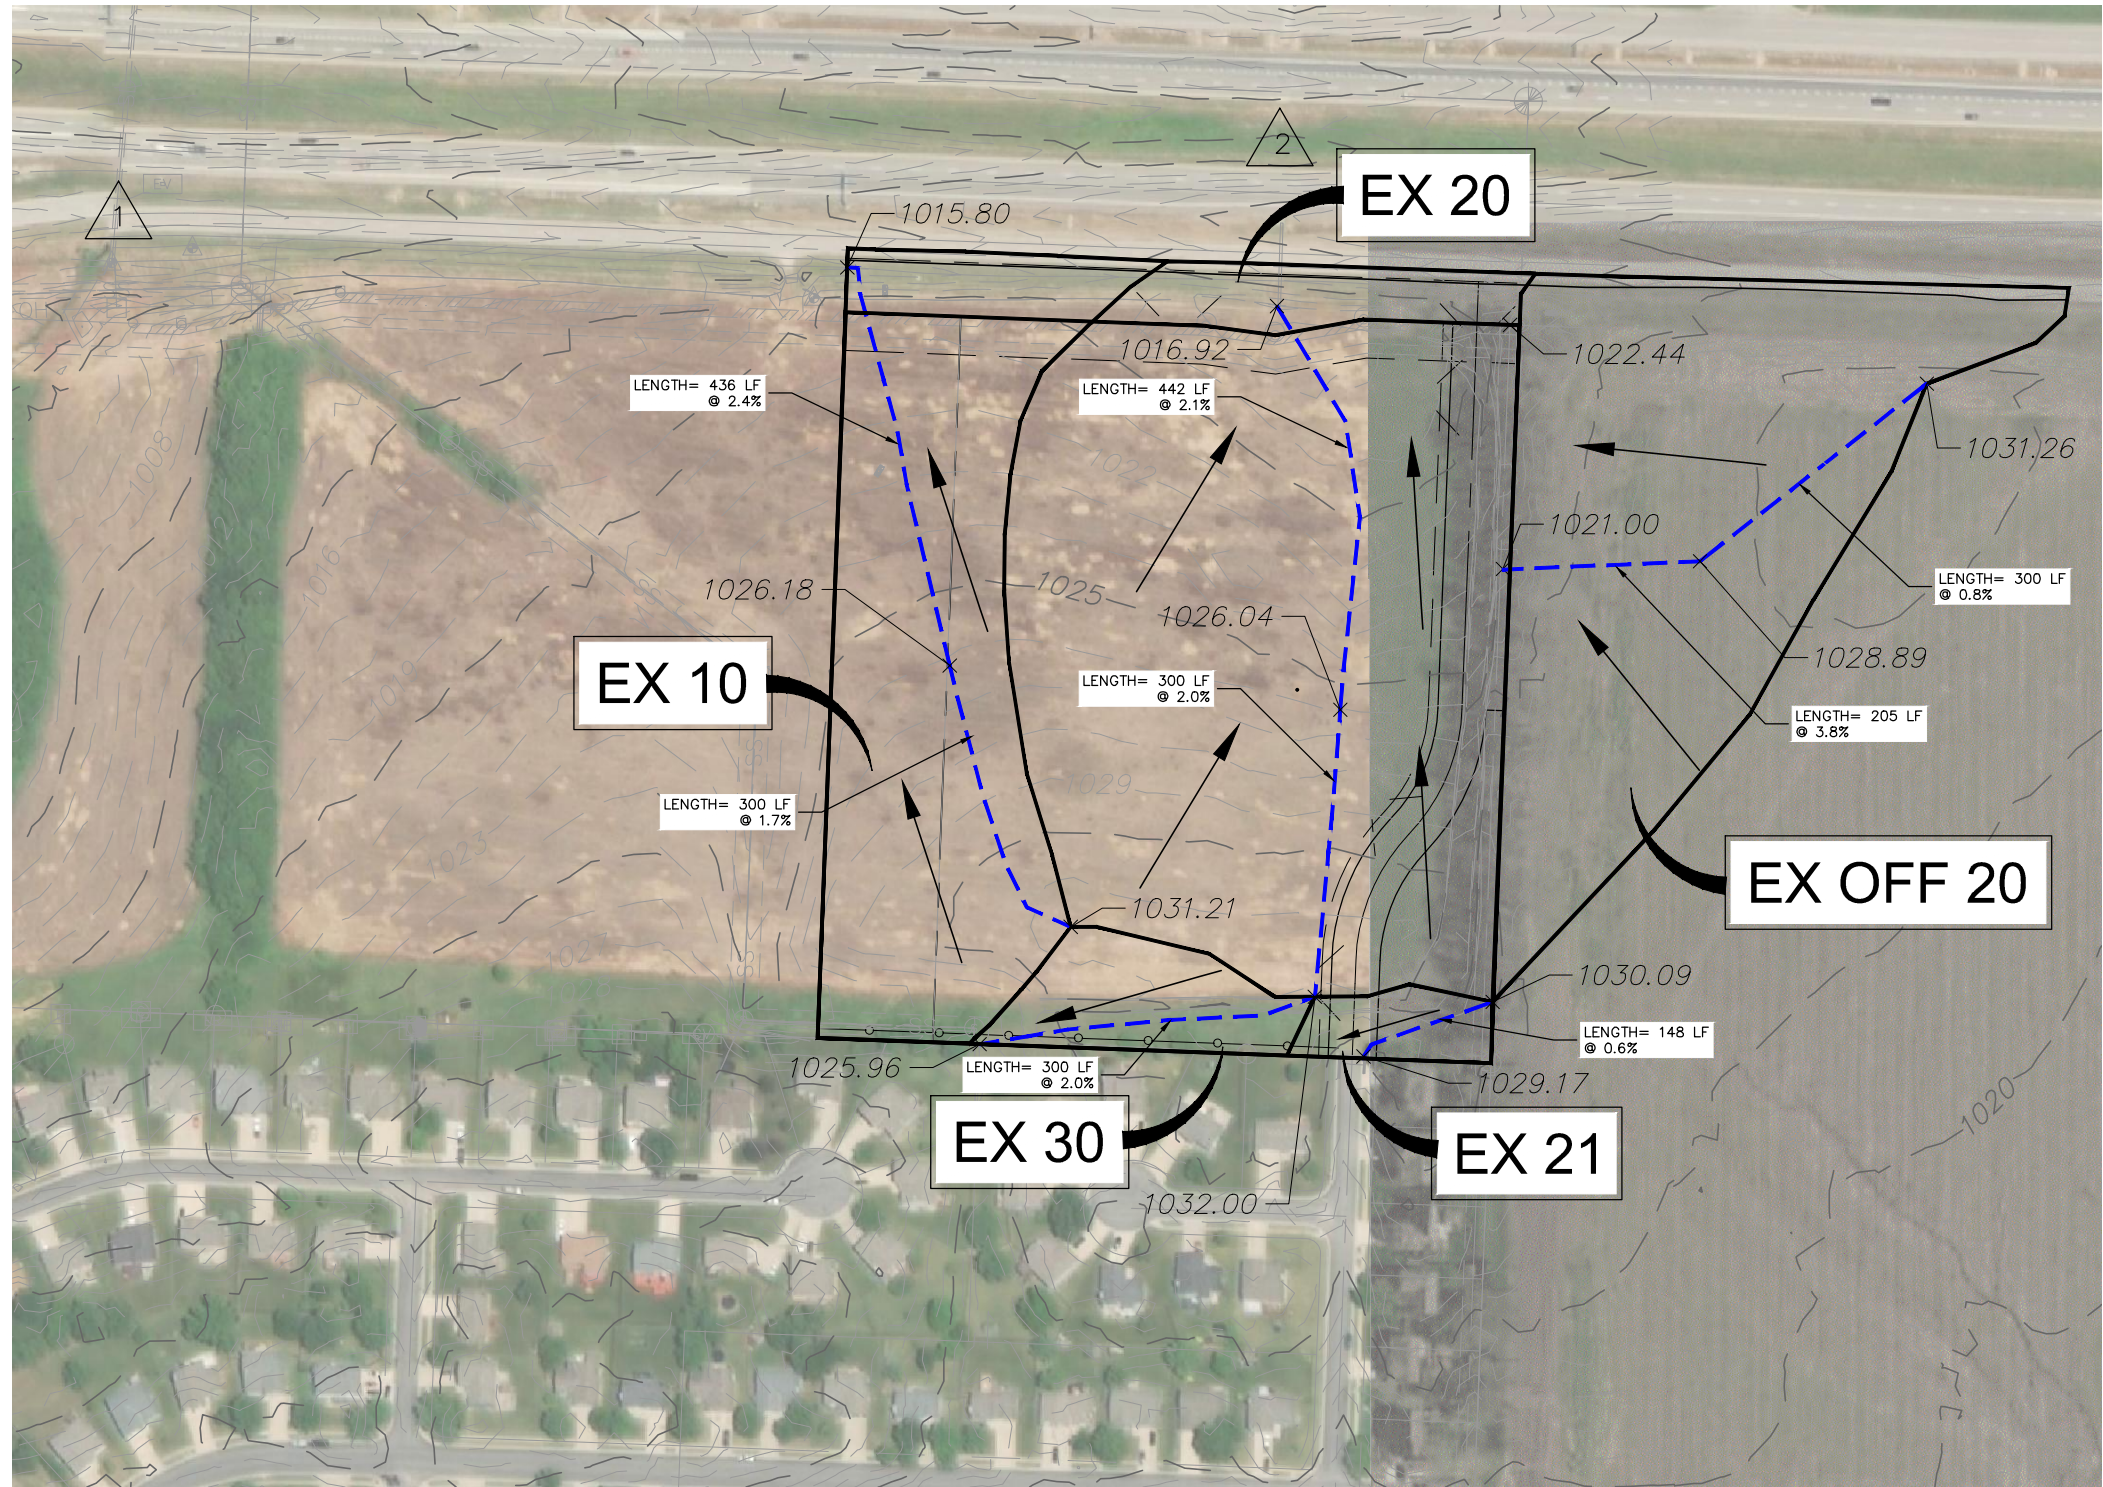

LEGEND

- DRAINAGE AREA BOUNDARY
- TC ROUTE
- FLOW DIRECTION
- POINT OF INTEREST

SUMMARY TABLE			
SUBBASIN	AREA (AC)	CN	TC (MIN.)
EX 10	3.98	75	26.30
EX 20	8.27	74	25.10
EX 21	0.31	74	18.81
EX30	0.69	74	19.75
EX OFF 20	4.94	75	28.90

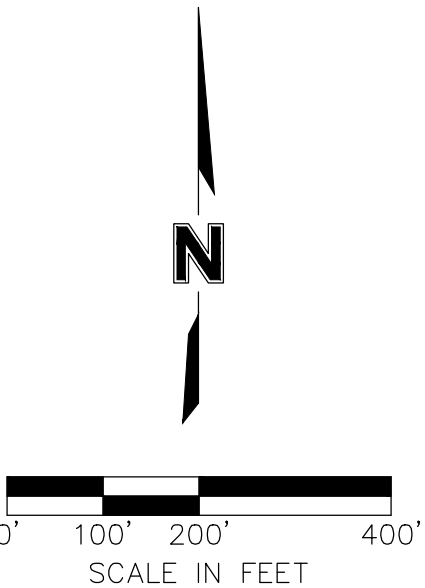

PROJECT: 018-1450
DRAWN BY: TDD
DATE: 02/19/2019

EXISTING CONDITIONS DRAINAGE AREA MAP


**olsson**  
550 St. Louis Street  
Springfield, MO 65806  
TEL 417.890.8802  
FAX 401.890.8805

FIGURE  
F-1




LEGEND

- DRAINAGE AREA BOUNDARY
- TC ROUTE
- FLOW DIRECTION
- POINT OF INTEREST

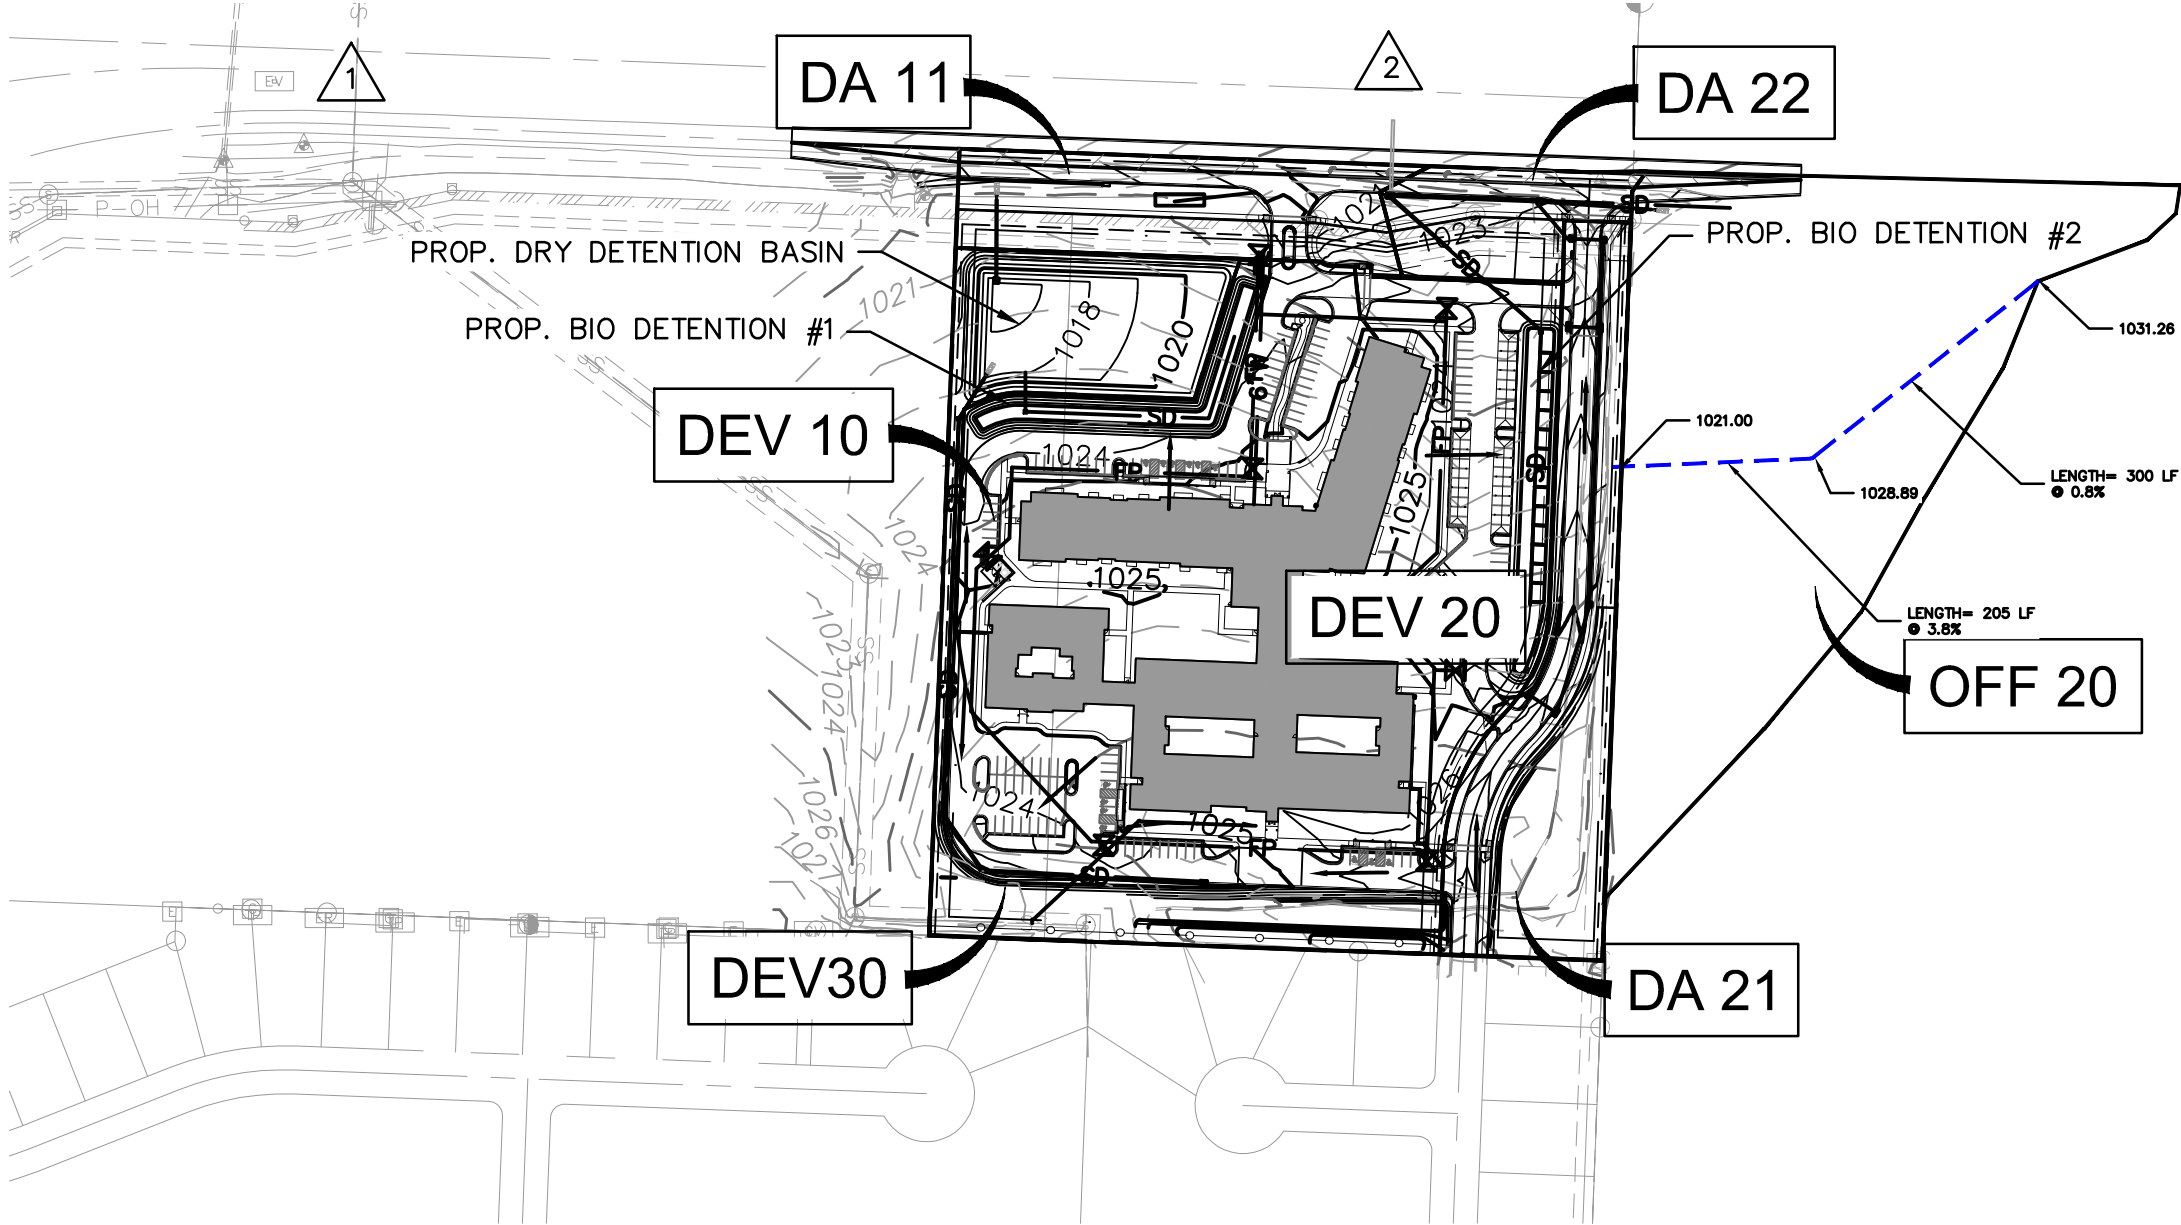

SUMMARY TABLE			
SUBBASIN	AREA (AC)	CN	TC (MIN.)
DEV 10	3.09	92	5.00
DA 11	1.06	87	5.00
DEV 30	4.17	88	5.00
DEV 20	2.52	90	5.00
DA 21	1.78	86	5.00
OFF DA 22	0.56	87	5.00
OFF 20	4.94	75	28.90

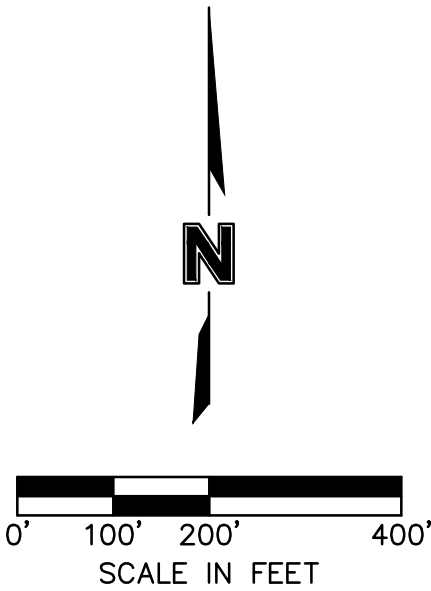

## **APPENDIX A**

### Hydrology & Detention Calculations

<b>Watershed Model Schematic.....</b>	<b>1</b>
---------------------------------------	----------

<b>Hydrograph Return Period Recap.....</b>	<b>2</b>
--	----------

## 2 - Year

<b>Summary Report.....</b>	<b>3</b>
----------------------------	----------

<b>Hydrograph Reports.....</b>	<b>4</b>
--------------------------------	----------

Hydrograph No. 1, SCS Runoff, EX 20.....	4
--	---

TR-55 Tc Worksheet.....	5
-------------------------	---

Hydrograph No. 2, SCS Runoff, EX 10 (POI 1).....	6
--	---

TR-55 Tc Worksheet.....	7
-------------------------	---

Hydrograph No. 3, SCS Runoff, OFF 20.....	8
---	---

TR-55 Tc Worksheet.....	9
-------------------------	---

Hydrograph No. 4, Combine, EX POI 2 (AT CULVERT).....	10
---	----

Hydrograph No. 5, SCS Runoff, DEV 10.....	11
---	----

Hydrograph No. 6, SCS Runoff, DEV 30.....	12
---	----

Hydrograph No. 7, Reservoir, BIO 1.....	13
---	----

Pond Report - BIORETENTION 1.....	14
-----------------------------------	----

Hydrograph No. 8, Combine, COMBINE.....	15
---	----

Hydrograph No. 9, Reservoir, DETENTION POND 1.....	16
--	----

Pond Report - DRY DETENTION 1.....	17
------------------------------------	----

Hydrograph No. 10, SCS Runoff, DA 11 (US ROUTE 50).....	18
---	----

Hydrograph No. 11, Combine, DEV POI 1.....	19
--	----

Hydrograph No. 12, SCS Runoff, DEV 20.....	20
--	----

Hydrograph No. 13, Reservoir, BIORETENTION 2.....	21
---	----

Pond Report - BIORETENTION 2.....	22
-----------------------------------	----

Hydrograph No. 14, SCS Runoff, DA 21 (PR. PUBLIC ACCESS ROAD).....	23
--	----

Hydrograph No. 15, SCS Runoff, OFF 20.....	24
--	----

Hydrograph No. 16, SCS Runoff, OFF DA 22 (US ROUTE 50).....	25
---	----

Hydrograph No. 17, Combine, DEV POI 2 (AT CULVERT).....	26
---	----

## 10 - Year

<b>Summary Report.....</b>	<b>27</b>
----------------------------	-----------

<b>Hydrograph Reports.....</b>	<b>28</b>
--------------------------------	-----------

Hydrograph No. 1, SCS Runoff, EX 20.....	28
--	----

Hydrograph No. 2, SCS Runoff, EX 10 (POI 1).....	29
--	----

Hydrograph No. 3, SCS Runoff, OFF 20.....	30
---	----

Hydrograph No. 4, Combine, EX POI 2 (AT CULVERT).....	31
---	----

Hydrograph No. 5, SCS Runoff, DEV 10.....	32
---	----

Hydrograph No. 6, SCS Runoff, DEV 30.....	33
---	----

Hydrograph No. 7, Reservoir, BIO 1.....	34
---	----

Hydrograph No. 8, Combine, COMBINE.....	35
---	----

Hydrograph No. 9, Reservoir, DETENTION POND 1.....	36
--	----

Hydrograph No. 10, SCS Runoff, DA 11 (US ROUTE 50).....	37
---	----

Hydrograph No. 11, Combine, DEV POI 1.....	38
--	----

Hydrograph No. 12, SCS Runoff, DEV 20.....	39
--	----

Hydrograph No. 13, Reservoir, BIORETENTION 2.....	40
---	----

Hydrograph No. 14, SCS Runoff, DA 21 (PR. PUBLIC ACCESS ROAD).....	41
--	----

Hydrograph No. 15, SCS Runoff, OFF 20.....	42
Hydrograph No. 16, SCS Runoff, OFF DA 22 (US ROUTE 50).....	43
Hydrograph No. 17, Combine, DEV POI 2 (AT CULVERT).....	44

## 100 - Year


<b>Summary Report.....</b>	<b>45</b>
----------------------------	-----------

<b>Hydrograph Reports.....</b>	<b>46</b>
--------------------------------	-----------

Hydrograph No. 1, SCS Runoff, EX 20.....	46
Hydrograph No. 2, SCS Runoff, EX 10 (POI 1).....	47
Hydrograph No. 3, SCS Runoff, OFF 20.....	48
Hydrograph No. 4, Combine, EX POI 2 (AT CULVERT).....	49
Hydrograph No. 5, SCS Runoff, DEV 10.....	50
Hydrograph No. 6, SCS Runoff, DEV 30.....	51
Hydrograph No. 7, Reservoir, BIO 1.....	52
Hydrograph No. 8, Combine, COMBINE.....	53
Hydrograph No. 9, Reservoir, DETENTION POND 1.....	54
Hydrograph No. 10, SCS Runoff, DA 11 (US ROUTE 50).....	55
Hydrograph No. 11, Combine, DEV POI 1.....	56
Hydrograph No. 12, SCS Runoff, DEV 20.....	57
Hydrograph No. 13, Reservoir, BIORETENTION 2.....	58
Hydrograph No. 14, SCS Runoff, DA 21 (PR. PUBLIC ACCESS ROAD).....	59
Hydrograph No. 15, SCS Runoff, OFF 20.....	60
Hydrograph No. 16, SCS Runoff, OFF DA 22 (US ROUTE 50).....	61
Hydrograph No. 17, Combine, DEV POI 2 (AT CULVERT).....	62

# Watershed Model Schematic

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

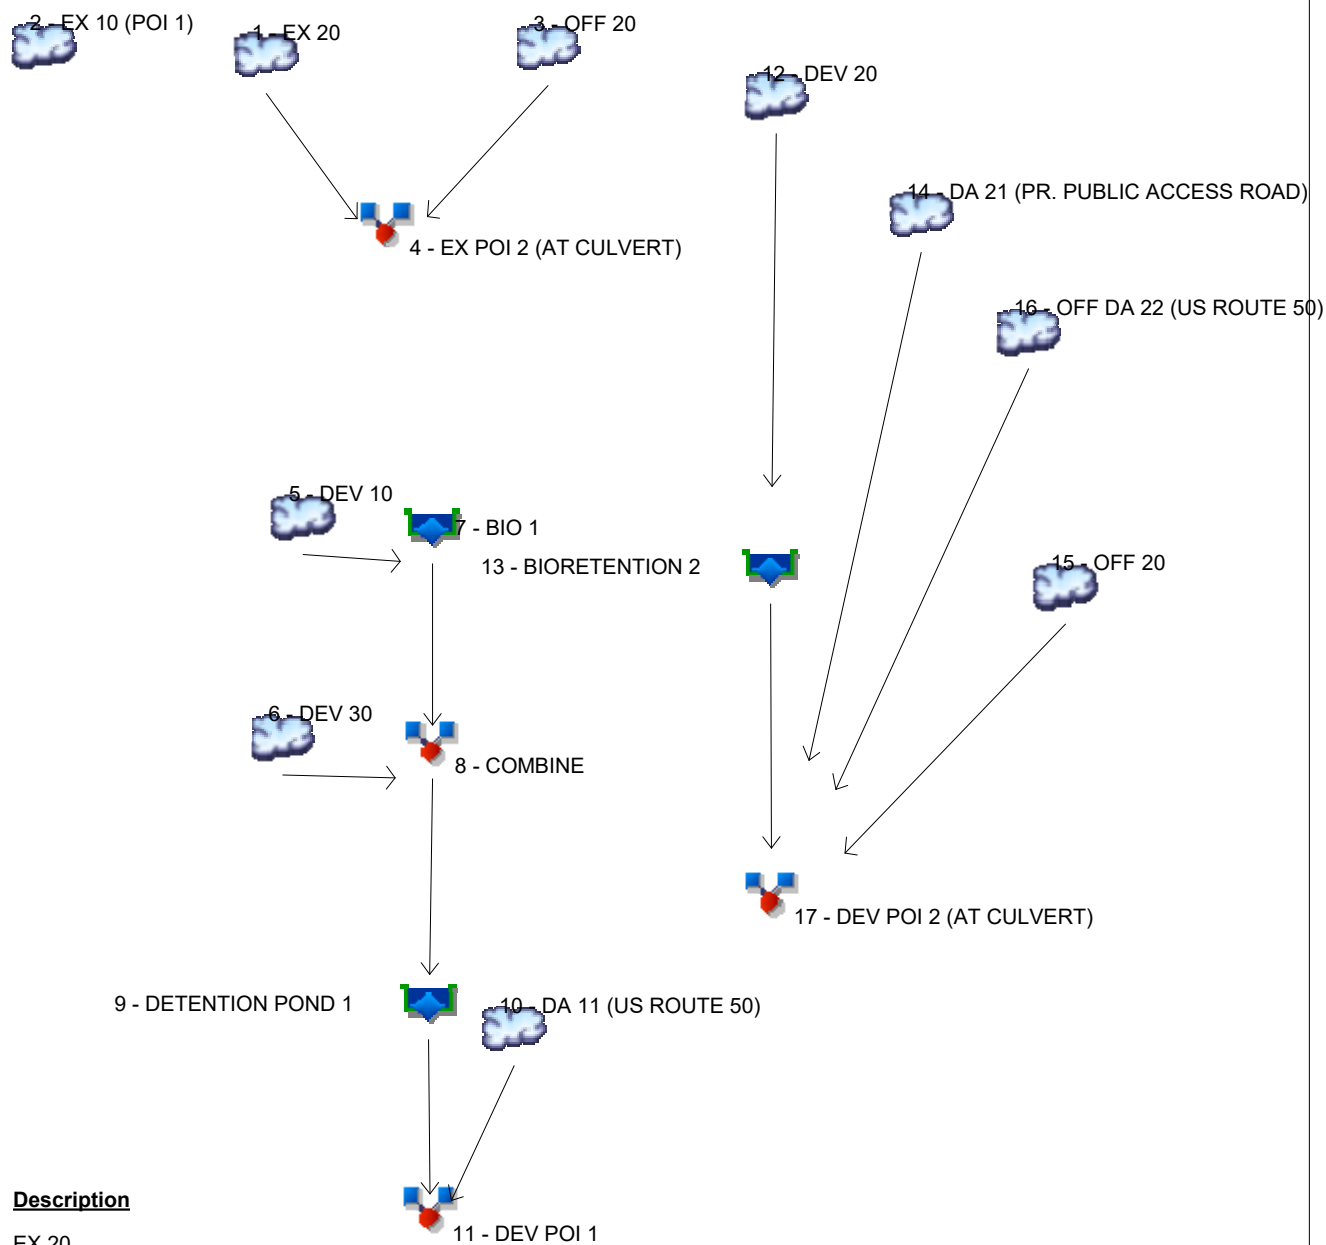

## Legend

Hyd.	Origin	Description
1	SCS Runoff	EX 20
2	SCS Runoff	EX 10 (POI 1)
3	SCS Runoff	OFF 20
4	Combine	EX POI 2 (AT CULVERT)
5	SCS Runoff	DEV 10
6	SCS Runoff	DEV 30
7	Reservoir	BIO 1
8	Combine	COMBINE
9	Reservoir	DETENTION POND 1
10	SCS Runoff	DA 11 (US ROUTE 50)
11	Combine	DEV POI 1
12	SCS Runoff	DEV 20
13	Reservoir	BIORETENTION 2
14	SCS Runoff	DA 21 (PR. PUBLIC ACCESS ROAD)
15	SCS Runoff	OFF 20
16	SCS Runoff	OFF DA 22 (US ROUTE 50)
17	Combine	DEV POI 2 (AT CULVERT)



# Hydrograph Return Period Recap

Hydranow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Inflow hyd(s)	Peak Outflow (cfs)								Hydrograph Description
			1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	
1	SCS Runoff	-----	-----	10.77	-----	-----	23.27	-----	-----	48.62	EX 20
2	SCS Runoff	-----	-----	5.462	-----	-----	11.58	-----	-----	23.85	EX 10 (POI 1)
3	SCS Runoff	-----	-----	6.315	-----	-----	13.39	-----	-----	27.64	OFF 20
4	Combine	1, 3	-----	17.04	-----	-----	36.54	-----	-----	75.69	EX POI 2 (AT CULVERT)
5	SCS Runoff	-----	-----	13.97	-----	-----	22.55	-----	-----	38.09	DEV 10
6	SCS Runoff	-----	-----	16.89	-----	-----	28.62	-----	-----	49.93	DEV 30
7	Reservoir	5	-----	2.326	-----	-----	8.272	-----	-----	10.22	BIO 1
8	Combine	6, 7	-----	18.92	-----	-----	31.96	-----	-----	59.12	COMBINE
9	Reservoir	8	-----	1.197	-----	-----	3.142	-----	-----	18.68	DETENTION POND 1
10	SCS Runoff	-----	-----	4.161	-----	-----	7.144	-----	-----	12.58	DA 11 (US ROUTE 50)
11	Combine	9, 10	-----	5.130	-----	-----	8.266	-----	-----	22.80	DEV POI 1
12	SCS Runoff	-----	-----	10.86	-----	-----	17.94	-----	-----	30.78	DEV 20
13	Reservoir	12	-----	0.702	-----	-----	4.782	-----	-----	6.010	BIORETENTION 2
14	SCS Runoff	-----	-----	6.763	-----	-----	11.77	-----	-----	20.92	DA 21 (PR. PUBLIC ACCESS ROAD)
15	SCS Runoff	-----	-----	6.315	-----	-----	13.39	-----	-----	27.64	OFF 20
16	SCS Runoff	-----	-----	2.198	-----	-----	3.774	-----	-----	6.646	OFF DA 22 (US ROUTE 50)
17	Combine	13, 14, 15, 16	-----	12.73	-----	-----	25.51	-----	-----	49.19	DEV POI 2 (AT CULVERT)
Proj. file: 81450_24-HR ANALYSIS.gpw										Friday, 02 / 15 / 2019	
										Page 14	

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	10.77	2	730	40,985	-----	-----	-----	EX 20
2	SCS Runoff	5.462	2	730	20,656	-----	-----	-----	EX 10 (POI 1)
3	SCS Runoff	6.315	2	732	26,046	-----	-----	-----	OFF 20
4	Combine	17.04	2	730	67,031	1, 3	-----	-----	EX POI 2 (AT CULVERT)
5	SCS Runoff	13.97	2	716	29,845	-----	-----	-----	DEV 10
6	SCS Runoff	16.89	2	716	34,924	-----	-----	-----	DEV 30
7	Reservoir	2.326	2	726	29,832	5	1021.25	11,278	BIO 1
8	Combine	18.92	2	716	64,756	6, 7	-----	-----	COMBINE
9	Reservoir	1.197	2	868	64,753	8	1019.74	33,040	DETENTION POND 1
10	SCS Runoff	4.161	2	716	8,557	-----	-----	-----	DA 11 (US ROUTE 50)
11	Combine	5.130	2	716	73,310	9, 10	-----	-----	DEV POI 1
12	SCS Runoff	10.86	2	716	22,774	-----	-----	-----	DEV 20
13	Reservoir	0.702	2	754	22,758	12	1020.51	11,652	BIORETENTION 2
14	SCS Runoff	6.763	2	716	13,843	-----	-----	-----	DA 21 (PR. PUBLIC ACCESS ROAD)
15	SCS Runoff	6.315	2	732	26,046	-----	-----	-----	OFF 20
16	SCS Runoff	2.198	2	716	4,521	-----	-----	-----	OFF DA 22 (US ROUTE 50)
17	Combine	12.73	2	718	67,167	13, 14, 15, 16	-----	-----	DEV POI 2 (AT CULVERT)
81450_24-HR ANALYSIS.gpw					Return Period: 2 Year			Friday, 02 / 15 / 2019	
								Page 15	


# Hydrograph Report

## Hyd. No. 1

EX 20

Hydrograph type	=	SCS Runoff	Peak discharge	=	10.77 cfs
Storm frequency	=	2 yrs	Time to peak	=	12.17 hrs
Time interval	=	2 min	Hyd. volume	=	40,985 cuft
Drainage area	=	8.270 ac	Curve number	=	74*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	25.10 min
Total precip.	=	3.71 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) = [(0.110 x 98) + (8.160 x 74)] / 8.270

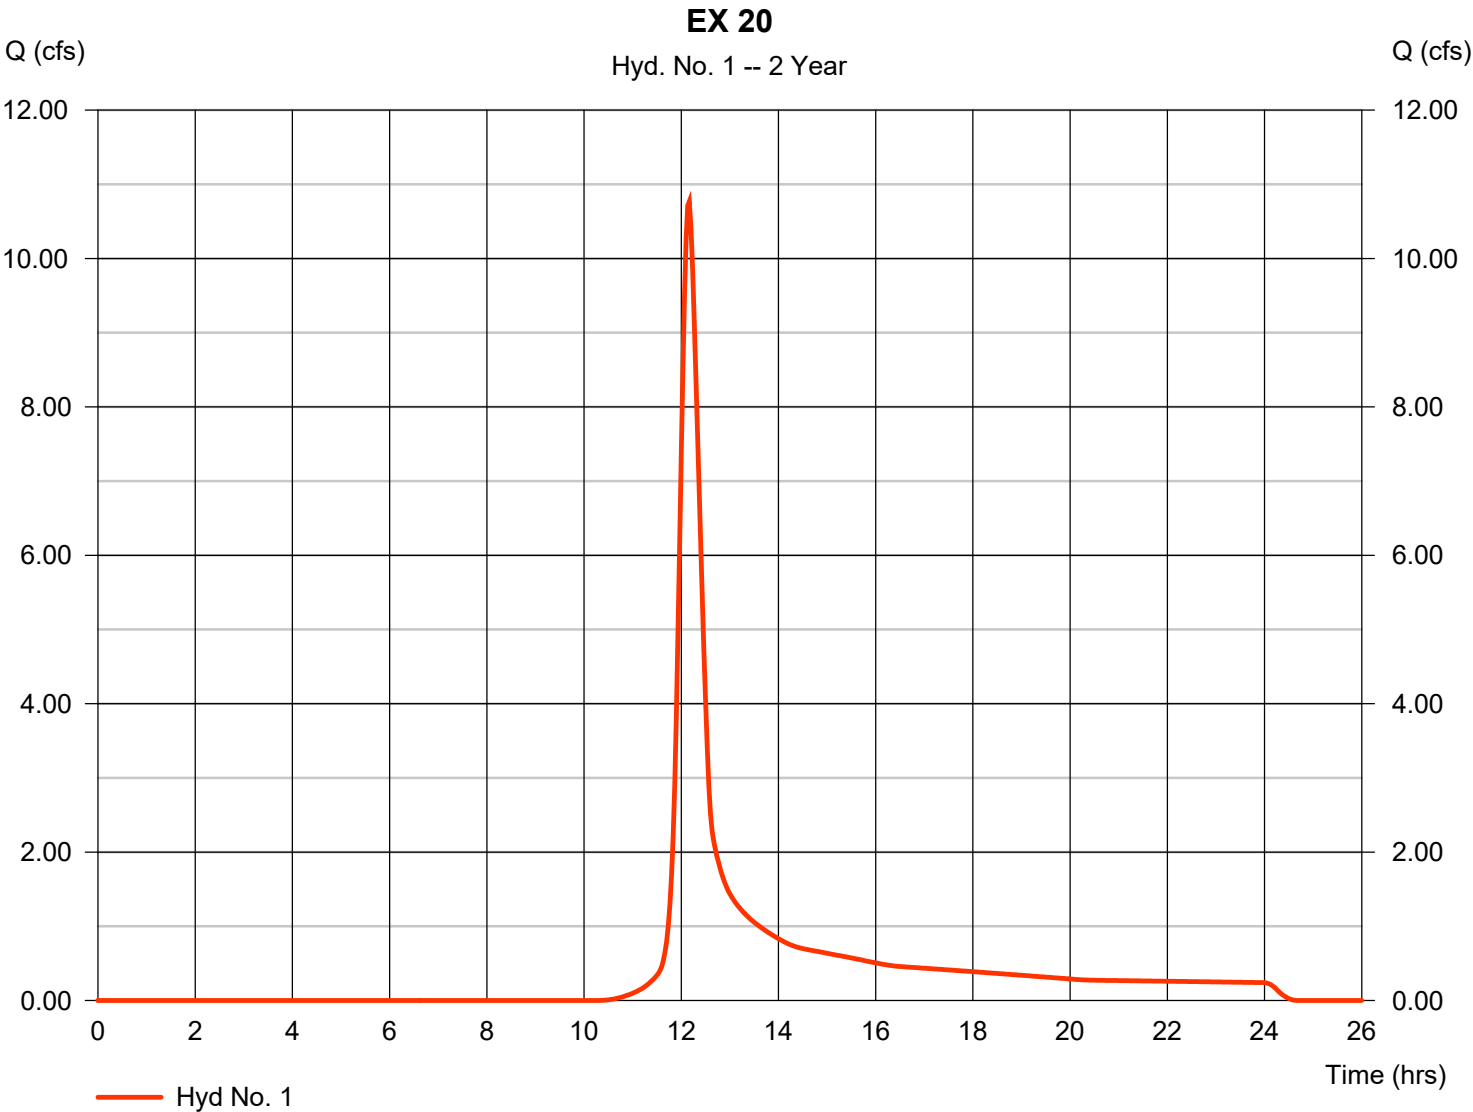

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

## Hyd. No. 1

EX 20

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.150	0.011	0.011	
Flow length (ft)	= 300.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 3.71	0.00	0.00	
Land slope (%)	= 2.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 21.91</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 21.91</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 440.00	0.00	0.00	
Watercourse slope (%)	= 2.00	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=2.28	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 3.21</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 3.21</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	(0)0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>25.10 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 2

EX 10 (POI 1)

Hydrograph type	= SCS Runoff	Peak discharge	= 5.462 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 20,656 cuft
Drainage area	= 3.980 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.30 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.090 \times 98) + (3.890 \times 74)] / 3.980$

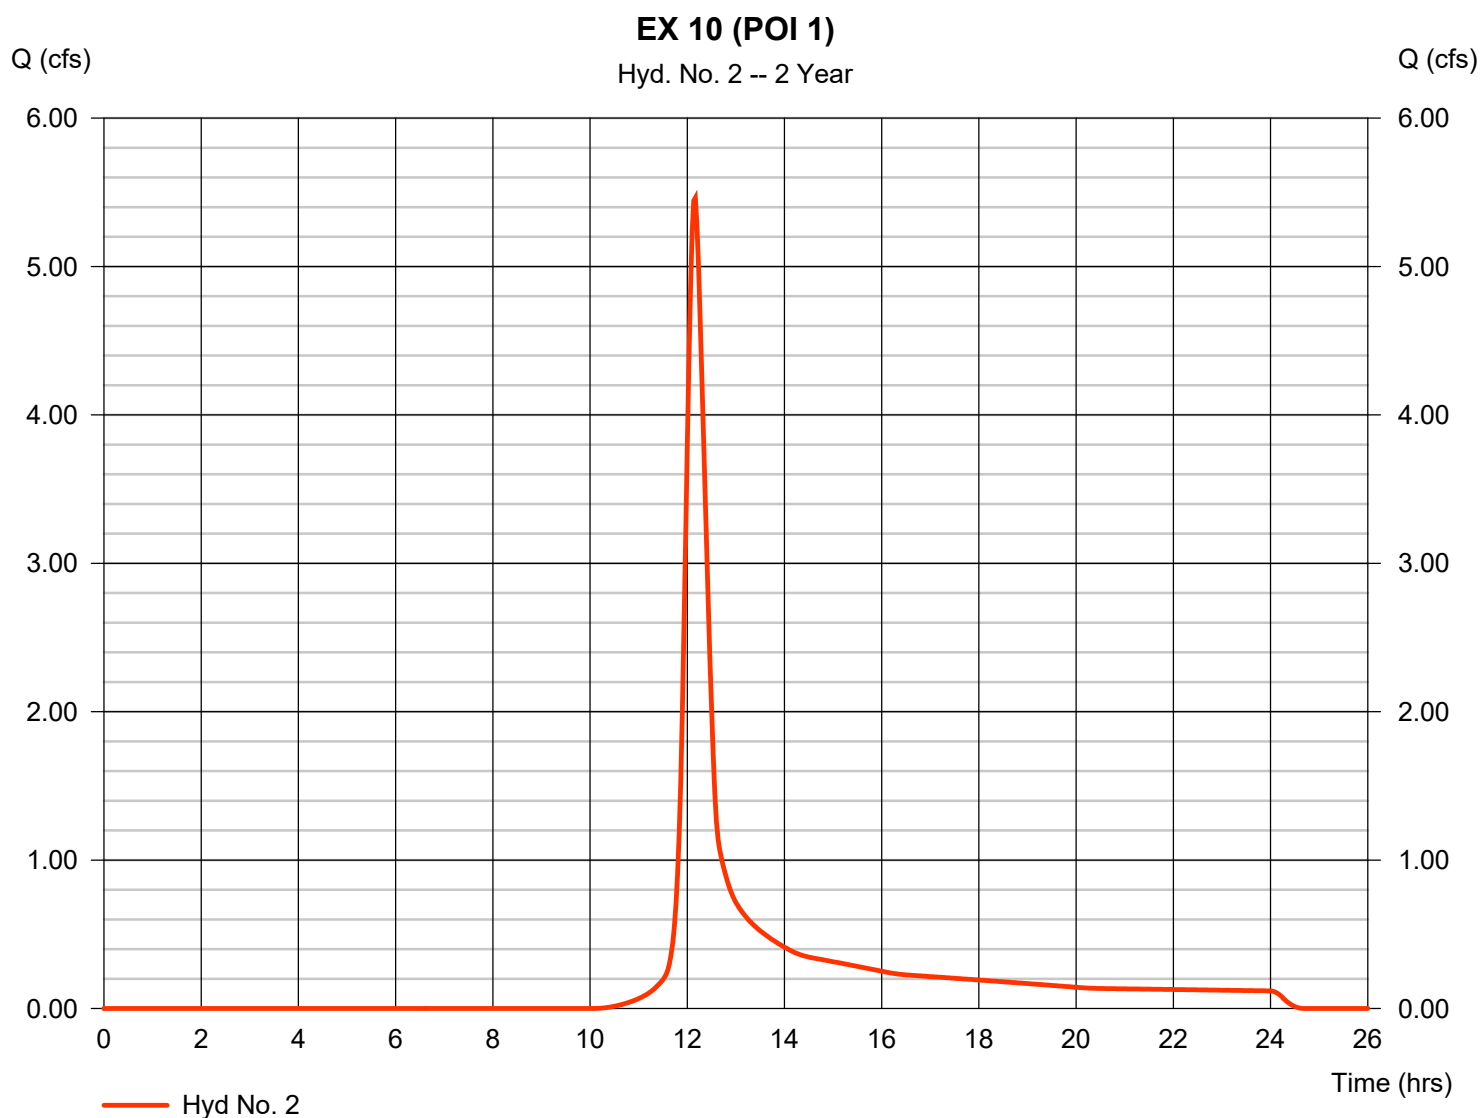

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

## Hyd. No. 2

EX 10 (POI 1)

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.150	0.011	0.011	
Flow length (ft)	= 300.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 3.71	0.00	0.00	
Land slope (%)	= 1.70	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 23.39</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 23.39</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 435.00	0.00	0.00	
Watercourse slope (%)	= 2.40	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=2.50	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 2.90</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 2.90</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	(0)0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>26.30 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 3


OFF 20

Hydrograph type	= SCS Runoff	Peak discharge	= 6.315 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.20 hrs
Time interval	= 2 min	Hyd. volume	= 26,046 cuft
Drainage area	= 4.940 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 28.90 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.140 \times 98) + (4.800 \times 74)] / 4.940$

### OFF 20

Hyd. No. 3 -- 2 Year

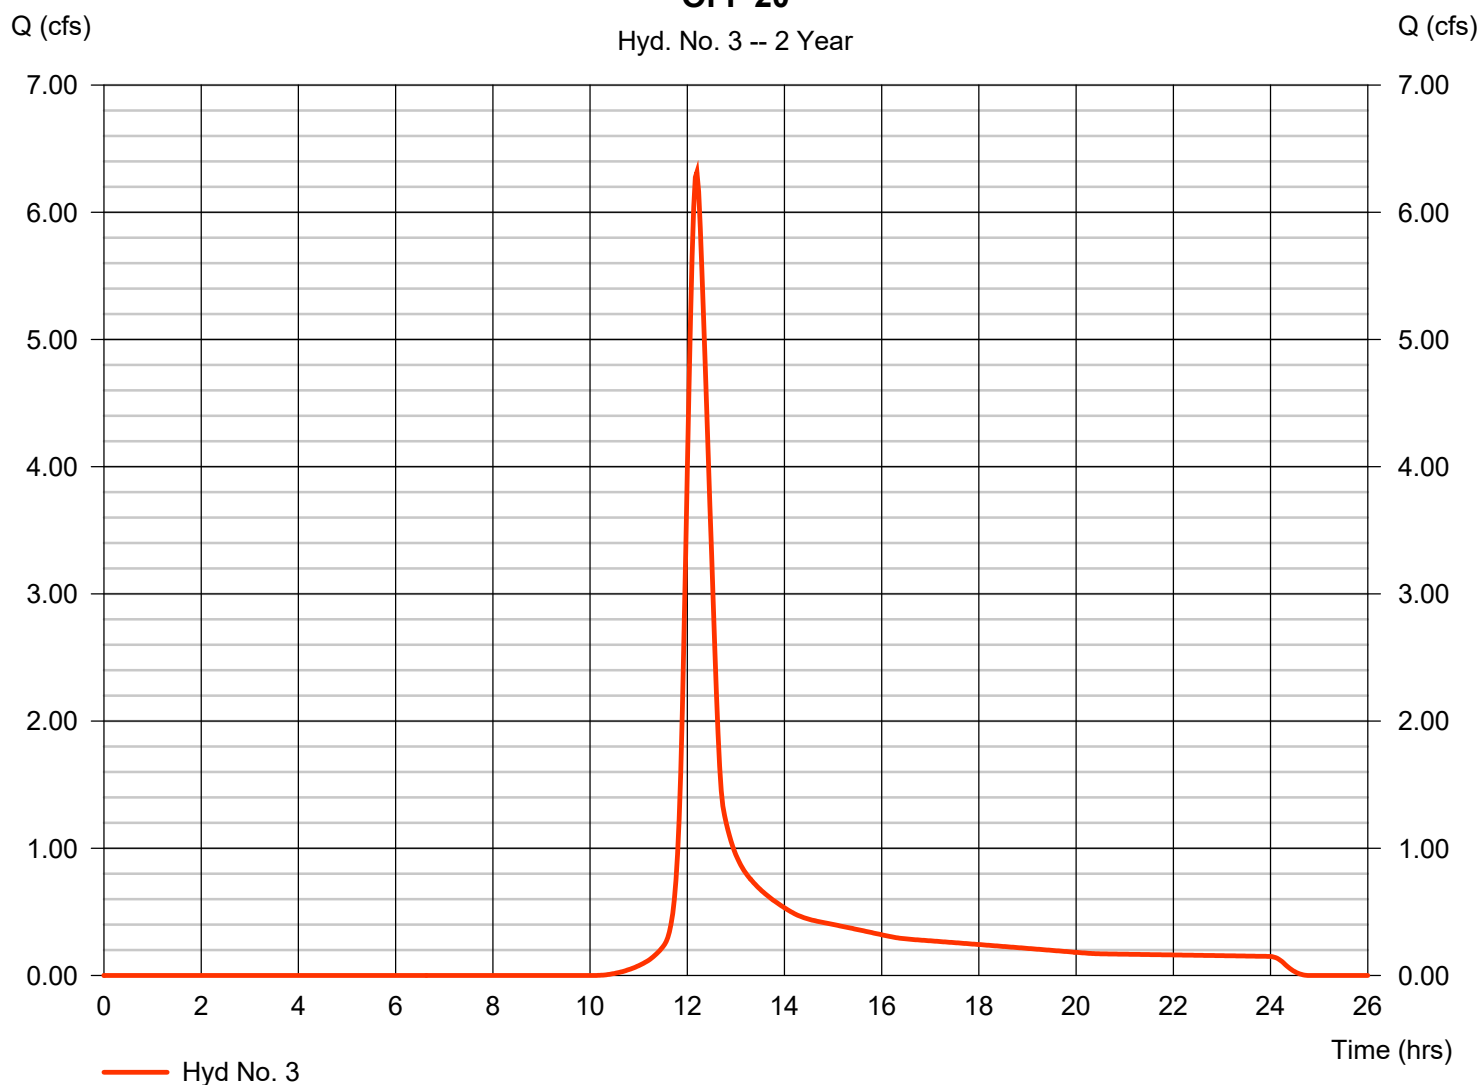

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

## Hyd. No. 3

OFF 20

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.150	0.011	0.011	
Flow length (ft)	= 300.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 3.71	0.00	0.00	
Land slope (%)	= 1.10	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 27.83</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 27.83</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 205.00	0.00	0.00	
Watercourse slope (%)	= 3.80	0.00	0.00	
Surface description	= Unpaved	Paved	Paved	
Average velocity (ft/s)	=3.15	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 1.09</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 1.09</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	(0)0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>28.90 min</b>



# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 4

EX POI 2 (AT CULVERT)

Hydrograph type	= Combine	Peak discharge	= 17.04 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 67,031 cuft
Inflow hyds.	= 1, 3	Contrib. drain. area	= 13.210 ac

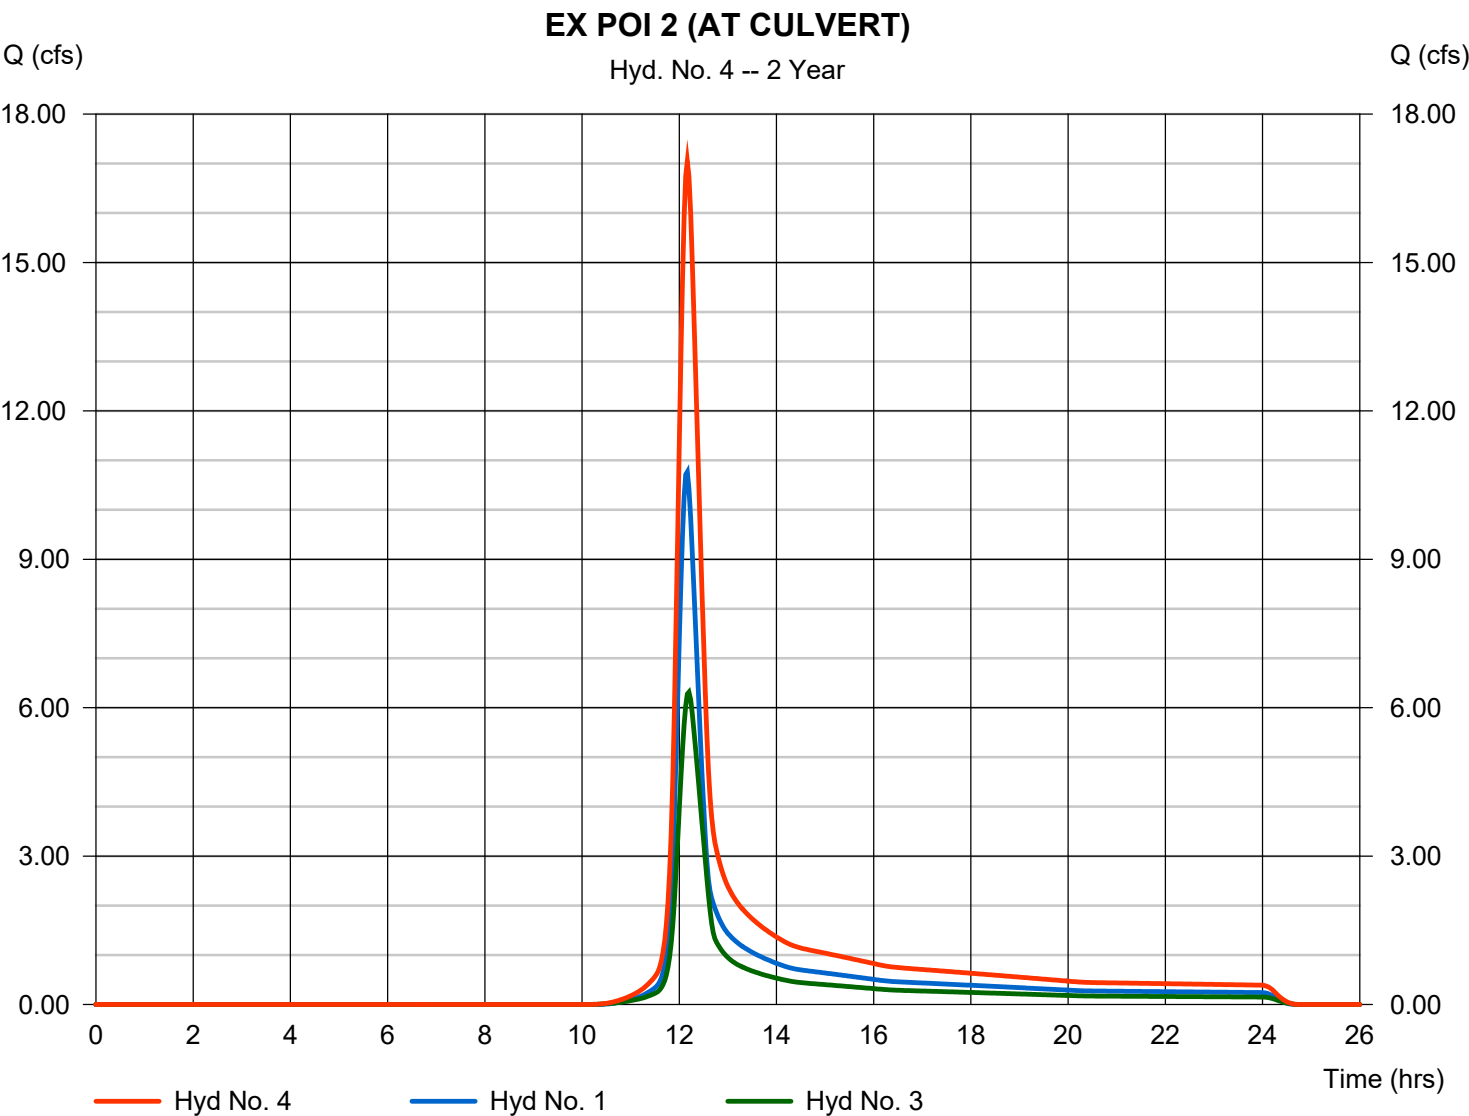

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 5

DEV 10

Hydrograph type	= SCS Runoff	Peak discharge	= 13.97 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 29,845 cuft
Drainage area	= 3.090 ac	Curve number	= 92*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(2.050 \times 98) + (1.040 \times 80)] / 3.090$

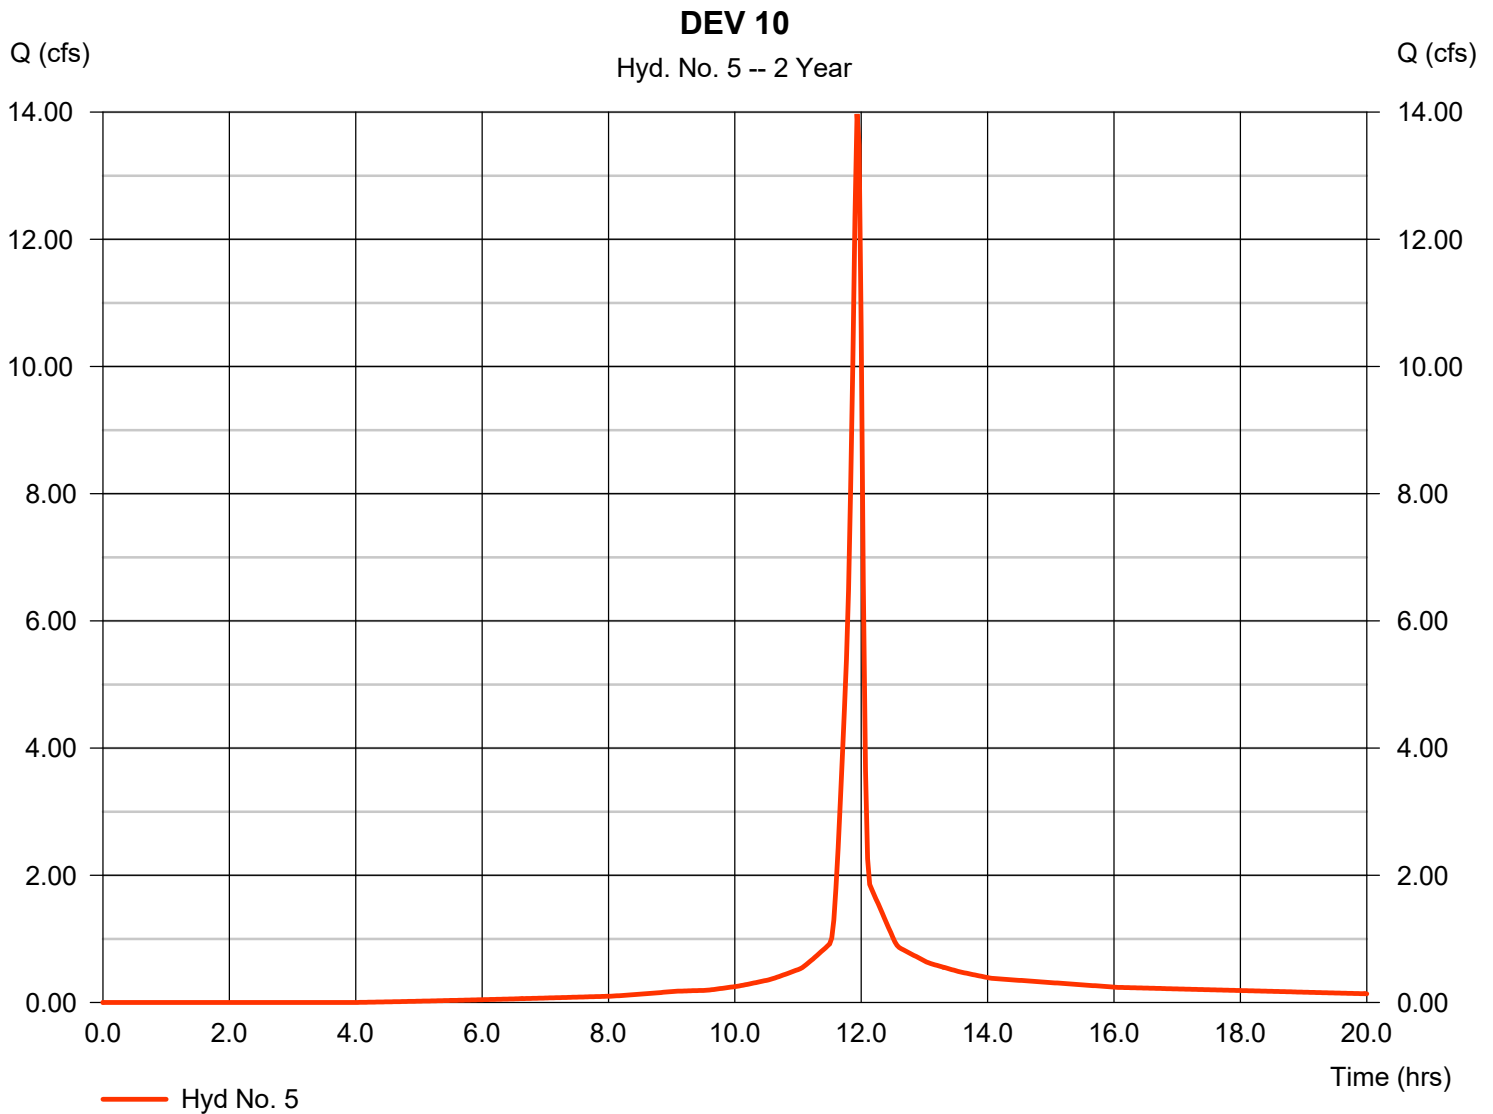

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 6

DEV 30


Hydrograph type = SCS Runoff  
 Storm frequency = 2 yrs  
 Time interval = 2 min  
 Drainage area = 4.170 ac  
 Basin Slope = 0.0 %  
 Tc method = User  
 Total precip. = 3.71 in  
 Storm duration = 24 hrs

Peak discharge = 16.89 cfs  
 Time to peak = 11.93 hrs  
 Hyd. volume = 34,924 cuft  
 Curve number = 88\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 5.00 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(1.850 \times 98) + (1.510 \times 80) + (0.810 \times 80)] / 4.170$

### DEV 30

Hyd. No. 6 -- 2 Year

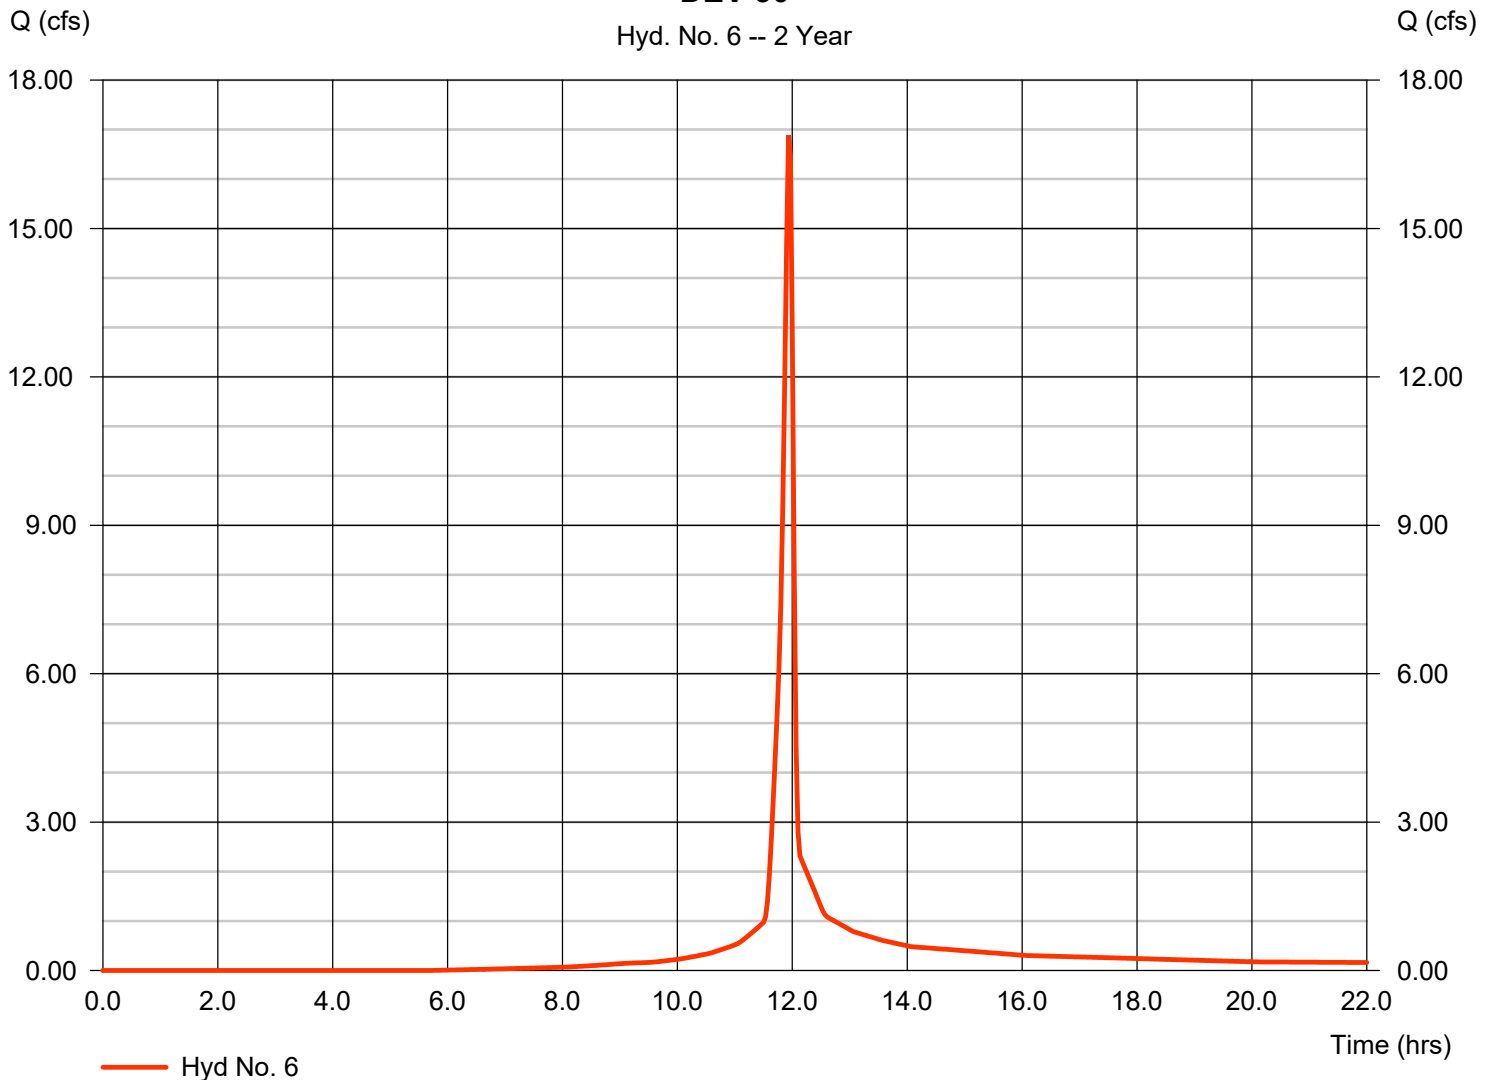

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 7

BIO 1

Hydrograph type	= Reservoir	Peak discharge	= 2.326 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 29,832 cuft
Inflow hyd. No.	= 5 - DEV 10	Max. Elevation	= 1021.25 ft
Reservoir name	= BIORETENTION 1	Max. Storage	= 11,278 cuft

Storage Indication method used.

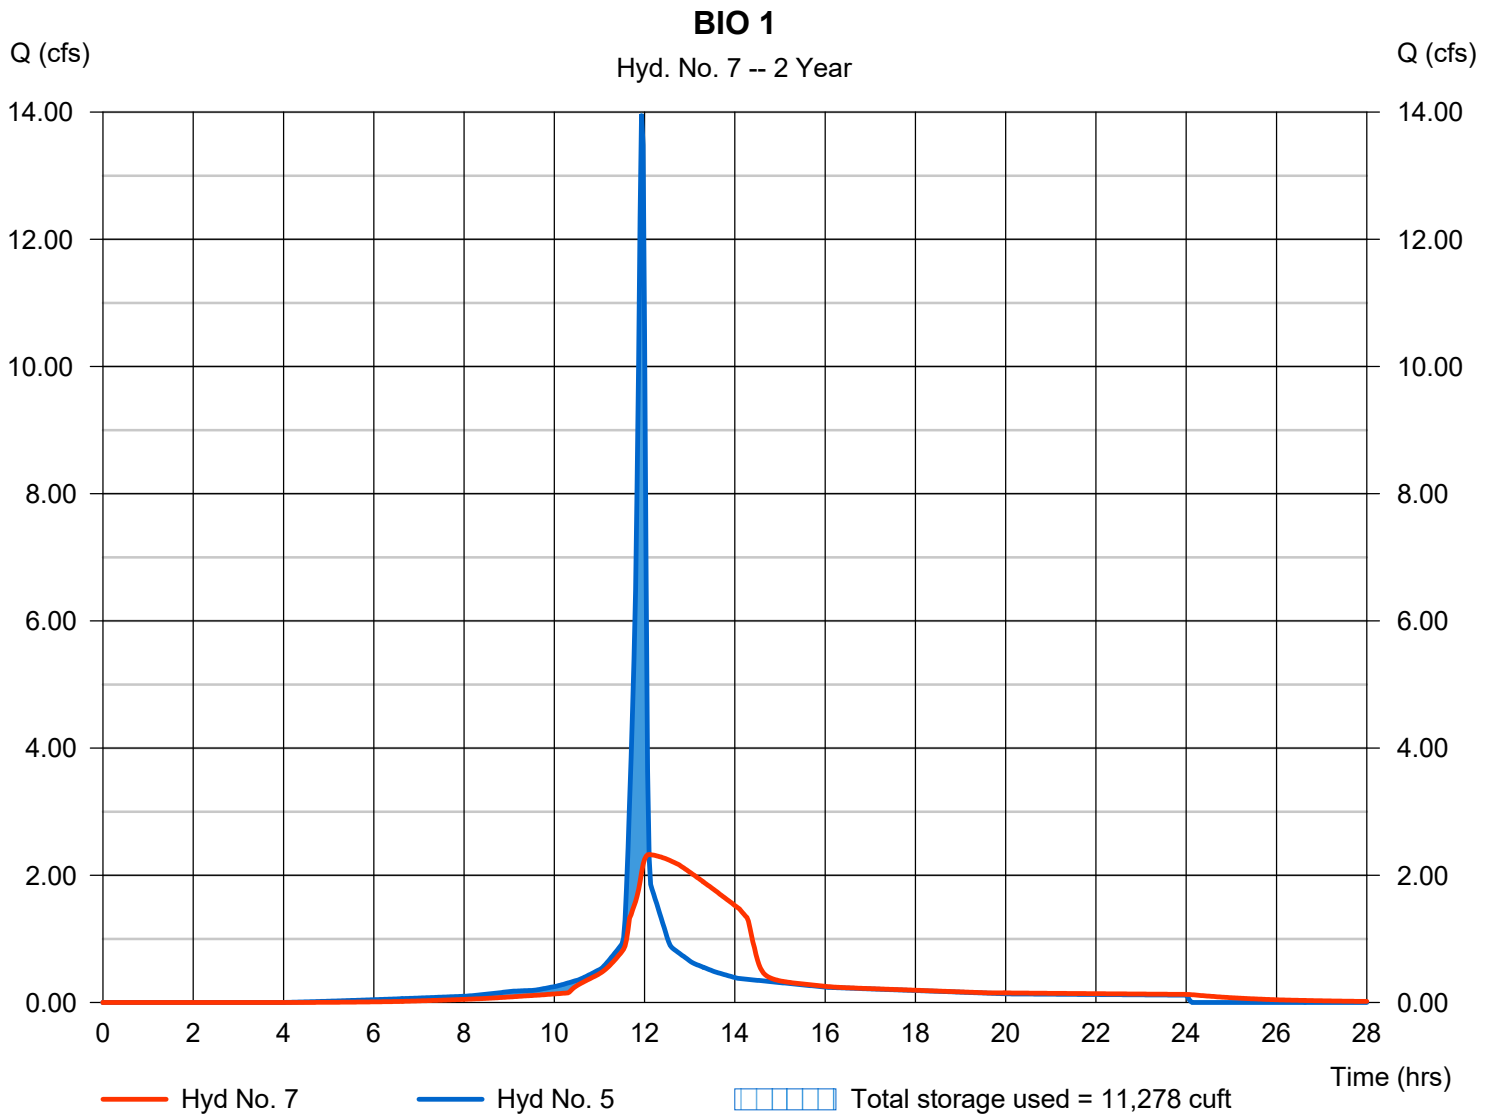

## Pond No. 2 - BIORETENTION 1

### Pond Data

**Contours** -User-defined contour areas. Conic method used for volume calculation. Beginning Elevation = 1019.00 ft

### Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	1019.00	00	0	0
1.00	1020.00	5,796	1,932	1,932
2.00	1021.00	8,214	6,969	8,901
3.00	1022.00	10,869	9,510	18,411
4.00	1023.00	13,220	12,024	30,435
5.00	1024.00	13,220	13,219	43,653


### Culvert / Orifice Structures

	[A]	[B]	[C]	[PrfRsr]
Rise (in)	= 12.00	8.00	0.00	0.00
Span (in)	= 12.00	8.00	0.00	0.00
No. Barrels	= 1	1	0	0
Invert El. (ft)	= 1019.00	1019.00	0.00	0.00
Length (ft)	= 10.00	0.50	0.00	0.00
Slope (%)	= 2.00	1.00	0.00	n/a
N-Value	= .013	.013	.013	n/a
Orifice Coeff.	= 0.60	0.60	0.60	0.60
Multi-Stage	= n/a	No	No	No

### Weir Structures

	[A]	[B]	[C]	[D]
Crest Len (ft)	= 9.00	353.00	0.00	0.00
Crest El. (ft)	= 1021.50	1023.00	0.00	0.00
Weir Coeff.	= 3.33	2.60	3.33	3.33
Weir Type	= Rect	Broad	---	---
Multi-Stage	= Yes	No	No	No
Exfil.(in/hr)	= 0.000 (by Wet area)			
TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

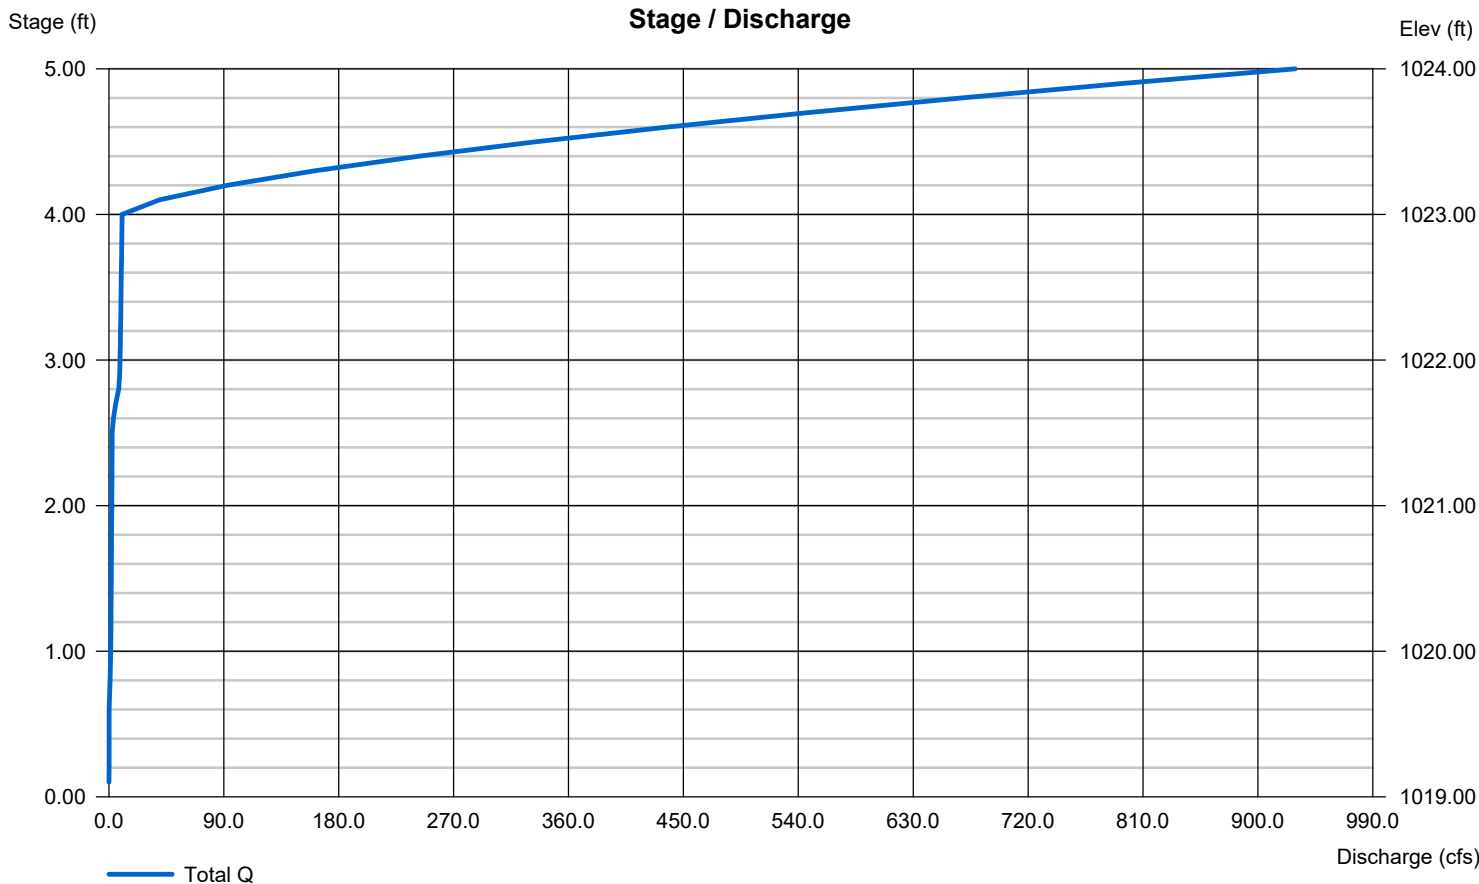

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 8

COMBINE

Hydrograph type	= Combine	Peak discharge	= 18.92 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 64,756 cuft
Inflow hyds.	= 6, 7	Contrib. drain. area	= 4.170 ac

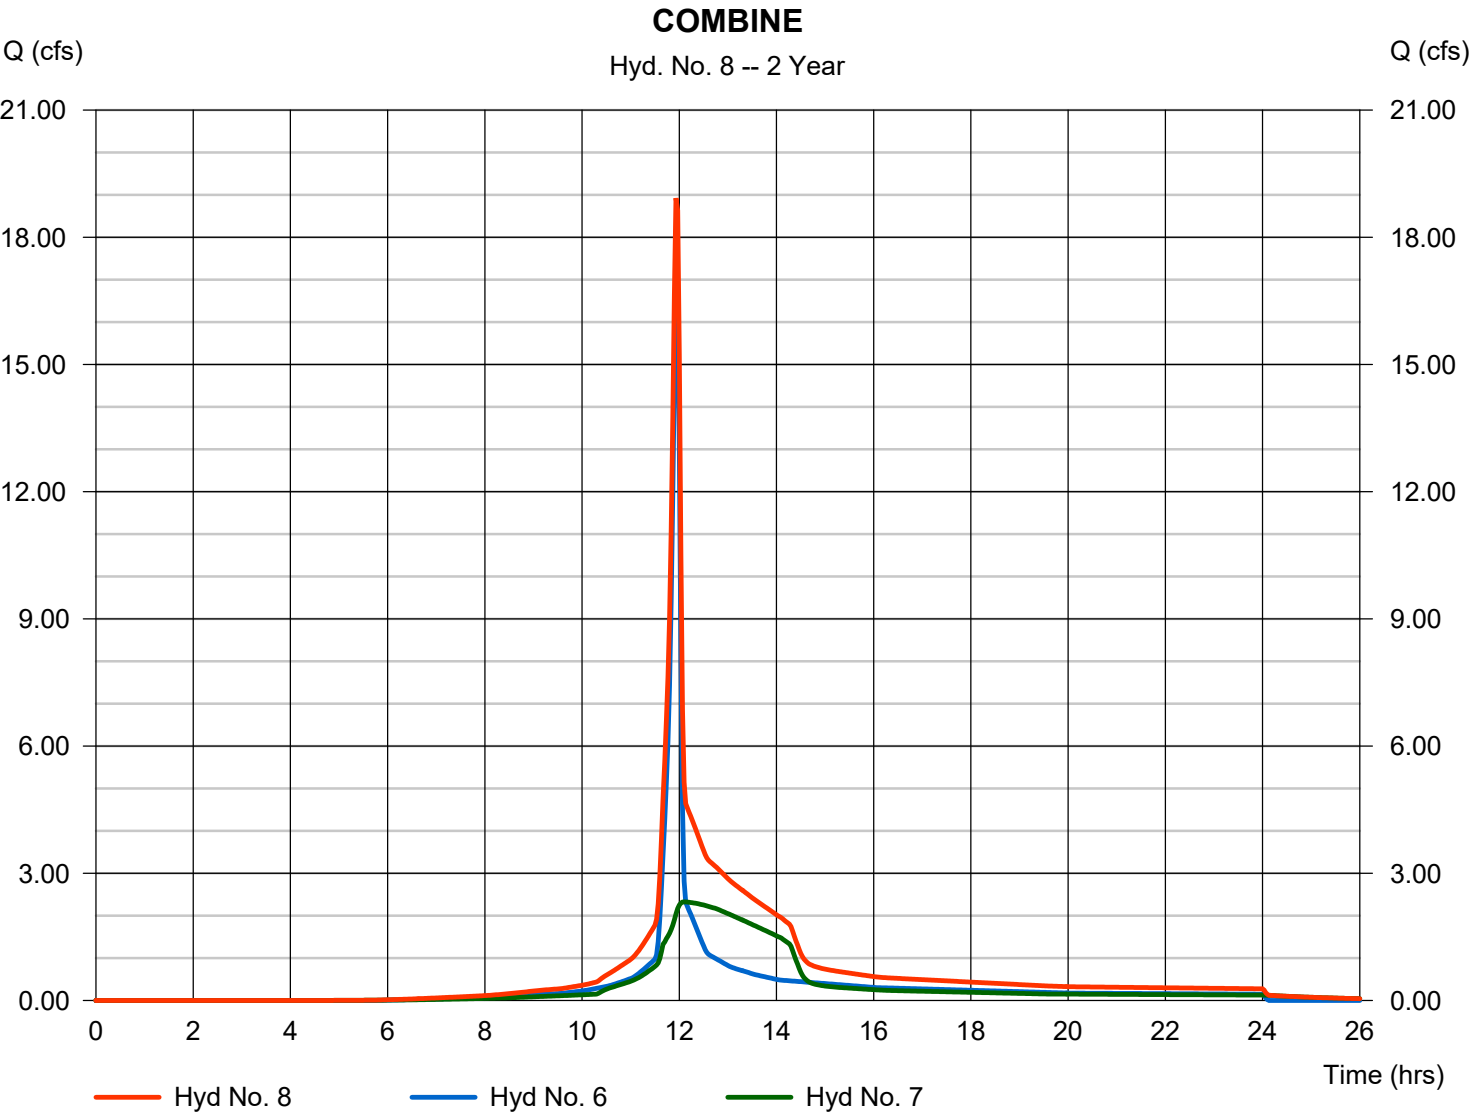

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 9

### DETENTION POND 1

Hydrograph type	= Reservoir	Peak discharge	= 1.197 cfs
Storm frequency	= 2 yrs	Time to peak	= 14.47 hrs
Time interval	= 2 min	Hyd. volume	= 64,753 cuft
Inflow hyd. No.	= 8 - COMBINE	Max. Elevation	= 1019.74 ft
Reservoir name	= DRY DETENTION 1	Max. Storage	= 33,040 cuft

Storage Indication method used.

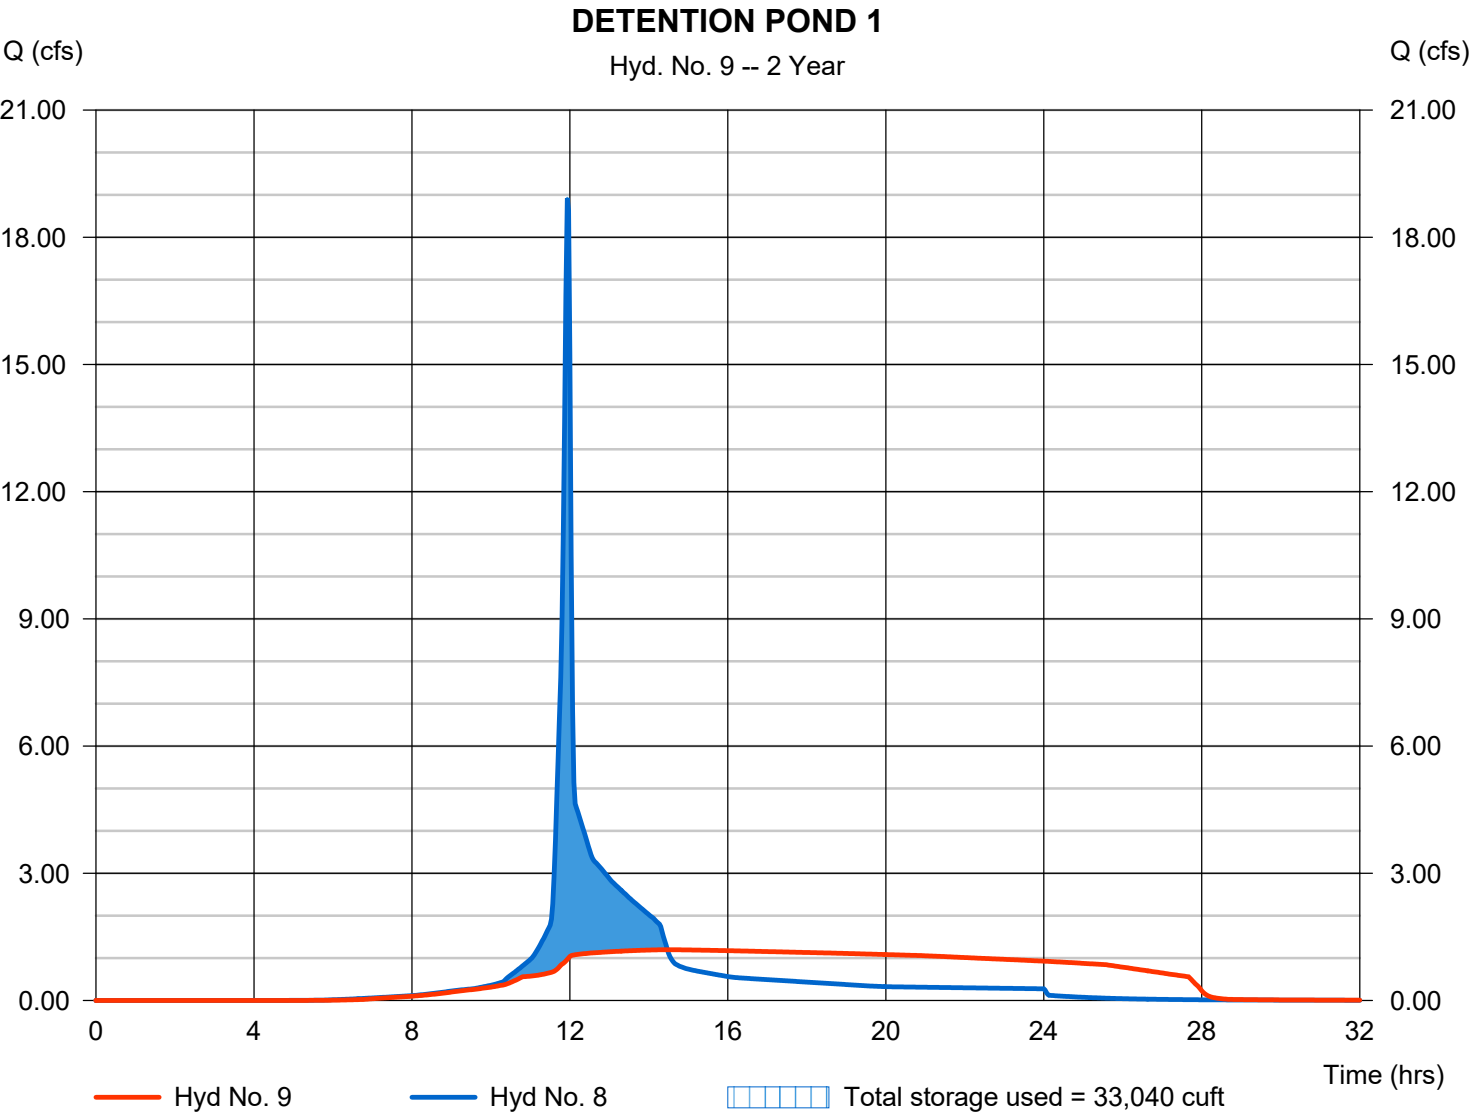

## Pond No. 1 - DRY DETENTION 1

### Pond Data

**Contours** -User-defined contour areas. Conic method used for volume calculation. Begining Elevation = 1016.00 ft

### Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	1016.00	00	0	0
1.00	1017.00	2,042	681	681
2.00	1018.00	8,847	5,046	5,727
3.00	1019.00	16,278	12,374	18,100
4.00	1020.00	24,535	20,264	38,364
5.00	1021.00	31,558	27,970	66,334
6.00	1022.00	35,419	33,467	99,801


### Culvert / Orifice Structures

	[A]	[B]	[C]	[PrfRsr]
Rise (in)	= 30.00	5.00	0.00	0.00
Span (in)	= 30.00	5.00	0.00	0.00
No. Barrels	= 1	1	0	0
Invert El. (ft)	= 1016.00	1016.00	0.00	0.00
Length (ft)	= 200.00	0.50	0.00	0.00
Slope (%)	= 0.50	1.00	0.00	n/a
N-Value	= .013	.013	.013	n/a
Orifice Coeff.	= 0.60	0.60	0.60	0.60
Multi-Stage	= n/a	Yes	No	No

### Weir Structures

	[A]	[B]	[C]	[D]
Crest Len (ft)	= 9.00	0.00	0.00	0.00
Crest El. (ft)	= 1020.33	0.00	0.00	0.00
Weir Coeff.	= 3.33	3.33	3.33	3.33
Weir Type	= Rect	---	---	---
Multi-Stage	= Yes	No	No	No
Exfil.(in/hr)	= 0.000 (by Contour)			
TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

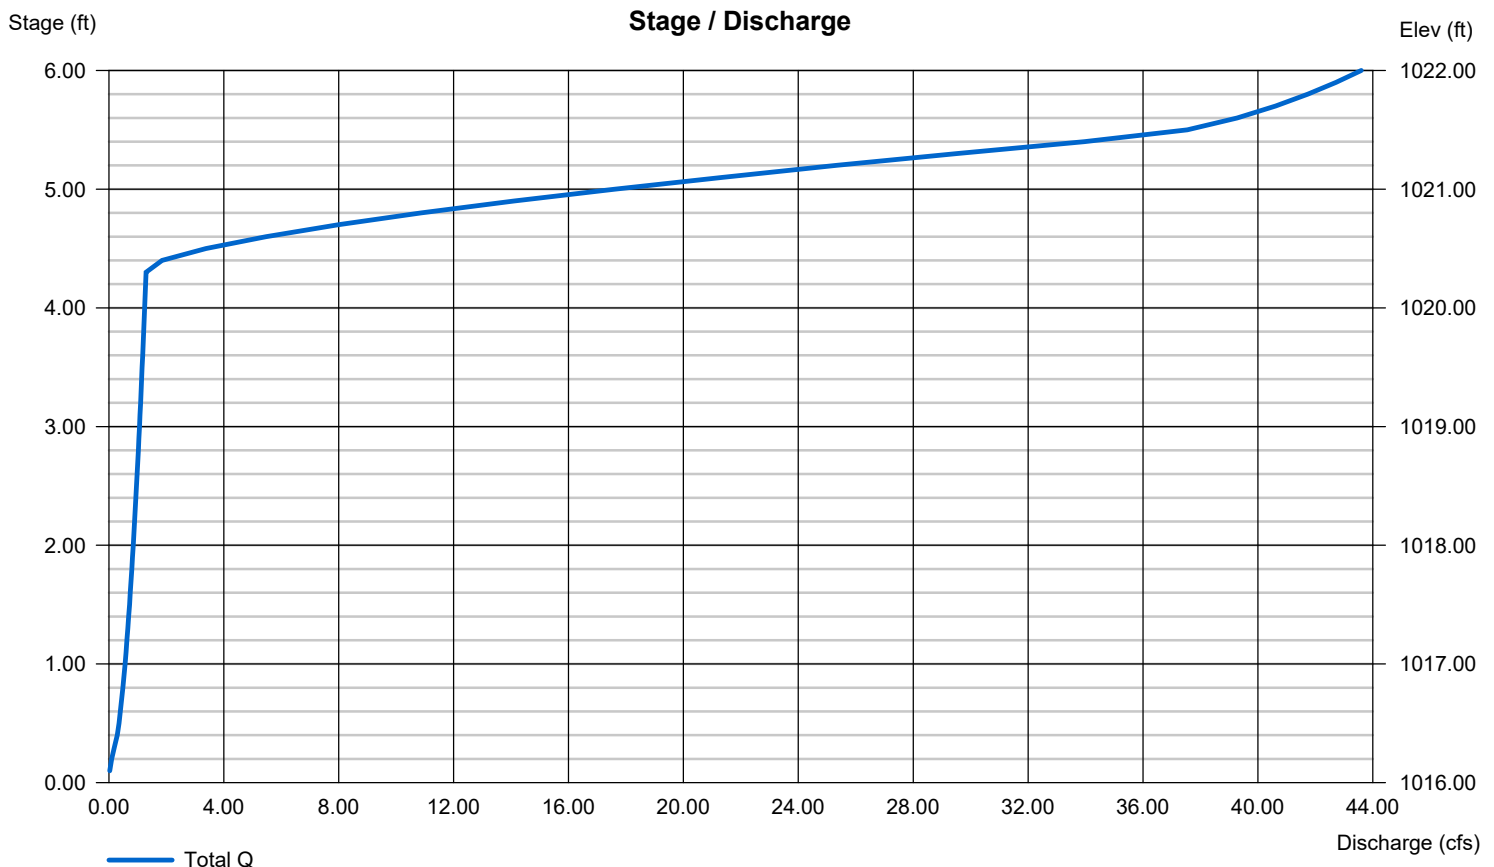



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 10

DA 11 (US ROUTE 50)

Hydrograph type	= SCS Runoff	Peak discharge	= 4.161 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 8,557 cuft
Drainage area	= 1.060 ac	Curve number	= 87*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.400 \times 98) + (0.660 \times 80)] / 1.060$

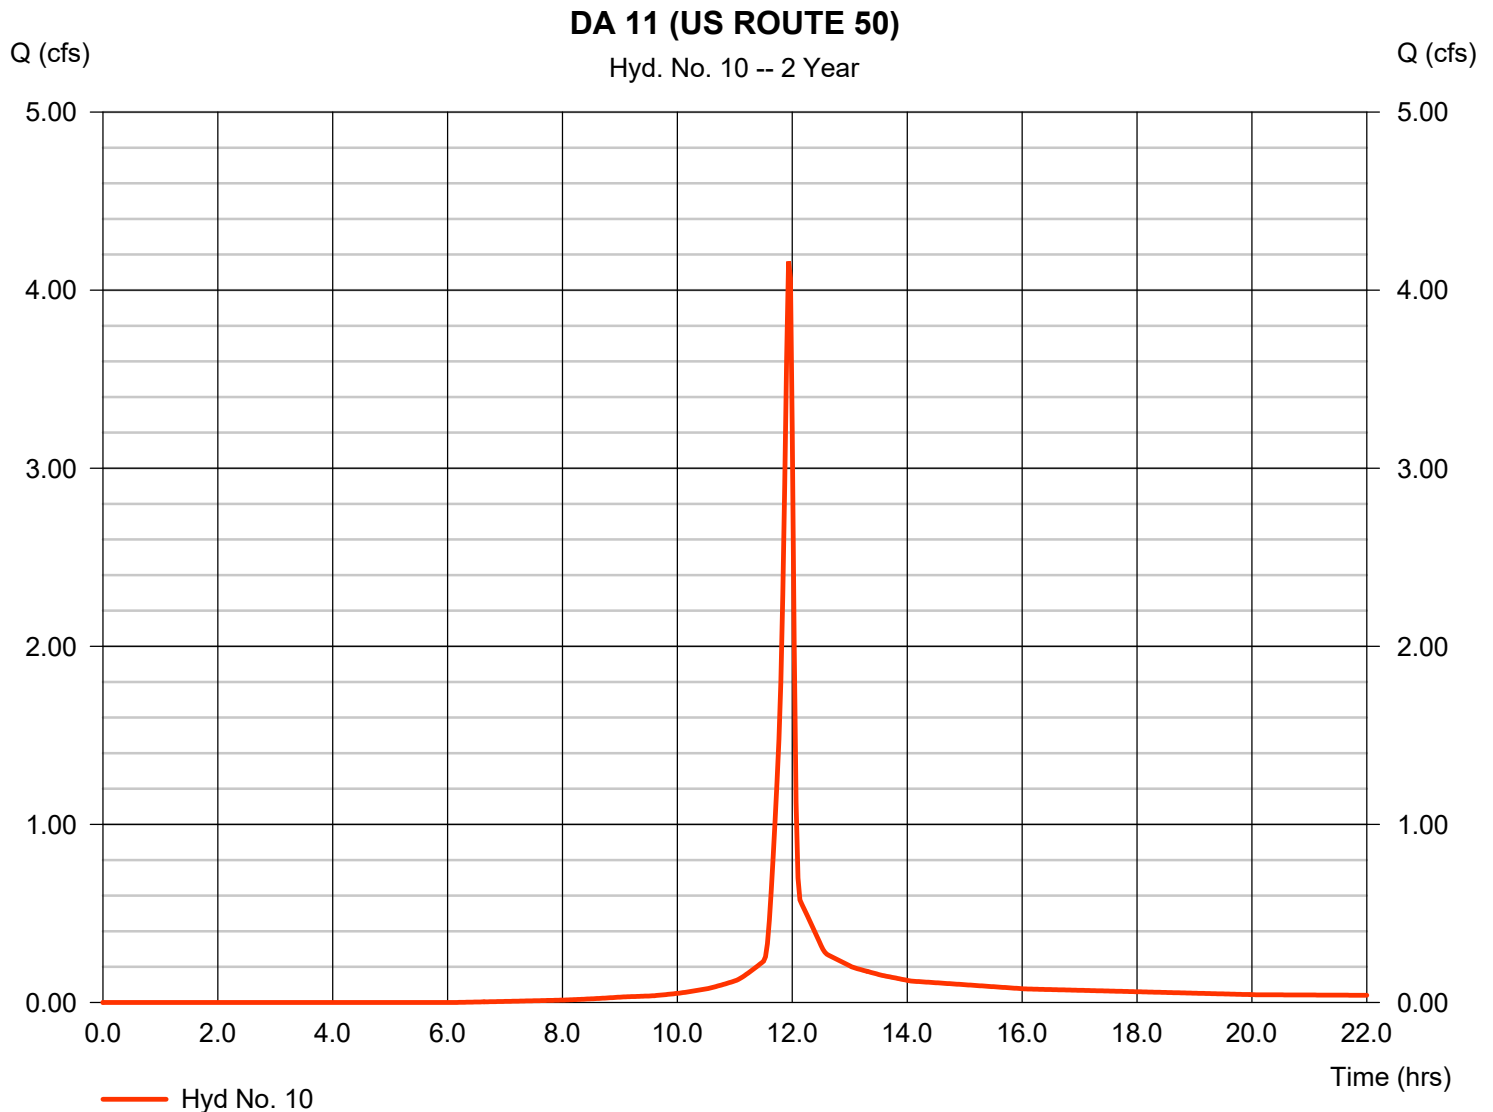

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 11

DEV POI 1

Hydrograph type	= Combine	Peak discharge	= 5.130 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 73,310 cuft
Inflow hyds.	= 9, 10	Contrib. drain. area	= 1.060 ac

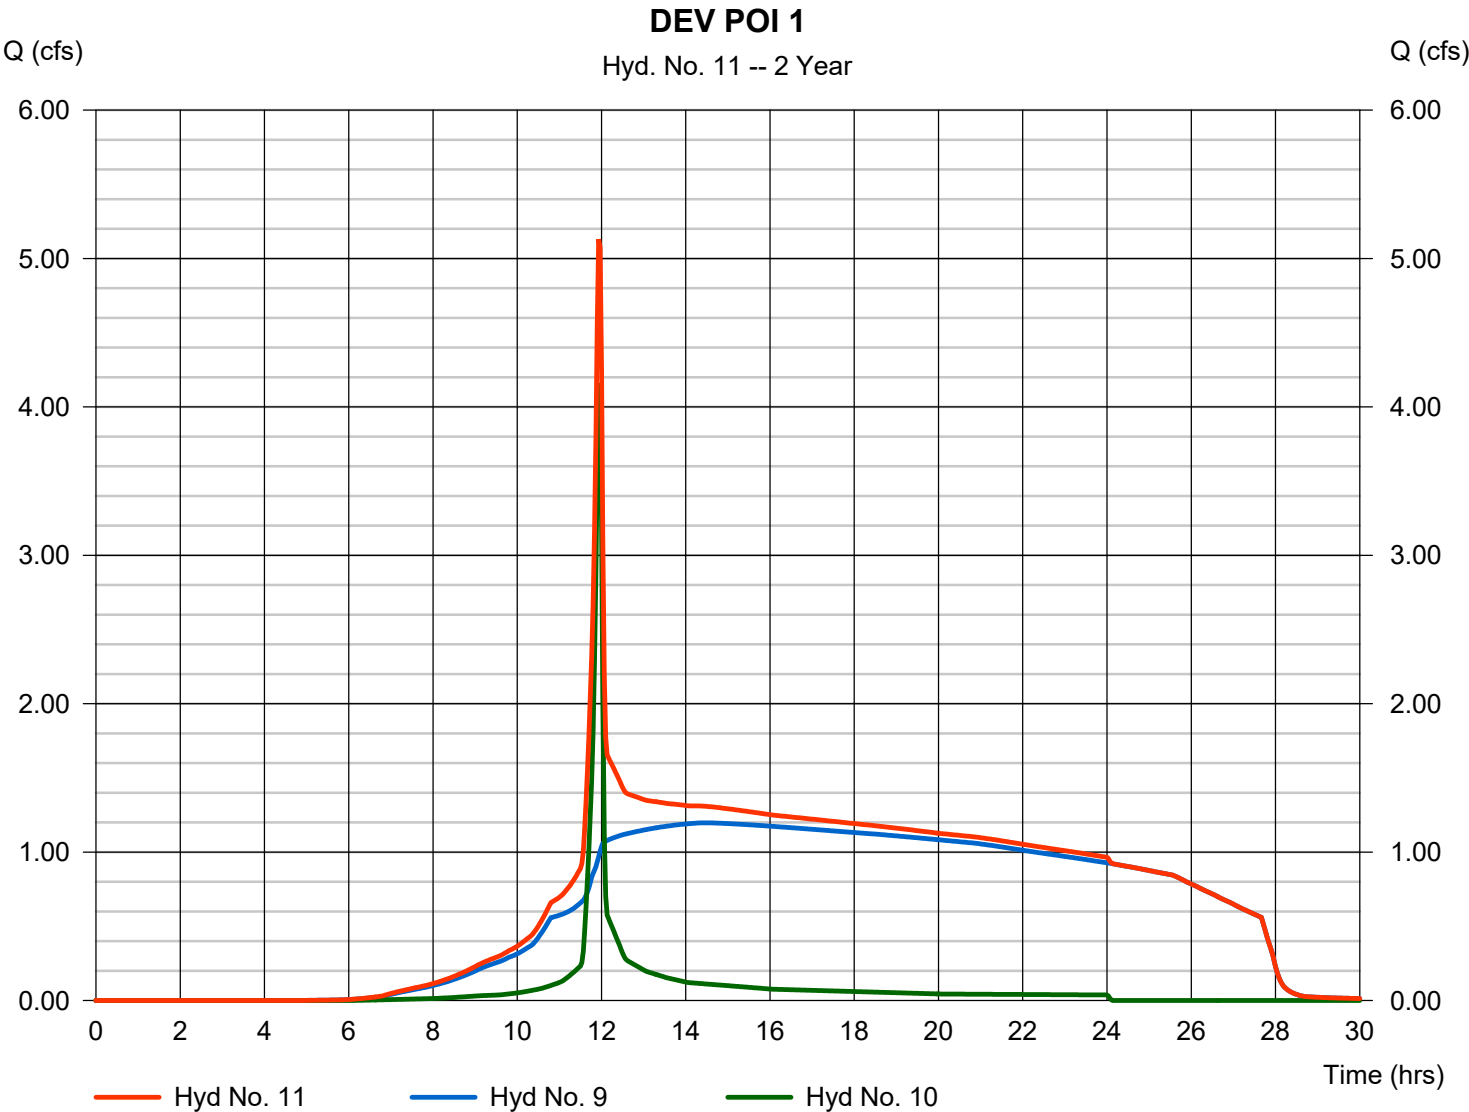

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 12

DEV 20

Hydrograph type	= SCS Runoff	Peak discharge	= 10.86 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 22,774 cuft
Drainage area	= 2.530 ac	Curve number	= 90*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.370 x 98) + (1.160 x 80)] / 2.530

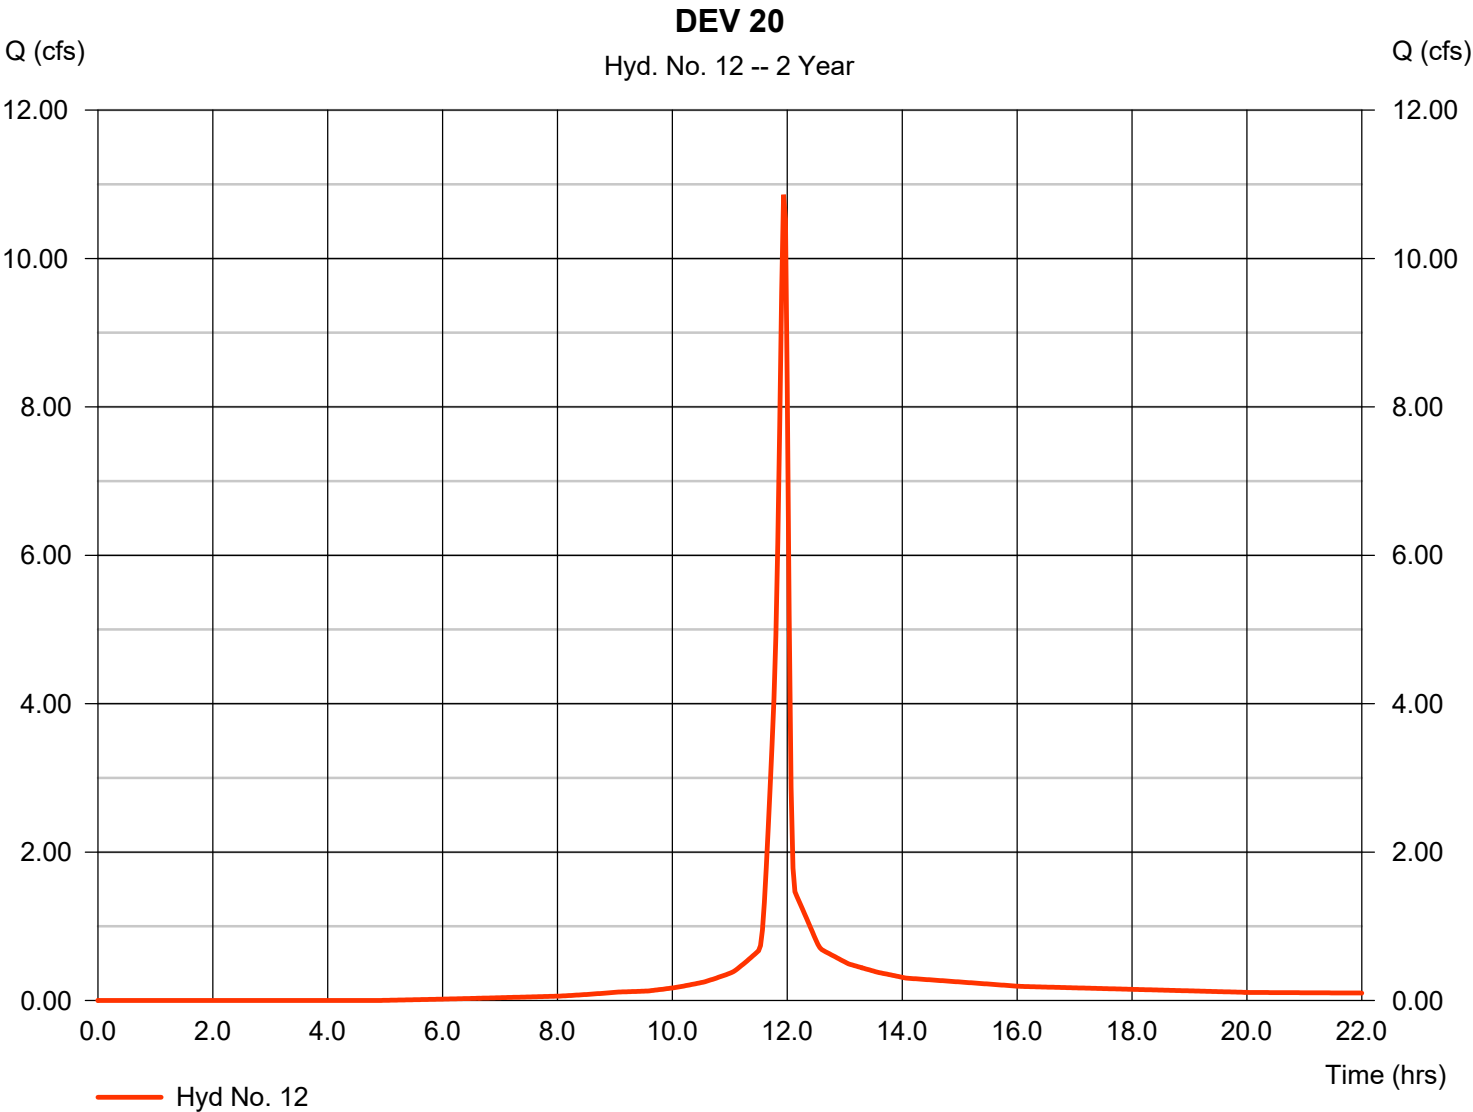

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 13

### BIORETENTION 2

Hydrograph type	= Reservoir	Peak discharge	= 0.702 cfs
Storm frequency	= 2 yrs	Time to peak	= 12.57 hrs
Time interval	= 2 min	Hyd. volume	= 22,758 cuft
Inflow hyd. No.	= 12 - DEV 20	Max. Elevation	= 1020.51 ft
Reservoir name	= BIRETENTION 2	Max. Storage	= 11,652 cuft

Storage Indication method used.

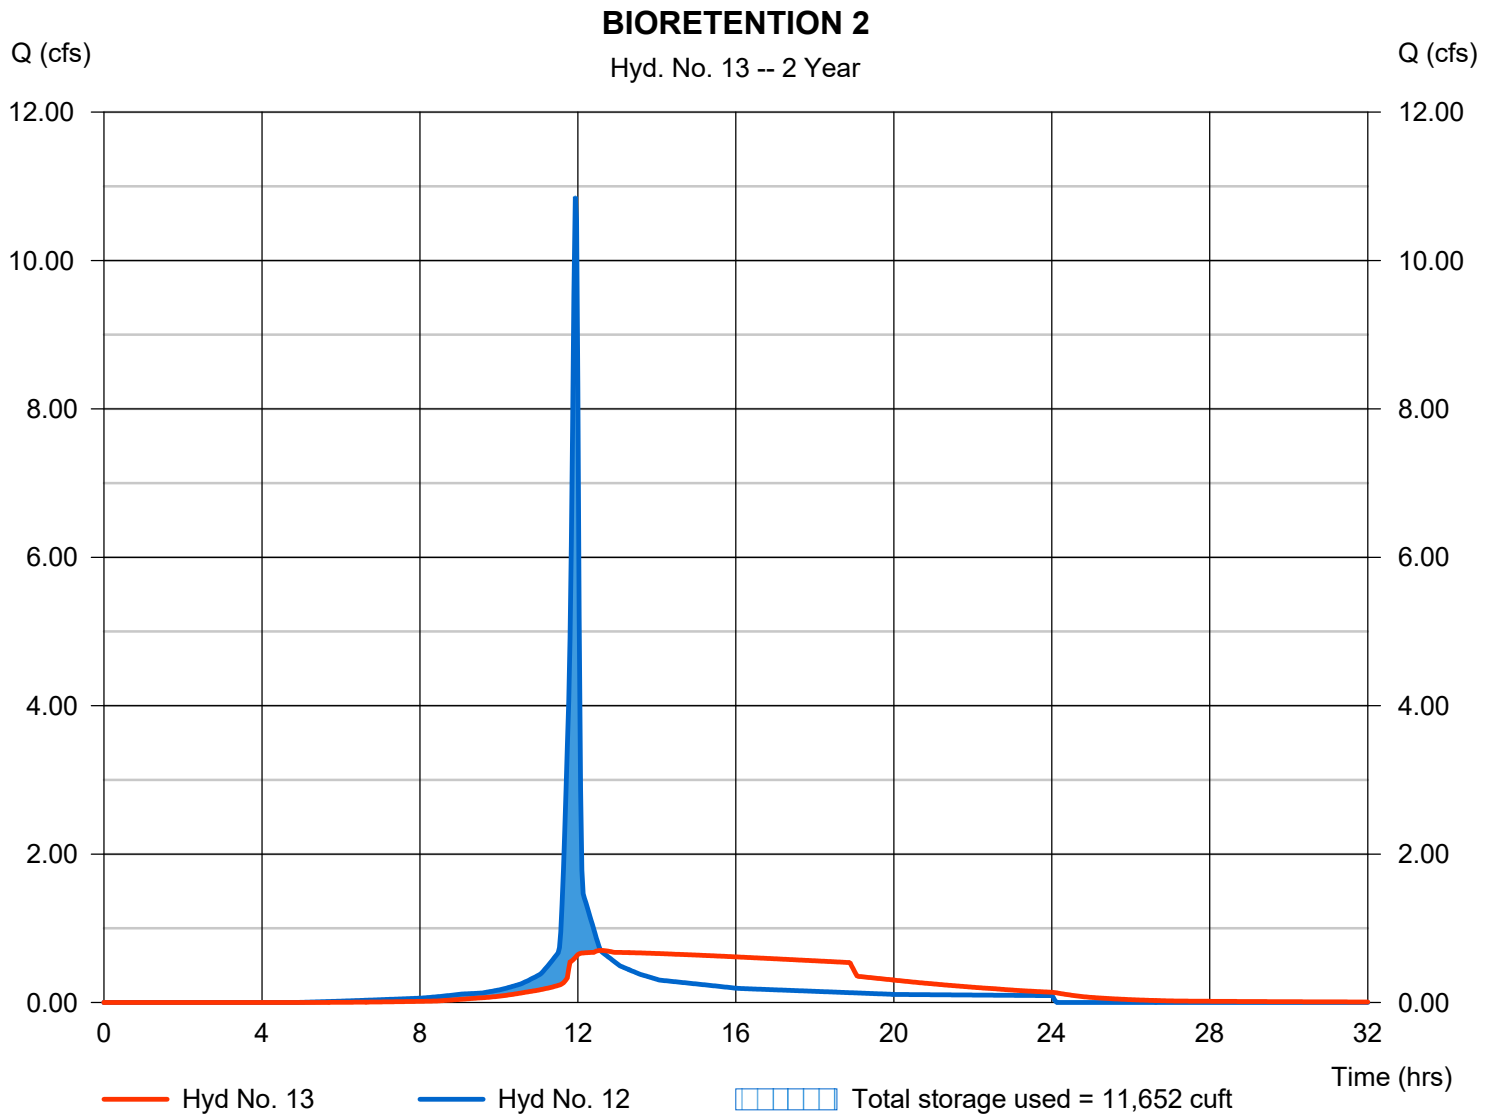

## Pond No. 3 - BIORETENTION 2

### Pond Data

Pond storage is based on user-defined values.

### Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	1017.50	n/a	0	0
1.00	1018.50	n/a	3,248	3,248
2.00	1019.50	n/a	203	3,451
3.00	1020.50	n/a	8,121	11,572
4.00	1021.50	n/a	9,629	21,201
5.00	1022.50	n/a	12,697	33,898


### Culvert / Orifice Structures

	[A]	[B]	[C]	[PrfRsr]
Rise (in)	= 12.00	4.00	0.00	0.00
Span (in)	= 12.00	4.00	0.00	0.00
No. Barrels	= 1	1	0	0
Invert El. (ft)	= 1017.50	1017.50	0.00	0.00
Length (ft)	= 100.00	0.50	0.00	0.00
Slope (%)	= 0.50	1.00	0.00	n/a
N-Value	= .013	.013	.013	n/a
Orifice Coeff.	= 0.60	0.60	0.60	0.60
Multi-Stage	= n/a	Yes	No	No

### Weir Structures

	[A]	[B]	[C]	[D]
Crest Len (ft)	= 3.00	0.00	0.00	0.00
Crest El. (ft)	= 1020.50	0.00	0.00	0.00
Weir Coeff.	= 3.33	3.33	3.33	3.33
Weir Type	= Rect	---	---	---
Multi-Stage	= Yes	No	No	No
Exfil.(in/hr)	= 0.000 (by Wet area)			
TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

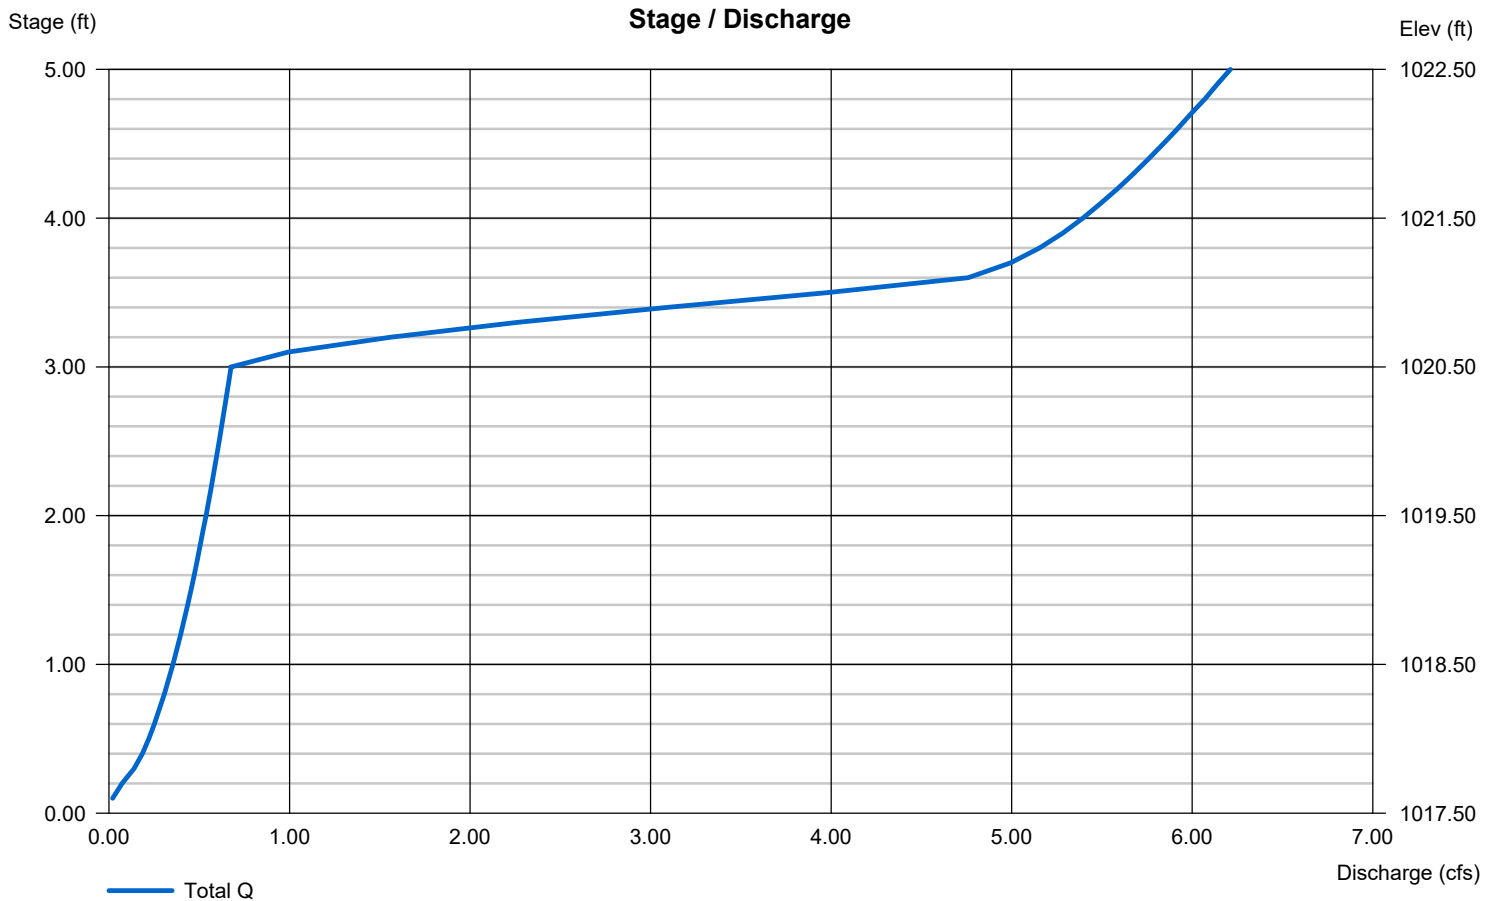

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 14

DA 21 (PR. PUBLIC ACCESS ROAD)

Hydrograph type	= SCS Runoff	Peak discharge	= 6.763 cfs
Storm frequency	= 2 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 13,843 cuft
Drainage area	= 1.780 ac	Curve number	= 86*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 3.71 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

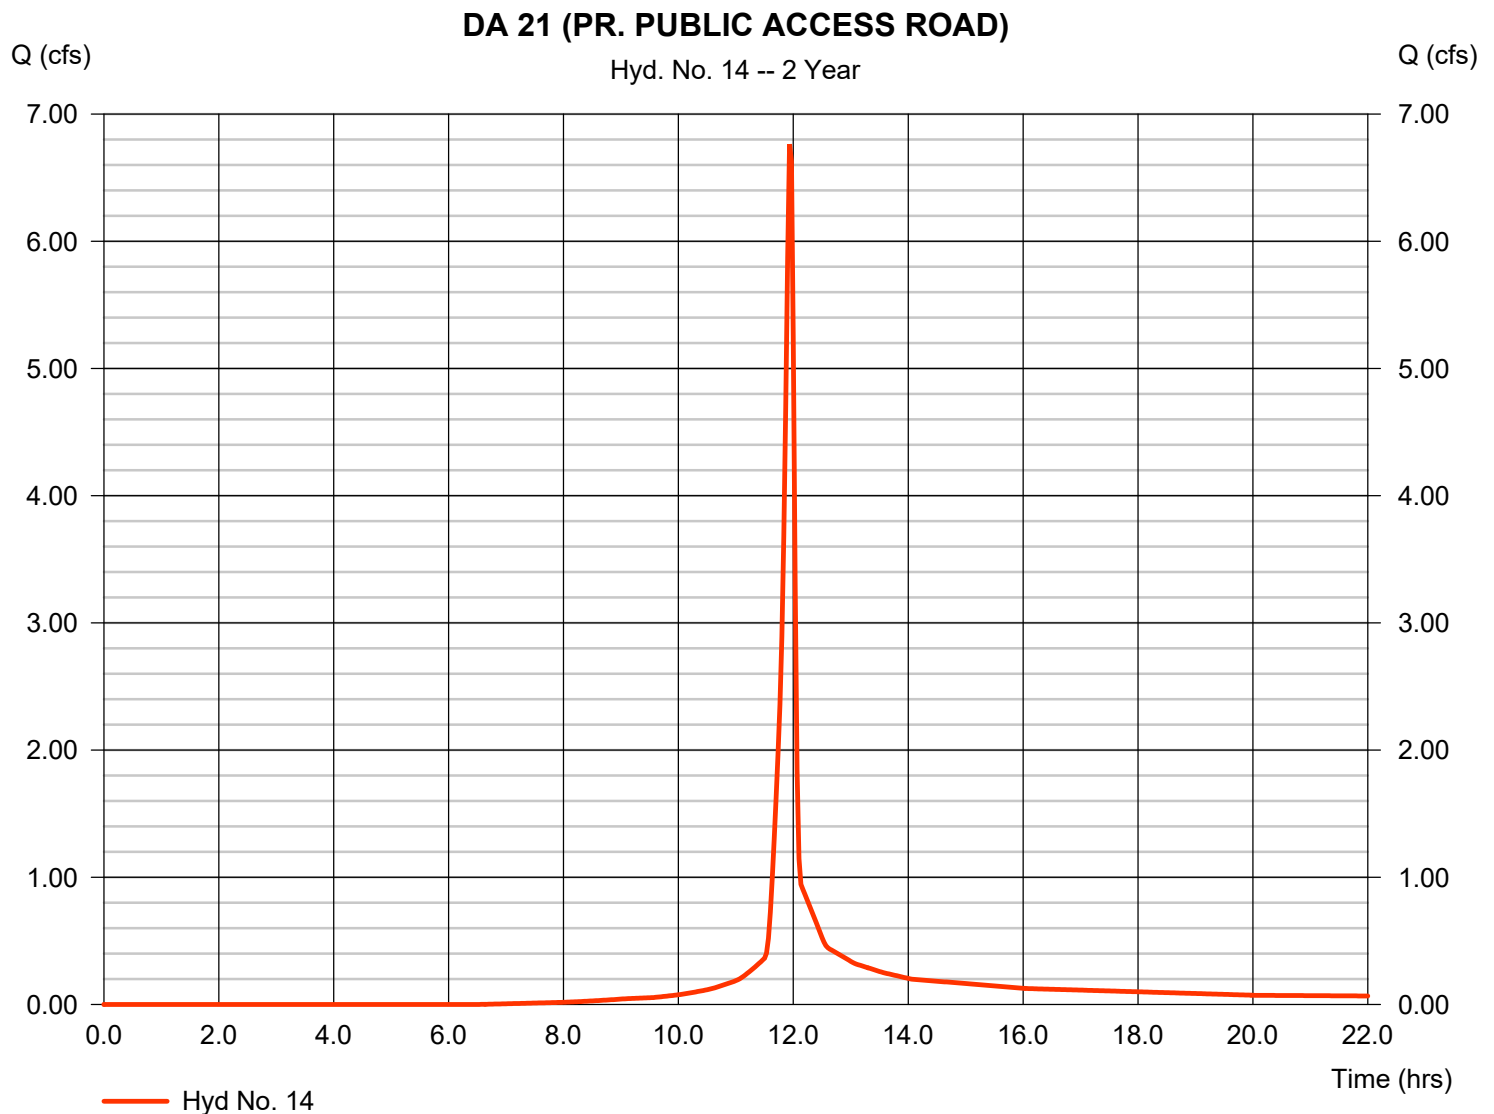\* Composite (Area/CN) =  $[(0.630 \times 98) + (1.150 \times 80)] / 1.780$ 

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 15

OFF 20


Hydrograph type = SCS Runoff  
 Storm frequency = 2 yrs  
 Time interval = 2 min  
 Drainage area = 4.940 ac  
 Basin Slope = 0.0 %  
 Tc method = User  
 Total precip. = 3.71 in  
 Storm duration = 24 hrs

Peak discharge = 6.315 cfs  
 Time to peak = 12.20 hrs  
 Hyd. volume = 26,046 cuft  
 Curve number = 75\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 28.90 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(0.190 \times 98) + (4.750 \times 74)] / 4.940$

### OFF 20

Hyd. No. 15 -- 2 Year

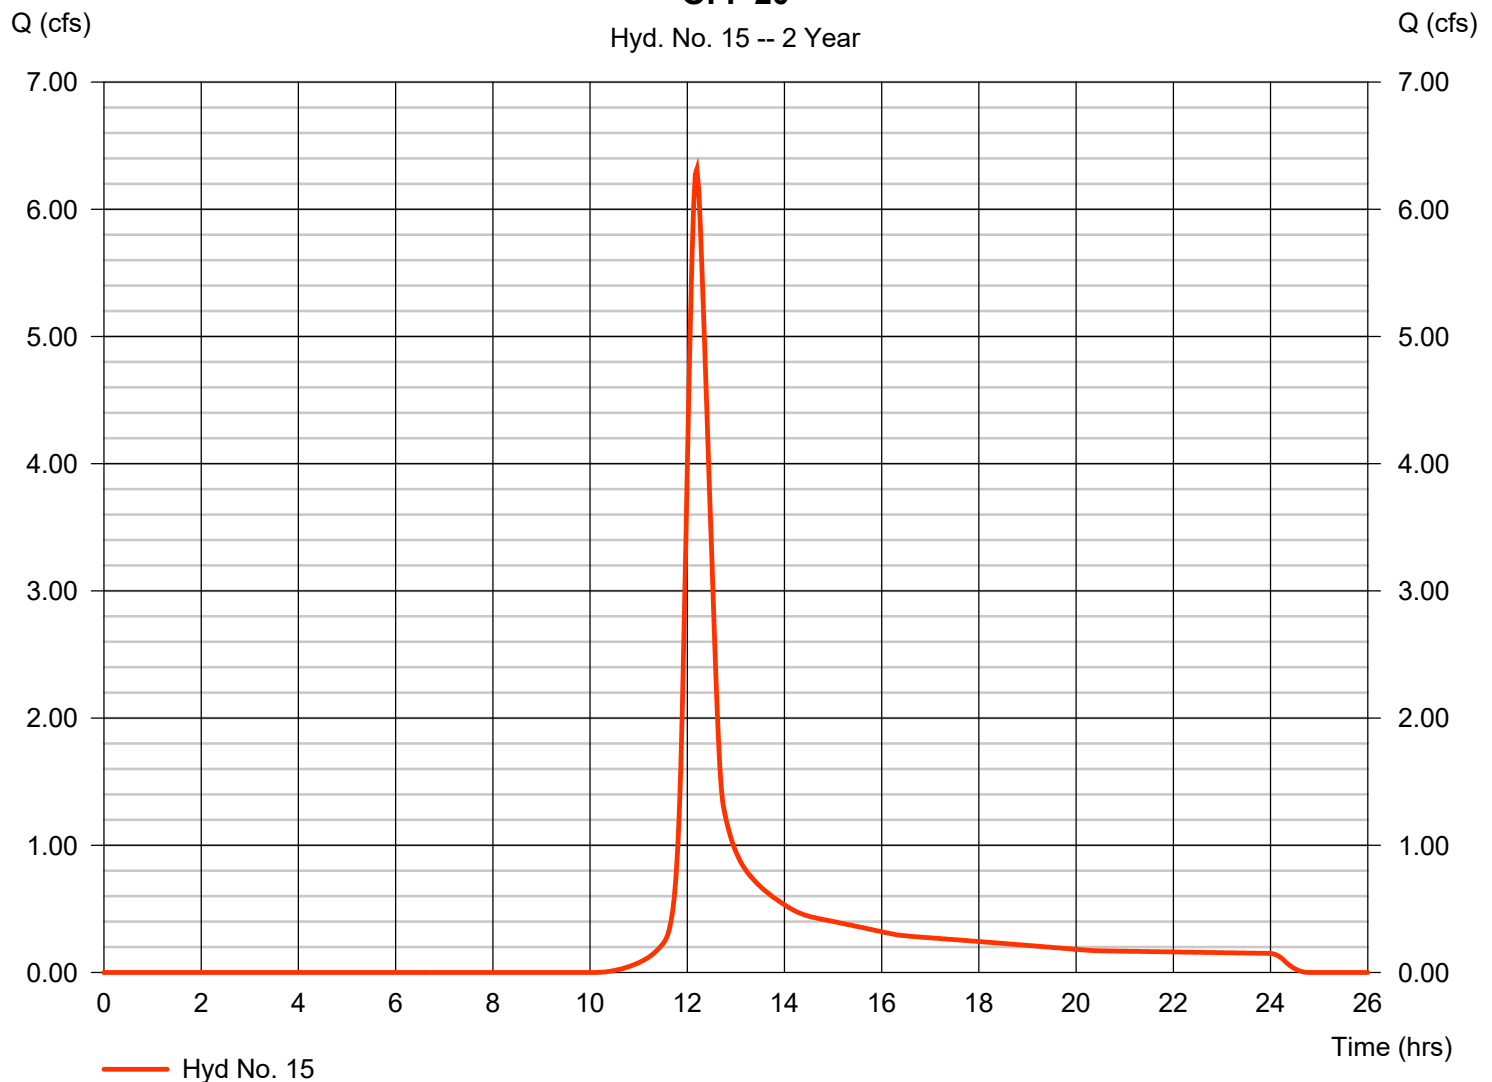

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 16

OFF DA 22 (US ROUTE 50)

Hydrograph type	=	SCS Runoff	Peak discharge	=	2.198 cfs
Storm frequency	=	2 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	4,521 cuft
Drainage area	=	0.560 ac	Curve number	=	87*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	3.71 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) =  $[(0.210 \times 98) + (0.350 \times 80)] / 0.560$

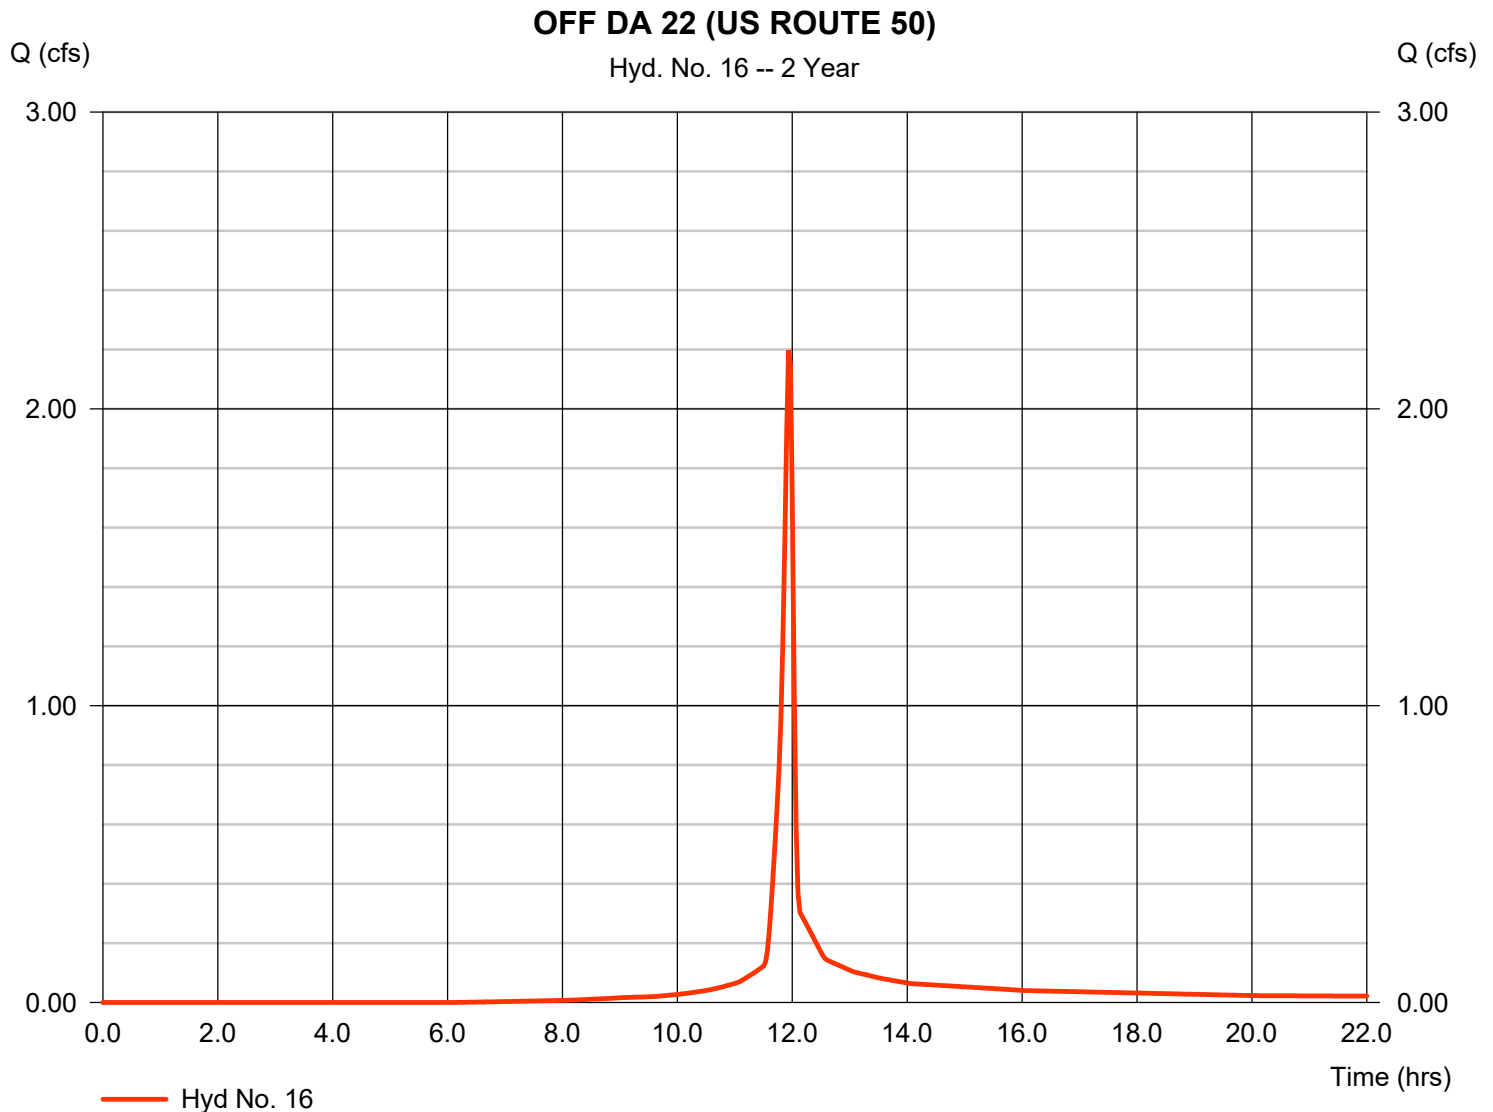



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 17

DEV POI 2 (AT CULVERT)

Hydrograph type = Combine  
 Storm frequency = 2 yrs  
 Time interval = 2 min  
 Inflow hyds. = 13, 14, 15, 16

Peak discharge = 12.73 cfs  
 Time to peak = 11.97 hrs  
 Hyd. volume = 67,167 cuft  
 Contrib. drain. area = 7.280 ac

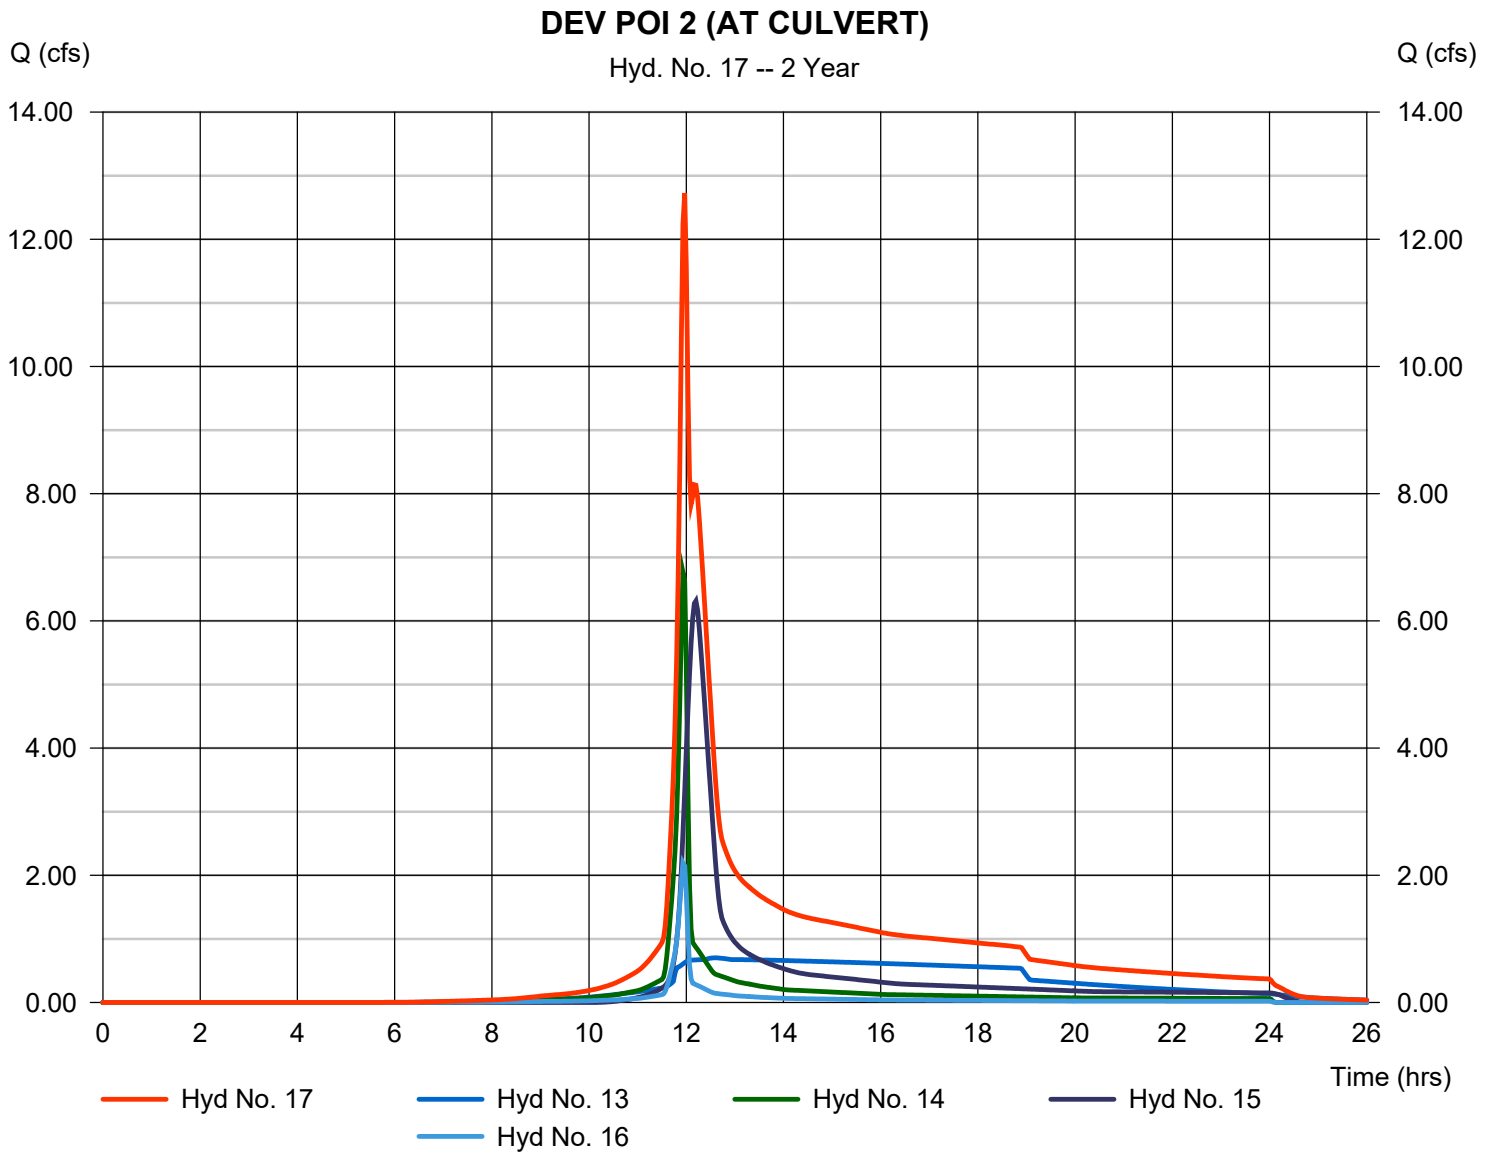

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	23.27	2	728	85,731	-----	-----	-----	EX 20
2	SCS Runoff	11.58	2	728	42,585	-----	-----	-----	EX 10 (POI 1)
3	SCS Runoff	13.39	2	730	53,696	-----	-----	-----	OFF 20
4	Combine	36.54	2	730	139,427	1, 3	-----	-----	EX POI 2 (AT CULVERT)
5	SCS Runoff	22.55	2	716	49,797	-----	-----	-----	DEV 10
6	SCS Runoff	28.62	2	716	61,008	-----	-----	-----	DEV 30
7	Reservoir	8.272	2	722	49,784	5	1021.90	17,339	BIO 1
8	Combine	31.96	2	718	110,792	6, 7	-----	-----	COMBINE
9	Reservoir	3.142	2	816	110,789	8	1020.48	51,919	DETENTION POND 1
10	SCS Runoff	7.144	2	716	15,124	-----	-----	-----	DA 11 (US ROUTE 50)
11	Combine	8.266	2	716	125,913	9, 10	-----	-----	DEV POI 1
12	SCS Runoff	17.94	2	716	38,875	-----	-----	-----	DEV 20
13	Reservoir	4.782	2	724	38,859	12	1021.11	17,438	BIORETENTION 2
14	SCS Runoff	11.77	2	716	24,758	-----	-----	-----	DA 21 (PR. PUBLIC ACCESS ROAD)
15	SCS Runoff	13.39	2	730	53,696	-----	-----	-----	OFF 20
16	SCS Runoff	3.774	2	716	7,990	-----	-----	-----	OFF DA 22 (US ROUTE 50)
17	Combine	25.51	2	718	125,303	13, 14, 15, 16	-----	-----	DEV POI 2 (AT CULVERT)
81450_24-HR ANALYSIS.gpw					Return Period: 10 Year			Friday, 02 / 15 / 2019	
								Page 39	

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019


## Hyd. No. 1

EX 20

Hydrograph type = SCS Runoff  
 Storm frequency = 10 yrs  
 Time interval = 2 min  
 Drainage area = 8.270 ac  
 Basin Slope = 0.0 %  
 Tc method = TR55  
 Total precip. = 5.66 in  
 Storm duration = 24 hrs

Peak discharge = 23.27 cfs  
 Time to peak = 12.13 hrs  
 Hyd. volume = 85,731 cuft  
 Curve number = 74\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 25.10 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(0.110 \times 98) + (8.160 \times 74)] / 8.270$

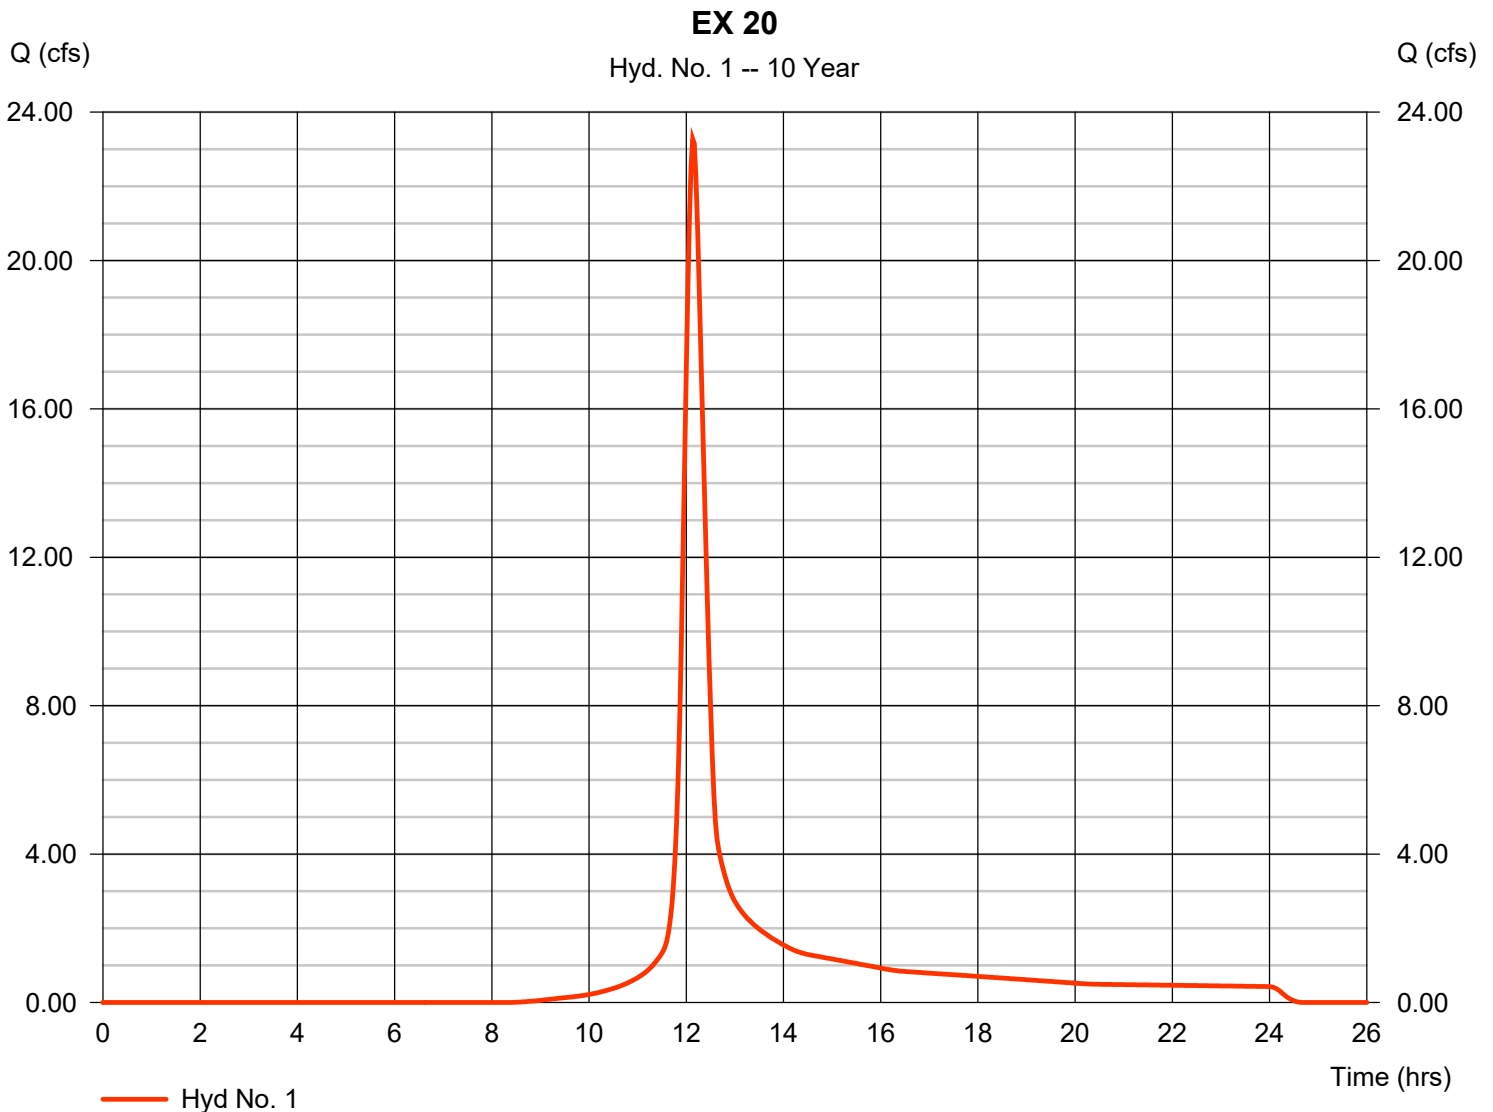

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 2

EX 10 (POI 1)

Hydrograph type	= SCS Runoff	Peak discharge	= 11.58 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.13 hrs
Time interval	= 2 min	Hyd. volume	= 42,585 cuft
Drainage area	= 3.980 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.30 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.090 \times 98) + (3.890 \times 74)] / 3.980$

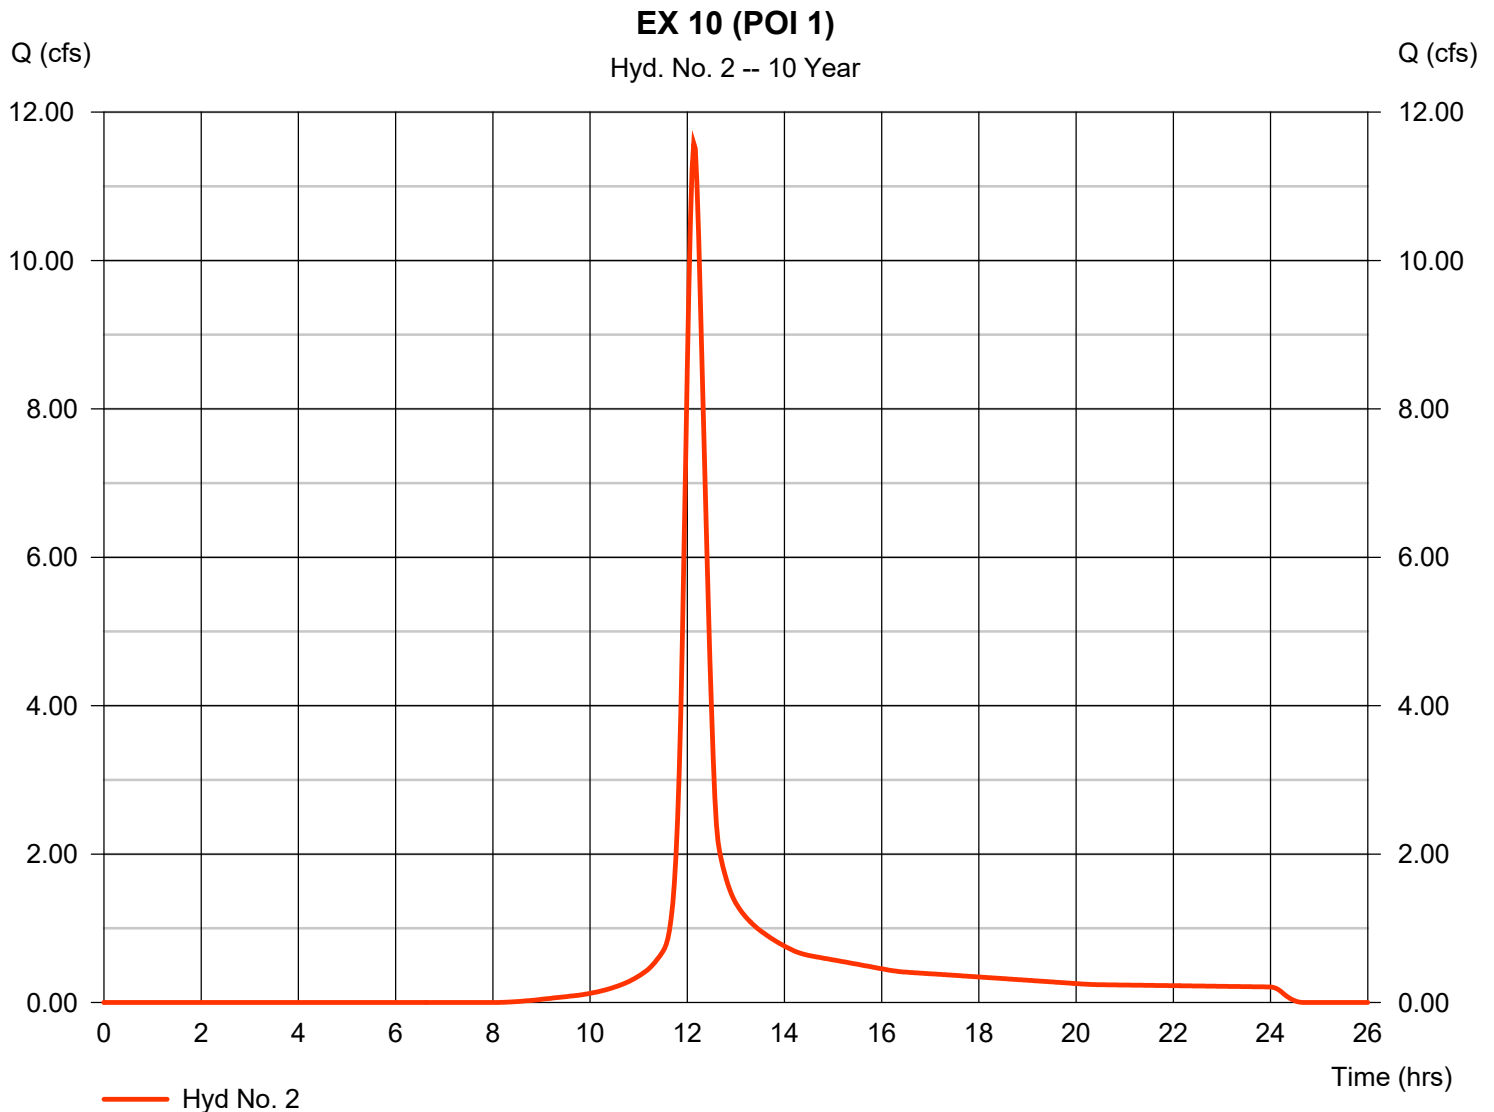

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 3

OFF 20

Hydrograph type	= SCS Runoff	Peak discharge	= 13.39 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 53,696 cuft
Drainage area	= 4.940 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 28.90 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(0.140 x 98) + (4.800 x 74)] / 4.940

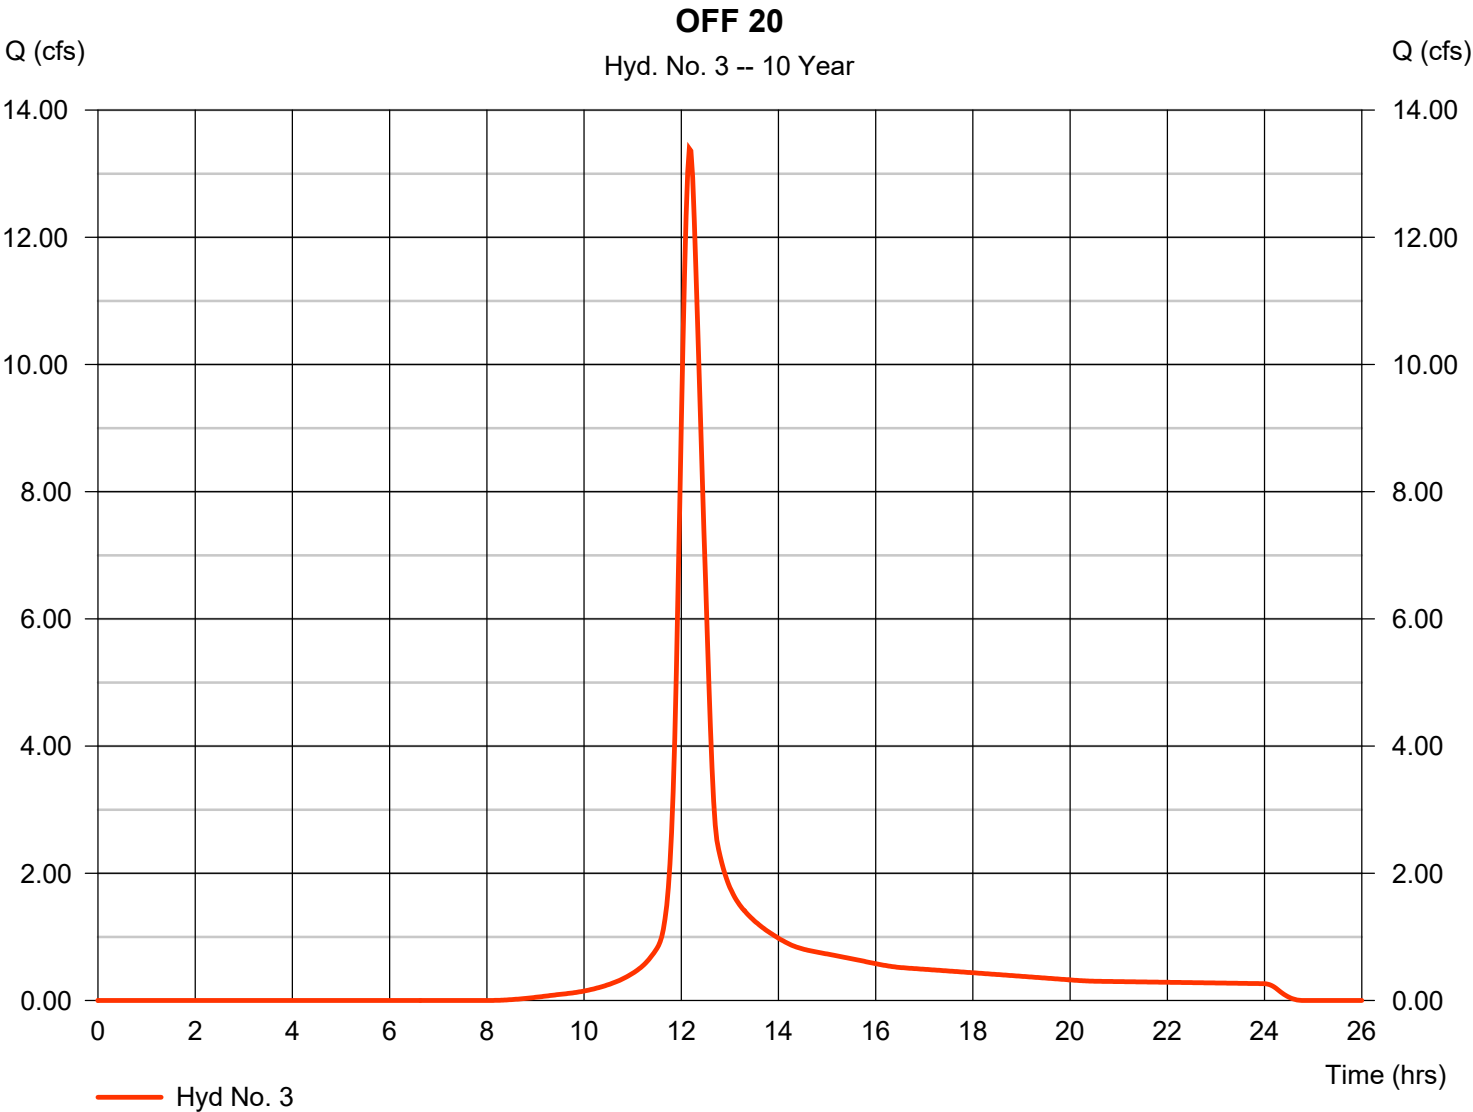

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 4

EX POI 2 (AT CULVERT)

Hydrograph type = Combine  
 Storm frequency = 10 yrs  
 Time interval = 2 min  
 Inflow hyds. = 1, 3

Peak discharge = 36.54 cfs  
 Time to peak = 12.17 hrs  
 Hyd. volume = 139,427 cuft  
 Contrib. drain. area = 13.210 ac

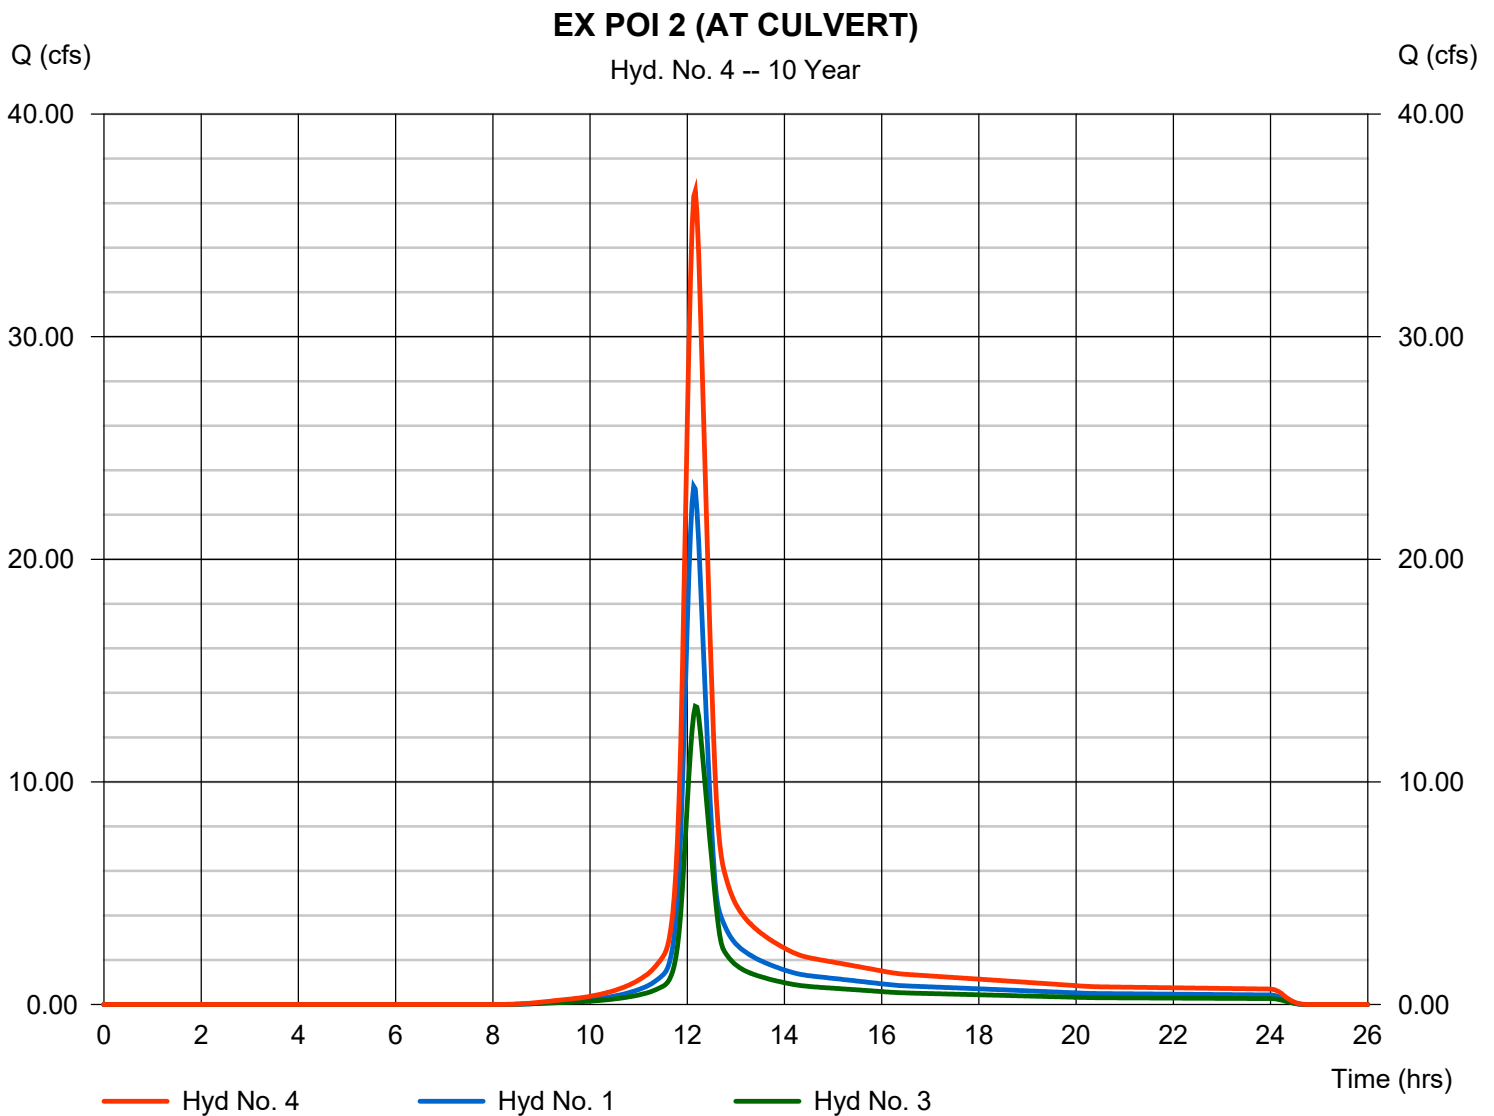

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 5

DEV 10

Hydrograph type	= SCS Runoff	Peak discharge	= 22.55 cfs
Storm frequency	= 10 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 49,797 cuft
Drainage area	= 3.090 ac	Curve number	= 92*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(2.050 \times 98) + (1.040 \times 80)] / 3.090$

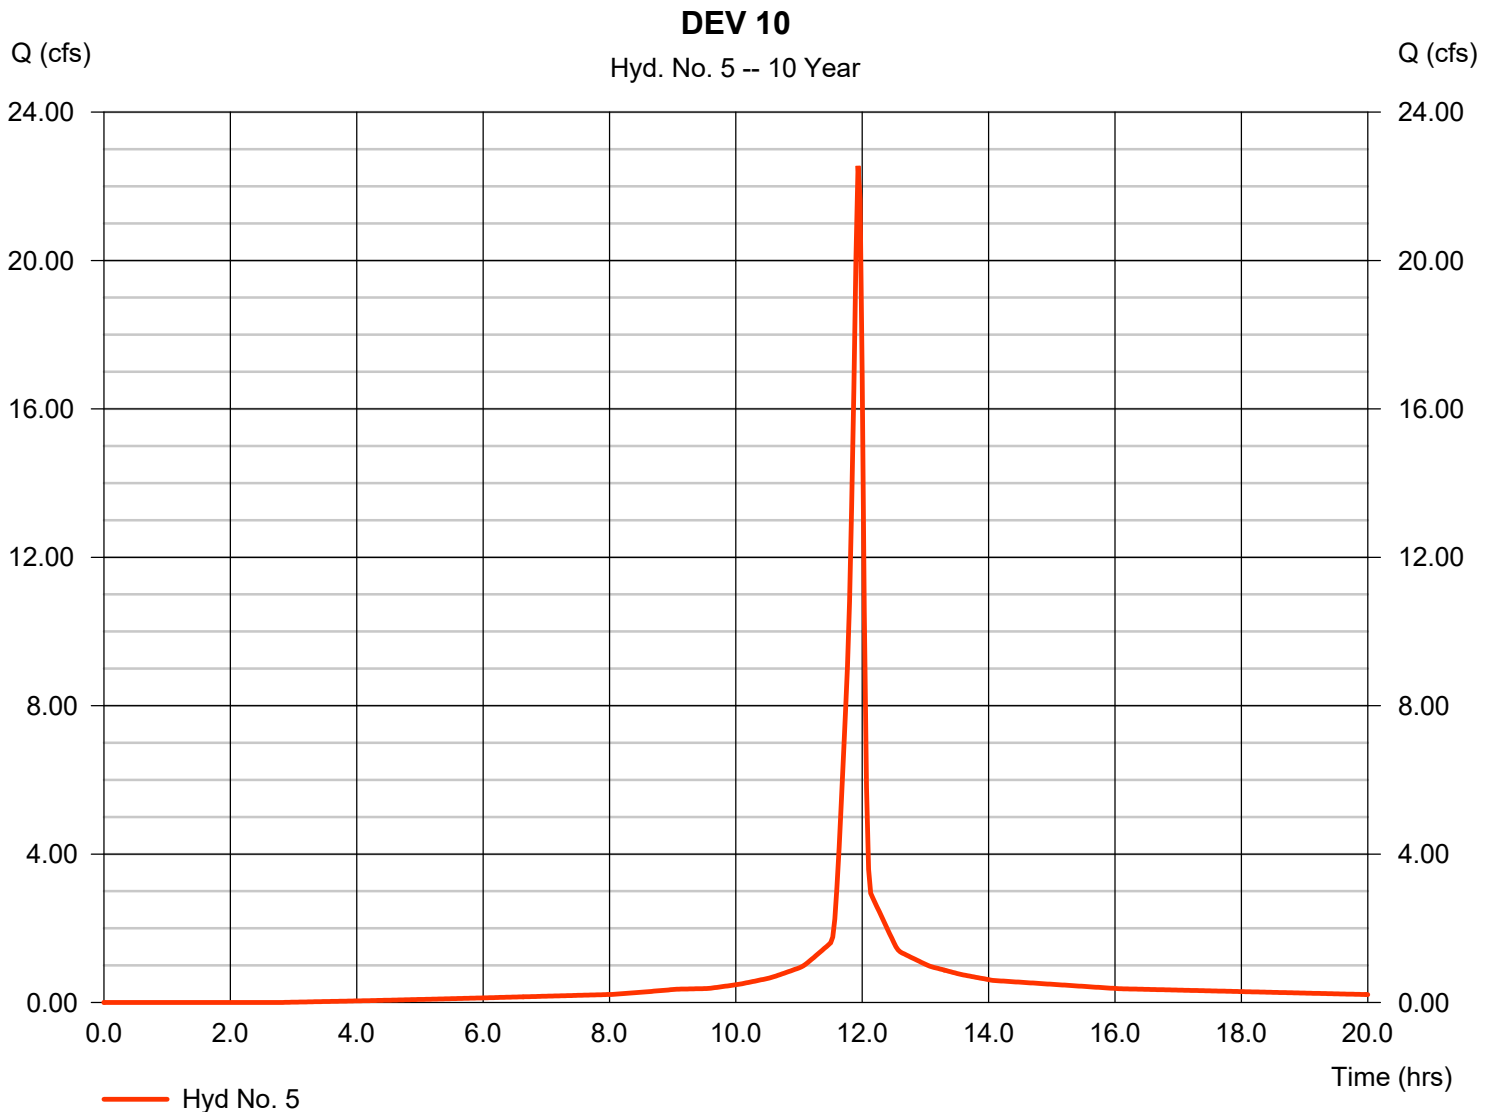

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 6

DEV 30

Hydrograph type	= SCS Runoff	Peak discharge	= 28.62 cfs
Storm frequency	= 10 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 61,008 cuft
Drainage area	= 4.170 ac	Curve number	= 88*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(1.850 \times 98) + (1.510 \times 80) + (0.810 \times 80)] / 4.170$

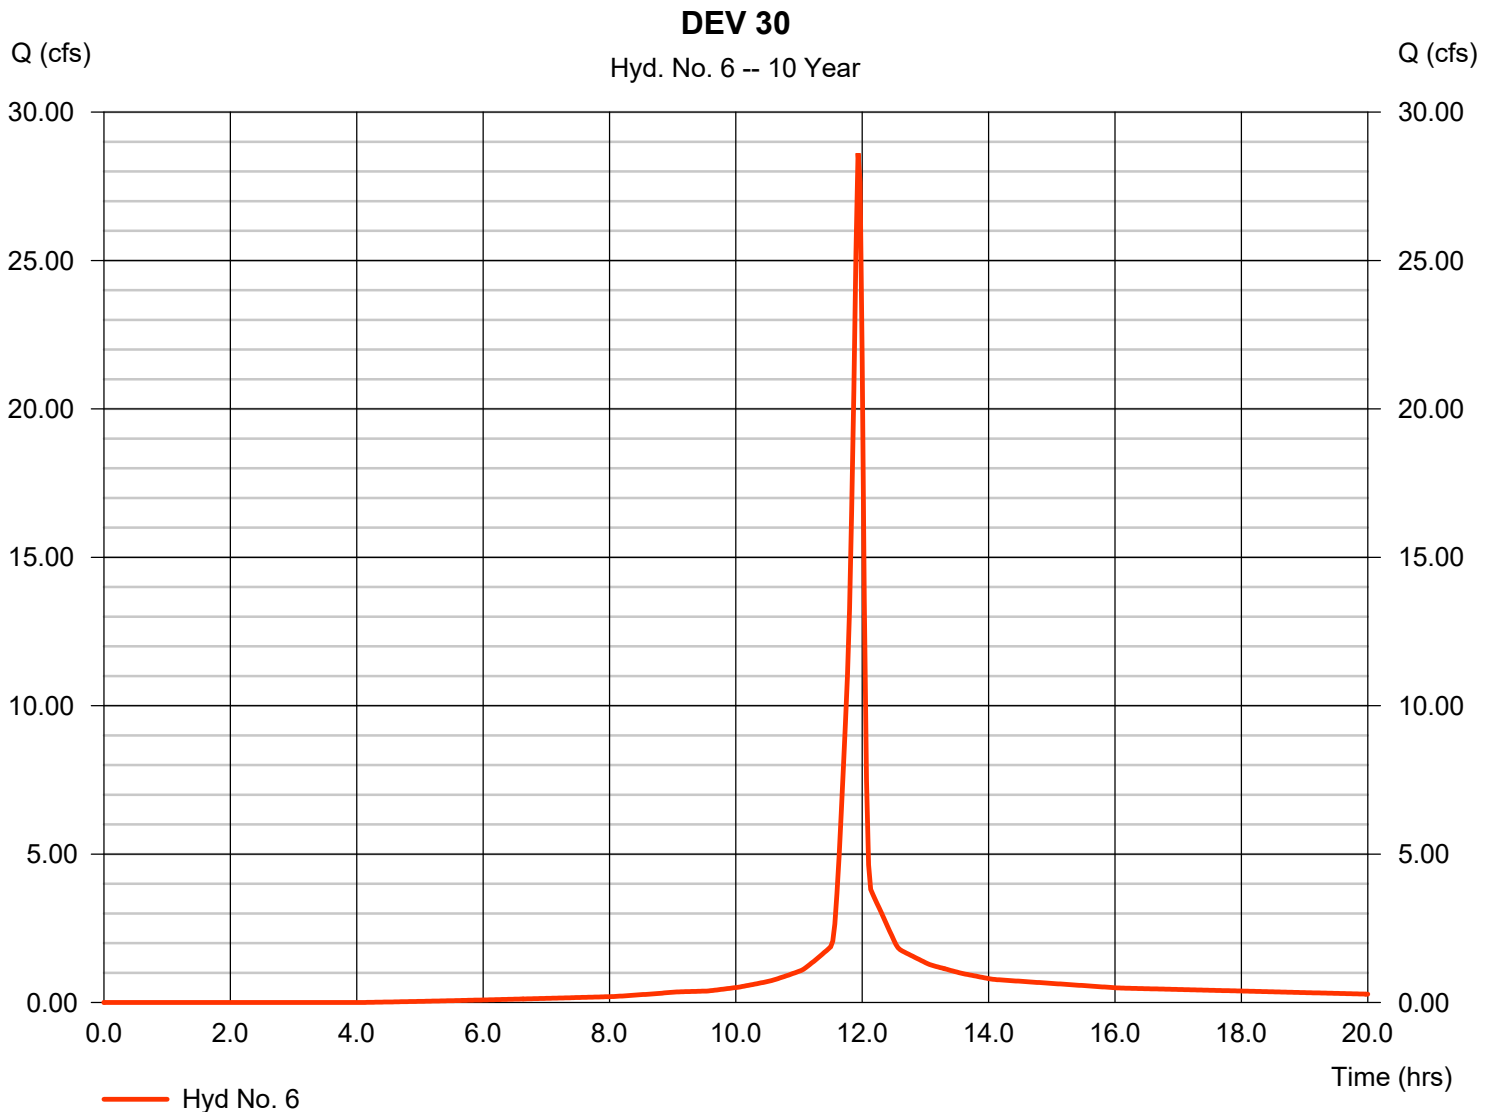



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 7

BIO 1

Hydrograph type	= Reservoir	Peak discharge	= 8.272 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.03 hrs
Time interval	= 2 min	Hyd. volume	= 49,784 cuft
Inflow hyd. No.	= 5 - DEV 10	Max. Elevation	= 1021.90 ft
Reservoir name	= BIORETENTION 1	Max. Storage	= 17,339 cuft

Storage Indication method used.

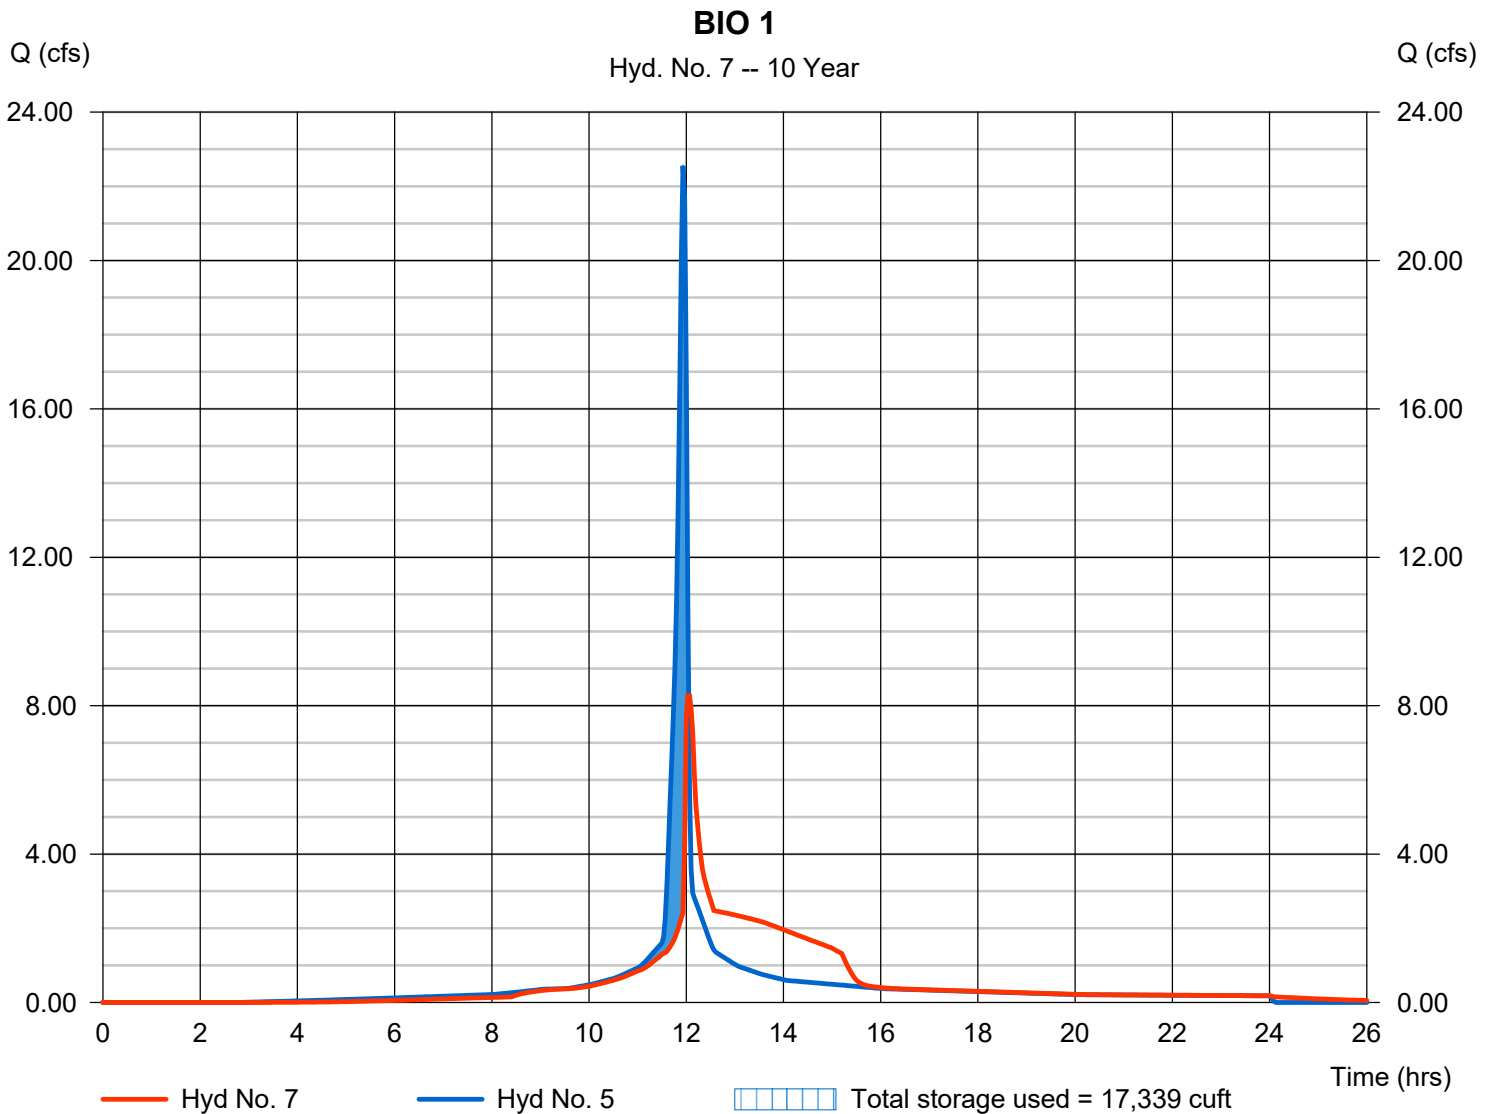

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 8

### COMBINE

Hydrograph type = Combine  
Storm frequency = 10 yrs  
Time interval = 2 min  
Inflow hyds. = 6, 7

Peak discharge = 31.96 cfs  
Time to peak = 11.97 hrs  
Hyd. volume = 110,792 cuft  
Contrib. drain. area = 4.170 ac

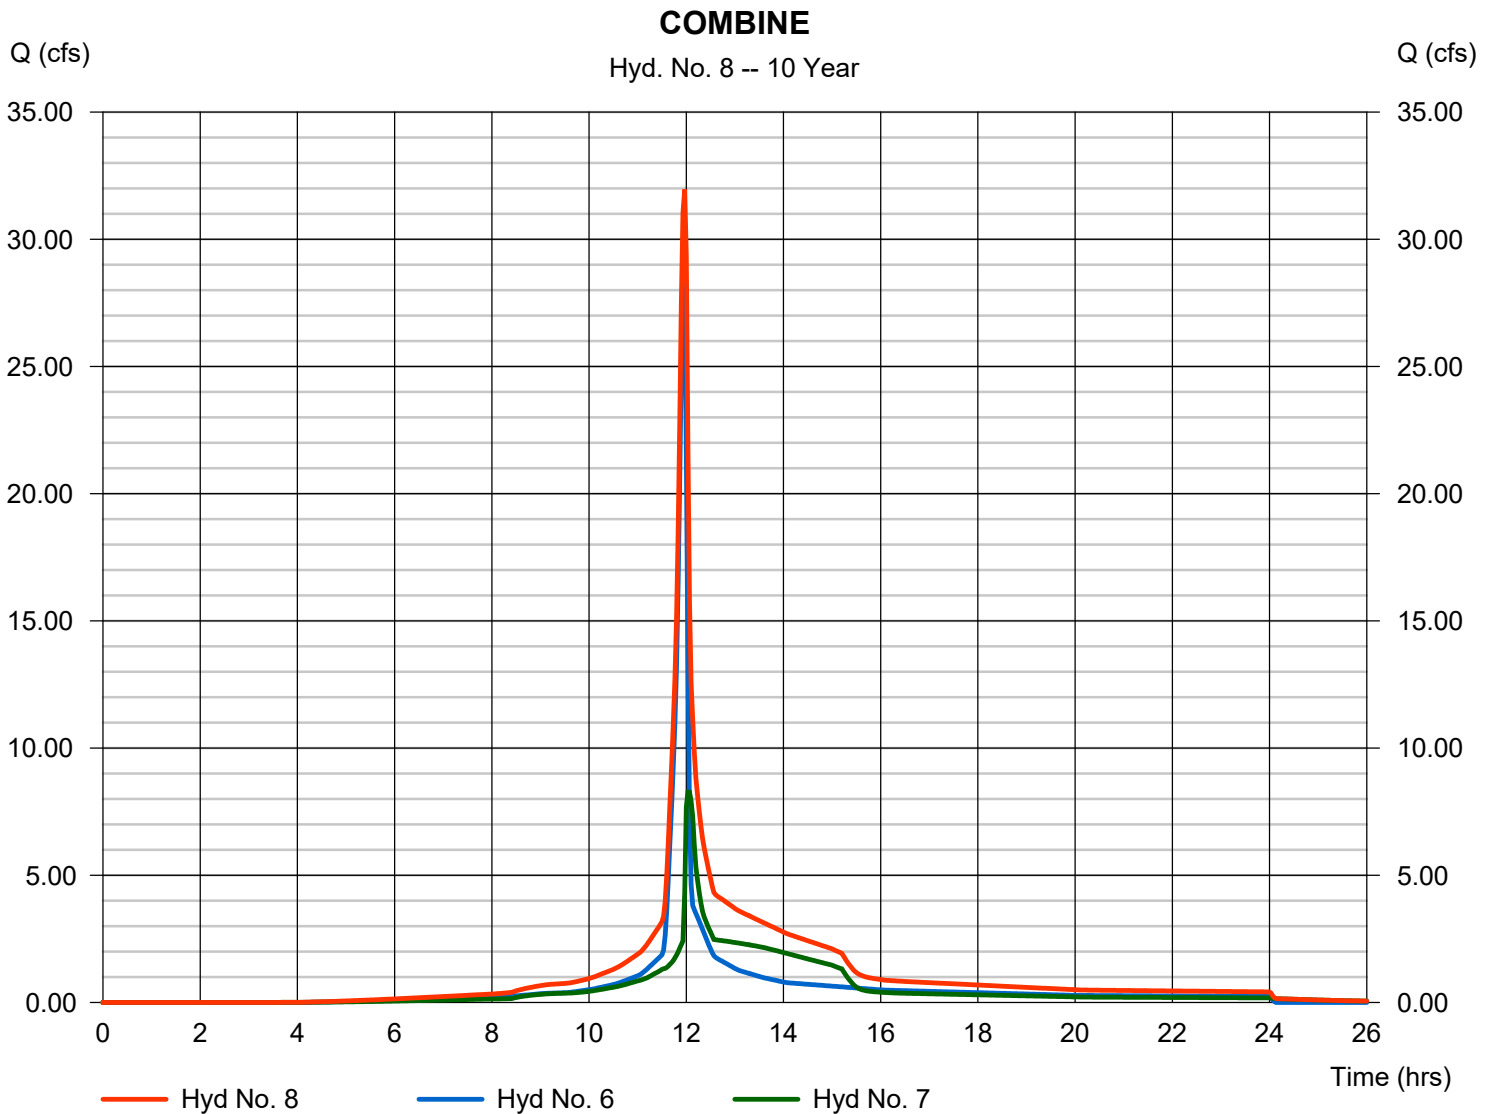

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 9

### DETENTION POND 1

Hydrograph type	= Reservoir	Peak discharge	= 3.142 cfs
Storm frequency	= 10 yrs	Time to peak	= 13.60 hrs
Time interval	= 2 min	Hyd. volume	= 110,789 cuft
Inflow hyd. No.	= 8 - COMBINE	Max. Elevation	= 1020.48 ft
Reservoir name	= DRY DETENTION 1	Max. Storage	= 51,919 cuft

Storage Indication method used.

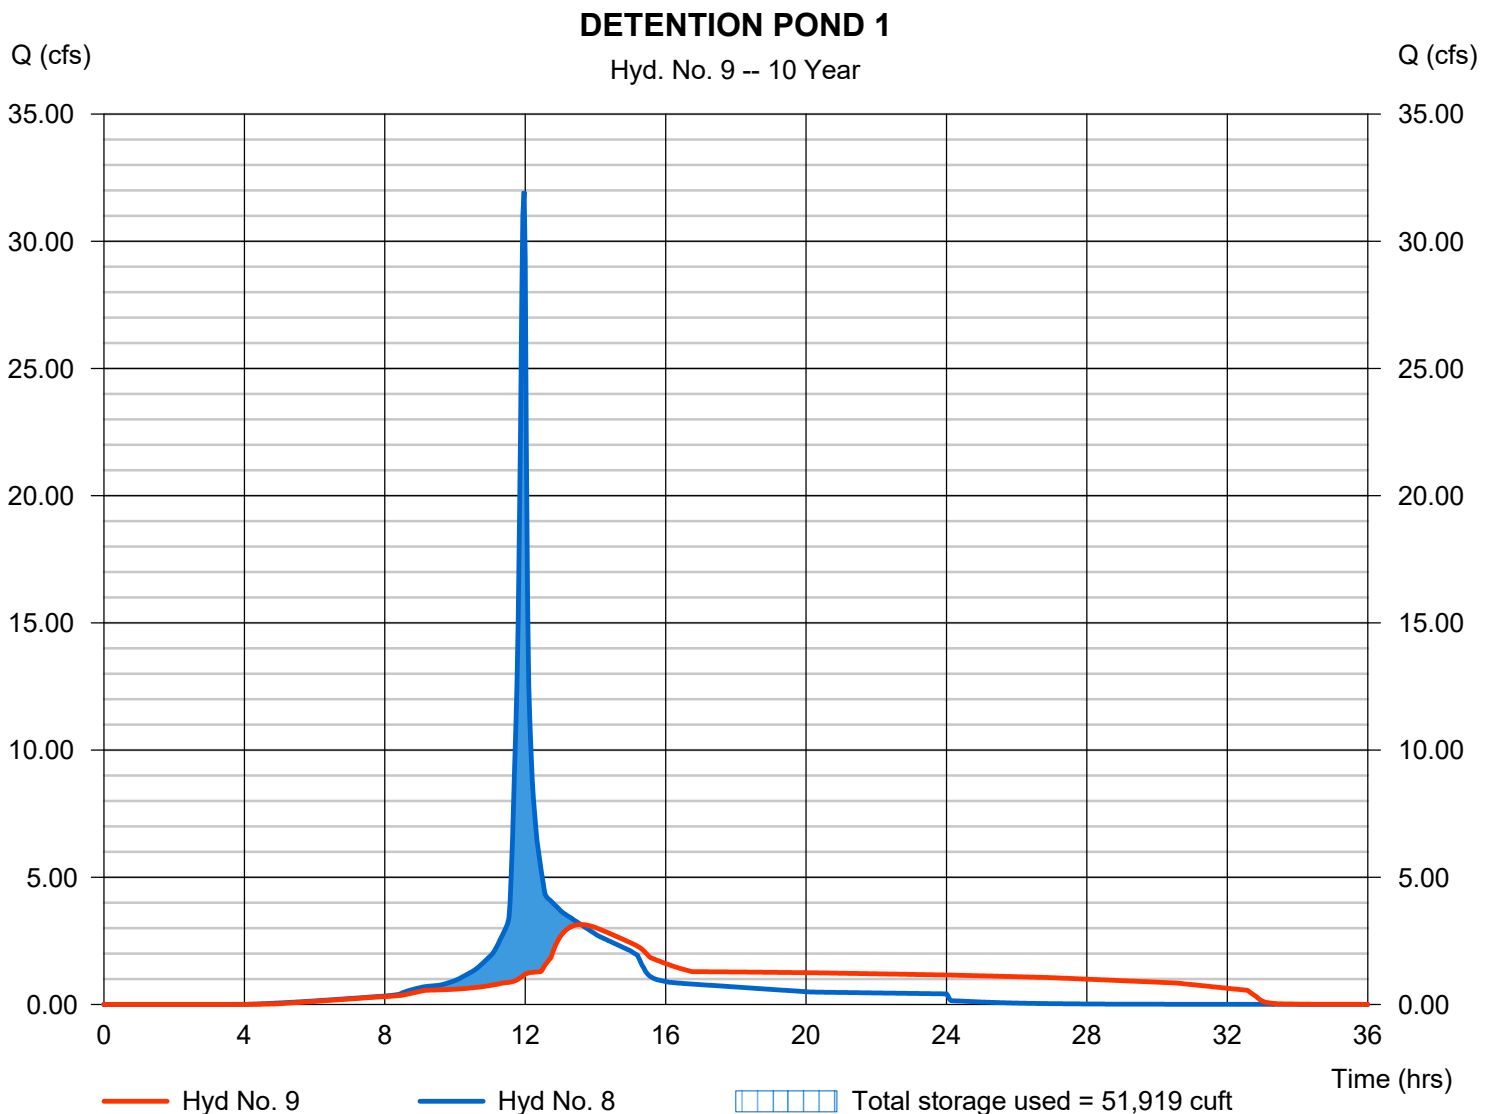

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 10

DA 11 (US ROUTE 50)

Hydrograph type	= SCS Runoff	Peak discharge	= 7.144 cfs
Storm frequency	= 10 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 15,124 cuft
Drainage area	= 1.060 ac	Curve number	= 87*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.400 \times 98) + (0.660 \times 80)] / 1.060$

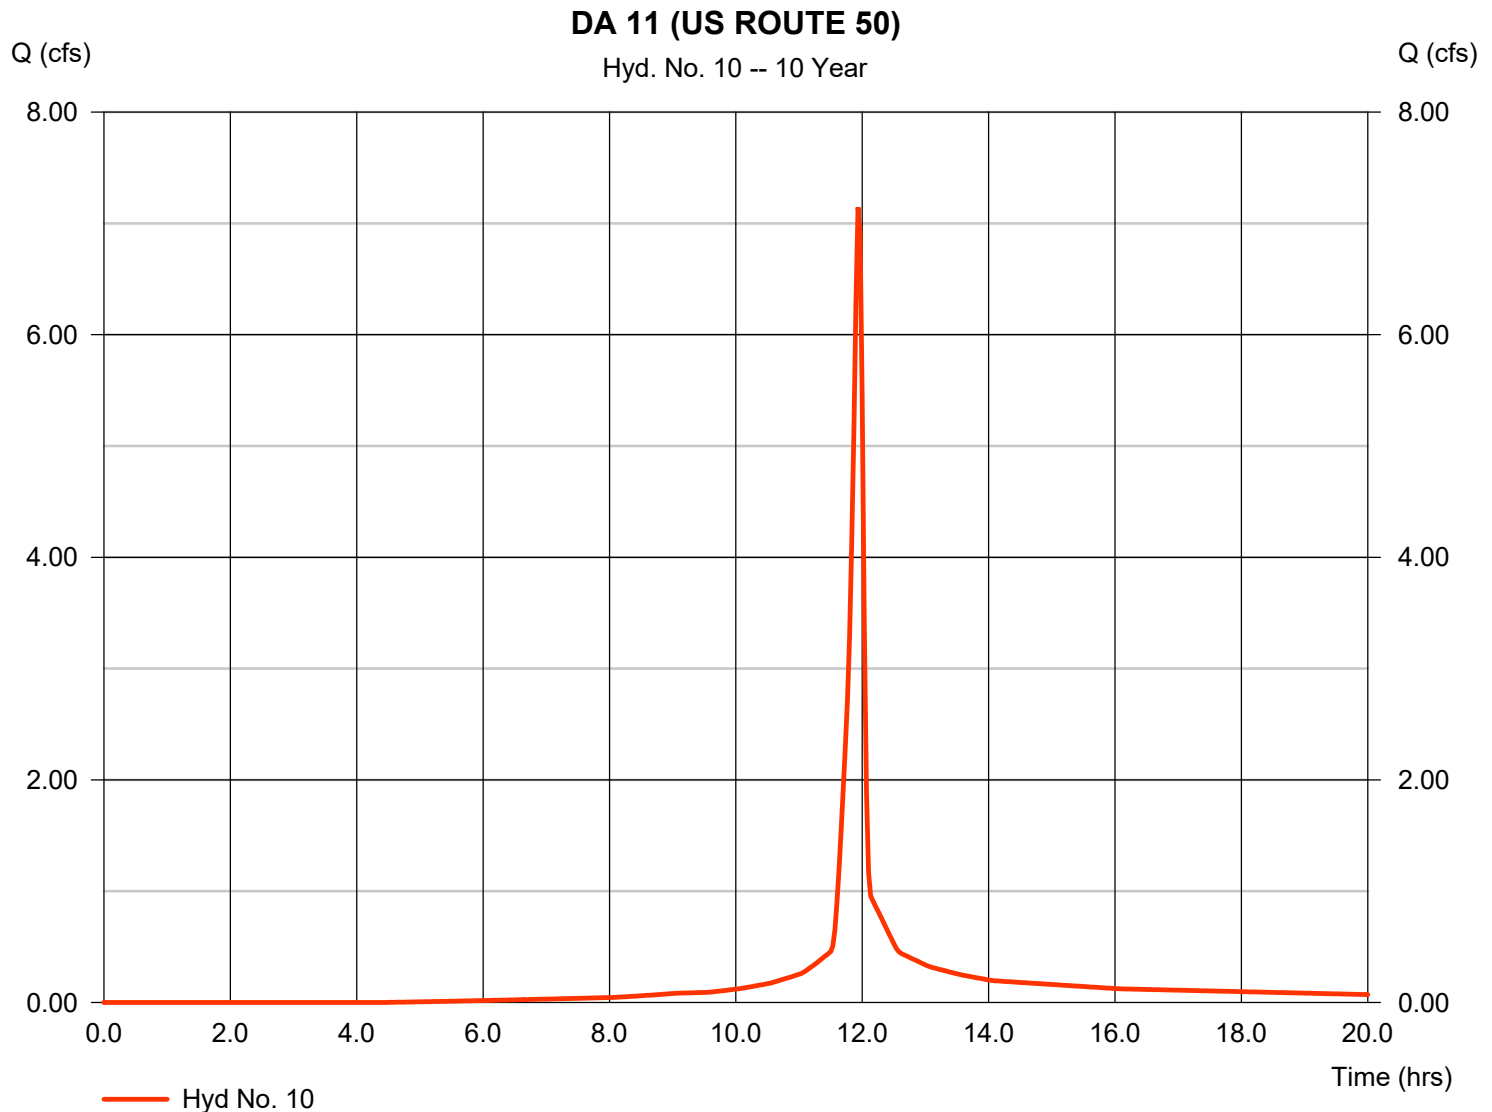

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 11

DEV POI 1

Hydrograph type = Combine  
 Storm frequency = 10 yrs  
 Time interval = 2 min  
 Inflow hyds. = 9, 10

Peak discharge = 8.266 cfs  
 Time to peak = 11.93 hrs  
 Hyd. volume = 125,913 cuft  
 Contrib. drain. area = 1.060 ac

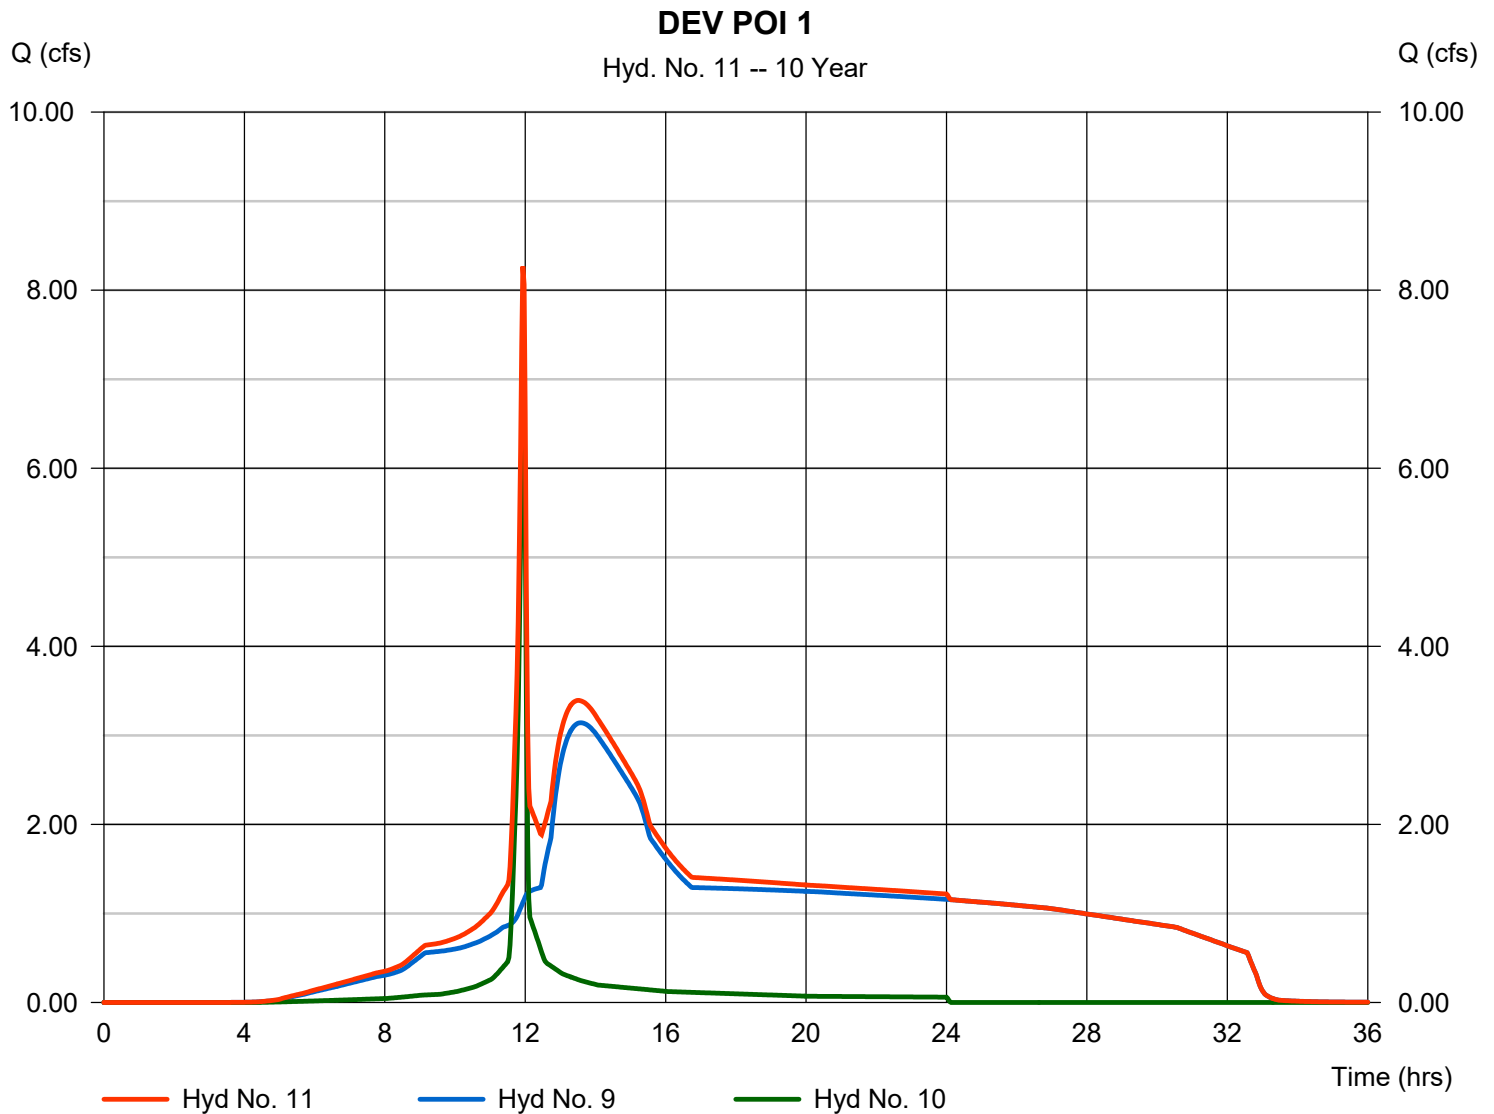

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 12

DEV 20

Hydrograph type	=	SCS Runoff	Peak discharge	=	17.94 cfs
Storm frequency	=	10 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	38,875 cuft
Drainage area	=	2.530 ac	Curve number	=	90*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	5.66 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) = [(1.370 x 98) + (1.160 x 80)] / 2.530

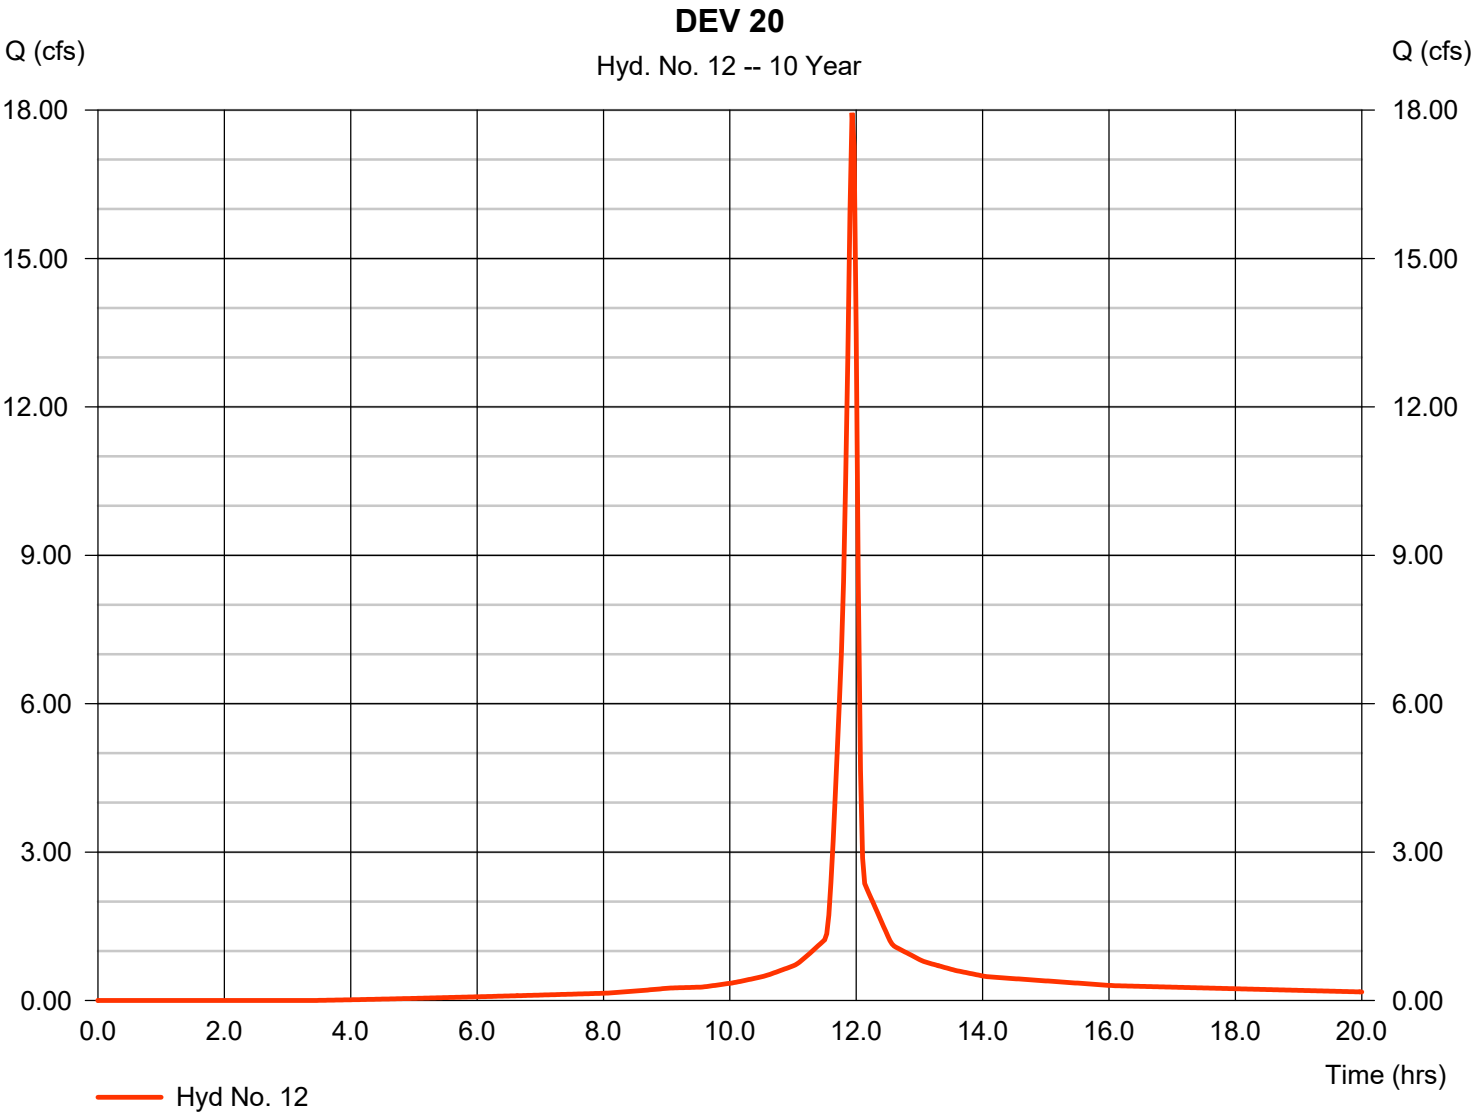

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 13

### BIORETENTION 2

Hydrograph type	= Reservoir	Peak discharge	= 4.782 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.07 hrs
Time interval	= 2 min	Hyd. volume	= 38,859 cuft
Inflow hyd. No.	= 12 - DEV 20	Max. Elevation	= 1021.11 ft
Reservoir name	= BIRETENTION 2	Max. Storage	= 17,438 cuft

Storage Indication method used.

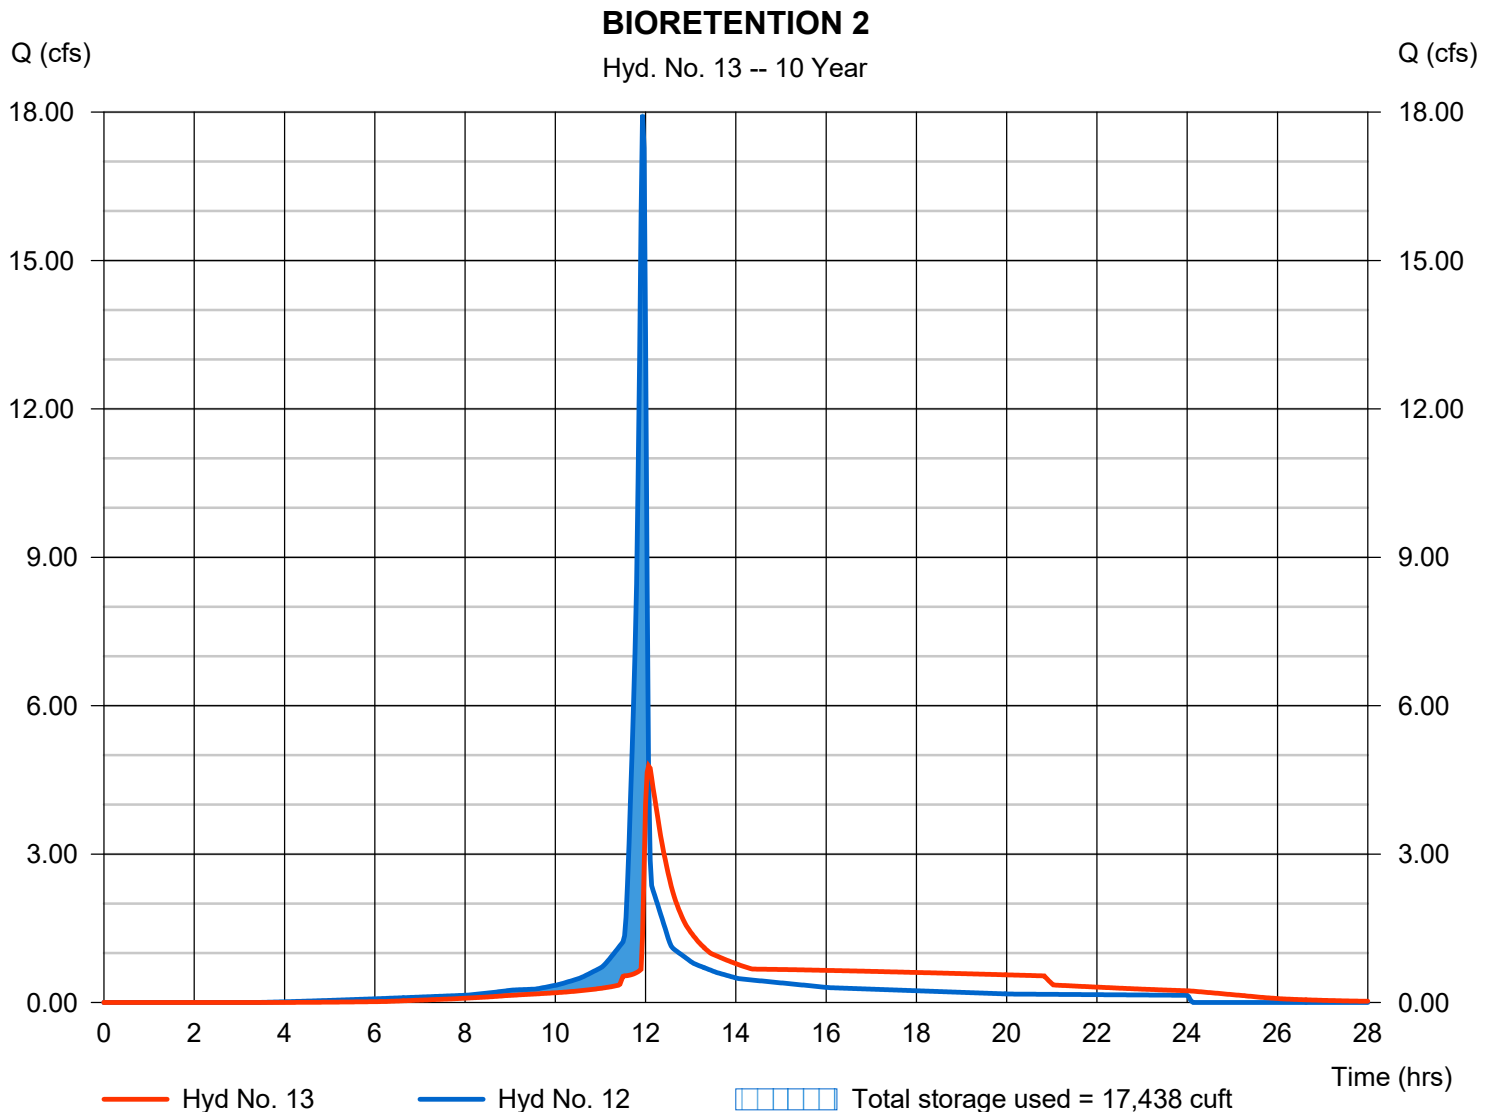

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019


## Hyd. No. 14

DA 21 (PR. PUBLIC ACCESS ROAD)

Hydrograph type	=	SCS Runoff	Peak discharge	=	11.77 cfs
Storm frequency	=	10 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	24,758 cuft
Drainage area	=	1.780 ac	Curve number	=	86*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	5.66 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) =  $[(0.630 \times 98) + (1.150 \times 80)] / 1.780$ 

### DA 21 (PR. PUBLIC ACCESS ROAD)

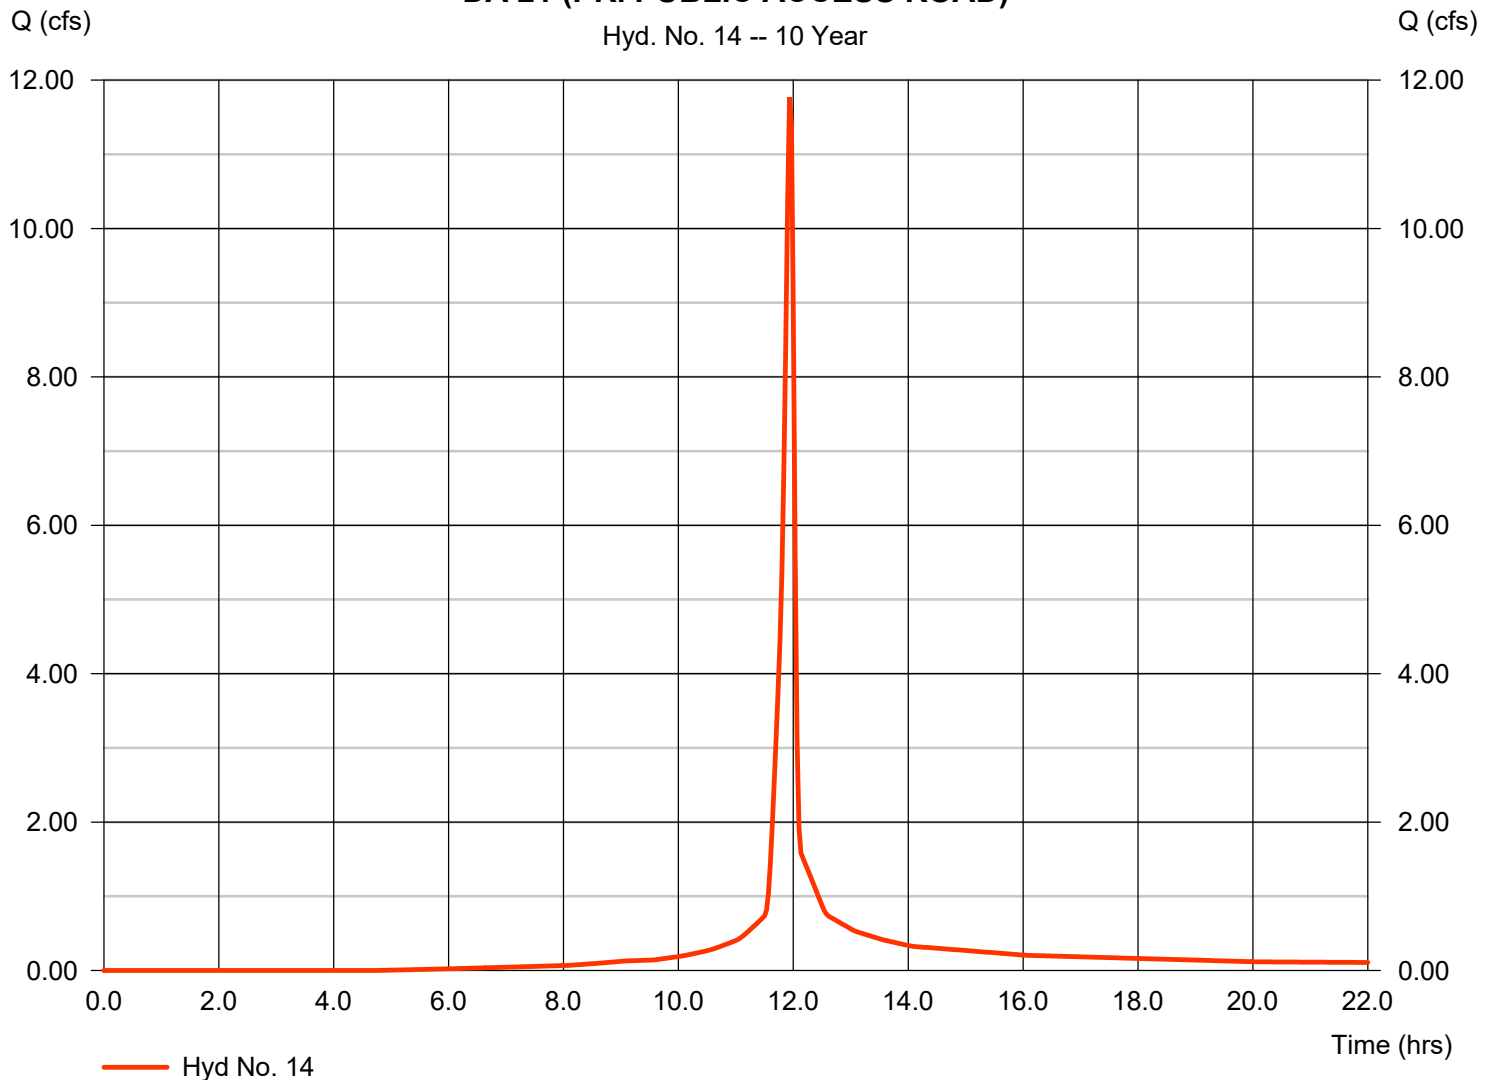



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 15

OFF 20

Hydrograph type	= SCS Runoff	Peak discharge	= 13.39 cfs
Storm frequency	= 10 yrs	Time to peak	= 12.17 hrs
Time interval	= 2 min	Hyd. volume	= 53,696 cuft
Drainage area	= 4.940 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 28.90 min
Total precip.	= 5.66 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.190 \times 98) + (4.750 \times 74)] / 4.940$

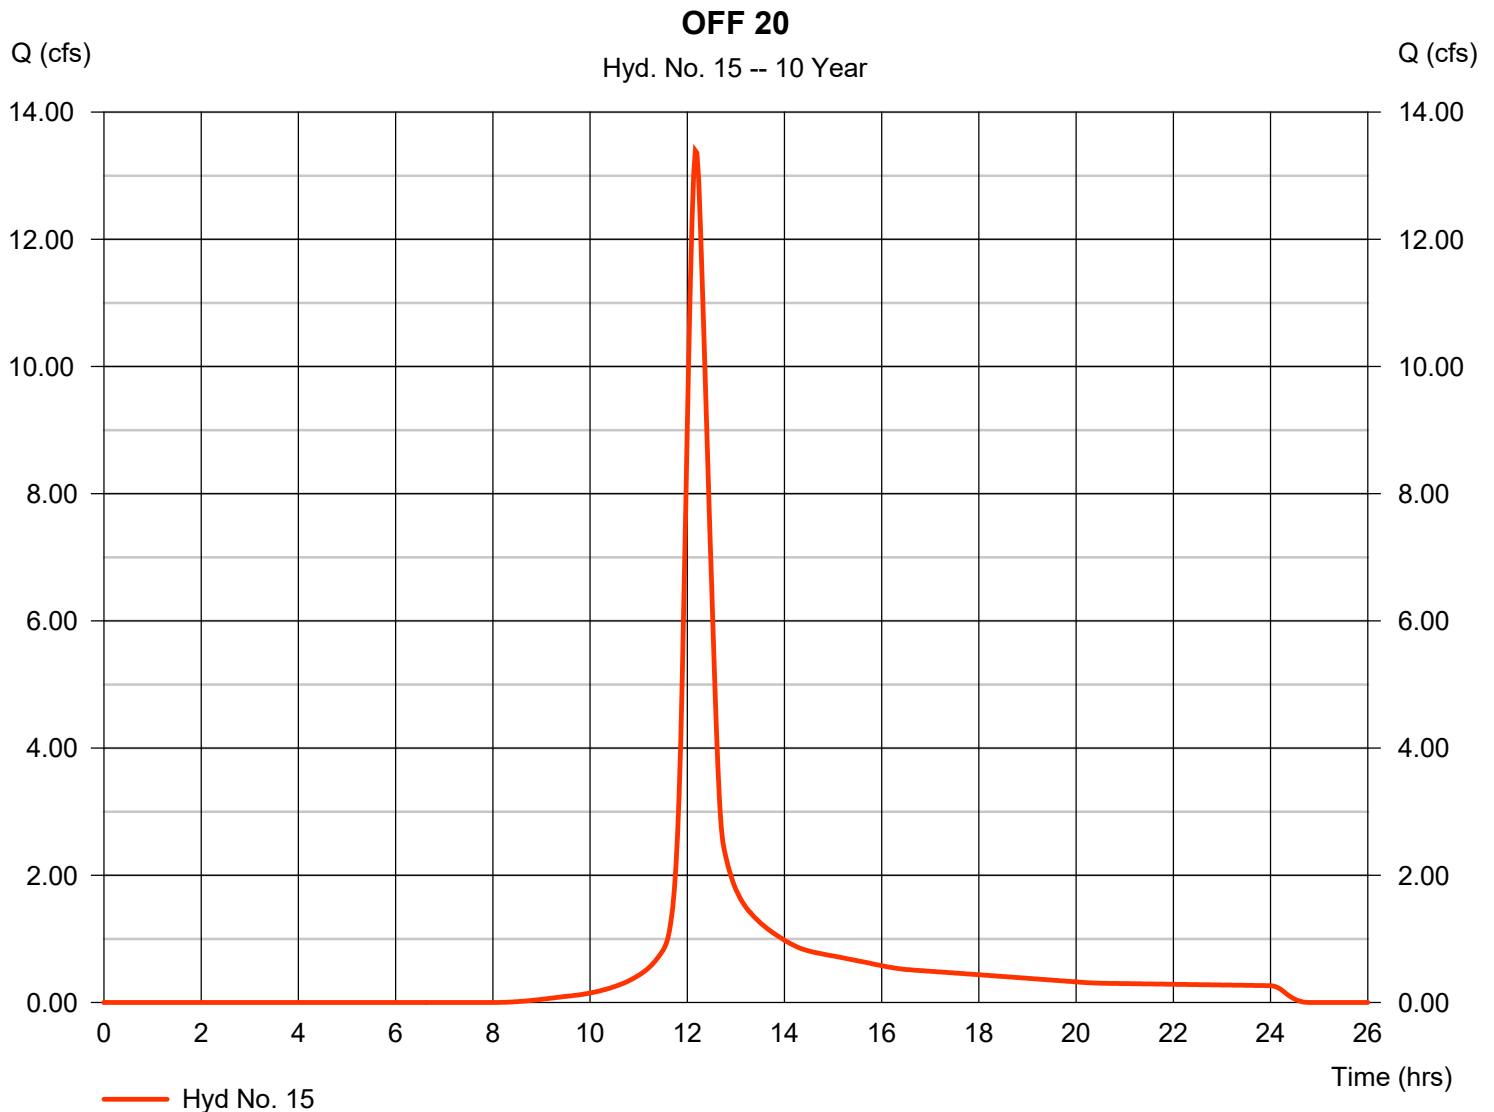

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 16

OFF DA 22 (US ROUTE 50)

Hydrograph type	=	SCS Runoff	Peak discharge	=	3.774 cfs
Storm frequency	=	10 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	7,990 cuft
Drainage area	=	0.560 ac	Curve number	=	87*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	5.66 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) =  $[(0.210 \times 98) + (0.350 \times 80)] / 0.560$

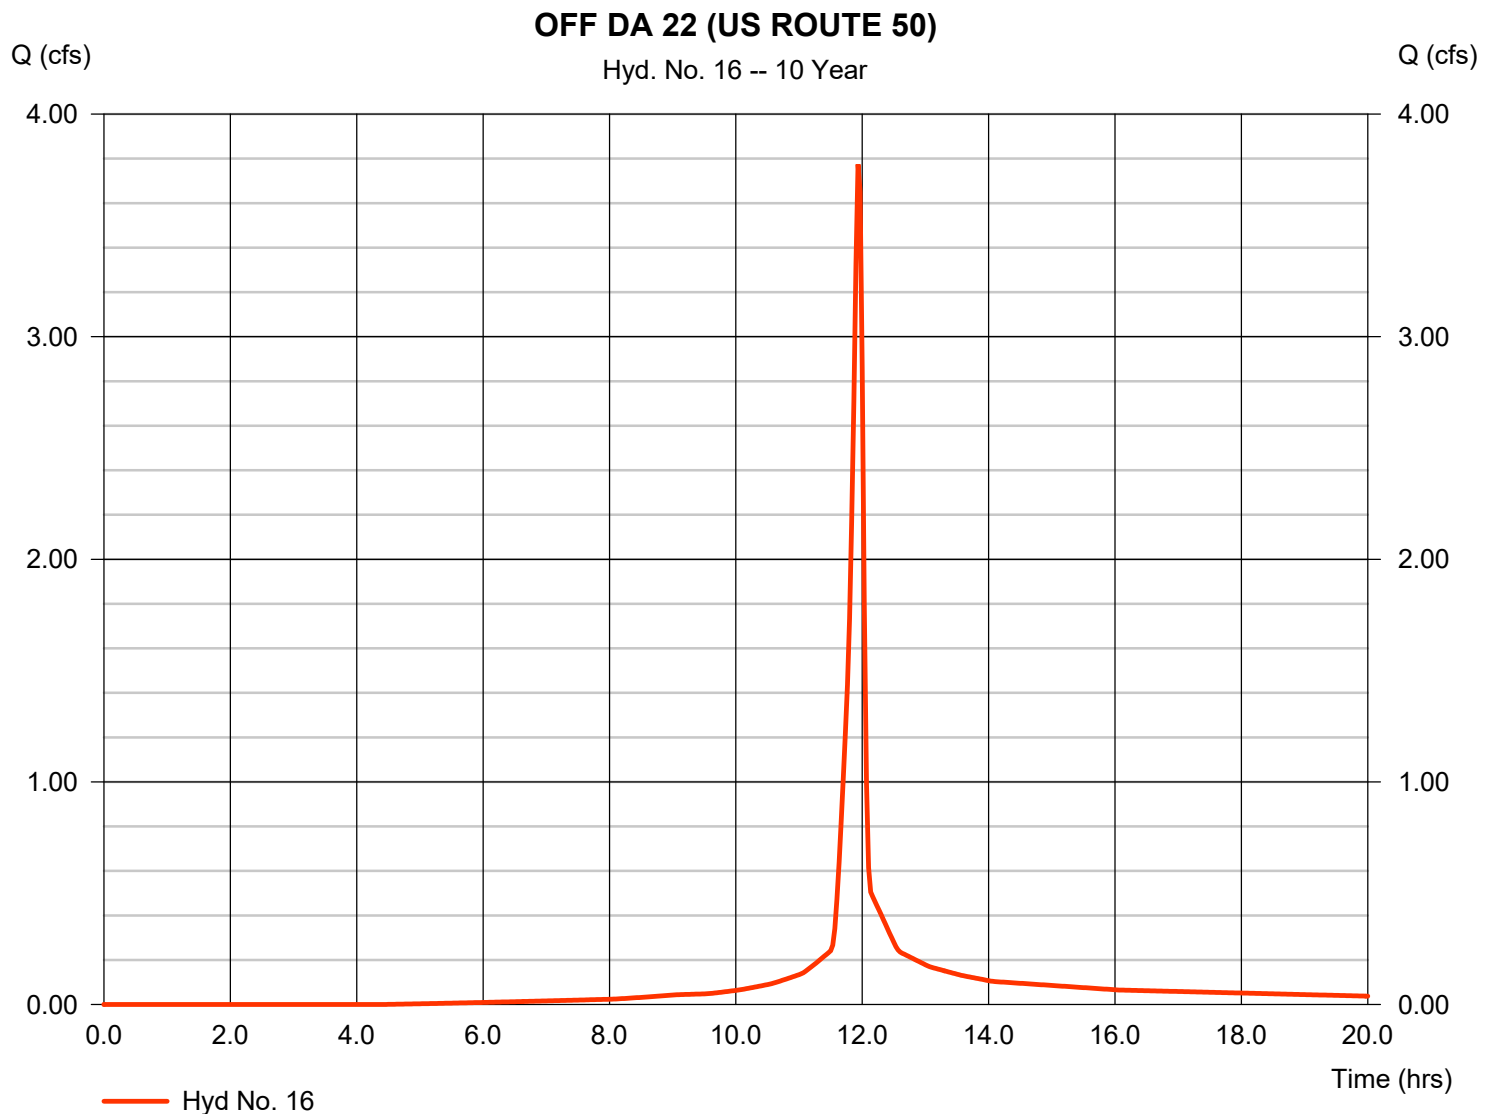

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 17

DEV POI 2 (AT CULVERT)

Hydrograph type = Combine  
 Storm frequency = 10 yrs  
 Time interval = 2 min  
 Inflow hyds. = 13, 14, 15, 16

Peak discharge = 25.51 cfs  
 Time to peak = 11.97 hrs  
 Hyd. volume = 125,303 cuft  
 Contrib. drain. area = 7.280 ac

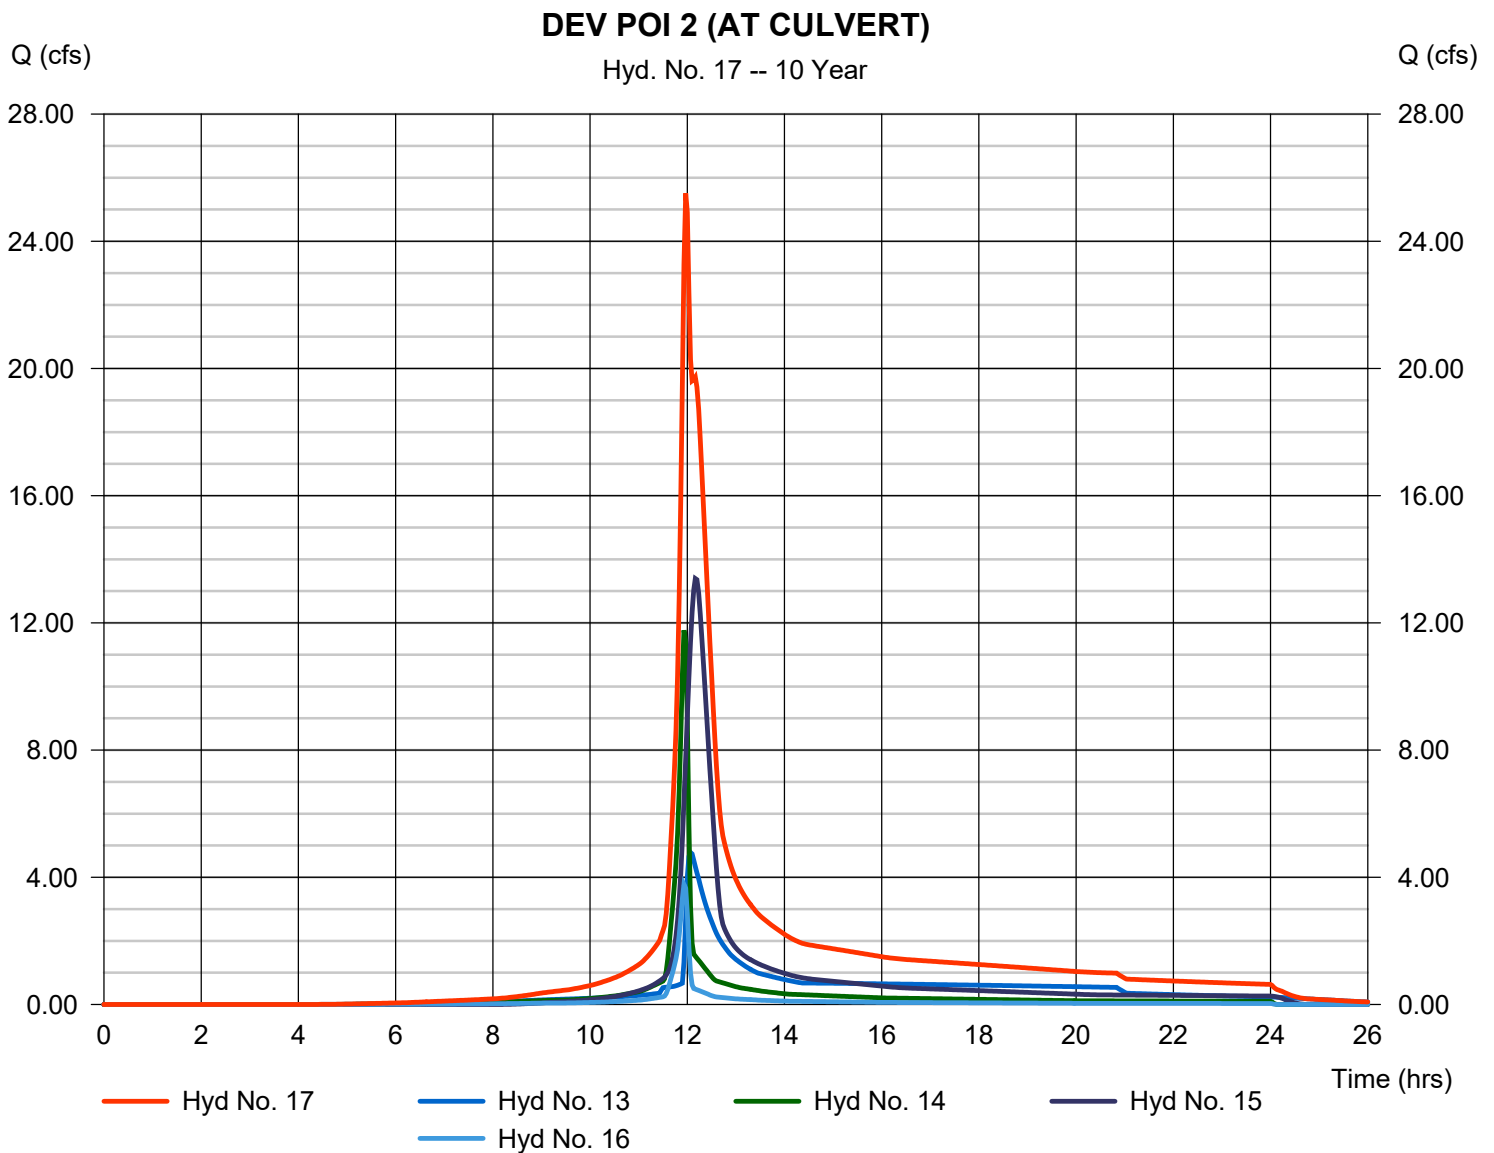

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	48.62	2	728	179,000	-----	-----	-----	EX 20
2	SCS Runoff	23.85	2	728	87,924	-----	-----	-----	EX 10 (POI 1)
3	SCS Runoff	27.64	2	730	110,864	-----	-----	-----	OFF 20
4	Combine	75.69	2	728	289,864	1, 3	-----	-----	EX POI 2 (AT CULVERT)
5	SCS Runoff	38.09	2	716	87,096	-----	-----	-----	DEV 10
6	SCS Runoff	49.93	2	716	110,597	-----	-----	-----	DEV 30
7	Reservoir	10.22	2	724	87,083	5	1022.97	30,074	BIO 1
8	Combine	59.12	2	716	197,680	6, 7	-----	-----	COMBINE
9	Reservoir	18.68	2	726	197,678	8	1021.03	67,289	DETENTION POND 1
10	SCS Runoff	12.58	2	716	27,670	-----	-----	-----	DA 11 (US ROUTE 50)
11	Combine	22.80	2	722	225,348	9, 10	-----	-----	DEV POI 1
12	SCS Runoff	30.78	2	716	69,210	-----	-----	-----	DEV 20
13	Reservoir	6.010	2	726	69,194	12	1022.23	30,379	BIORETENTION 2
14	SCS Runoff	20.92	2	716	45,720	-----	-----	-----	DA 21 (PR. PUBLIC ACCESS ROAD)
15	SCS Runoff	27.64	2	730	110,864	-----	-----	-----	OFF 20
16	SCS Runoff	6.646	2	716	14,618	-----	-----	-----	OFF DA 22 (US ROUTE 50)
17	Combine	49.19	2	718	240,396	13, 14, 15, 16	-----	-----	DEV POI 2 (AT CULVERT)
81450_24-HR ANALYSIS.gpw					Return Period: 100 Year			Friday, 02 / 15 / 2019	Page 57

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019


## Hyd. No. 1

EX 20

Hydrograph type = SCS Runoff  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Drainage area = 8.270 ac  
 Basin Slope = 0.0 %  
 Tc method = TR55  
 Total precip. = 9.25 in  
 Storm duration = 24 hrs

Peak discharge = 48.62 cfs  
 Time to peak = 12.13 hrs  
 Hyd. volume = 179,000 cuft  
 Curve number = 74\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 25.10 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(0.110 \times 98) + (8.160 \times 74)] / 8.270$

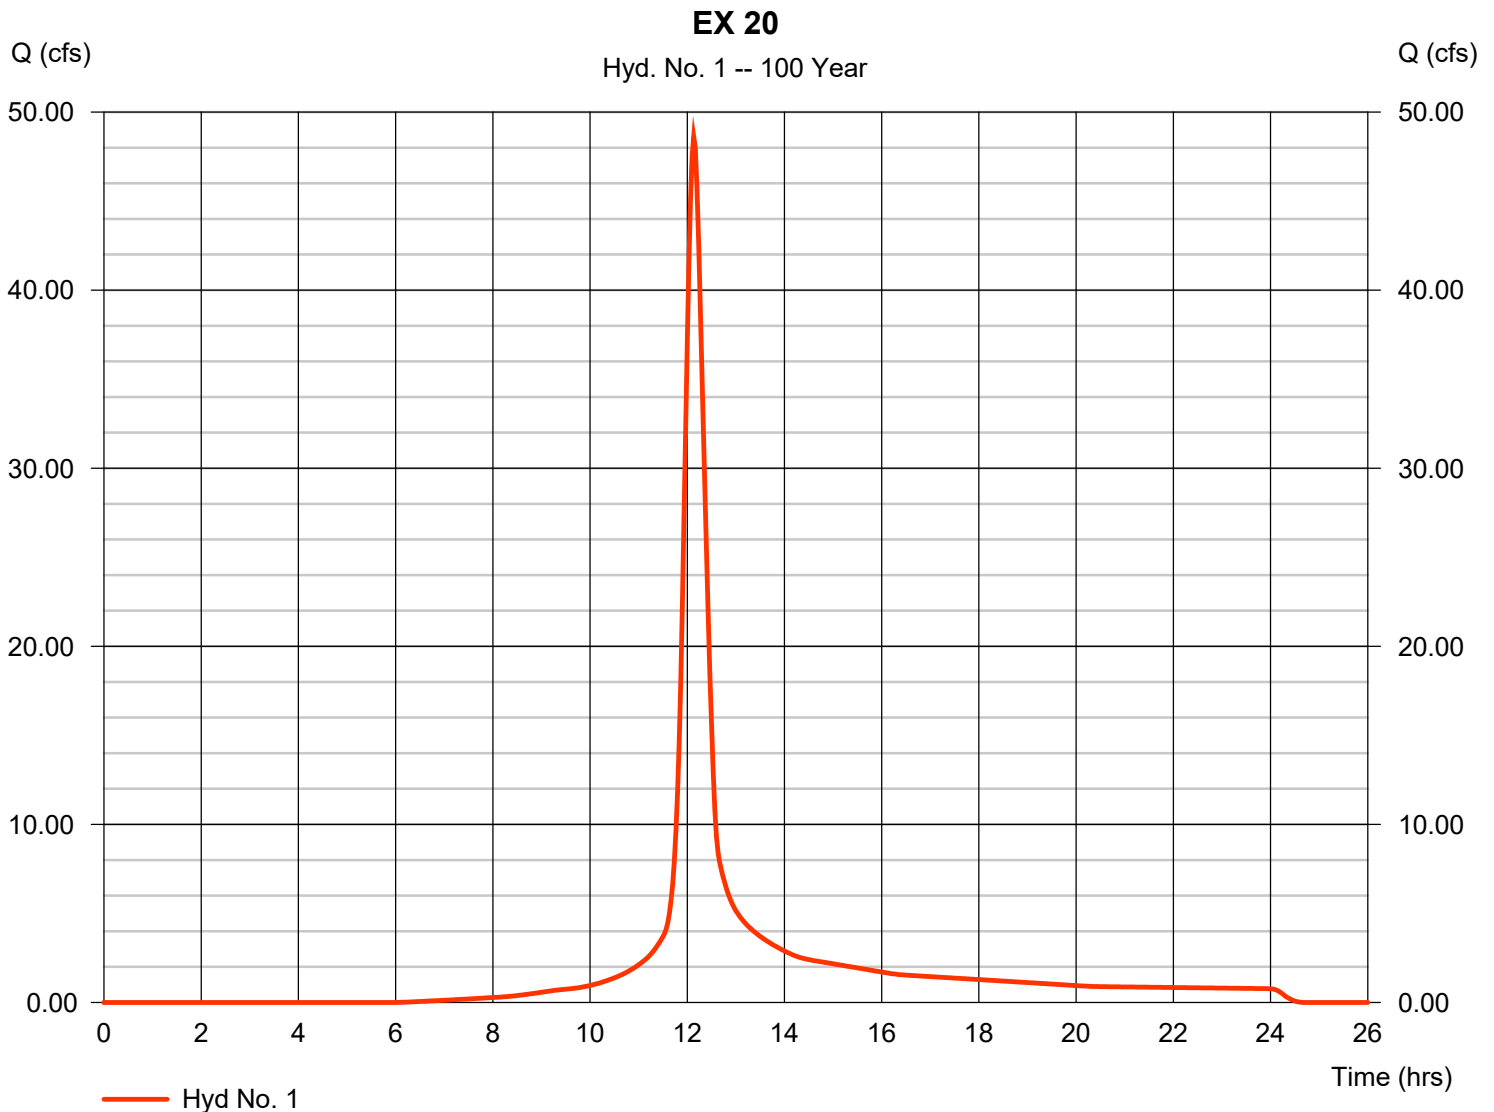

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 2

EX 10 (POI 1)

Hydrograph type	= SCS Runoff	Peak discharge	= 23.85 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.13 hrs
Time interval	= 2 min	Hyd. volume	= 87,924 cuft
Drainage area	= 3.980 ac	Curve number	= 75*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.30 min
Total precip.	= 9.25 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) =  $[(0.090 \times 98) + (3.890 \times 74)] / 3.980$

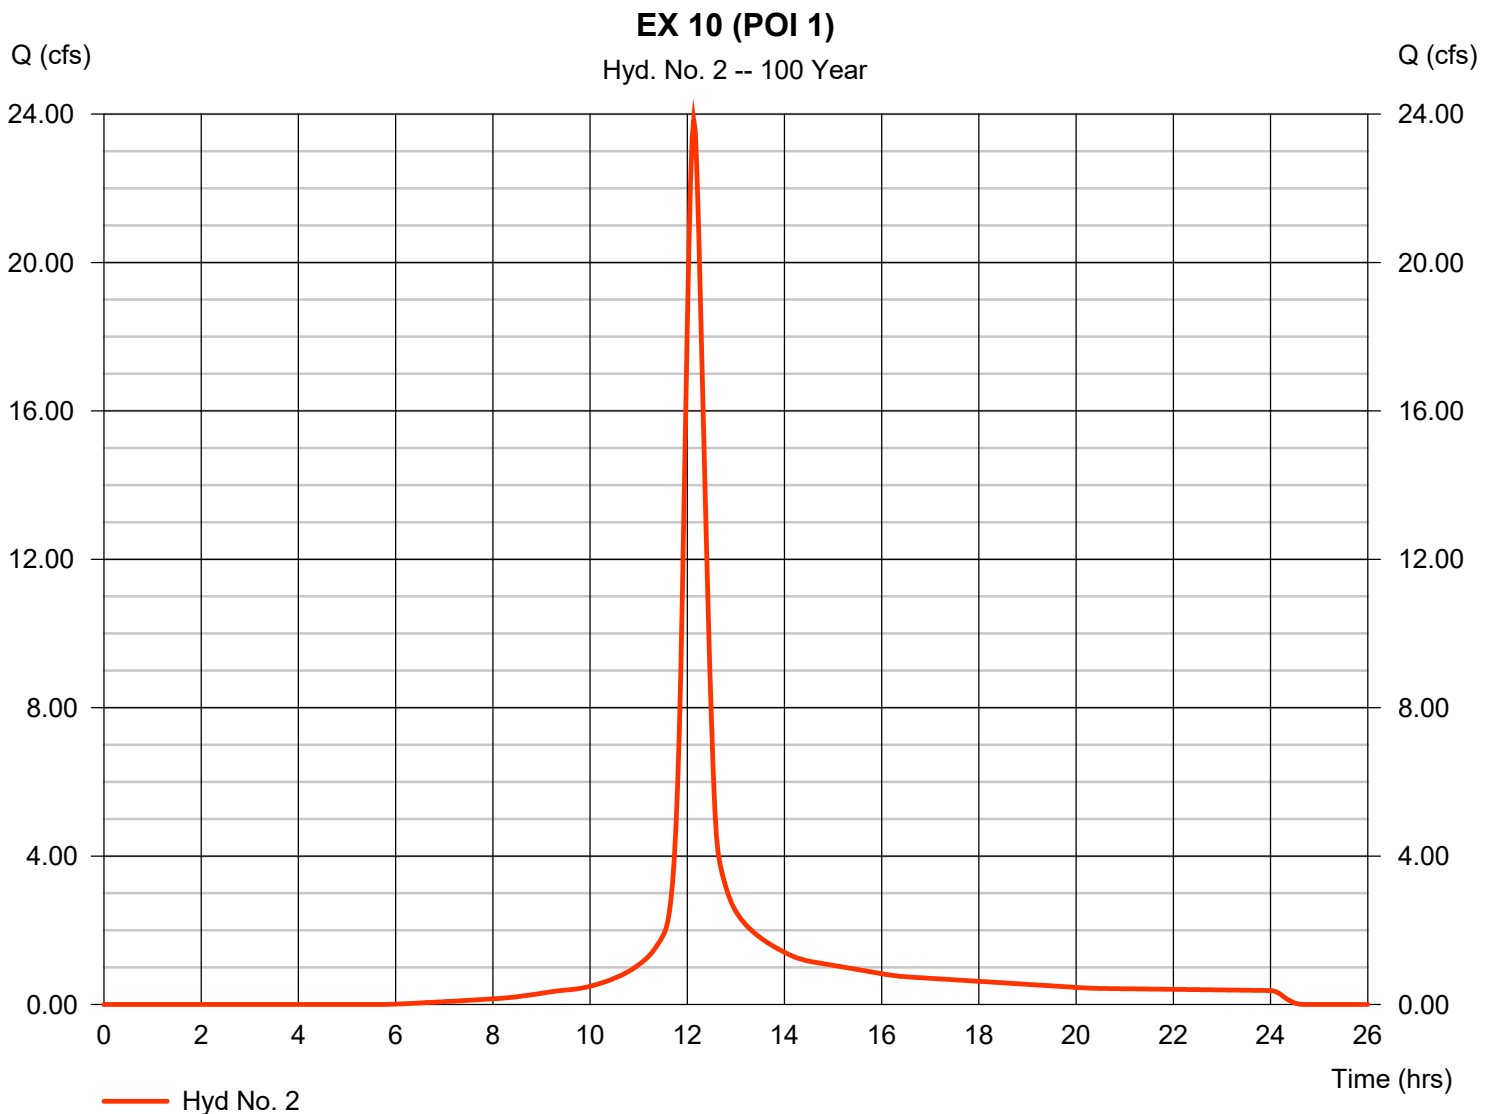

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019


## Hyd. No. 3

OFF 20

Hydrograph type = SCS Runoff  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Drainage area = 4.940 ac  
 Basin Slope = 0.0 %  
 Tc method = TR55  
 Total precip. = 9.25 in  
 Storm duration = 24 hrs

Peak discharge = 27.64 cfs  
 Time to peak = 12.17 hrs  
 Hyd. volume = 110,864 cuft  
 Curve number = 75\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 28.90 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(0.140 \times 98) + (4.800 \times 74)] / 4.940$

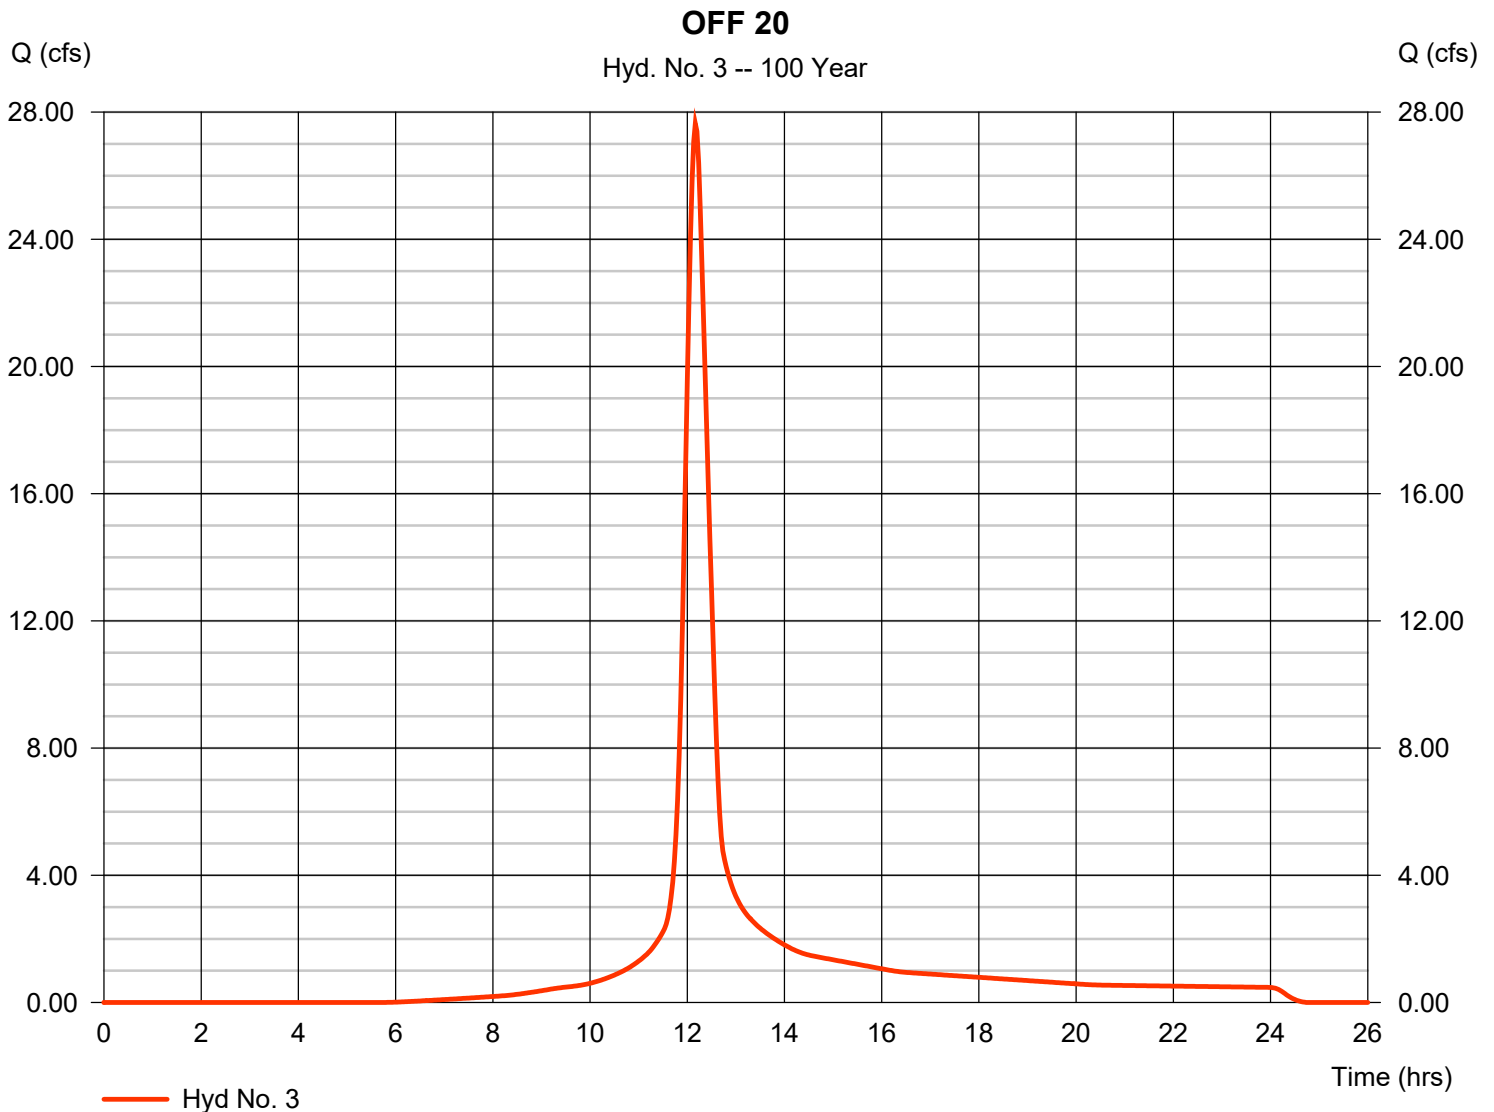

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 4

EX POI 2 (AT CULVERT)

Hydrograph type	= Combine	Peak discharge	= 75.69 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.13 hrs
Time interval	= 2 min	Hyd. volume	= 289,864 cuft
Inflow hyds.	= 1, 3	Contrib. drain. area	= 13.210 ac

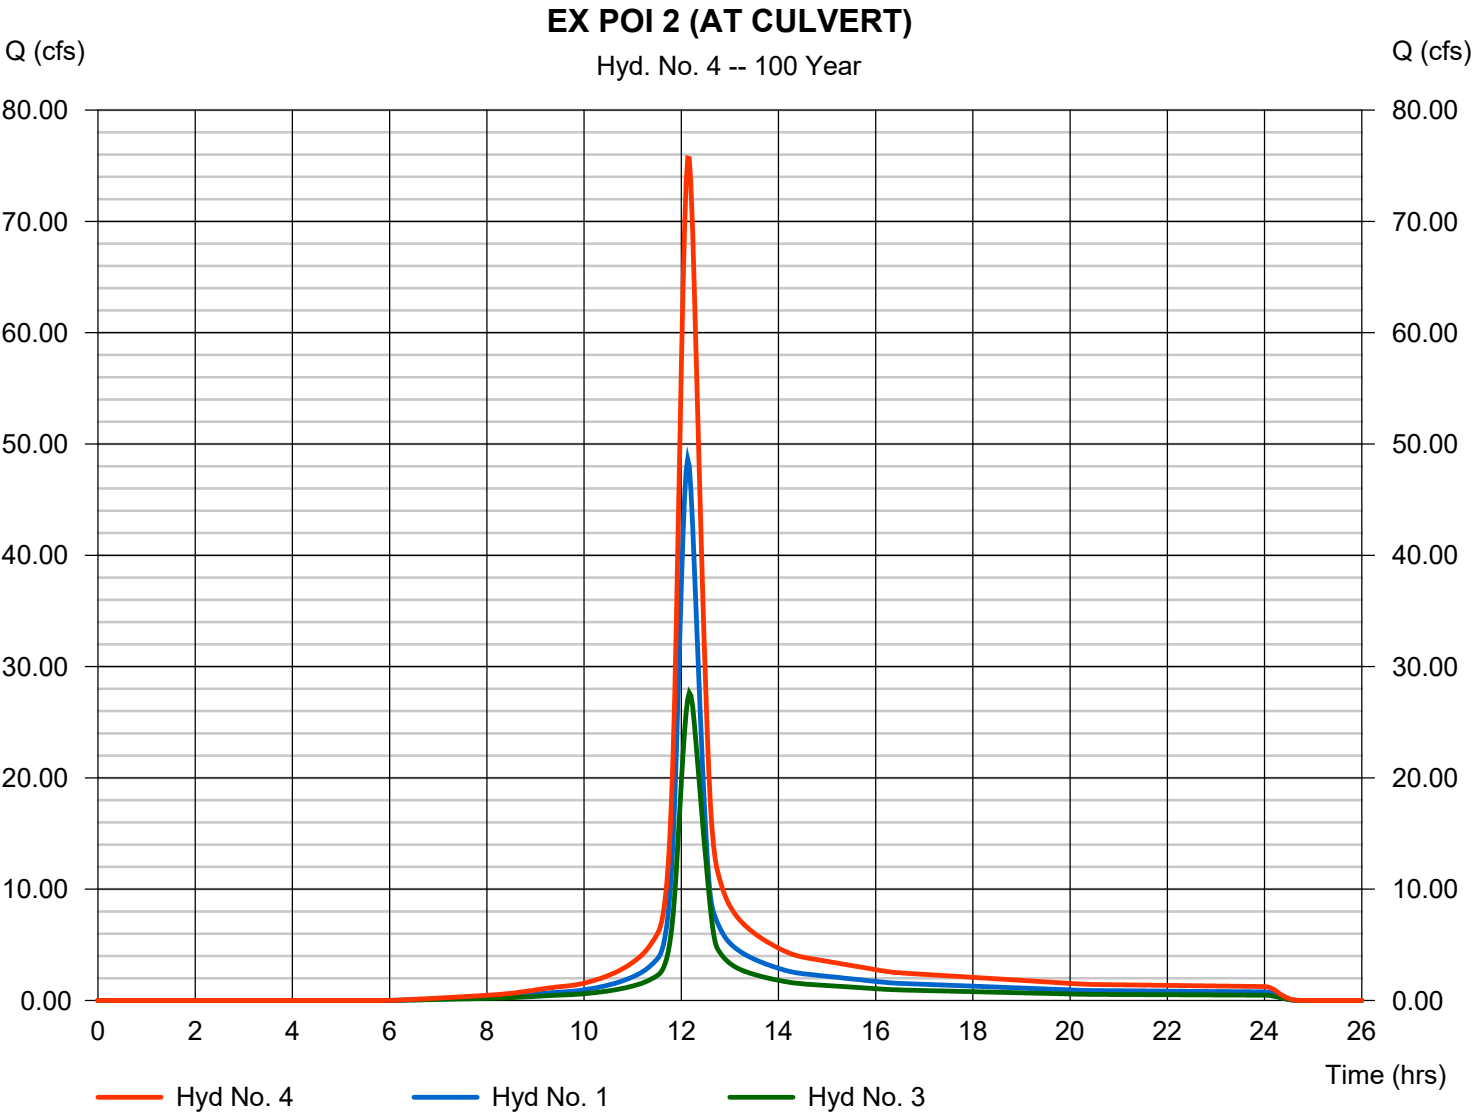



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 5

DEV 10

Hydrograph type	= SCS Runoff	Peak discharge	= 38.09 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 87,096 cuft
Drainage area	= 3.090 ac	Curve number	= 92*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 9.25 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(2.050 x 98) + (1.040 x 80)] / 3.090

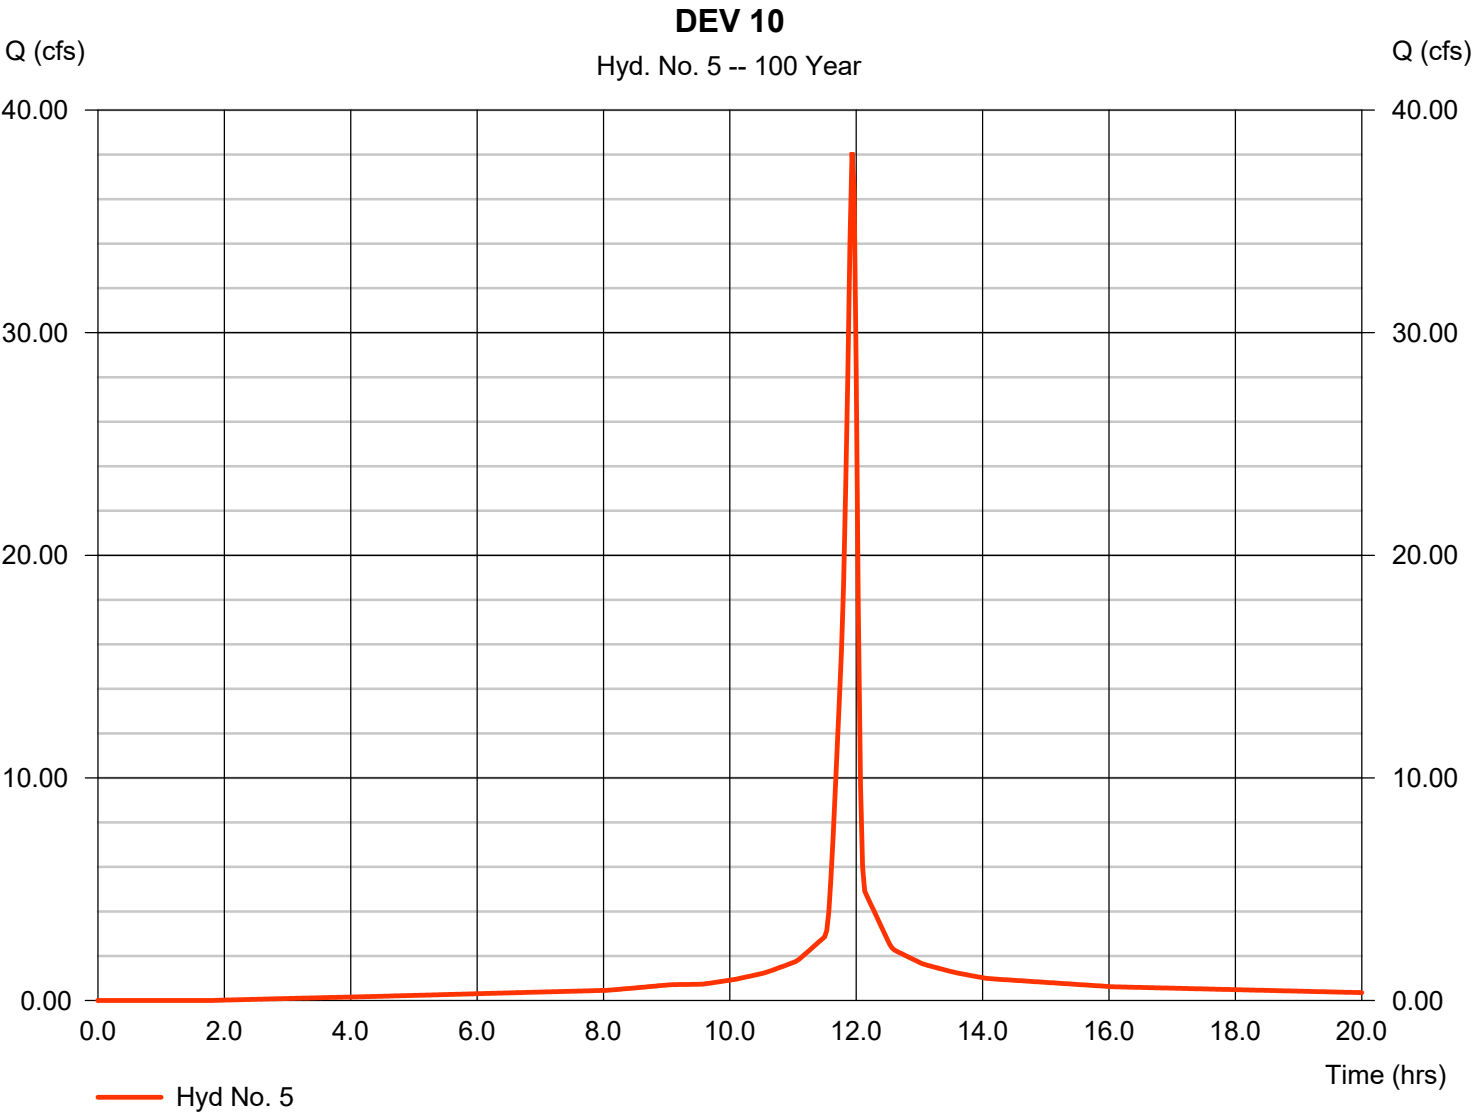

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 6

DEV 30


Hydrograph type = SCS Runoff  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Drainage area = 4.170 ac  
 Basin Slope = 0.0 %  
 Tc method = User  
 Total precip. = 9.25 in  
 Storm duration = 24 hrs

Peak discharge = 49.93 cfs  
 Time to peak = 11.93 hrs  
 Hyd. volume = 110,597 cuft  
 Curve number = 88\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 5.00 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(1.850 \times 98) + (1.510 \times 80) + (0.810 \times 80)] / 4.170$

### DEV 30

Hyd. No. 6 -- 100 Year

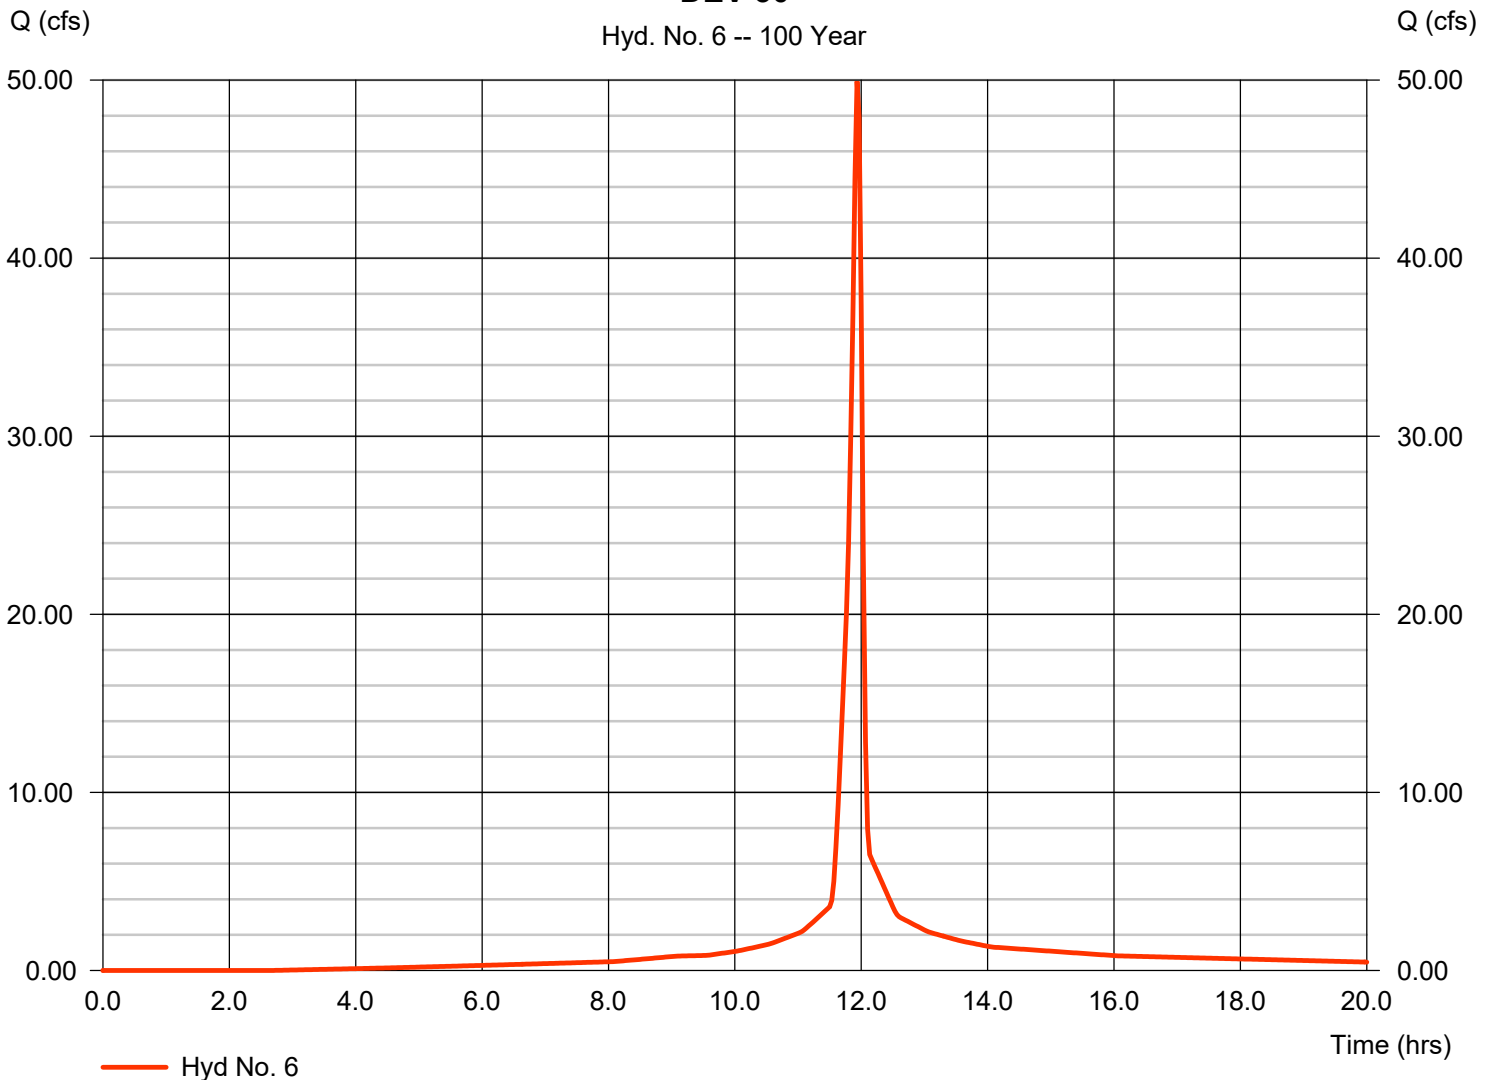

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 7

BIO 1

Hydrograph type	= Reservoir	Peak discharge	= 10.22 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.07 hrs
Time interval	= 2 min	Hyd. volume	= 87,083 cuft
Inflow hyd. No.	= 5 - DEV 10	Max. Elevation	= 1022.97 ft
Reservoir name	= BIORETENTION 1	Max. Storage	= 30,074 cuft

Storage Indication method used.

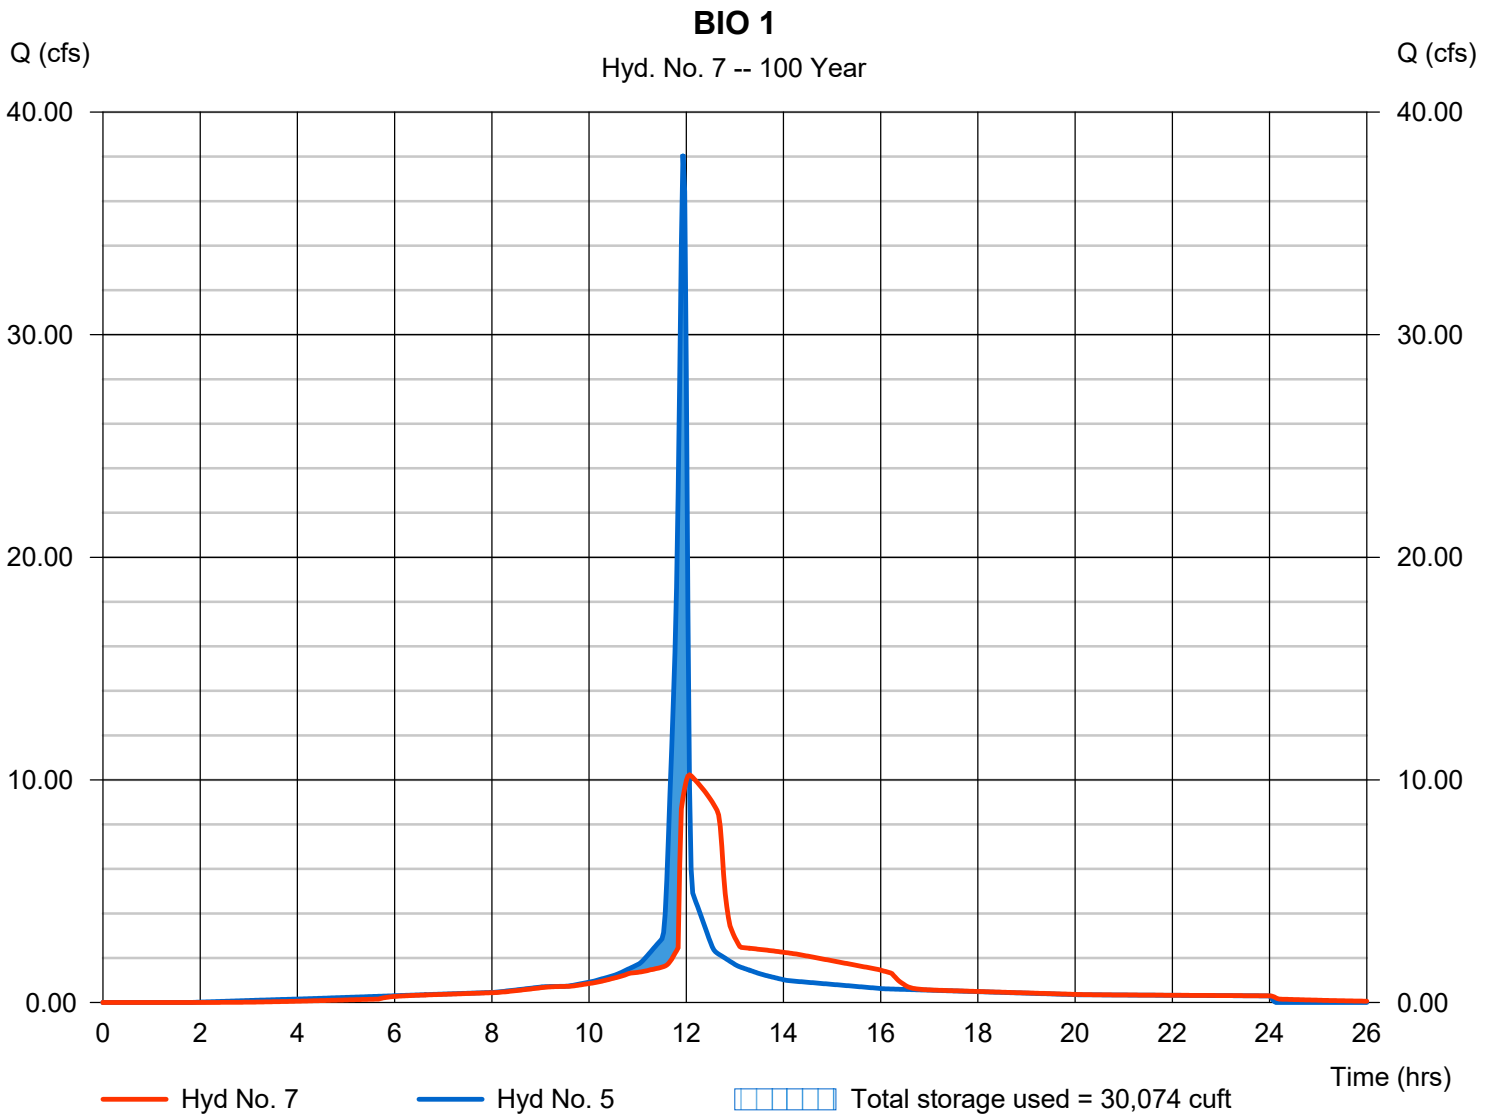

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 8

### COMBINE

Hydrograph type = Combine  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Inflow hyds. = 6, 7

Peak discharge = 59.12 cfs  
 Time to peak = 11.93 hrs  
 Hyd. volume = 197,680 cuft  
 Contrib. drain. area = 4.170 ac

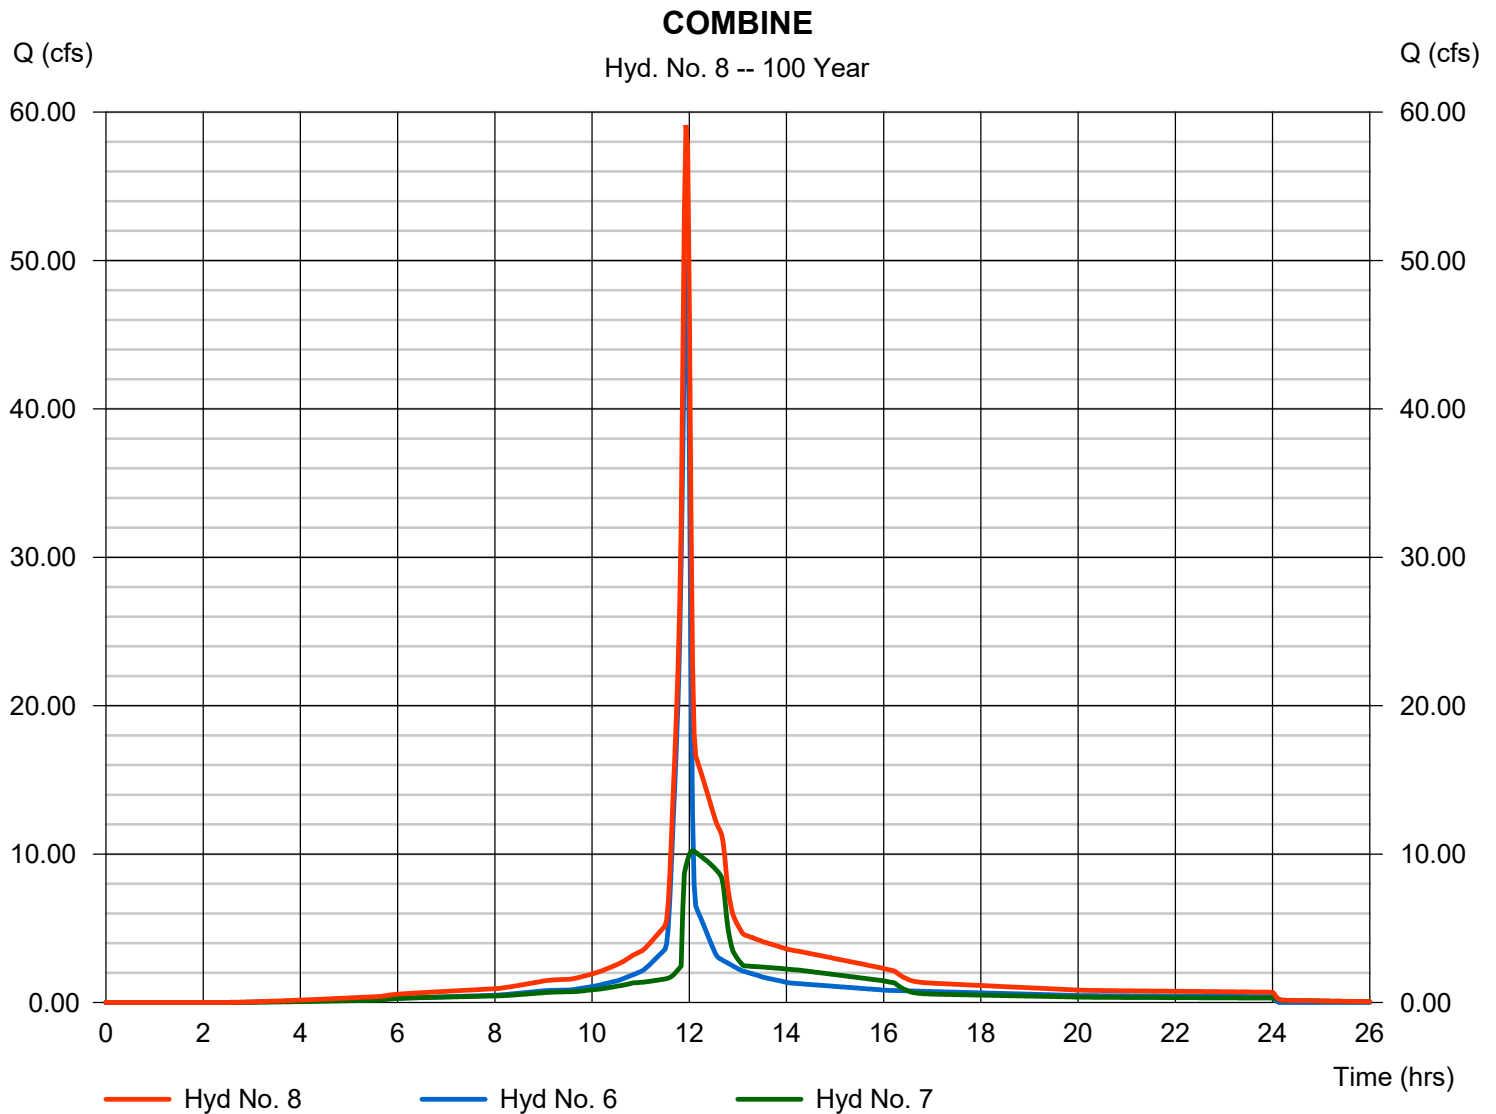

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 9

### DETENTION POND 1

Hydrograph type	= Reservoir	Peak discharge	= 18.68 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 197,678 cuft
Inflow hyd. No.	= 8 - COMBINE	Max. Elevation	= 1021.03 ft
Reservoir name	= DRY DETENTION 1	Max. Storage	= 67,289 cuft

Storage Indication method used.

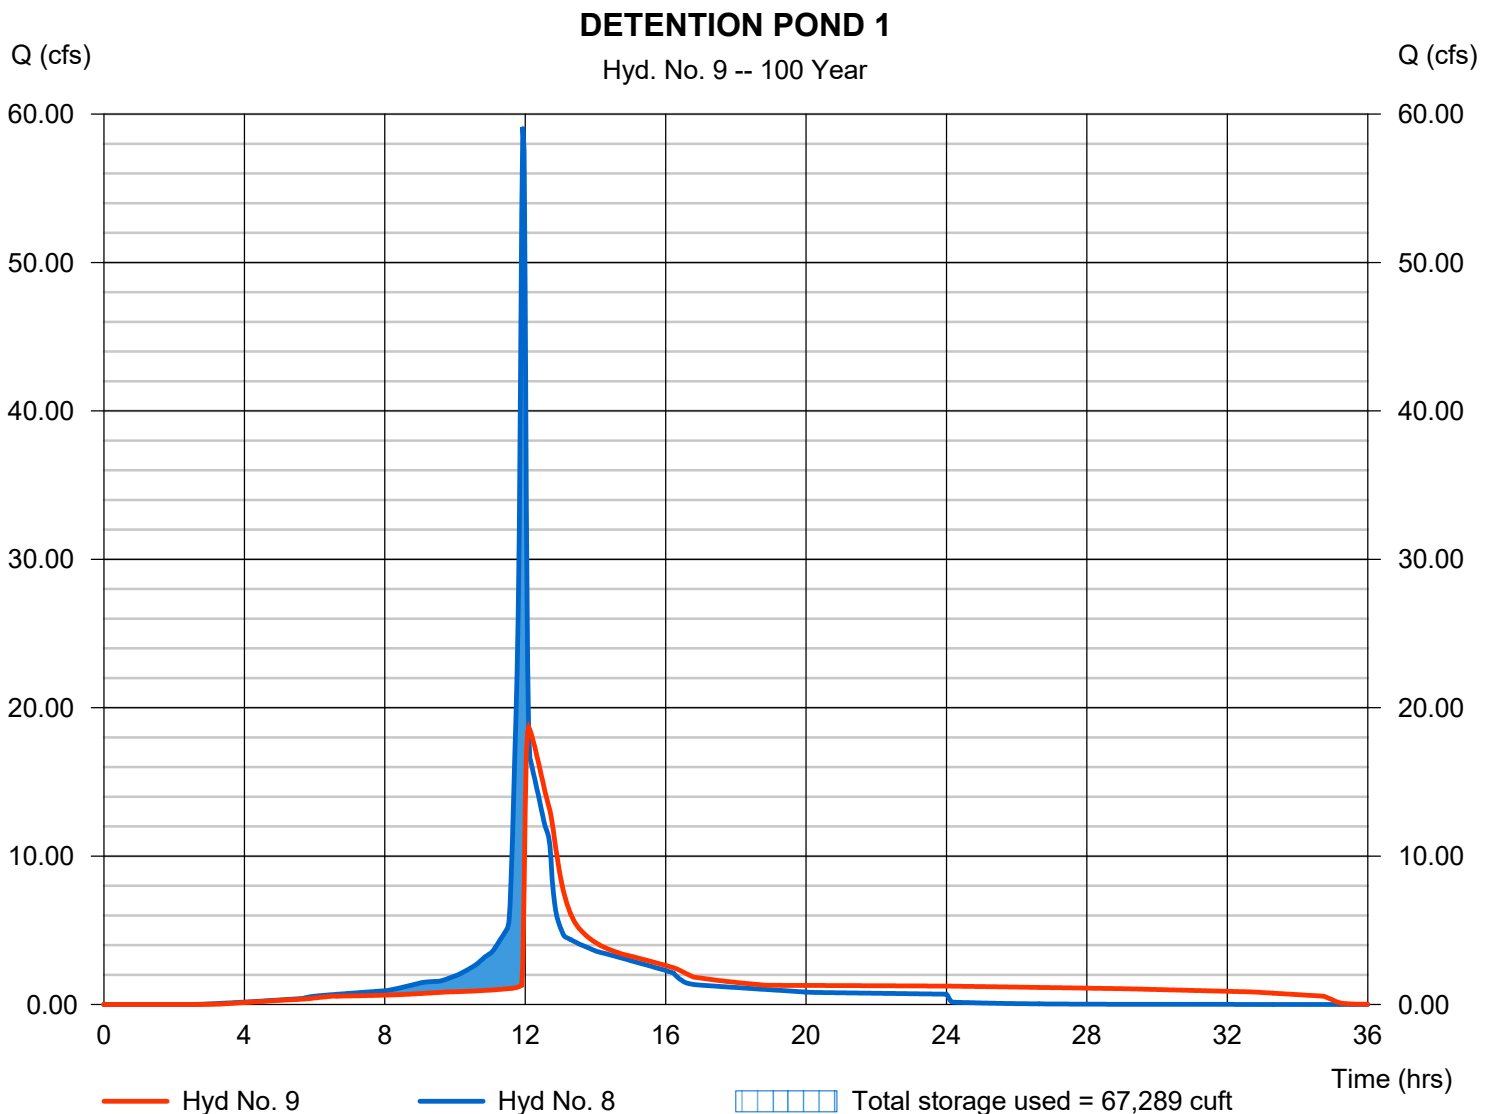

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 10

DA 11 (US ROUTE 50)

Hydrograph type	= SCS Runoff	Peak discharge	= 12.58 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 27,670 cuft
Drainage area	= 1.060 ac	Curve number	= 87*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 9.25 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

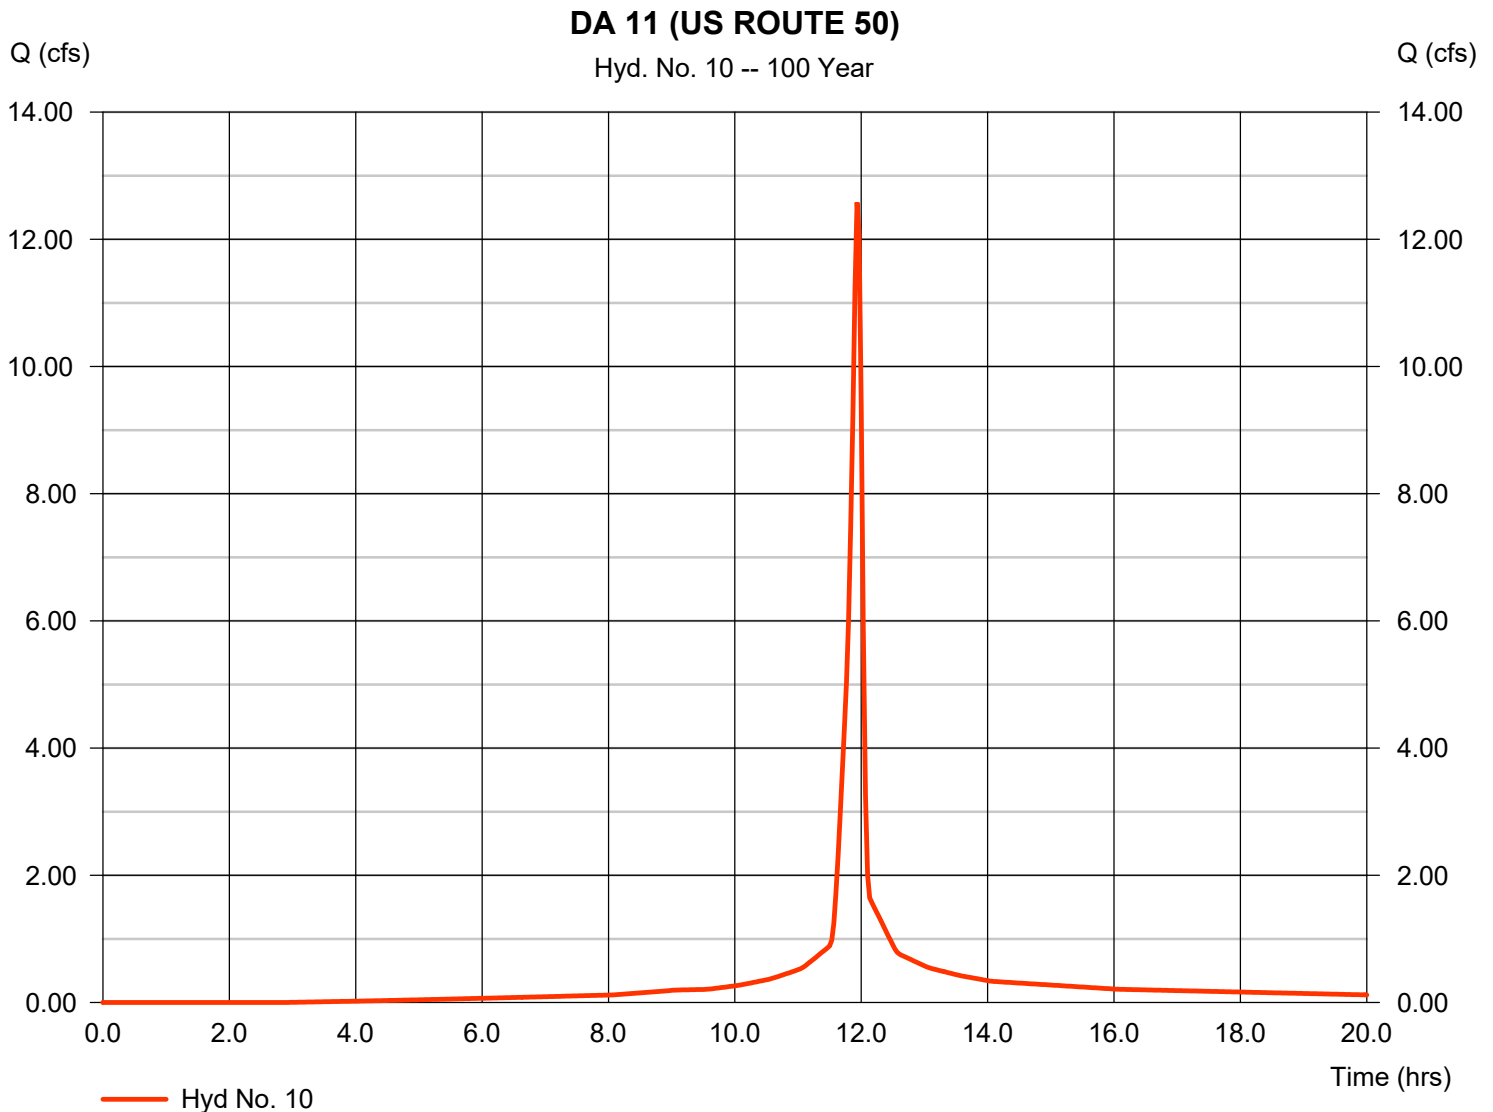\* Composite (Area/CN) =  $[(0.400 \times 98) + (0.660 \times 80)] / 1.060$ 

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 11

DEV POI 1

Hydrograph type = Combine  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Inflow hyds. = 9, 10

Peak discharge = 22.80 cfs  
 Time to peak = 12.03 hrs  
 Hyd. volume = 225,348 cuft  
 Contrib. drain. area = 1.060 ac

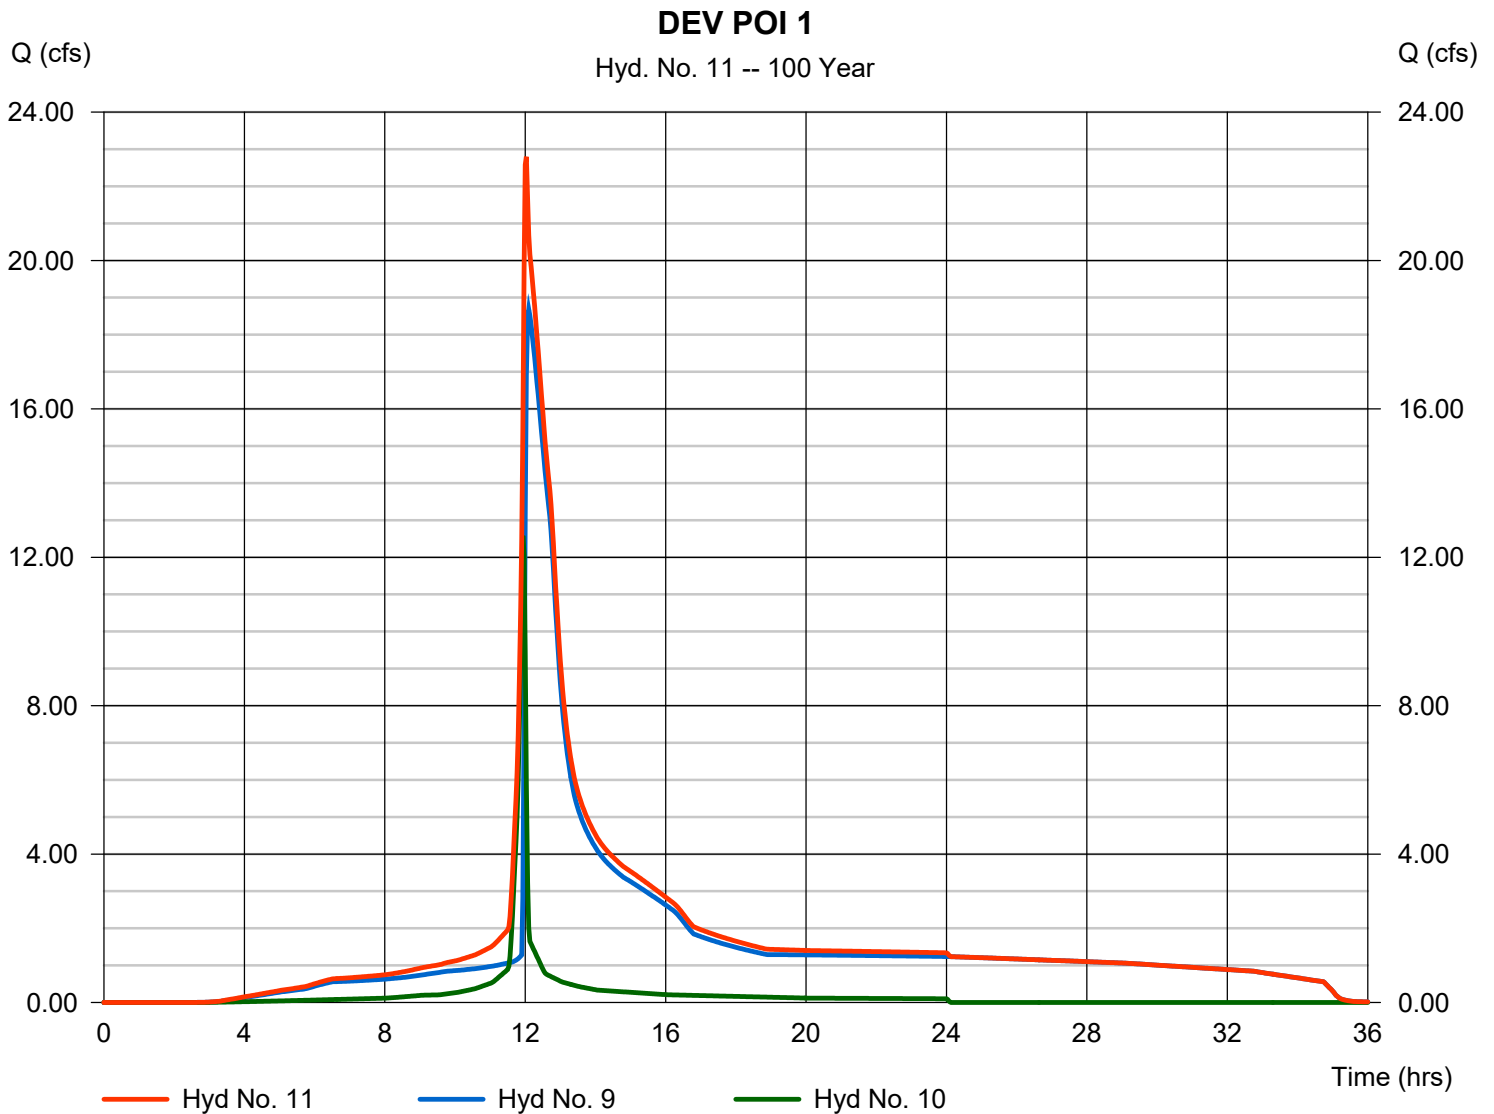

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 12

DEV 20

Hydrograph type	= SCS Runoff	Peak discharge	= 30.78 cfs
Storm frequency	= 100 yrs	Time to peak	= 11.93 hrs
Time interval	= 2 min	Hyd. volume	= 69,210 cuft
Drainage area	= 2.530 ac	Curve number	= 90*
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= User	Time of conc. (Tc)	= 5.00 min
Total precip.	= 9.25 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

\* Composite (Area/CN) = [(1.370 x 98) + (1.160 x 80)] / 2.530

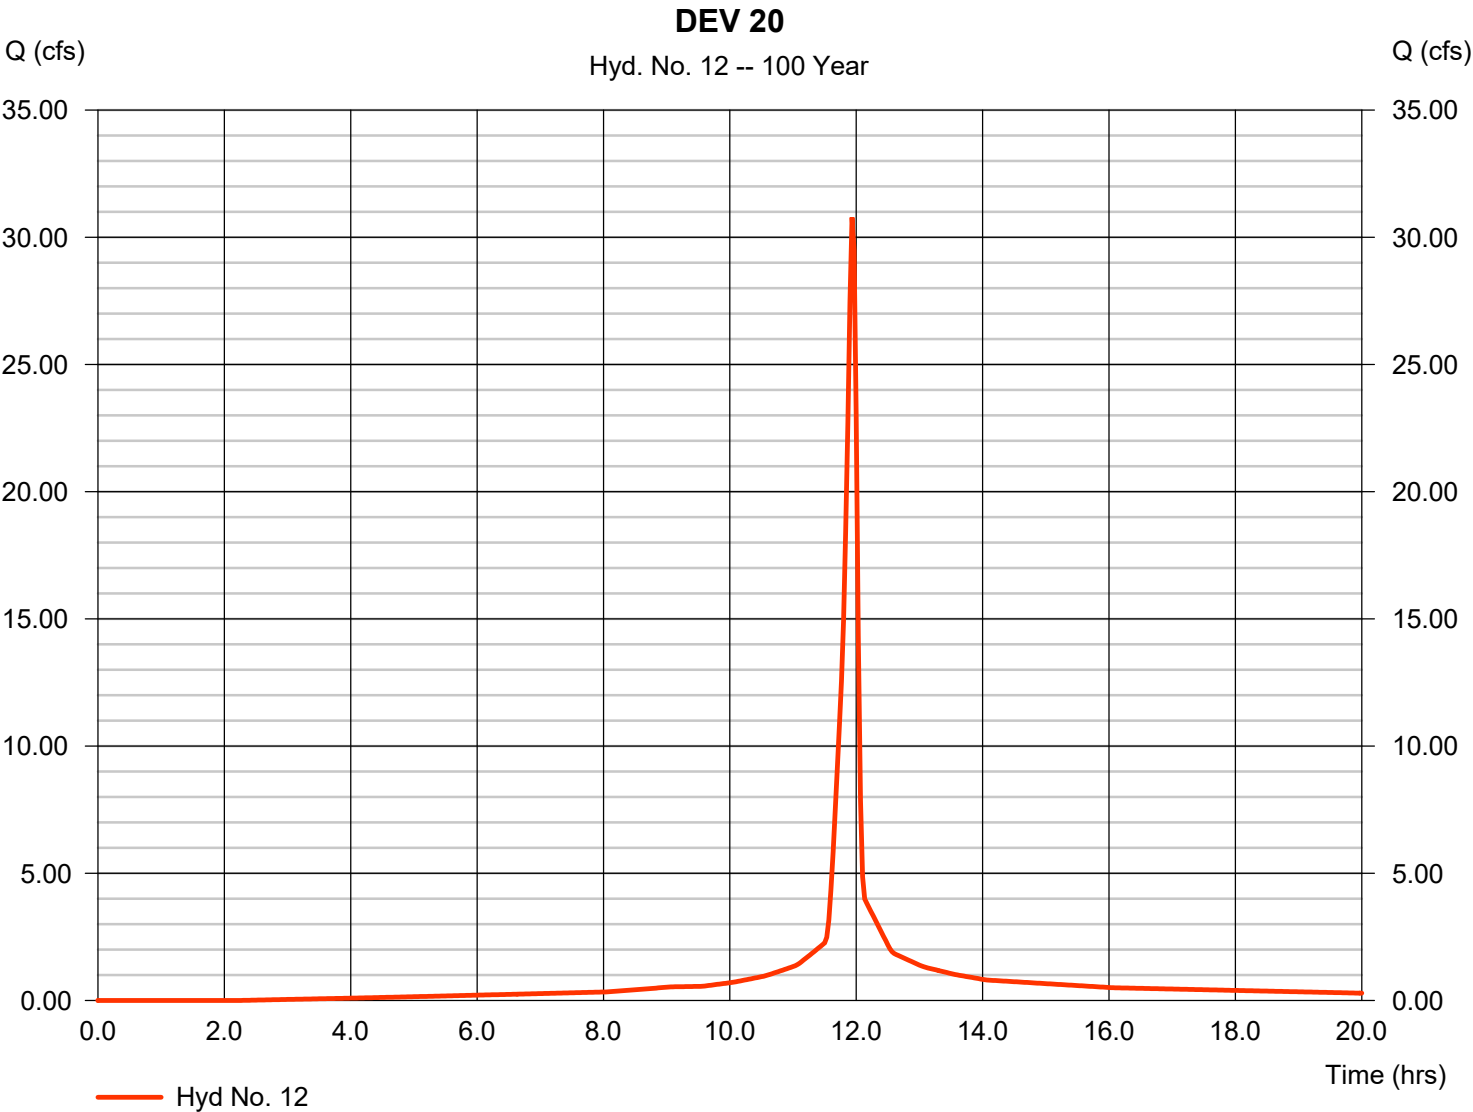



# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 13

### BIORETENTION 2

Hydrograph type	= Reservoir	Peak discharge	= 6.010 cfs
Storm frequency	= 100 yrs	Time to peak	= 12.10 hrs
Time interval	= 2 min	Hyd. volume	= 69,194 cuft
Inflow hyd. No.	= 12 - DEV 20	Max. Elevation	= 1022.23 ft
Reservoir name	= BIRETENTION 2	Max. Storage	= 30,379 cuft

Storage Indication method used.

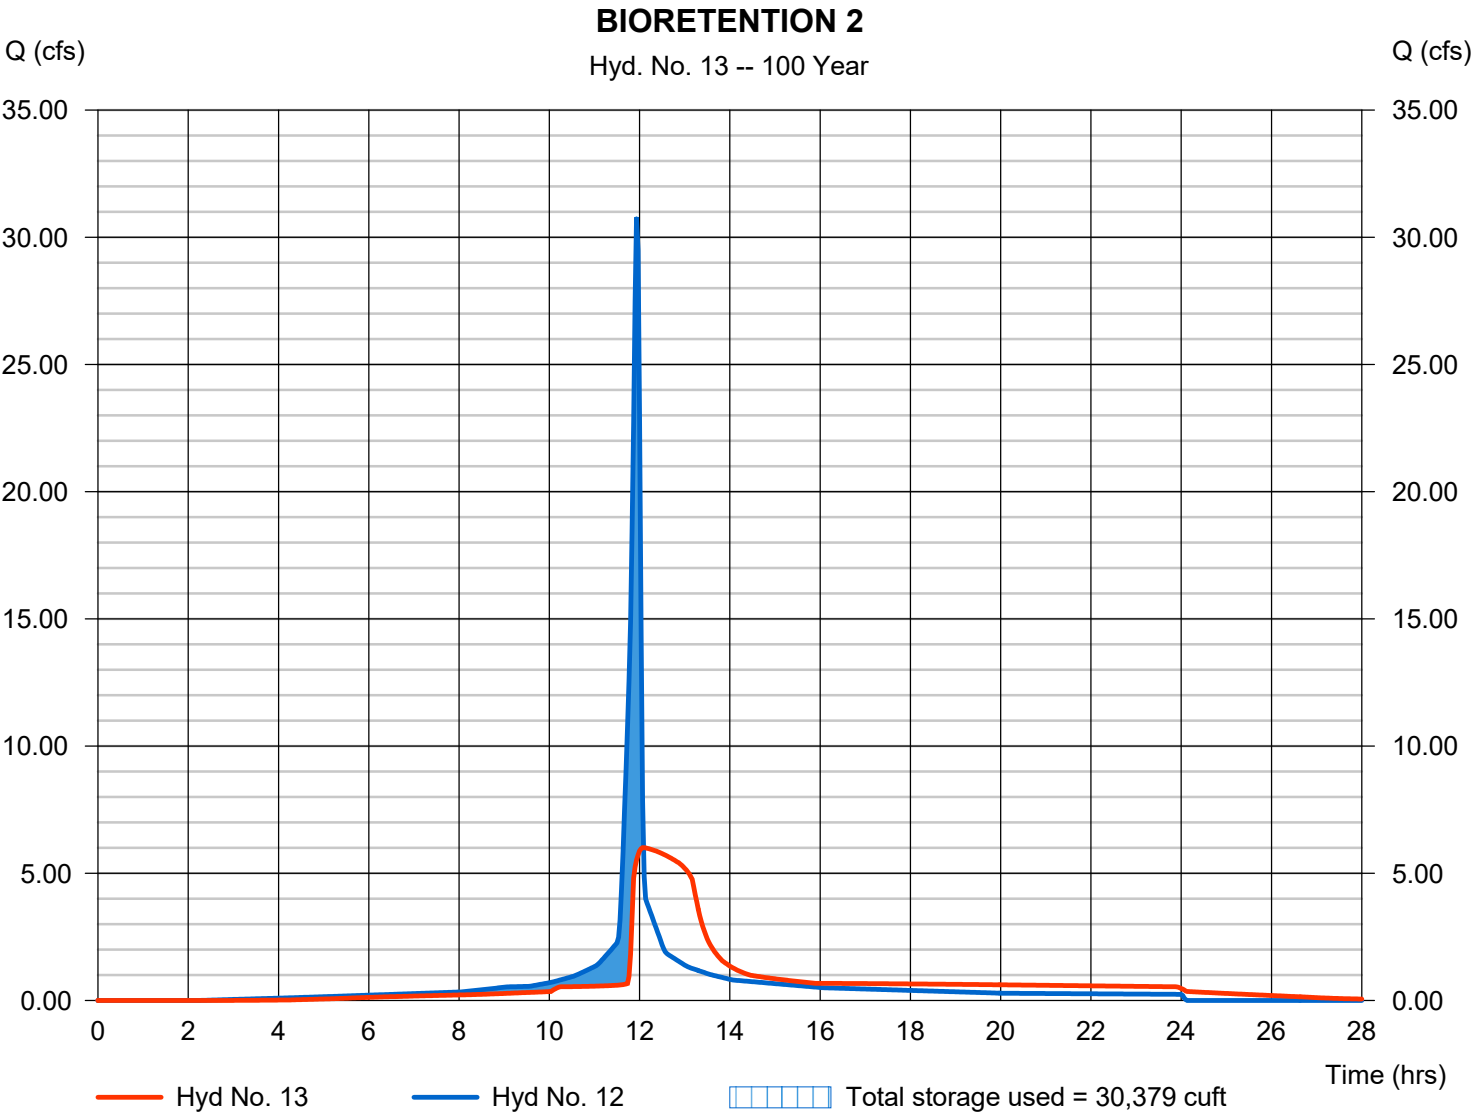

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019


## Hyd. No. 14

DA 21 (PR. PUBLIC ACCESS ROAD)

Hydrograph type	=	SCS Runoff	Peak discharge	=	20.92 cfs
Storm frequency	=	100 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	45,720 cuft
Drainage area	=	1.780 ac	Curve number	=	86*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	9.25 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) =  $[(0.630 \times 98) + (1.150 \times 80)] / 1.780$

### DA 21 (PR. PUBLIC ACCESS ROAD)

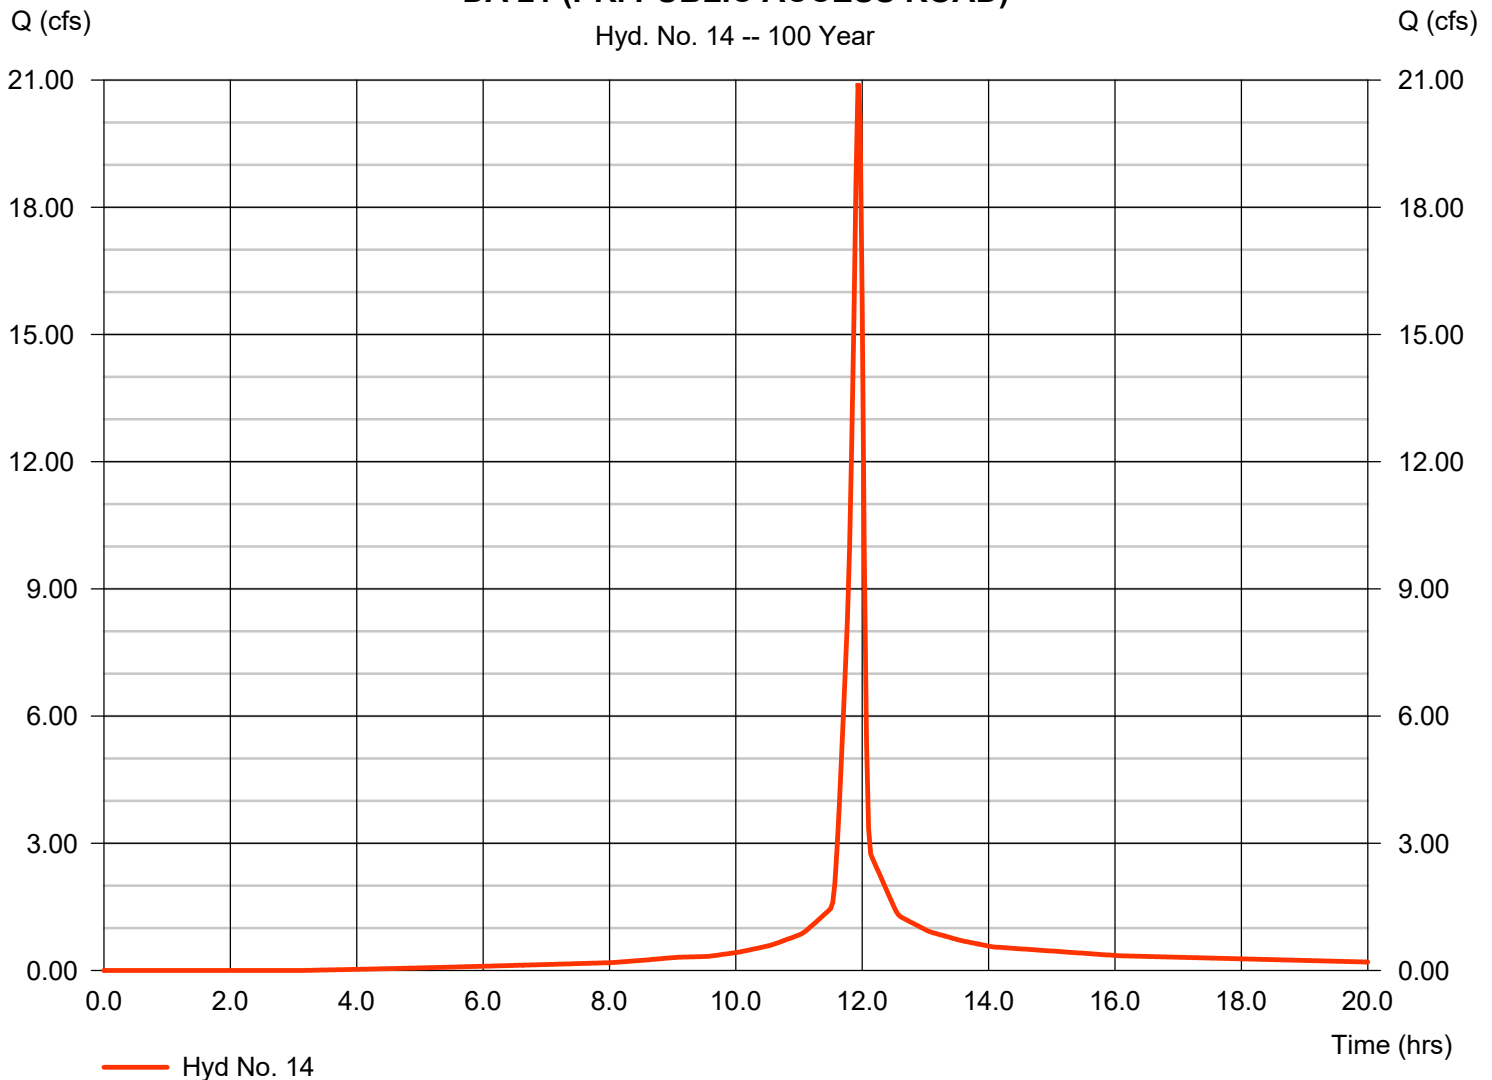

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020

Friday, 02 / 15 / 2019

## Hyd. No. 15

OFF 20


Hydrograph type = SCS Runoff  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Drainage area = 4.940 ac  
 Basin Slope = 0.0 %  
 Tc method = User  
 Total precip. = 9.25 in  
 Storm duration = 24 hrs

Peak discharge = 27.64 cfs  
 Time to peak = 12.17 hrs  
 Hyd. volume = 110,864 cuft  
 Curve number = 75\*  
 Hydraulic length = 0 ft  
 Time of conc. (Tc) = 28.90 min  
 Distribution = Type II  
 Shape factor = 484

\* Composite (Area/CN) =  $[(0.190 \times 98) + (4.750 \times 74)] / 4.940$

### OFF 20

Hyd. No. 15 -- 100 Year

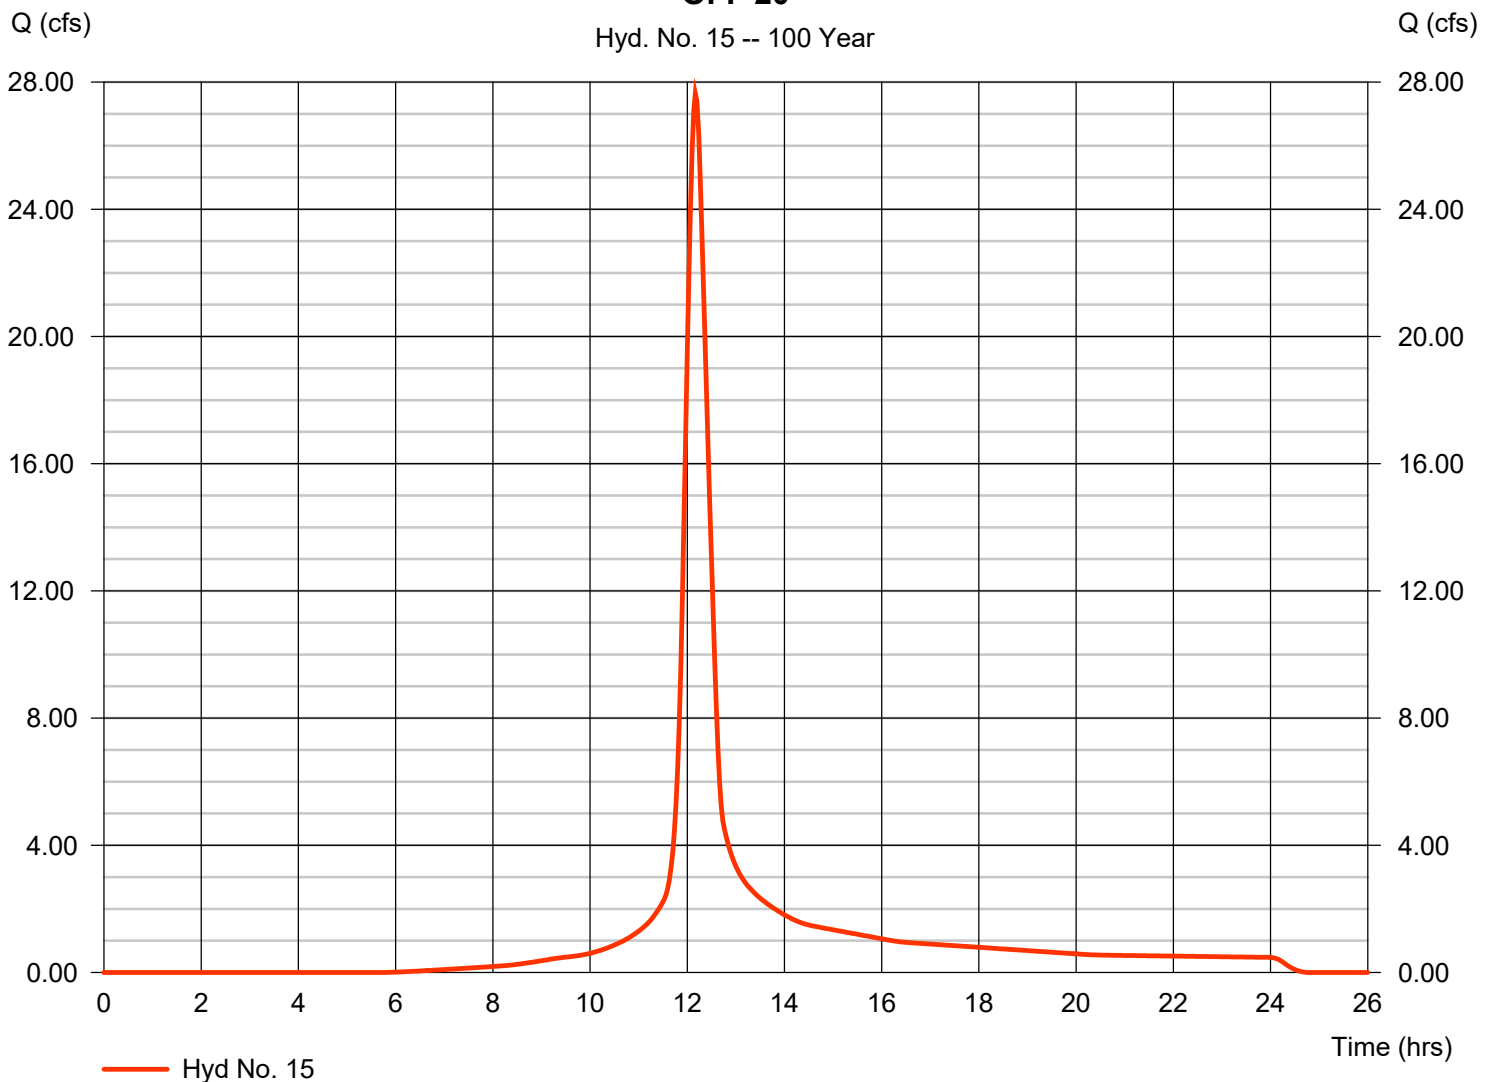

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 16

OFF DA 22 (US ROUTE 50)

Hydrograph type	=	SCS Runoff	Peak discharge	=	6.646 cfs
Storm frequency	=	100 yrs	Time to peak	=	11.93 hrs
Time interval	=	2 min	Hyd. volume	=	14,618 cuft
Drainage area	=	0.560 ac	Curve number	=	87*
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	User	Time of conc. (Tc)	=	5.00 min
Total precip.	=	9.25 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

\* Composite (Area/CN) =  $[(0.210 \times 98) + (0.350 \times 80)] / 0.560$

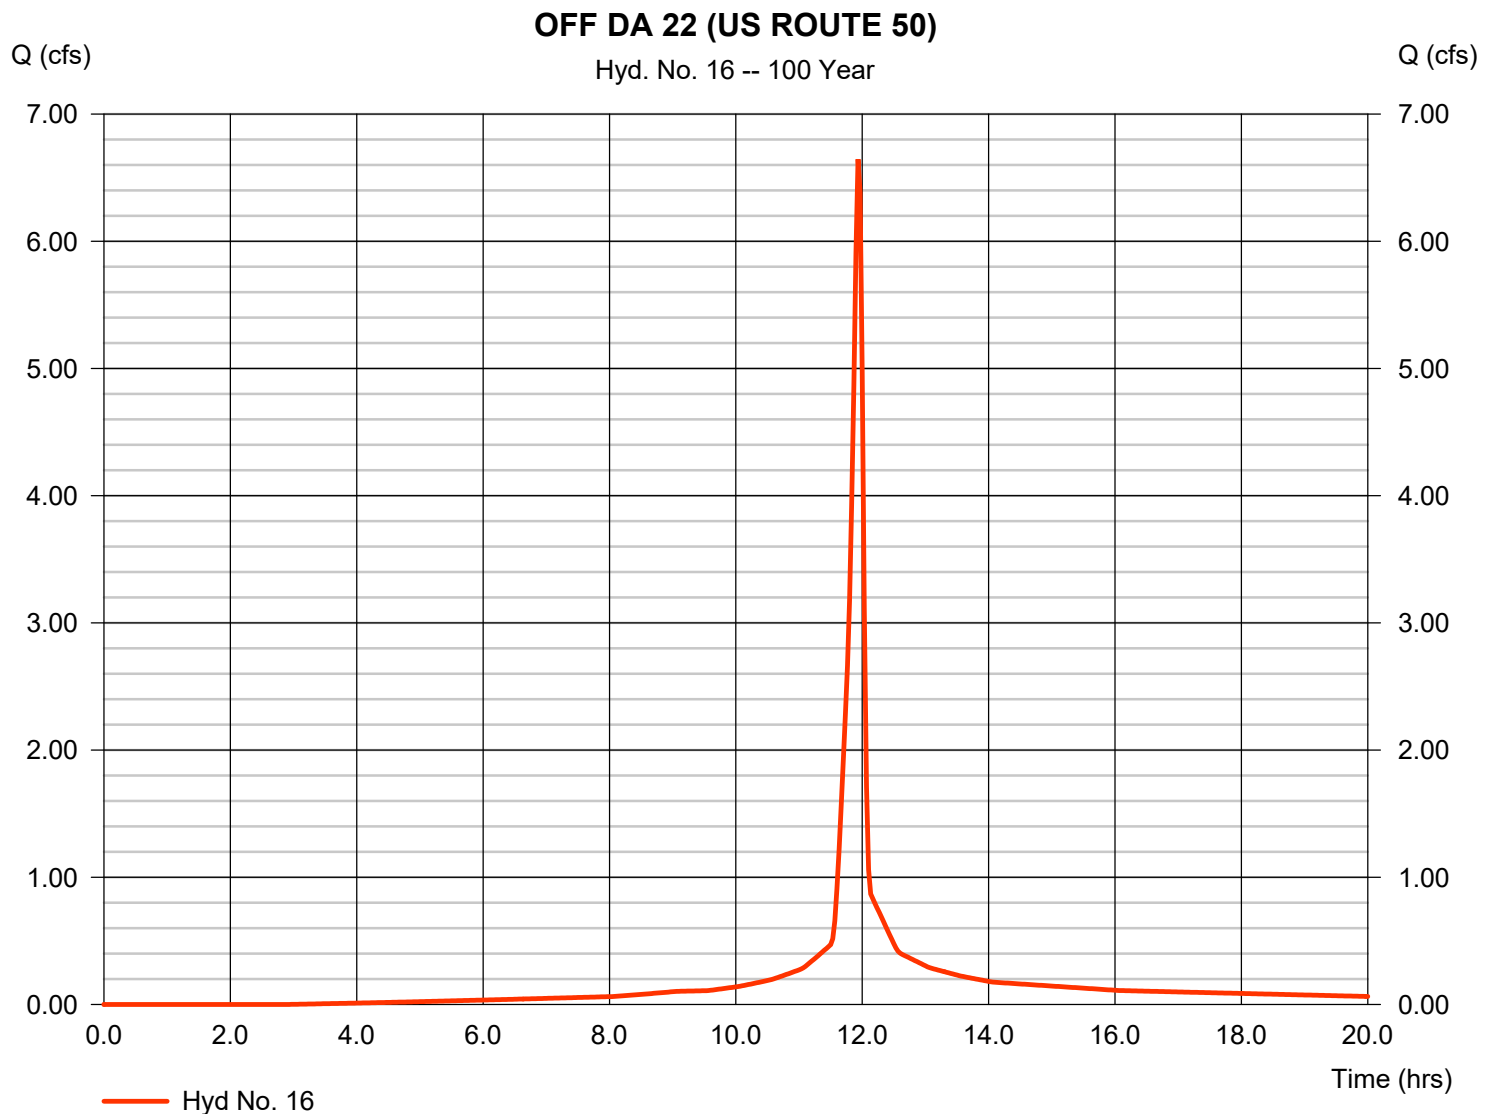

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® 2019 by Autodesk, Inc. v2020


Friday, 02 / 15 / 2019

## Hyd. No. 17

DEV POI 2 (AT CULVERT)

Hydrograph type = Combine  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Inflow hyds. = 13, 14, 15, 16

Peak discharge = 49.19 cfs  
 Time to peak = 11.97 hrs  
 Hyd. volume = 240,396 cuft  
 Contrib. drain. area = 7.280 ac

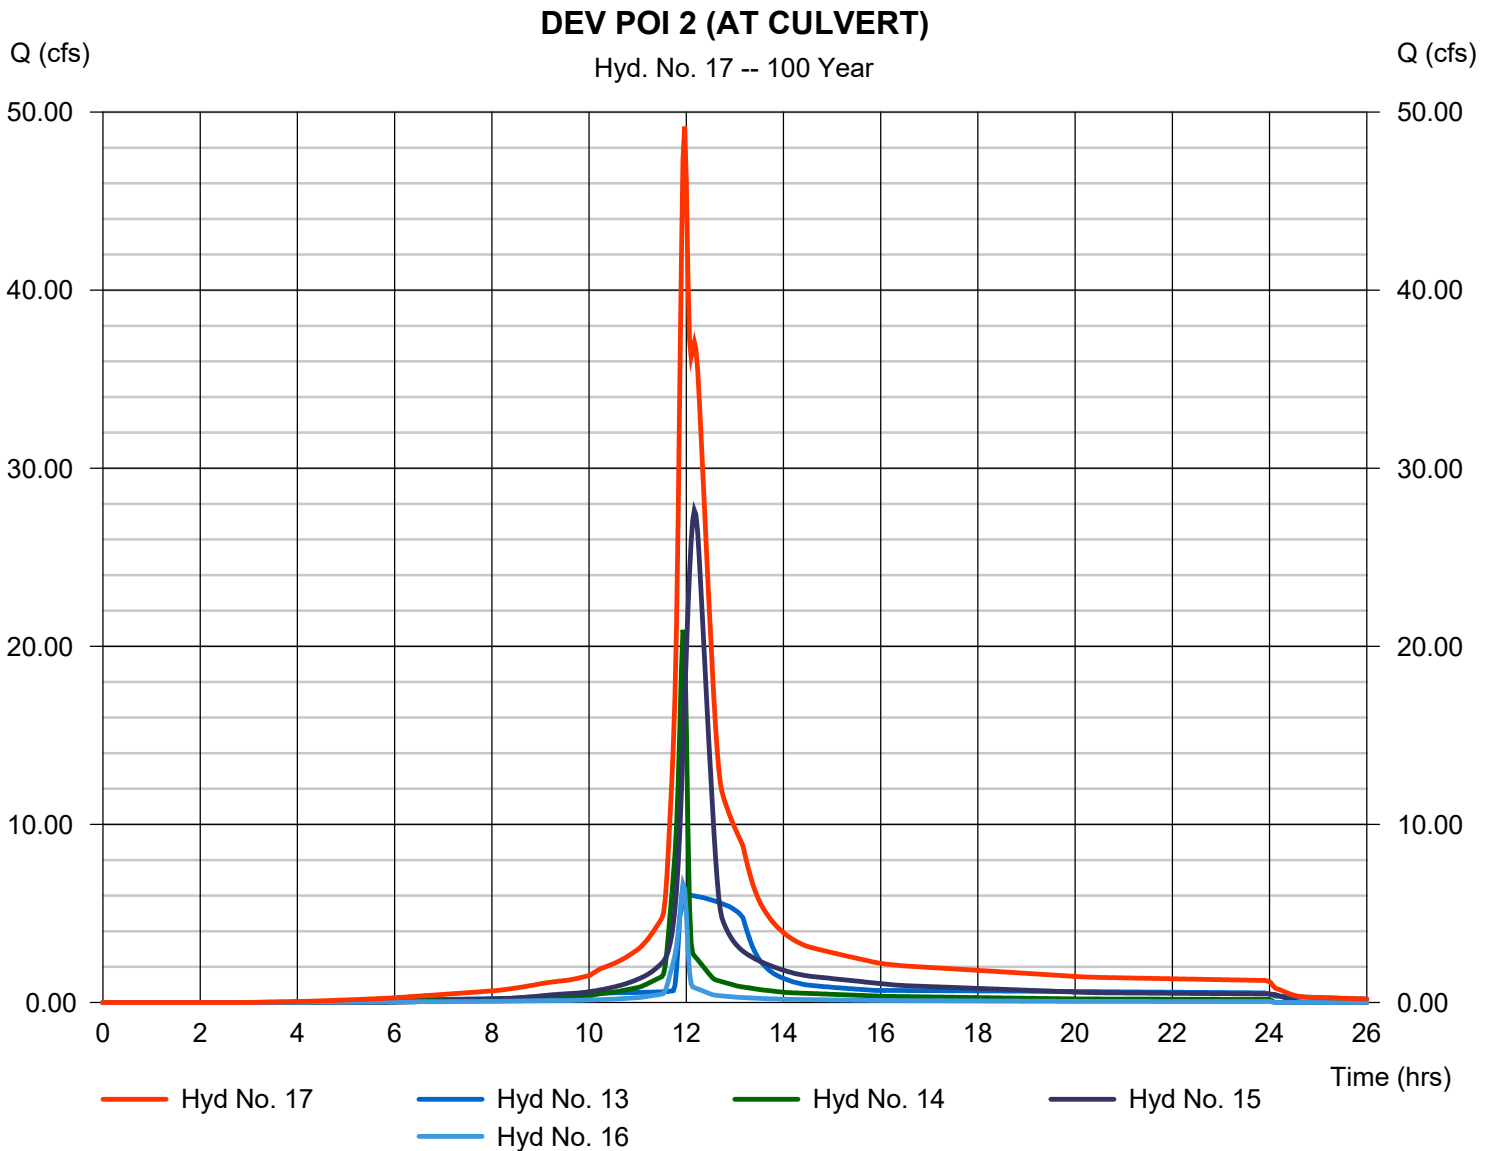

# Hydrologic Soil Group—Jackson County, Missouri (EXISTING DRAINAGE AREA)



MAP LEGEND

**Area of Interest (AOI)**

Area of Interest (AOI)

**Soils**

**Soil Rating Polygons**

A

A/D

B

B/D

C

C/D

D

Not rated or not available

**Soil Rating Lines**

A

A/D

B

B/D

C

C/D

D

Not rated or not available

**Soil Rating Points**

A

A/D

B

B/D

**Water Features**

Streams and Canals

**Transportation**

Rails

Interstate Highways

US Routes

Major Roads

Local Roads

**Background**

Aerial Photography

C

C/D

D

Not rated or not available

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service  
Web Soil Survey URL:  
Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri  
Survey Area Data: Version 19, Sep 13, 2018

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 11, 2017—Sep 22, 2017

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
10000	Arisburg silt loam, 1 to 5 percent slopes	C	14.9	80.7%
10082	Arisburg-Urban land complex, 1 to 5 percent slopes	C	3.6	19.3%
<b>Totals for Area of Interest</b>			<b>18.4</b>	<b>100.0%</b>

## Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.



## Rating Options

*Aggregation Method:* Dominant Condition

*Component Percent Cutoff:* None Specified

*Tie-break Rule:* Higher



**NOAA Atlas 14, Volume 8, Version 2**  
**Location name: Lees Summit, Missouri, USA\***  
**Latitude: 38.9004°, Longitude: -94.3314°**  
**Elevation: 1024.15 ft\*\***  
 \* source: ESRI Maps  
 \*\* source: USGS



### POINT PRECIPITATION FREQUENCY ESTIMATES

Sanja Perica, Deborah Martin, Sandra Pavlovic, Ishani Roy, Michael St. Laurent, Carl Trypaluk, Dale Unruh, Michael Yekta, Geoffrey Bonnin

NOAA, National Weather Service, Silver Spring, Maryland

[PF tabular](#) | [PF graphical](#) | [Maps & aeriels](#)

### PF tabular





PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches) <sup>1</sup>										
Duration	Average recurrence interval (years)									
	1	2	5	10	25	50	100	200	500	1000
5-min	0.415 (0.324-0.529)	0.484 (0.378-0.618)	0.599 (0.466-0.767)	0.696 (0.539-0.894)	0.832 (0.625-1.10)	0.938 (0.691-1.25)	1.05 (0.748-1.43)	1.16 (0.798-1.62)	1.31 (0.871-1.87)	1.42 (0.926-2.07)
10-min	0.607 (0.474-0.775)	0.709 (0.553-0.905)	0.877 (0.682-1.12)	1.02 (0.789-1.31)	1.22 (0.916-1.61)	1.37 (1.01-1.84)	1.53 (1.10-2.09)	1.70 (1.17-2.37)	1.92 (1.27-2.75)	2.08 (1.36-3.03)
15-min	0.740 (0.578-0.945)	0.864 (0.674-1.10)	1.07 (0.832-1.37)	1.24 (0.962-1.60)	1.49 (1.12-1.96)	1.68 (1.23-2.24)	1.87 (1.34-2.55)	2.07 (1.43-2.89)	2.34 (1.56-3.35)	2.54 (1.65-3.69)
30-min	1.02 (0.800-1.31)	1.20 (0.939-1.54)	1.50 (1.17-1.92)	1.75 (1.35-2.24)	2.09 (1.57-2.76)	2.36 (1.74-3.15)	2.63 (1.88-3.59)	2.91 (2.00-4.07)	3.28 (2.18-4.70)	3.57 (2.32-5.18)
60-min	1.34 (1.05-1.71)	1.57 (1.23-2.01)	1.97 (1.53-2.52)	2.30 (1.78-2.95)	2.76 (2.08-3.66)	3.13 (2.31-4.20)	3.51 (2.51-4.80)	3.90 (2.69-5.46)	4.43 (2.95-6.35)	4.83 (3.14-7.02)
2-hr	1.66 (1.30-2.10)	1.95 (1.53-2.47)	2.43 (1.91-3.09)	2.85 (2.22-3.63)	3.44 (2.61-4.53)	3.91 (2.90-5.20)	4.39 (3.16-5.97)	4.89 (3.40-6.81)	5.57 (3.74-7.94)	6.10 (4.00-8.80)
3-hr	1.87 (1.48-2.36)	2.20 (1.74-2.78)	2.76 (2.17-3.49)	3.24 (2.54-4.11)	3.93 (3.00-5.16)	4.48 (3.35-5.95)	5.06 (3.67-6.86)	5.66 (3.95-7.85)	6.48 (4.38-9.22)	7.13 (4.70-10.3)
6-hr	2.26 (1.80-2.82)	2.66 (2.12-3.34)	3.37 (2.67-4.22)	3.98 (3.14-5.01)	4.88 (3.76-6.37)	5.60 (4.22-7.39)	6.36 (4.65-8.57)	7.16 (5.05-9.89)	8.27 (5.63-11.7)	9.15 (6.07-13.1)
12-hr	2.66 (2.13-3.30)	3.16 (2.54-3.93)	4.04 (3.23-5.03)	4.81 (3.83-6.02)	5.94 (4.62-7.72)	6.86 (5.21-9.00)	7.83 (5.77-10.5)	8.86 (6.30-12.2)	10.3 (7.06-14.5)	11.4 (7.64-16.2)
24-hr	3.11 (2.51-3.82)	3.71 (2.99-4.57)	4.74 (3.82-5.86)	5.66 (4.54-7.02)	7.00 (5.48-9.03)	8.10 (6.20-10.5)	9.25 (6.88-12.3)	10.5 (7.51-14.3)	12.2 (8.44-17.0)	13.5 (9.14-19.1)
2-day	3.66 (2.98-4.47)	4.31 (3.50-5.26)	5.43 (4.41-6.66)	6.43 (5.19-7.91)	7.90 (6.24-10.1)	9.10 (7.03-11.8)	10.4 (7.77-13.7)	11.7 (8.47-15.9)	13.6 (9.50-18.9)	15.1 (10.3-21.2)
3-day	4.06 (3.33-4.94)	4.71 (3.85-5.73)	5.84 (4.76-7.12)	6.85 (5.55-8.38)	8.33 (6.61-10.6)	9.55 (7.41-12.3)	10.8 (8.16-14.3)	12.2 (8.87-16.5)	14.1 (9.92-19.5)	15.7 (10.7-21.9)
4-day	4.40 (3.61-5.33)	5.05 (4.14-6.12)	6.17 (5.05-7.50)	7.18 (5.84-8.76)	8.65 (6.89-11.0)	9.87 (7.68-12.7)	11.1 (8.42-14.6)	12.5 (9.12-16.8)	14.4 (10.2-19.9)	16.0 (10.9-22.2)
7-day	5.21 (4.30-6.27)	5.89 (4.86-7.10)	7.07 (5.82-8.53)	8.09 (6.62-9.80)	9.56 (7.64-12.0)	10.8 (8.41-13.7)	12.0 (9.11-15.6)	13.3 (9.74-17.7)	15.1 (10.7-20.6)	16.5 (11.4-22.9)
10-day	5.90 (4.89-7.07)	6.66 (5.52-7.99)	7.93 (6.55-9.53)	9.00 (7.40-10.9)	10.5 (8.43-13.1)	11.7 (9.20-14.8)	13.0 (9.87-16.7)	14.2 (10.5-18.9)	16.0 (11.3-21.7)	17.3 (12.0-23.9)
20-day	7.87 (6.58-9.35)	8.89 (7.43-10.6)	10.5 (8.78-12.6)	11.9 (9.85-14.2)	13.7 (11.0-16.8)	15.1 (11.9-18.7)	16.4 (12.5-20.9)	17.7 (13.1-23.2)	19.4 (13.9-26.1)	20.7 (14.5-28.3)
30-day	9.51 (7.99-11.3)	10.8 (9.03-12.7)	12.7 (10.7-15.1)	14.3 (11.9-17.1)	16.4 (13.2-19.9)	17.9 (14.1-22.1)	19.3 (14.9-24.5)	20.8 (15.4-27.0)	22.5 (16.1-30.1)	23.7 (16.7-32.4)
45-day	11.6 (9.80-13.7)	13.1 (11.1-15.5)	15.5 (13.0-18.3)	17.3 (14.5-20.6)	19.7 (15.9-23.8)	21.4 (17.0-26.3)	23.0 (17.7-28.9)	24.5 (18.2-31.6)	26.3 (18.9-34.9)	27.5 (19.4-37.3)
60-day	13.4 (11.4-15.7)	15.1 (12.8-17.8)	17.8 (15.0-21.0)	19.9 (16.7-23.5)	22.5 (18.2-27.0)	24.3 (19.3-29.7)	26.0 (20.1-32.5)	27.5 (20.5-35.4)	29.3 (21.1-38.7)	30.5 (21.6-41.3)

<sup>1</sup> Precipitation frequency (PF) estimates in this table are based on frequency analysis of partial duration series (PDS). Numbers in parenthesis are PF estimates at lower and upper bounds of the 90% confidence interval. The probability that precipitation frequency estimates (for a given duration and average recurrence interval) will be greater than the upper bound (or less than the lower bound) is 5%. Estimates at upper bounds are not checked against probable maximum precipitation (PMP) estimates and may be higher than currently valid PMP values. Please refer to NOAA Atlas 14 document for more information.

[Back to Top](#)

## PF graphical

PDS-based depth-duration-frequency (DDF) curves  
Latitude: 38.9004°, Longitude: -94.3314°

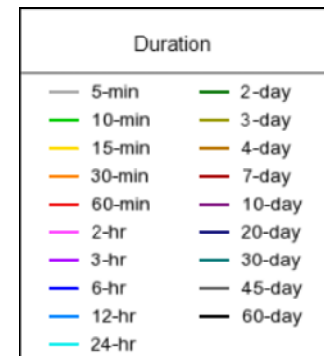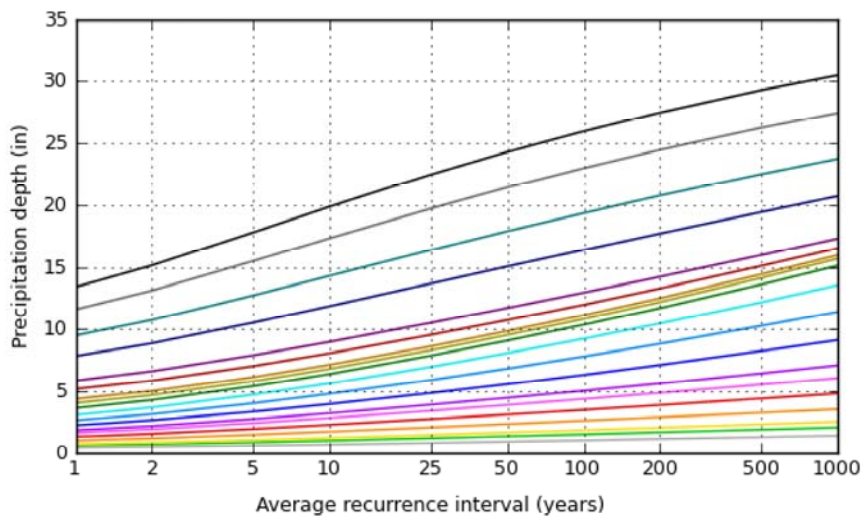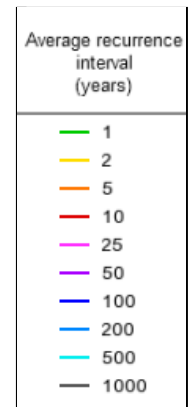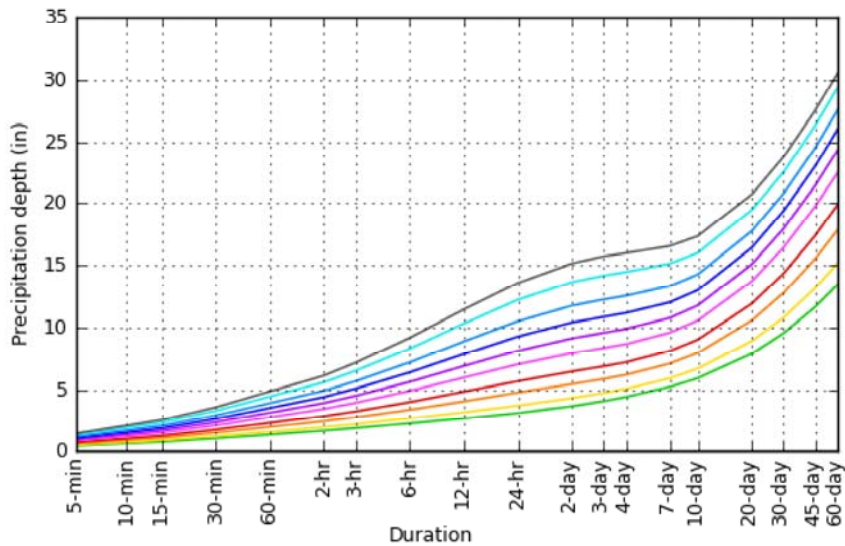


NOAA Atlas 14, Volume 8, Version 2

Created (GMT): Mon Jan 7 21:25:41 2019

[Back to Top](#)

## Maps & aerals


Small scale terrain

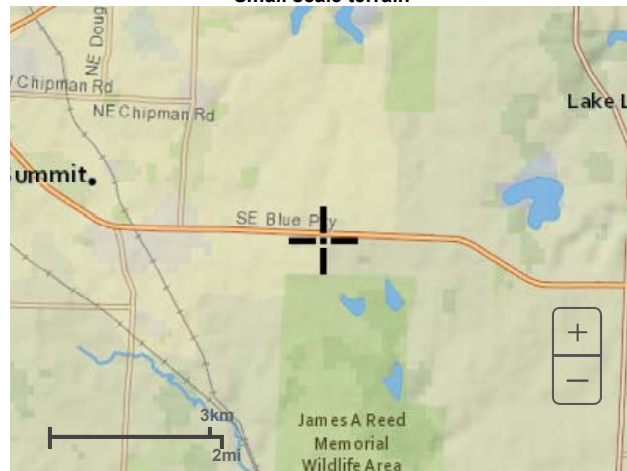


Large scale terrain



Large scale map

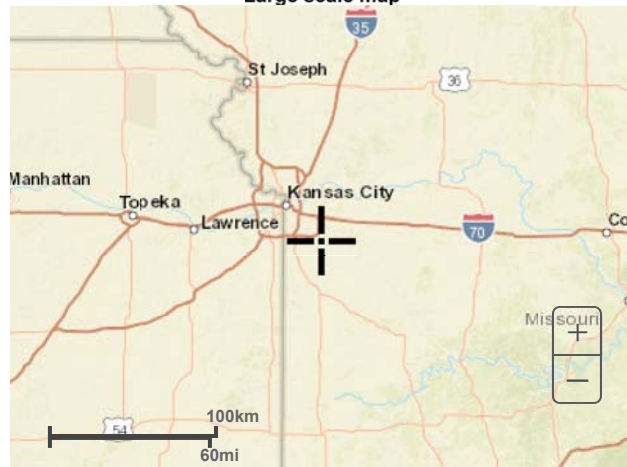

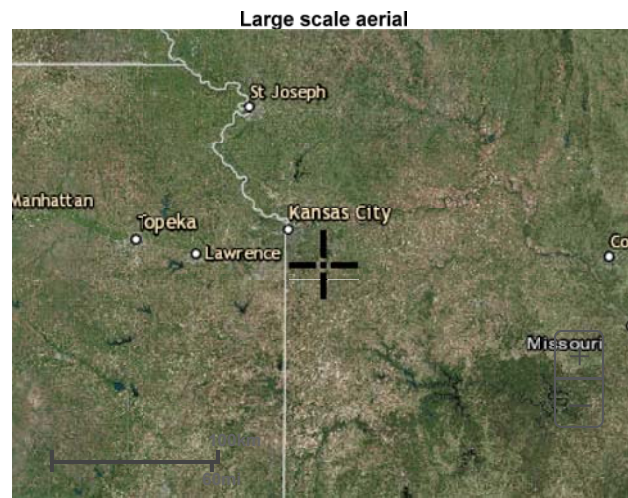

[Back to Top](#)

---

[US Department of Commerce](#)  
[National Oceanic and Atmospheric Administration](#)  
[National Weather Service](#)  
[National Water Center](#)  
1325 East West Highway  
Silver Spring, MD 20910  
Questions?: [HDSC.Questions@noaa.gov](mailto:HDSC.Questions@noaa.gov)

[Disclaimer](#)

## **APPENDIX B**

### Water Quality Calculations

**DA 10 - Water Quality Volume Calculation Worksheet**

Short Cut Method (Claytor and Schueler, 1996)

Date: 01/10/2019

Project Name: **Lee's Summit Senior Living Facility**Description: **DA 10 Water Quality Volume****Drainage Areas to Pond 1**

$$WQV (ft^3) = (P/12)(R_v)(A*43,560)$$

Where

P = rainfall depth = 1.37 inches

 $R_v = \text{volumetric runoff coefficient} = 0.05 + 0.009I$ 

I = percent impervious cover (in percent, e.g. 80% = 80)

A = total site area in acres

P= 1.37 inch  
A= 3.09 acres  
Impervious Area= 2.05 acres  
I= 66 %  
Rv= 0.644

<b>WQV= 9896 cubic feet</b>
-----------------------------

0.227 ac-ft

**DA 20 - Water Quality Volume Calculation Worksheet**

Short Cut Method (Claytor and Schueler, 1996)

Date:

Project Name:

Description: **DA 20 Water Quality Volume**

$$WQV (ft^3) = (P/12)(R_v)(A*43,560)$$

Where

P = rainfall depth = 1.37 inches

 $R_v = \text{volumetric runoff coefficient} = 0.05 + 0.009I$ 

I = percent impervious cover (in percent, e.g. 80% = 80)

A = total site area in acres

P= 1.37 inch  
A= 2.53 acres  
Impervious Area= 1.37 acres  
I= 54 %  
Rv= 0.536

<b>WQV= 6744 cubic feet</b>
-----------------------------

0.155 ac-ft

**DA 30 - Water Quality Volume Calculation Worksheet**

**Short Cut Method (Claytor and Schueler, 1996)**

**Date:**

**Project Name:**

**Description:**            **DA 30 Water Quality Volume**

$$WQV (ft^3) = (P/12)(R_v)(A*43,560)$$

Where

P = rainfall depth = 1    1.37 inches

$R_v$  = volumetric runoff coefficient =  $0.05 + 0.009I$

I = percent impervious cover (in percent, e.g. 80% = 80)

A = total site area in acres

P=            1.37 inch

A=            4.17 acres

Impervious Area=    1.85 acres

I=            44 %

$R_v$ =           0.446

<b>WQV=    9249 cubic feet</b>
--------------------------------

0.212 ac-ft



## **APPENDIX C**

### **APWA\MARC BMP Level of Service Calculations**

## WORKSHEET 1: REQUIRED LEVEL OF SERVICE - UNDEVELOPED SITE

Project:  
Location:

By:  
Checked:

Date:  
Date:

### 1. Runoff Curve Number

#### A. Predevelopment CN

Cover Description	Soil HSG	CN from Table 1	Area (ac.)	Product of CN x Area
Pasture (GOOD)	C	74	9.78	
Totals:				

Area-Weighted CN = total product/total area = 74 (Round to integer)

#### B. Postdevelopment CN

Cover Description	Soil HSG <sup>1</sup>	CN from Table 1	Area (ac.)	Product of CN x Area
PAVEMENT/ROOFS	NA	98	5.21	510.58
OPEN SPACE (TURF,GOOD)	D	80	4.57	365.6
Totals:			9.78	876.18

<sup>1</sup> Postdevelopment CN is one HSG higher for all cover types except preserved vegetation, absent documentation showing how postdevelopment soil structure will be preserved.

Area-Weighted CN = total product/total area = 90 (Round to integer)

#### C. Level of Service (LS) Calculation

		Change in CN	LS
Predevelopment CN:	<span style="border: 1px solid black; padding: 2px;">74</span>	17+	8
		7 to 16	7
Postdevelopment CN:	<span style="border: 1px solid black; padding: 2px;">90</span>	4 to 6	6
		1 to 3	5
Difference:	<span style="border: 1px solid black; padding: 2px;">16</span>	0	4
		-7 to -1	3
LS Required (see scale at right):	<span style="border: 1px solid black; padding: 2px;">7</span>	-8 to -17	2
		-18 to -21	1
		-22 -	0

## WORKSHEET 2: DEVELOP MITIGATION PACKAGE(S) THAT MEET THE REQUIRED LS

Project:  
Location:  
Sheet \_\_ of \_\_

By:  
Checked:  
Date:

Date:

### 1. Required LS (New Development, Wksht 1) or Total VR (Redevelopment, Wksht 1A):

7

Note: Various BMPs may alter CN of proposed development, and LS; recalculate both if applicable.

### 2. Proposed BMP Option Package No. \_\_\_\_

Cover/BMP Description	Treatment Area	VR from Table 4.4 or 4.6 <sup>1</sup>	Product of VR x Area
Extended Dry Detention Area	1.11	4.0	4.44
Bioretention 1 DA10	3.09	8.5	26.26
Bioretention 2 DA 20	2.52	8.5	21.42
Bioretention 3 DA 30	3.06	8.5	26.01
Total <sup>2</sup> :	9.78	Total:	78.13
		*Weighted VR:	7.99

= total product/total a

<sup>1</sup> VR calculated for final BMP only in Treatment Train.

<sup>2</sup> Total treatment area cannot exceed 100 percent of the actual site area.

\* Blank In Redevelopment

Meets required LS (Yes/No)?

YES

(If No, or if additional options are being tested, proceed below.)

### 3. Proposed BMP Option Package No. \_\_\_\_

Cover/BMP Description	Treatment Area	VR from Table 4.4 or 4.6 <sup>1</sup>	Product of VR x Area
Extended Dry Detention Area	3.36	4.0	13.44
Bioretention 1 DA10	3.09	8.5	26.26
Bioretention 2 DA 20	2.52	8.5	21.42
Native Vegetation Establish	0.81	9.5	7.69
Total <sup>2</sup> :	9.78	Total:	68.81
		*Weighted VR:	7.03

= total product/total a

<sup>1</sup> VR calculated for final BMP only in Treatment Train.

<sup>2</sup> Total treatment area cannot exceed 100 percent of the actual site area.

\* Blank In Redevelopment

Meets required LS (Yes/No)?

YES

(If No, or if additional options are being tested, move to next sheet.)

# **LEE'S SUMMIT SENIOR LIVING COMMUNITY**

Lee's Summit, MO - 2019

January 2019

Olsson Project No. 018-1450