

Preliminary Stormwater Management Plan

prepared for

**Lakewood Business Park – Lot 35
4101 NE Port Drive
Lee's Summit, MO 64064**

February 14, 2019

prepared by

**SCHLAGEL & ASSOCIATES, P.A.
14920 W 107th ST
Lenexa, Kansas
(913) 492-5158
Schlagel & Associates Project 18-222**

for

**Sallee Development
3730 NW Troon Drive
Lee's Summit, MO 64064**



Executive Summary

February 14, 2019

Gene Williams, P.E.
220 SE Green Street
Lee's Summit, MO 64063

**RE: Lakewood Business Park – Lot 35
4101 NE Port Drive
Lee's Summit, MO 64064**

Dear Gene Williams,

We are submitting the enclosed stormwater management study in support of the preliminary plat application for Lakewood Business Park. This report has been prepared to address permitting requirements and provides preliminary design calculations for the required storm water detention and BMP facilities. We have modeled the existing site conditions as they existed at the time this report was prepared.

The proposed site is a 2.93 acres commercial/industrial proposed parcel located in Lee's Summit, MO east of I-470 and north of Northeast Lakewood Way. The proposed development has been analyzed and designed to meet the APWA Comprehensive Control Strategy, which entails limiting post-development peak discharge rates from the site for the 2-Year, 10-Year, and 100-Year design storm events. An Extended Dry Detention Basin (EDDB) along with a Proprietary Media Filtration Device has been designed to detain the mentioned events as well as provided 40-hour detention of runoff from the local 90% mean annual event. All elements of the enclosed drainage system will be designed and constructed in accordance with all City of Lee's Summit, Missouri, requirements.

Sincerely,

Schlagel & Associates, P.A.

Ryan McGinnis
Design Engineer

John P. Becker, P.E.
Project Engineer

TABLE OF CONTENTS

	<u>Page No.</u>
TABLE OF CONTENTS.....	III
LIST OF TABLES	IV
LIST OF FIGURES.....	V
1.0 GENERAL INFORMATION.....	1-1
1.1 Objective	1-1
1.2 Methodology	1-1
2.0 EXISTING CONDITIONS ANALYSIS	2-1
2.1 Tributary Areas	2-1
2.2 Curve Number and Time of Concentration	2-1
2.3 Existing Flow Rates	2-2
2.4 Downstream Drainage Issues.....	2-3
2.5 Agency Review	2-3
2.5.1 Corps of Engineers Review.....	2-3
2.5.2 FEMA Requirements.....	2-3
2.5.3 Missouri Department of Natural Resources	2-4
3.0 PROPOSED CONDITIONS ANALYSIS.....	3-1
3.1 Tributary Areas	3-1
3.2 Curve Number and Time of Concentration	3-1
3.3 Proposed Flow Rates.....	3-2
3.4 Detention Analysis	3-2
4.0 SUMMARY AND RECOMMENDATIONS.....	4-1
APPENDIX A	A
-EXISTING SITE AERIAL PHOTOGRAPH	A.1
-EXISTING DRAINAGE MAP	A.2
-PROPOSED DRAINAGE MAP.....	A.3
-EDDB WATER QUALITY DESIGN	A.4
-FEMA FIRMETTE	A.5
-NATIONAL WETLANDS INVENTORY	A.6
-BMP LEVEL OF SERVICE.....	A.7
APPENDIX B	B
-NRCS SOIL RESOURCE REPORT	B.1
-HYDROCAD MODEL OUTPUT REPORT	B.2

* * * *

LIST OF TABLES

<u>Table No.</u>	<u>Page No.</u>
Table 2-1 - Existing Flow Rates	2-2
Table 2-2 - Existing Runoff Evaluation	2-3
Table 3-1 – HydroCAD Runoff Conditions.....	3-2
Table 3-2 - Required & Proposed Runoff Comparison.....	3-3
Table 3-3 - Exit Flow & Velocity For EDDB	3-4

* * * * *

LIST OF FIGURES

<u>Figure No.</u>	<u>Page No.</u>
Figure A.1 – Existing Site Aerial Photograph	Appendix A
Figure A.2 – Existing Drainage Map.....	Appendix A
Figure A.3 – Proposed Drainage Map	Appendix A
Figure A.4 – FEMA FIRMette	Appendix A
Figure A.5 – National Wetlands Inventory.....	Appendix A
NRCS Soil Survey Report.....	Appendix B
HydroCAD Model Output Report.....	Appendix B

* * * * *

1.0 GENERAL INFORMATION

Sallee Development is proposing to develop the 2.93 acres of land located in the West half of Section 9, Township 48 North, Range 31 West, Jackson County, Missouri. The property is located in commercial vacant land and is bounded on the North by similar industrial development and on the East by agricultural/residential land. The property is bounded on the West by Northeast Port Drive and on the South the property is bounded by Northeast Lakewood Way and the North 2.5 Million Gallon Water Tank. The proposed development includes a single commercial warehouse building with associated infrastructure.

1.1 OBJECTIVE

The intent of this report is to provide information pertaining to the existing and proposed watersheds, identifying and addressing any downstream drainage issues, determine and address any detention requirements, provide 40-hour extended detention of runoff from the local 90% mean annual event, and address permitting requirements. This study provides the preliminary design calculations for the development of the facility and associated infrastructure. Detailed designs will be required and provided with permit documents.

1.2 METHODOLOGY

The following were utilized in the assessment, preparation and analysis of watersheds in this design concept plan: *Section 5600, 2011, Storm Drainage Systems & Facilities* of the Standard Specifications & Design Criteria of the Kansas City Metropolitan Chapter of the American Public Works Association; *City of Lee's Summit, Missouri Design Criteria (2011 Revision), Storm Drainage Systems & Facilities*, prepared by the City of Lee's Summit, Missouri, Public Works Department.

Watersheds for the site were defined according to soil cover and type, tributary area, and runoff times of concentration. Soil cover was determined from inspection of the site and aerial photography. A soil survey for the project area was obtained from the United

States Department of Agriculture, Natural Resources Conservation Service (NRCS), website and was utilized in determining soil type. The entire NRCS Soil Resource Report can be found in Appendix B. Watershed size was determined from both aerial topography and topographical survey, and by the proposed grading plan.

Times of concentration were compiled according to *NRCS TR-55 Urban Hydrology for Small Watersheds (1986)* methodology for sheet flow, shallow concentrated flow, and channel flow. Travel times for channel flows were determined using the length and velocity of the open channel. *HydroCAD-10* was utilized to model the runoff. All storm events were modeled using *SCS 24-hour Type II* distributions and were modeled for 2-Year, 10-Year, and 100-Year storm events.

* * * * *

2.0 EXISTING CONDITIONS ANALYSIS

The site lies within the Little Blue River Watershed. The existing site contains one watershed which has a release point located on the southwest portion of the site. Offsite stormwater comes into the site from the southeast and drains to the same release point previously mentioned.

2.1 TRIBUTARY AREAS

The existing drainage tributary is provided in Appendix A, Figure A.2. The site release point has been identified as Release Point 1(RP-1). The area has been delineated according to the existing topography and an annotation callout of, EX. DA-A, Ex. Off DA-B, and Ex. Off DA-C, on Figure A.2, has been provided for the watershed that drains to the release point, RP-1.

2.2 CURVE NUMBER AND TIME OF CONCENTRATION

The existing curve numbers and time of concentrations for each area have been established based on the procedures outlined in *NRCS TR-55 Urban Hydrology for Small Watersheds (1986)*. Existing curve numbers were based upon aerial photography, site inspection, and the soil types present on site.

The NRCS Soil Resource Report indicated that a Hydrologic Soil Group (HSG) of D was present on site. Hydrologically poor conditions indicate a state of land use that will provide higher runoff compared to good conditions. Therefore, group D was utilized to model the existing runoff conditions. A current aerial photograph can be found in Appendix A, Figure A.1; it depicts the existing cover conditions. Table 2-1 found in section 2.3 Existing Flow Rates summarizes the curve numbers for each of the watershed areas.

Cover types for existing conditions were considered to be a “pasture, grassland, or range” in fair condition and a small section of “unconnected pavement”. Procedures

outlined in *NRCS TR-55 Urban Hydrology for Small Watersheds* recommends utilizing curve numbers 89 and 98 for HSG D, for the respective cover types mentioned.

Time of concentration flow paths were based upon sheet flow and shallow concentrated flow for the existing conditions. Sheet flow lengths were limited to where a grade break occurred. Flow was then considered shallow concentrated flow until a channel was visible either from the USGS topographic map or the aerial photograph, and then from that point was considered channel flow determined by the length of the channel and the velocity of flow.

2.3 EXISTING FLOW RATES

Existing flow rates were determined for the 2-Year, 10-Year, and 100-Year design storms. Offsite runoff is included in the calculations for Table 2-1 and Table 2-2 below for Ex. Drainage Area A, Ex. DA-A. Appropriate runoff coefficient curve numbers were based upon aerial photography, site inspection, and the soil types present on site. Detailed calculations with composite curve numbers and time of concentration can be found in the HydroCAD Model Output in Appendix B.

Table 2-1 - Existing Flow Rates

Drainage Sub-Basin	Runoff Coeff. (CN)	Time of Concentration (minutes)	Area (acres)	2-Year Peak Flow (cfs)	10-Year Peak Flow (cfs)	100-Year Peak Flow (cfs)
Ex. DA-A	85	9.8	2.93	8.64	15.53	24.83
Ex. Off DA-B	84	6.7	0.64	2.10	3.75	5.97
Ex. Off DA-C	84	8.1	0.12	0.38	0.68	1.08

Table 2-2 below reflects the total existing runoff for the sites stormwater at the release point identified in Figure A.2 found in Appendix A.

Table 2-2 - Existing Runoff Evaluation

Drainage Sub-Basin Release Points	2-Year Peak Flow (cfs)	10-Year Peak Flow (cfs)	100-Year Peak Flow (cfs)
RP 1	11.01	19.77	31.59

2.4 DOWNSTREAM DRAINAGE ISSUES

The existing downstream drainage system has been reviewed with this development plan. FEMA flood maps have been checked and currently no immediate downstream issues appear to be present. A FEMA FIRMette is included in Appendix A, Figure A.6 and Figure A.7. The project lies outside of the identified FEMA floodplain per map number 29095C0430G.

2.5 AGENCY REVIEW

Permitting requirements of the following agencies were reviewed as part of the existing conditions analysis. These sections provide a discussion of the federal and state stormwater permitting that may be required for the proposed development. Supporting maps are located in Appendix A.

2.5.1 Corps of Engineers Review

The National Wetlands Inventory (NWI) map was reviewed for the site and there are no identified wetlands located within the project site. The NWI map can be found in Appendix A, Figure A.5. We do not anticipate any Corps of Engineers requirements associated with this project at this time.

2.5.2 FEMA Requirements

No FEMA identified floodplain is located on the proposed property per Flood Insurance Rate Map Panel No. 29095C0430G. There is currently no work proposed in the regulated floodplain. Please see the attached FEMA FIRMette in Appendix A, Figure A.4.

2.5.3 Missouri Department of Natural Resources

All land disturbance activities will be permitted in accordance with the City of Lee's Summit, MO specifications as well as the Missouri Department of Water Pollution Control general permit under the National Pollution Discharge Elimination System (NPDES) and an authorized Notice of Intent (NOI) application form. The disturbance of the site is greater than one acre; therefore, NPDES and NOI applications are required with the future permitting of the site in compliance with local, state and federal guidelines.

* * * * *

3.0 PROPOSED CONDITIONS ANALYSIS

With the proposed development, the site watershed will be divided into sub-basins for analysis. Stormwater runoff will be conveyed through the site via open sheet flow, shallow concentrated flow and a detention pond. An Extended Dry Detention Basin will collect the 2-Year, 10-Year, and 100-Year storm events for On-site Drainage Area-1, Off-site Drainage Area-1, and Off-site Drainage Area-2. On-Site Drainage Area-3 will be un-detained and allowed to run off the site as sheet flow.

All components of the overland and enclosed storm sewer systems will meet or exceed the specifications provided in *Section 5600 – Storm Drainage Systems & Facilities* of the *Standard Specifications and Design Criteria* compiled by the Kansas City Metropolitan Chapter of the American Public Works Association.

3.1 TRIBUTARY AREAS

Existing Drainage Area A, will be divided into sub-catchments, On-site Drainage Area-1, Off-Site Drainage Area-1, and Off-Site Drainage Area-2 will collect into the extended dry detention basin. On-Site Drainage Area-3 will bypass the storage areas and the extended dry detention basin. The parcel's release point designation remains the same for the proposed conditions. These tributary areas and their release point can be located in Appendix A, Figure A.3.

3.2 CURVE NUMBER AND TIME OF CONCENTRATION

Curve numbers for the proposed development were developed in a similar manner as the existing conditions. Hydrologic Soil Group (HSG) of D was utilized for post-development conditions. Cover types for the proposed conditions were considered to be heavily grassed in good condition with impervious areas, such as roofs and pavement.

Time of concentration was established in a similar manner as the existing conditions. Shallow concentrated flow lengths were shortened and considered paved. Detailed calculations with composite curve numbers and time of concentration can be found in

the HydroCAD Model Output in Appendix B. Appendix A, Figure A.3 depicts the proposed drainage conditions.

3.3 PROPOSED FLOW RATES

Proposed flow rates were determined for the 2-Year, 10-Year, and 100-Year design storms. Detailed calculations can be found in the HydroCAD Model Output Report in Appendix B.

Table 3-1 – HydroCAD Runoff Conditions

Drainage Sub-Basin	Ruoff Coeff. (CN)	Time of Concentration (minutes)	Area (acres)	2-Year Peak Flow (cfs)	10-Year Peak Flow (cfs)	100-Year Peak Flow (cfs)
DA-1	89	24.1	2.59	6.03	10.19	15.71
OFF DA-1	84	13.0	0.12	0.32	0.58	0.92
OFF DA-2	84	10.7	0.64	1.55	2.96	4.92
DA-3	83	14.8	0.34	0.82	1.50	2.43

3.4 DETENTION ANALYSIS

The runoff hydrographs utilized to determine the peak flow volumes for each tributary area were determined using *TR-55* methodology and *HydroCAD-10*. For the 2-Year, 10-Year, and 100-Year storm events, the complete hydrograph routing and model output can be found in the HydroCAD Model Output Report in Appendix B.

The site will need to provide detention that meets the requirement under the Comprehensive Control release rates under Section 5608.4C1a and 5608.4C1b of the APWA. This entails limiting post-development peak discharge rates from the site for the 2-Year, 10-Year, and 100-Year design storm events, as well as providing 40-Hour extended detention of runoff from the local 90% mean annual event. The post-development peak discharge rates from the site shall not exceed the following:

- 50% storm peak rate less than or equal to 0.5 cfs per site acre
- 10% storm peak rate less than or equal to 2.0 cfs per site acre

- 1% storm peak rate less than or equal to 3.0 cfs per site acre

Based on the proposed drainage area of 2.93 acres, the required peak discharge with additional allowable offsite drainage peak discharge rates from Table 3-1 – HydroCAD Runoff Conditions are shown in Table 3-2 - Required & Proposed Runoff Comparison. The proposed post-development peak discharge rates are shown next to the maximum allowable peak discharge rates for comparison.

Table 3-2 - Required & Proposed Runoff Comparison

Site Release Information (cubic feet per second) (w/ EDDB)				
	Required Peak Discharge (A)	Allowable Offsite Discharge (B)	Required + Offsite Discharge (A+B)	Proposed Discharge
2-Year (50%)	1.47	2.48	3.95	3.06
10-Year (10%)	5.86	4.43	10.29	10.15
100-Year (1%)	8.79	7.05	15.84	12.16

Please note: Site release rates are not a direct addition of sub-basin runoff due to differences in the time peak as well as storage effects within the basins.

Stormwater runoff for DA-1, OFF DA-1, and OFF DA-2 is mitigated and detained by Extended Dry Detention Basin on the southwest corner of the property. Stormwater runoff for DA-3 will run freely through the site and ultimately detained by near-by existing street inlets. Proposed stormwater drainage structures have been aptly located throughout the site to capture and convey not only offsite but proposed stormwater runoff to the EDDB. The Water Quality volume above at the EDDB will be released over 40 hours.

Additionally, erosion control procedures will be designed and implemented at the 12" HDPE outlet to reduce impact on the site downstream. Table 3-3 summarizes the exiting flow and velocity for the EDDB for the 2-Year, 10-Year, and 100-Year storm events. EDDB Water Quality Design calculations can be found in Appendix A.

Table 3-3 - Exit Flow & Velocity For EDDB

	2-Year Event	10-Year Event	100-Year Event
Q (cfs)	2.90	9.42	10.63
V (fps)	9.94	11.99	13.54

* * * * *

4.0 SUMMARY AND RECOMMENDATIONS

The proposed drainage site is a 2.93 acres commercial/industrial parcel of land located in Lee's Summit, MO east of I-470 and north of Northeast Lakewood Way. The proposed development has been analyzed and designed to meet the APWA Comprehensive Control Strategy, which entails limiting post-development peak discharge rates from the site for the 2-Year, 10-Year, and 100-Year design storm events. An EDDB has been designed to detain the mentioned events as well as provided 40-hour detention of runoff from the local 90% mean annual event. All elements of the enclosed drainage system will be designed and constructed in accordance with all City of Lee's Summit, Missouri, requirements.

* * * *

APPENDIX A

- Existing Site Aerial Photograph
- Existing Drainage Map
- Proposed Drainage Map
- EDDB Water Quality Design
- FEMA FIRMette
- National Wetlands Inventory
- BMP Level of Service

Jackson County MO Map


Legend



DISCLAIMER: These maps are NOT SURVEY ACCURATE.

DISCLAIMER: Requestor knowingly accepts the data and information "as-is" and the County expressly disclaims any representation as to the completeness or accuracy of the data or information. Further, the County expressly disclaims any representation as to the suitability of the data or information for any specific use intended by requestor. Maps are intended to show as accurately as possible the relationship of data, but are not survey accurate.

RELEASE: Requestor expressly releases and agrees to hold the County, its officials, and its employees, harmless from any and all claims or damages arising out of the use of the data or information. Requestor expressly agrees to assume all risk for use and reliance on the data and information.
Date: 1/4/2019

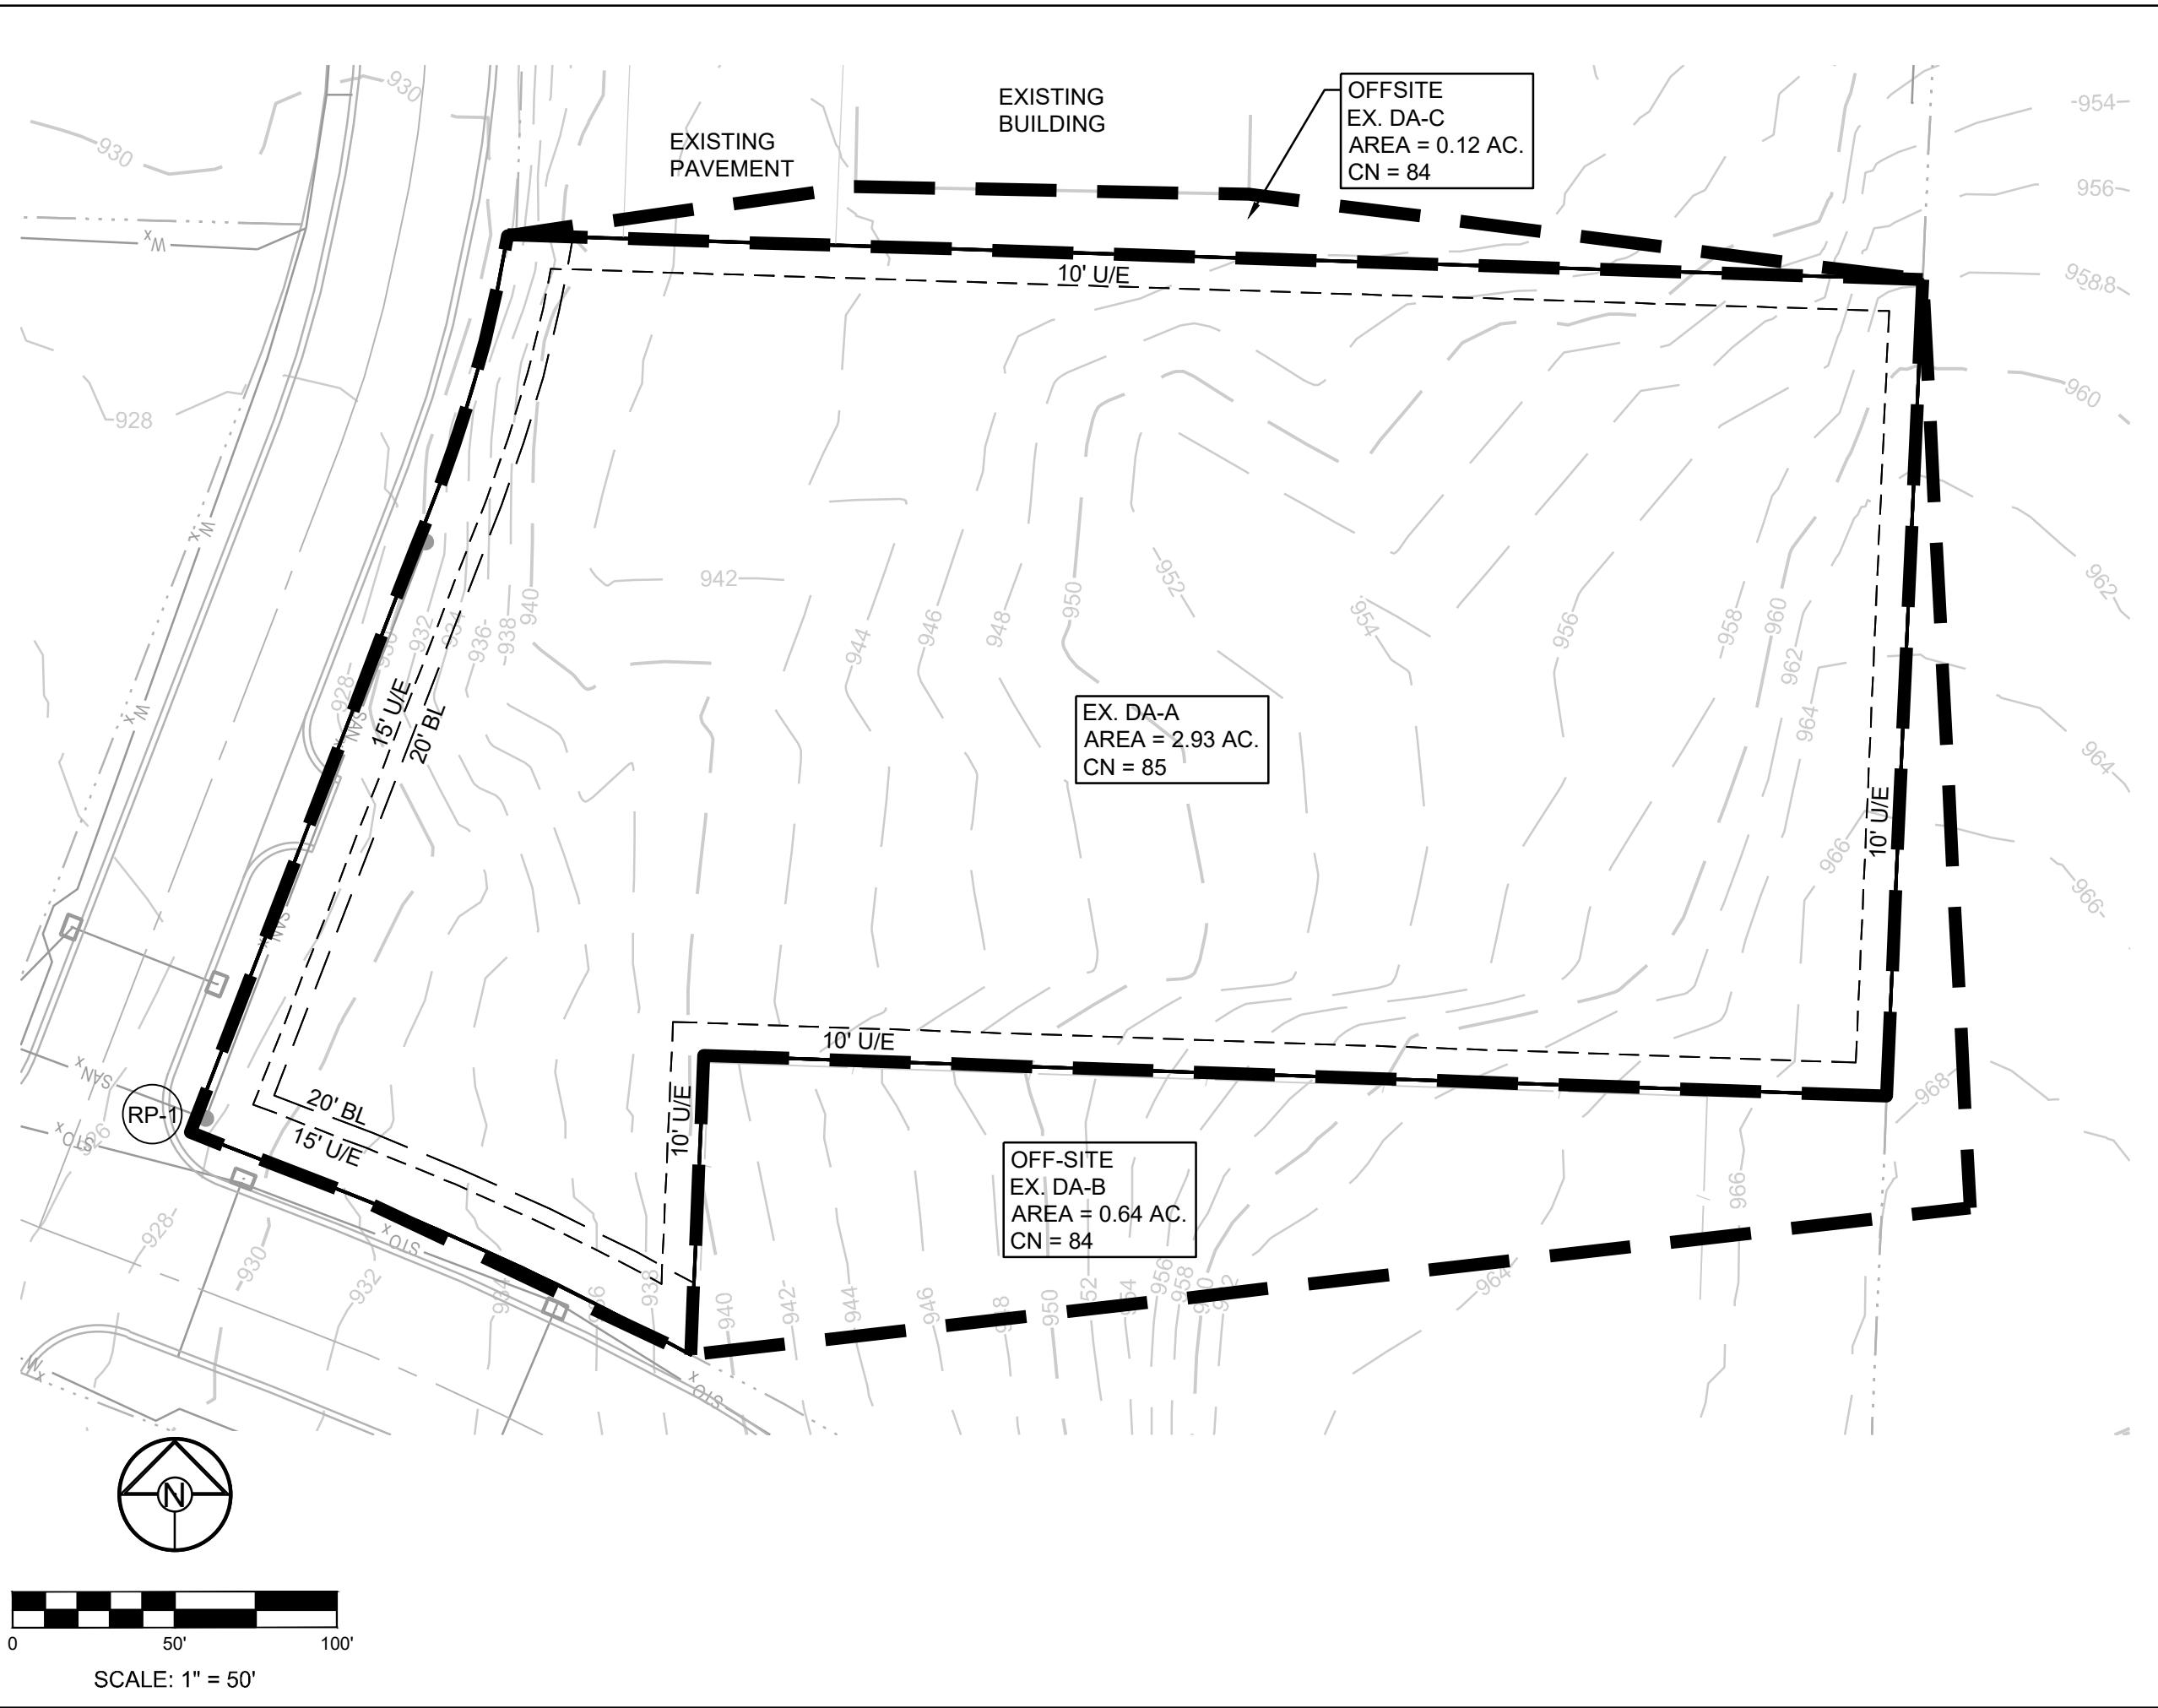

SCHLAGEL & ASSOCIATES, P.A.
Engineers • Planners • Surveyors • Landscape Architects
11020 West 107th Street • Lenexa, Kansas 66215



1-800-525-1212 • 100 South Main Street • Lexington, Kentucky 40507
(913) 492-5158 • Fax: (913) 492-8400
WWW.SCHLAGELASSOCIATES.COM

Missouri State Certificates of Authority
EE20002003800-F #LAC2001005237 #LS2002008859-F

LAKWOOD BUSINESS PARK
LOT 35
EXISTING DRAINAGE MAP

4101 NE PORT DRIVE
EE'S SUMMIT MO 64064


DRAWN BY:	RPM
DATE PREPARED:	1/9/2019
PROJ. NUMBER:	18-222

**EXISTING
DRAINAGE MAP**

SHEET

A.2

OF

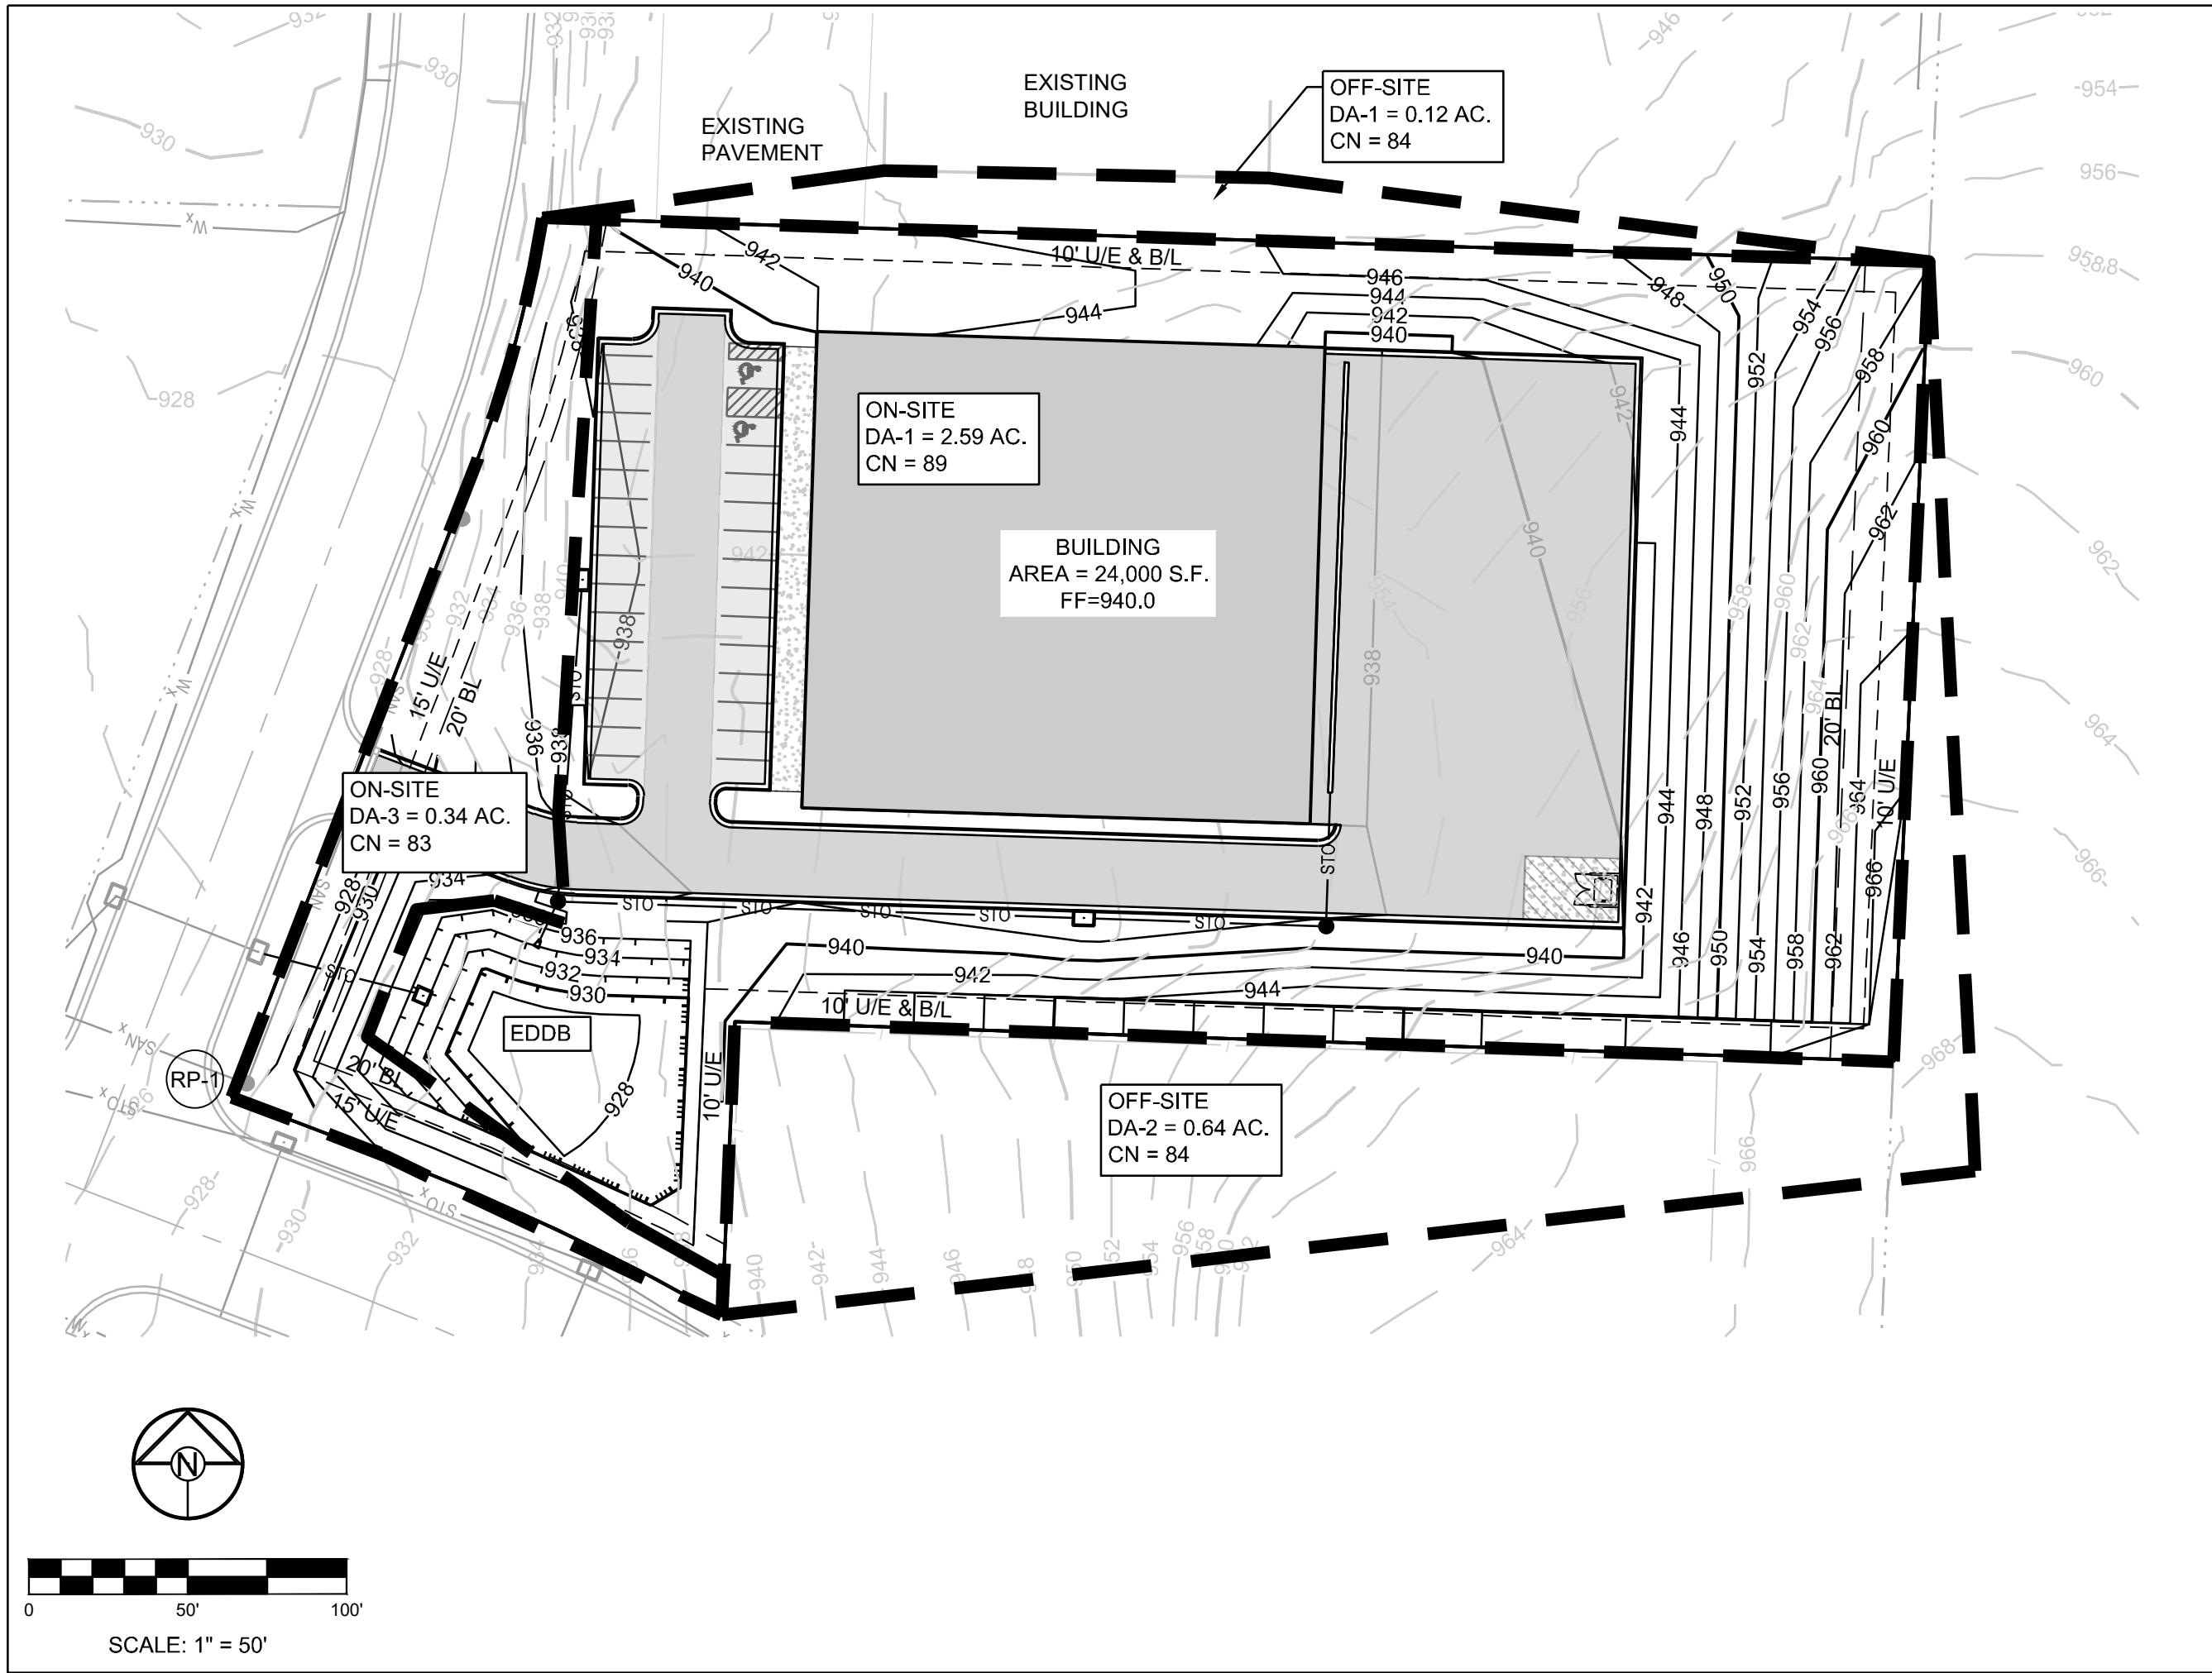

LAKWOOD BUSINESS PARK
LOT 35
PRELIMINARY DRAINAGE PLAN

SHEET
A.3
OF 3



SCHLAGEL & ASSOCIATES, P.A.
Engineers•Planners•Surveyors•Landscape Architects
14920 West 107th Street Lenexa, Kansas 66215
(913) 492-5158 • Fax: (913) 492-8400
www.SCHLAGELASSOCIATES.COM

Missouri State Certificates of Authority
#E2002003800-F #LAC2001005237 #LS2002008859-F

4101 NE PORT DRIVE
LEES SUMMIT, MO 64064

DRAWN BY:	RPM
DATE PREPARED:	1/9/2019
PROJ. NUMBER:	18-2222
PROPOSED DRAINAGE MAP	

Basin Volume - EDDB-1

Project Name: **LAKWOOD BUSINESS PARK - LOT 35**

Project #: **18-222**

Time: **2/14/2019 14:16**

Work By: **R. McGinnis**

Volume computed using Conic Method For Reservoir Volumes

$$\text{Volume} = (1/3) * (\text{EL2}-\text{EL1}) * (\text{Area1} + \text{Area2} + (\text{Area1} * \text{Area2})^{0.5})$$

Elevation (ft)	Area (ft ²)	Area (AC)	Δ Volume (ft ³)	Total Volume (ft ³)	Total Volume (ac-ft)
926	863	0.020	0	0	0.000
928	1,656	0.038	2,476	2,476	0.057
930	2,578	0.059	4,200	6,676	0.153
932	3,630	0.083	6,177	12,853	0.295
934	4,810	0.110	8,412	21,265	0.488
936	6,089	0.140	10,873	32,138	0.738

Water Quality Volume Calculation- EDDB-1

WQV = P * Weighted RV

WQV - Water Quality Volume (watershed-inches)

P - Rainfall Event (1.37 inches in Kansas City)

RV - Volumetric Runoff Coefficient

RV = 0.05 + 0.009(I)

I - Percent Site Imperviousness (%)

I. Determine Weighted RV & Weighted Rational C Coefficient

Total Drainage Area

Cover Type	% Impervious	Area (Ac.)	Total Impervious Area (Ac.)	Rational Runoff Coefficient	RV	C * Area	RV * Area
Impervious (Building and Parking)	95	1.27	1.21	0.87	0.91	1.10	1.15
Open Space	0	1.32	0.00	0.30	0.05	0.40	0.07
Total	47	2.59	1.21			1.50	1.22

RV = Sum(RV*A)/Total Area = 1.215 / 2.59 = 0.469

C = Sum(C*A)/Total Area = 1.501 / 2.59 = 0.579

II. Determine Water Quality Volume

WQV = P * RV = 1.37 * 0.4692 = 0.643 in

III. Determine Total Water Quality Volume

Total Watershed Area (AT) = 2.59 acres
WQV = 0.643 in

WQV = (2.59 * 0.642)/12 = 0.14 ac-ft 6044.057085 c.f.

IV. Peak rate of runoff for WQV

Q = K*C*i*A

K = 1 for WQV

C = 0.3 + 0.6 I

I = Percent impervious

i = Rainfall Intensity from Table 9 in BMP manual

C = 0.3+0.6*I = 0.58
K = 1.00
i = 1.90
Q (cfs) = 2.85

Design Procedure Form: Extended Dry Detention Basin (EDDB) Main Worksheet	
Project #: 18-222 Designer: RPM Checked by: JPB Company: Schlagel Date: 2/14/2019 Project: LAKEWOOD BUSINESS PARK - LOT 35 Location:	EDDB
I. Basin Water Quality Storage Volume:	
Step 1) Tributary Area to EDDB, A_T (ac.)	A_T (ac.) = 2.59
Step 2) Calculate WQ _V using method in Section 6.1	WQ_V (ac-ft) = 0.14
Step 3) Add 20 percent to account for silt and sand sediment deposition in the basin	V_{design} (ac-ft) = 0.17
IIa. Water Quality Outlet Type	
Step 1) Set Water Quality Outlet Type Type 1 = Single Orifice Type 2 = Perforated riser or plate Type 3 = v-notch weir	Outlet Type = 2
Step 2) Proceed to step 2b, 2c, or 2d based on water quality outlet type	
IIb. Water Quality Outlet, Single Orifice	
Step 1) Depth of water quality volume at outlet, Z_{WQ} (ft.)	Z_{WQ} (ft.) = 2.50
Step 2) Average head of Water Quality volume over invert of orifice, H_{WQ} (ft) $H_{WQ} = 0.5 * Z_{WQ}$	H_{WQ} (ft.) = 1.25
Step 3) Average water quality outflow rate, Q_{WQ} (cfs) $Q_{WQ} = (WQ_V * 43,560) / (40 * 3600)$	Q_{WQ} (cfs) = 0.050
Step 4) Set value of orifice discharge coefficient, C_o $C_o = 0.66$ when thickness of riser/weir plate is = or < orifice diameter $C_o = 0.80$ when thickness of riser/weir plate is > orifice diameter	C_o = 0.66
Step 5) Water quality outlet orifice diameter (4.0-in, min.), D_o (in) $D_o = 12 * 2 * (Q_{WQ}/C_o * \pi * (2 * g * H)^{0.5})^{0.5}$	D_o (in) = 1.25
Step 6) To size outlet orifice for EDDB with an irregular stage-volume relationship, use Single Outlet Worksheet	
IIc. Water Quality Outlet, Perforated Riser	
Step 1) Depth at outlet above lowest perforation, Z_{WQ} (ft.)	Z_{WQ} (ft.) = 2.50
Step 2) Recommended maximum outlet area per row, A_o (in^2) $A_o = (WQ_V) / (0.013 * Z_{WQ}^2 + 0.22 * Z_{WQ} - 0.10)$	A_o (in^2) = 0.31
Step 3) Circular perforation diameter per row assuming a single column, D_1 (in)	D_1 (in) = 0.63
Step 4) Number of Columns, n_c	n_c = 1.00
Step 5) Design circular perforation diameter (should be between 1 and 2 inches), D_{perf} (in)	D_{perf} (in) = 1.00
Step 6) Horizontal perforation column spacing when $n_c > 1$, center to center, S_c If $D_{perf} \geq 1.0$ in, $S_c = 4$	S_c (in) = N/A
Step 7) Number of rows (4" vertical spacing between perforations, center to center), n_r	n_r = 7.00

II.b. Water Quality Outlet, V-notch Weir

Step 1) Depth of water quality volume above permanent pool, Z_{WQ} (ft.)	Z_{WQ} (ft.) =	<input type="text" value="2.50"/>
Step 2) Average head of Water Quality volume over invert of V-notch, H_{WQ} (ft)	H_{WQ} (ft.) =	<input type="text" value="1.25"/>
$H_{WQ} = 0.5 * Z_{WQ}$		
Step 3) Average water quality outflow rate, Q_{WQ} (cfs)	Q_{WQ} (cfs) =	<input type="text" value="0.05"/>
$Q_{WQ} = (WQv * 43,560)/(40 * 3600)$		
Step 4) V-notch weir coefficient, C_V	C_V =	<input type="text" value="2.50"/>
Step 5) V-notch weir angle, θ (deg) $\theta = 2 * \arctan(Q_{WQ} / C_V * H_{WQ}^{5/2})$ V-notch angle should be at least 20 degrees. Set to 20 degrees if calculated angle is smaller.	θ (deg) =	<input type="text" value="1.13"/>
Step 6) Top width of V-notch weir $W_V = 2 * Z_{WQ} * \tan(\theta/2)$	W_V =	<input type="text" value="0.05"/>

Step 7) To calculate v-notch angle for EDDB with and irregular stage-volume relationship, use the V-notch Weir Worksheet

III. Flood Control

Refer to APWA Specifications Section 5608

IV. Trash Racks

Step 1) Total outlet area, A_{ot} (in^2)	A_{ot} (in^2) =	<input type="text" value="0.06"/>
Step 2) Required trash rack open area, A_t (in^2) $A_t = A_{ot} * 77 * e^{(0.124 * D)}$ for single orifice outlet $A_t = (A_{ot}/2) * 77 * e^{(-0.124 * D)}$ for orifice plate outlet $A_t = 4 * A_{ot}$ for v-notch weir outlet	A_t (in^2) =	<input type="text" value="0.25"/>

V. Basin Shape

Step 1) Length to width ratio should be 3:1 (L:W) wherever practical	L:W =	<input type="text" value="3.00"/>
Step 2) Low flow channel side lining	Concrete: Soil/ riprap: No low flow channel:	<input type="text" value="X"/>
Step 3) Top stage floor drainage slope (toward low flow channel), S_{ts} (%) Top stage depth, D_{ts} (ft)	S_{ts} (%) = D_{ts} (ft) =	<input type="text" value="1.00"/> <input type="text" value="1.25"/>
Step 4) Bottom stage volume, V_{bs} (ac-ft)	V_{bs} (% of WQv) = V_{bs} (ac-ft) =	<input type="text" value="34.14"/> <input type="text" value="0.057"/>

VI. Forebay (Optional)

Step 1) Volume should be greater than 10% of WQv	Min. Vol _{FB} (ac-ft) =	<input type="text" value="0.01"/>
Step 2) Forebay depth, Z_{FB} (ft)	Z_{FB} (ft) =	<input type="text" value="2.00"/>
Step 3) Forebay surface area, A_{FB} (ac)	A_{FB} (ac) =	<input type="text" value="0.01"/>
Step 4) Paved/hard bottom and sides?		<input type="text" value="0.00"/>

VII. Basin side slopes


Basin side slopes shall be at least 4:1 (H:V)	Side Slope (H:V) =	<input type="text" value="3:01"/> (TRM used)
---	--------------------	---

VIII. Dam Embankment side slopes

Dam embankment side slopes shouls be at least 3:1 (H:V)	Dam Embankment (H:V) =	<input type="text" value="3:01"/>
---	------------------------	-----------------------------------

IX. Vegetation

Check method of vegetation planted in the EDDB or descibe "other"	X Native Grass <input type="checkbox"/> Irrigated Turf Grass <input type="checkbox"/> Other: _____
---	--

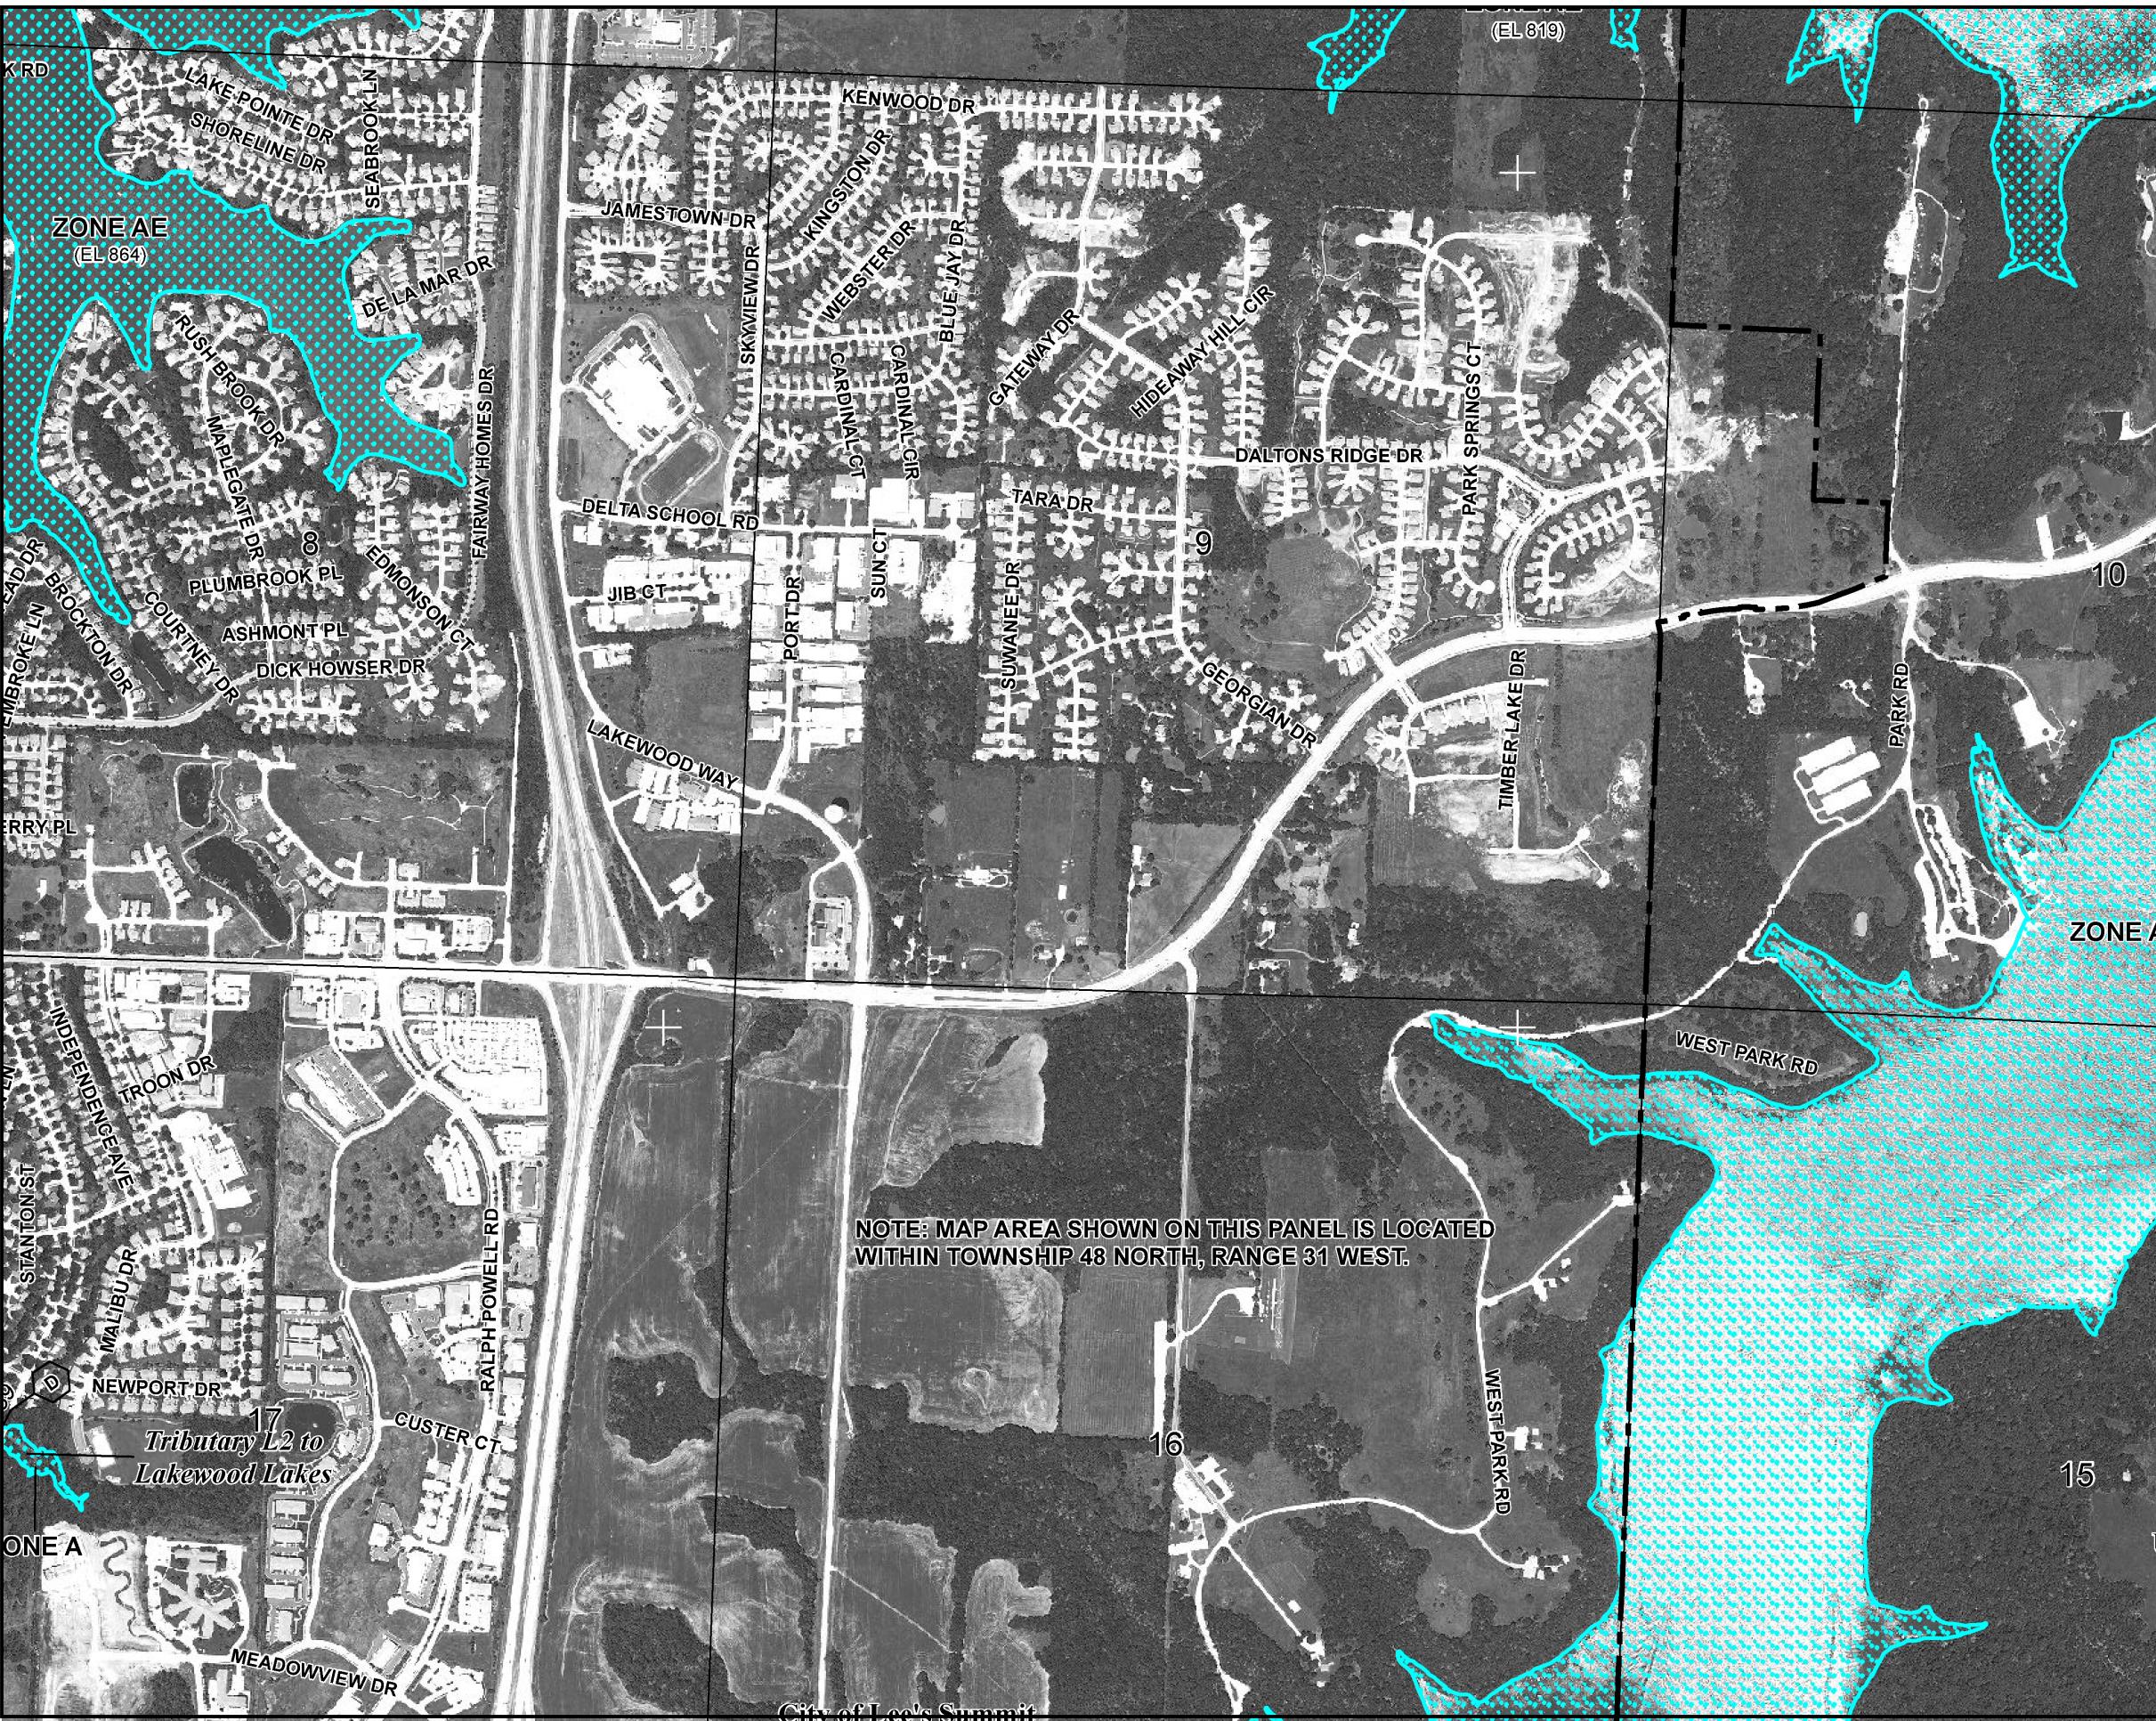

NFIP

PANEL 0430G

FIRM
FLOOD INSURANCE RATE MAP
JACKSON COUNTY,
MISSOURI
AND INCORPORATED AREAS

PANEL 430 OF 625
(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS:

COMMUNITY	NUMBER	PANEL	SUFFIX
JACKSON COUNTY	290492	0430	G
LEE'S SUMMIT, CITY OF	290174	0430	G

MAP NUMBER 29095C0430G
MAP REVISED JANUARY 20, 2017
Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msfc.fema.gov



U.S. Fish and Wildlife Service

National Wetlands Inventory

18-222-Lakewood Business Park



January 4, 2019

Wetlands

- Estuarine and Marine Deepwater
- Estuarine and Marine Wetland

- Freshwater Emergent Wetland
- Freshwater Forested/Shrub Wetland
- Freshwater Pond
- Lake
- Other
- Riverine

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

ENTIRE SITE

WORKSHEET 1: REQUIRED LEVEL OF SERVICE

Project: LAKEWOOD BUSINESS PARK - LOT 35
Location: 4101 NE Port Drive, Lee's Summit, MO
Check one: Undeveloped X Developed

WORK BY: RPM
DATE: 01/16/19
9:27:59 AM

1. Runoff Curve Number

A. Predevelopment CN

Area-Weighted CN = total product/total area =

85 (round to integer)

B. Post Development CN

¹ Postdevelopment CN is one HSG higher for all cover types except preserved vegetation, absent documentation showing how postdevelopment soil structure will be preserved.

Area-Weighted CN = total product/total area =

88 (round to integer)

C. Level of Service (LS) Calculation

Predevelopment CN:		85
Postdevelopment CN:		88
Difference:		3
LS Required (see scale at right):		5

Table 4.2
LS for Previously Undeveloped Sites

Change in CN	LS	Change in CN	LS
1	4.3	17	7.1
2	4.7	18	7.2
3	5	19	7.3
4	5.3	20	7.4
5	5.7	21	7.6
6	6	22	7.7
7	6.1	23	7.8
8	6.2	24	7.9
9	6.3	25	8
10	6.4	25+	8
11	6.5		
12	6.6		
13	6.7		
14	6.8		
15	6.9		
16	7		

Sources: U.S. Department of Agriculture, Natural Resource Conservation Service. *Urban Hydrology for Small Watersheds, Technical Release 55 (TR-55)*, 1986. BMP Manual Addendum #1 Accepted November 10, 2016

ENTIRE SITE

WORKSHEET 2: DEVELOP MITIGATION PACKAGE(S) THAT MEET THE REQUIRED LS

Project: LAKEWOOD BUSINESS PARK - LOT 35
Location:

WORK BY: RPM
DATE: 1/16/2019

1. Required LS

2. Proposed BMP Option Package No.

STF Reference #	Cover/BMP Description	Treatment Area	VR from Table 2 or Table 3	Area x VR Total Treatment Area
	PROPRIETARY DEVICE	2.59	7.00	6.19
	OFFSITE DRAINAGE	0.34	0.00	0.00
	Total:	2.93	LS:	6.19

MEETS REQUIRED LS (YES/NO)?

APPENDIX B

-NRCS Soil Resource Report

-HydroCAD Model Output Report



United States
Department of
Agriculture

NRCS

Natural
Resources
Conservation
Service

A product of the National Cooperative Soil Survey, a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local participants

**Custom Soil Resource Report for
Jackson County,
Missouri**



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface.....	2
How Soil Surveys Are Made.....	5
Soil Map.....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
Jackson County, Missouri.....	13
10024—Greenton-Urban land complex, 5 to 9 percent slopes.....	13
10143—Snead-Urban land complex, 9 to 30 percent slopes.....	14
References.....	16

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units).

Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and


Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.


Custom Soil Resource Report Soil Map

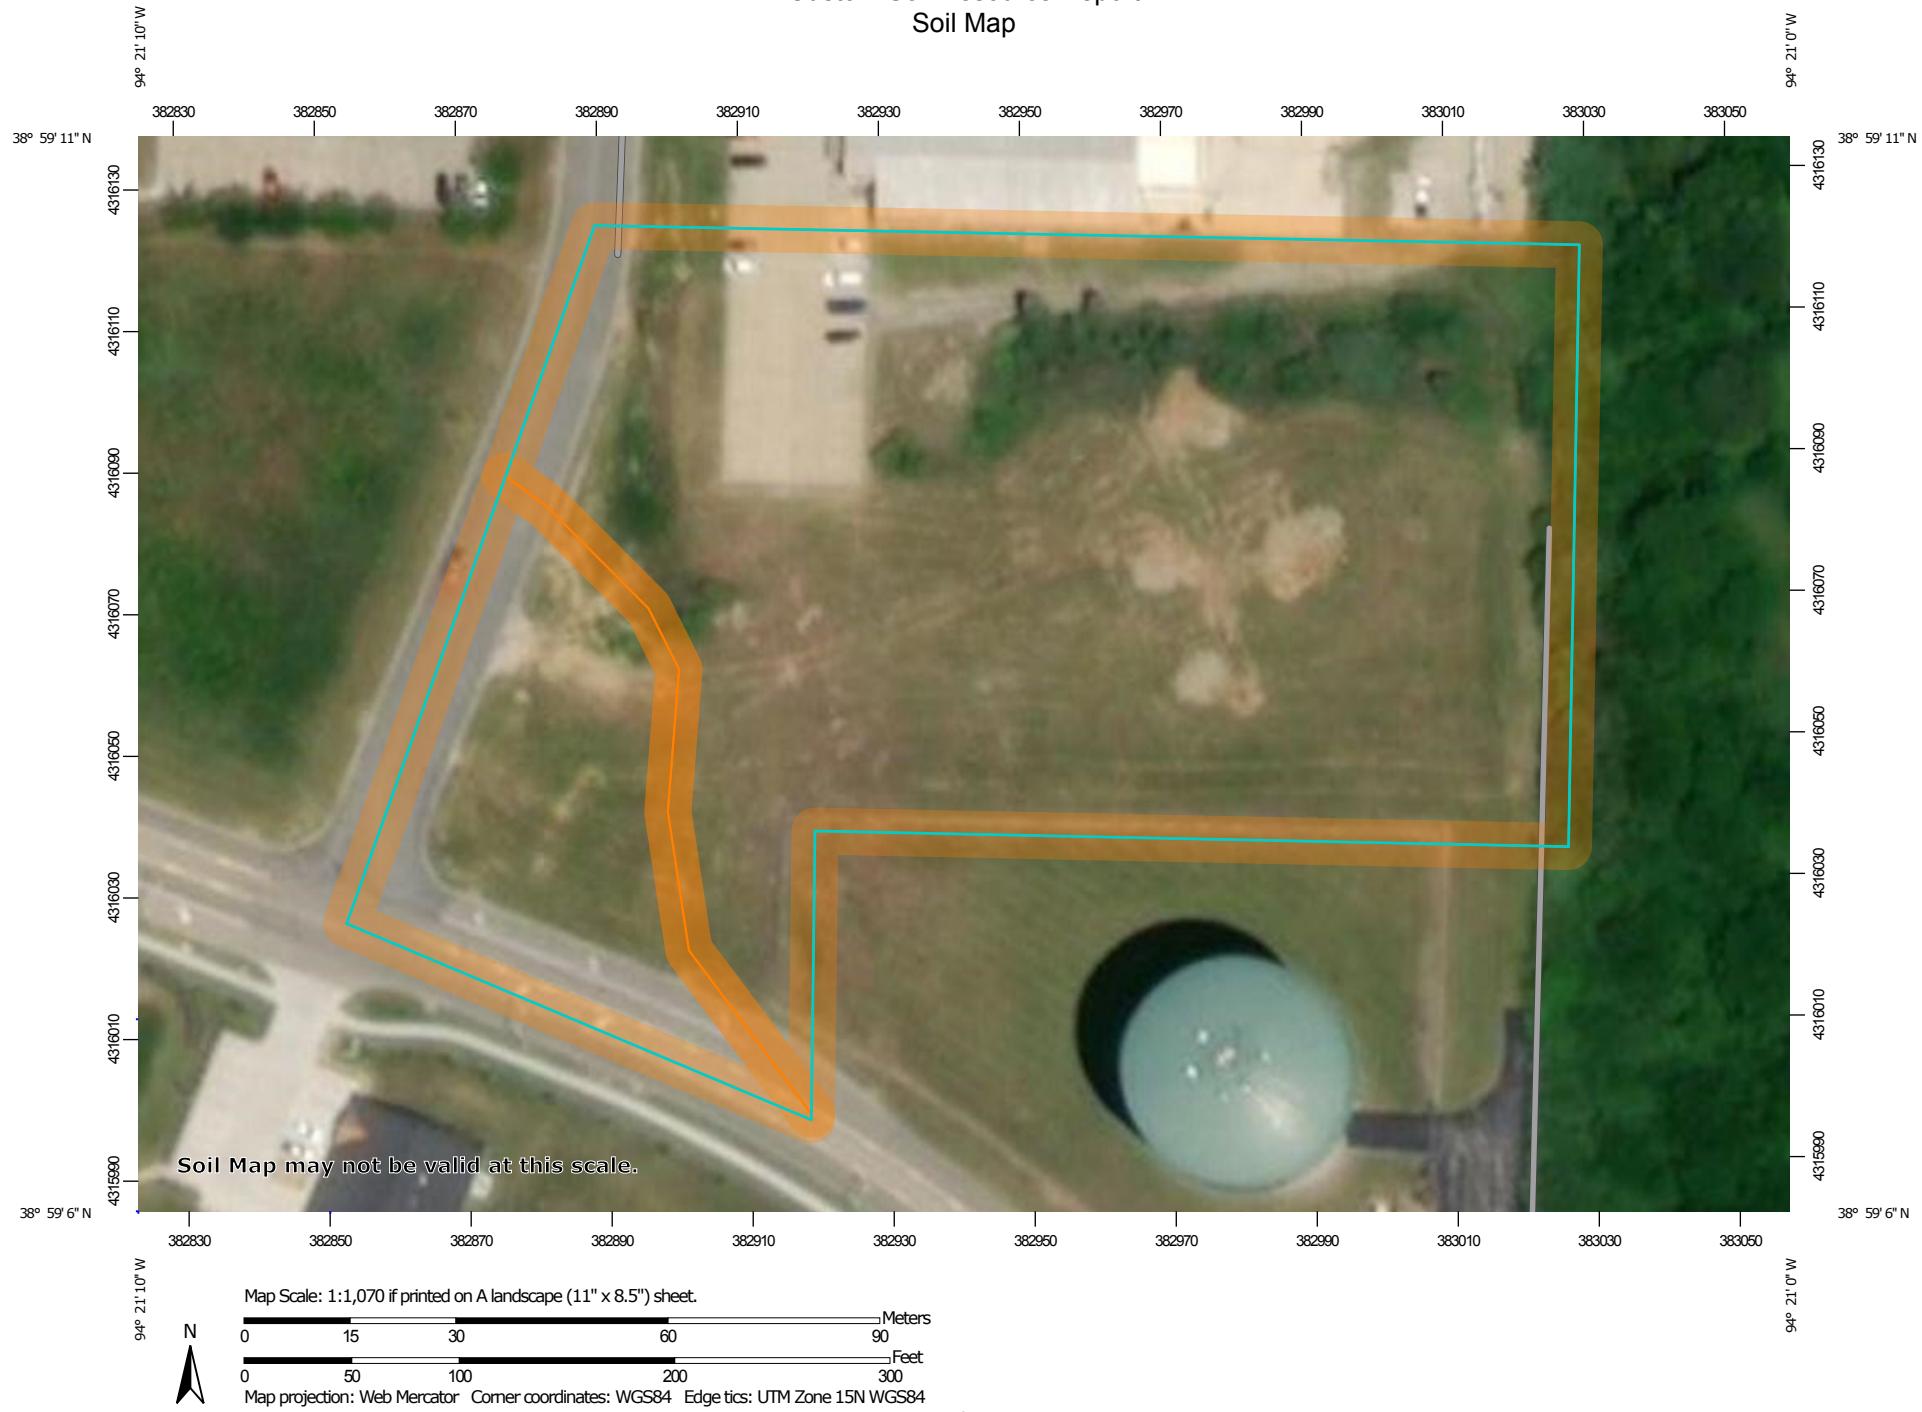

Custom Soil Resource Report

MAP LEGEND

Area of Interest (AOI)



Area of Interest (AOI)

Soils



Soil Map Unit Polygons



Soil Map Unit Lines



Soil Map Unit Points

Special Point Features



Blowout



Borrow Pit



Clay Spot



Closed Depression



Gravel Pit



Gravelly Spot



Landfill



Lava Flow



Marsh or swamp



Mine or Quarry



Miscellaneous Water



Perennial Water



Rock Outcrop



Saline Spot



Sandy Spot



Severely Eroded Spot



Sinkhole



Slide or Slip



Sodic Spot

Spoil Area



Stony Spot



Very Stony Spot



Wet Spot




Other



Special Line Features

Water Features



Streams and Canals

Transportation



Rails



Interstate Highways



US Routes



Major Roads



Local Roads

Background



Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri

Survey Area Data: Version 19, Sep 13, 2018

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jun 11, 2017—Sep 22, 2017

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
10024	Greentown-Urban land complex, 5 to 9 percent slopes	3.0	82.4%
10143	Snead-Urban land complex, 9 to 30 percent slopes	0.6	17.6%
Totals for Area of Interest		3.7	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however,

onsite investigation is needed to define and locate the soils and miscellaneous areas.

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Jackson County, Missouri

10024—Greenton-Urban land complex, 5 to 9 percent slopes

Map Unit Setting

National map unit symbol: 2qky4

Elevation: 800 to 1,100 feet

Mean annual precipitation: 33 to 41 inches

Mean annual air temperature: 50 to 55 degrees F

Frost-free period: 177 to 220 days

Farmland classification: Prime farmland if drained

Map Unit Composition

Greenton and similar soils: 60 percent

Urban land: 35 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Greenton

Setting

Landform: Hillslopes

Landform position (two-dimensional): Shoulder

Landform position (three-dimensional): Side slope

Down-slope shape: Convex

Across-slope shape: Convex, concave

Parent material: Loess over residuum weathered from limestone and shale

Typical profile

A - 0 to 16 inches: silty clay loam

Bt1 - 16 to 26 inches: silty clay loam

2Bt2 - 26 to 80 inches: silty clay

Properties and qualities

Slope: 5 to 9 percent

Depth to restrictive feature: About 16 inches to abrupt textural change

Natural drainage class: Somewhat poorly drained

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to moderately high (0.06 to 0.20 in/hr)

Depth to water table: About 12 to 30 inches

Frequency of flooding: None

Frequency of ponding: None

Salinity, maximum in profile: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water storage in profile: Low (about 3.6 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 3e

Hydrologic Soil Group: D

Ecological site: Loess Upland Prairie (R109XY002MO)

Other vegetative classification: Grass/Prairie (Herbaceous Vegetation)

Hydric soil rating: No

Description of Urban Land

Setting

Landform: Hills

Landform position (two-dimensional): Backslope

Across-slope shape: Convex, concave

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydric soil rating: No

10143—Snead-Urban land complex, 9 to 30 percent slopes

Map Unit Setting

National map unit symbol: 2ql0r

Elevation: 700 to 900 feet

Mean annual precipitation: 33 to 41 inches

Mean annual air temperature: 50 to 55 degrees F

Frost-free period: 177 to 220 days

Farmland classification: Not prime farmland

Map Unit Composition

Snead and similar soils: 65 percent

Urban land: 25 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Snead

Setting

Landform: Hillslopes

Landform position (two-dimensional): Backslope

Landform position (three-dimensional): Side slope

Down-slope shape: Convex

Across-slope shape: Convex

Parent material: Residuum weathered from calcareous shale

Typical profile

A - 0 to 12 inches: flaggy silty clay loam

Bw - 12 to 40 inches: silty clay

Cr - 40 to 80 inches: bedrock

Properties and qualities

Slope: 9 to 30 percent

Depth to restrictive feature: 39 to 50 inches to paralithic bedrock

Natural drainage class: Moderately well drained

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately high (0.00 to 0.20 in/hr)

Depth to water table: About 24 to 36 inches

Custom Soil Resource Report

Frequency of flooding: None

Frequency of ponding: None

Calcium carbonate, maximum in profile: 5 percent

Salinity, maximum in profile: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water storage in profile: Low (about 5.3 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 6e

Hydrologic Soil Group: D

Ecological site: Interbedded Sedimentary Backslope Savanna (R109XY012MO)

Other vegetative classification: Mixed/Transitional (Mixed Native Vegetation)

Hydric soil rating: No

Description of Urban Land

Setting

Landform: Hills

Landform position (two-dimensional): Backslope

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydric soil rating: No

References



- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf

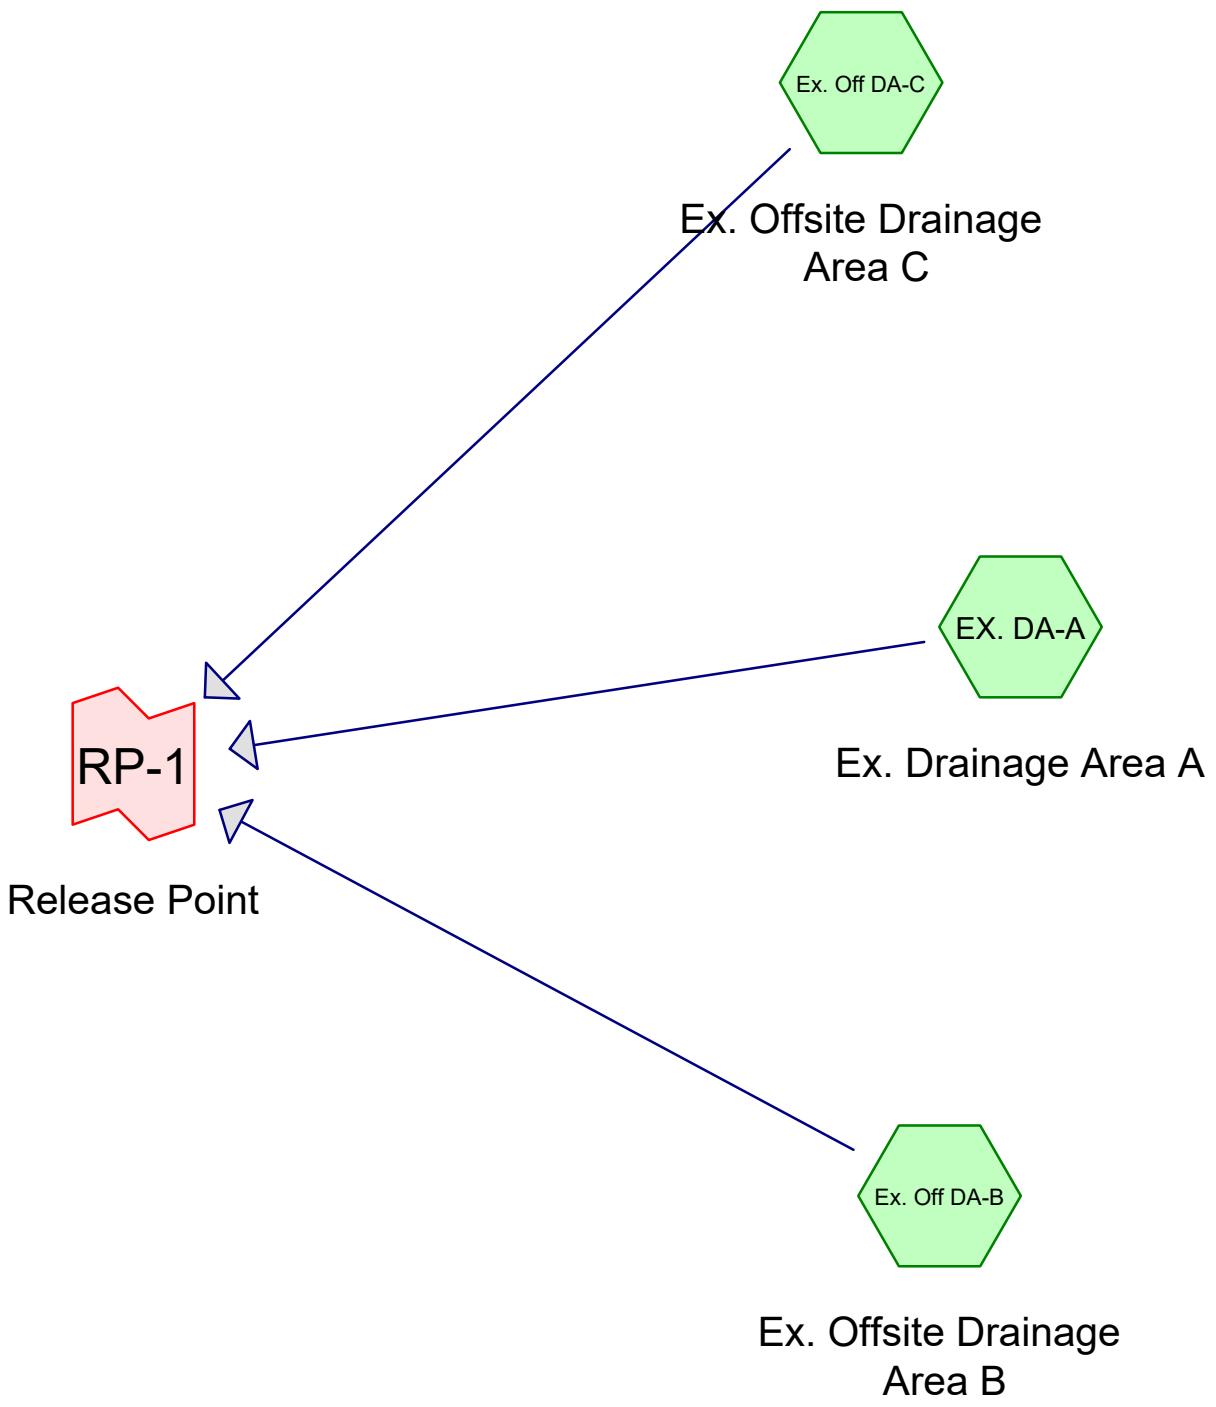

Routing Diagram for 18-222-HydroCAD-EX
Prepared by {enter your company name here}, Printed 1/16/2019
HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

Printed 1/16/2019

Page 2**Area Listing (all nodes)**

Area (acres)	CN	Description (subcatchment-numbers)
3.540	84	50-75% Grass cover, Fair, HSG D (EX. DA-A, Ex. Off DA-B, Ex. Off DA-C)
0.150	98	Unconnected pavement, HSG D (EX. DA-A)
3.690	85	TOTAL AREA

EXISTING RUNOFF CONDITIONS

18-222-HydroCAD-EX

Prepared by {enter your company name here}

Printed 1/16/2019

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

Page 3

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	0.000	3.540	0.000	3.540	50-75% Grass cover, Fair	EX. DA-A, Ex. Off
							DA-B, Ex. Off
							DA-C
0.000	0.000	0.000	0.150	0.000	0.150	Unconnected pavement	EX. DA-A
0.000	0.000	0.000	3.690	0.000	3.690	TOTAL AREA	

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 2-Year Rainfall=3.50"
Printed 1/16/2019
Page 4

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment EX. DA-A: Ex. Drainage Area Runoff Area=2.930 ac 5.12% Impervious Runoff Depth>1.79"
Flow Length=674' Slope=0.0600 '/' Tc=9.8 min UI Adjusted CN=84 Runoff=8.64 cfs 0.437 af

Subcatchment Ex. Off DA-B: Ex. Offsite Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>1.79"
Flow Length=396' Slope=0.0710 '/' Tc=6.7 min CN=84 Runoff=2.10 cfs 0.095 af

SubcatchmentEx. Off DA-C: Ex. Offsite Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>1.79"
Flow Length=369' Slope=0.0434 '/' Tc=8.1 min CN=84 Runoff=0.38 cfs 0.018 af

Link RP-1: Release Point Inflow=11.01 cfs 0.550 af
Primary=11.01 cfs 0.550 af

Total Runoff Area = 3.690 ac Runoff Volume = 0.550 af Average Runoff Depth = 1.79"
95.93% Pervious = 3.540 ac 4.07% Impervious = 0.150 ac

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC


EXISTING RUNOFF CONDITIONS
 Type II 24-hr 2-Year Rainfall=3.50"
 Printed 1/16/2019
 Page 5

Summary for Subcatchment EX. DA-A: Ex. Drainage Area A

Runoff = 8.64 cfs @ 12.01 hrs, Volume= 0.437 af, Depth> 1.79"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Adj	Description
2.780	84		50-75% Grass cover, Fair, HSG D
0.150	98		Unconnected pavement, HSG D
2.930	85	84	Weighted Average, UI Adjusted
2.780			94.88% Pervious Area
0.150			5.12% Impervious Area
0.150			100.00% Unconnected
Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)
5.9	100	0.0600	0.28
3.9	574	0.0600	2.45
9.8	674	Total	
			Description
			Sheet Flow, Sheet
			Grass: Short n= 0.150 P2= 3.71"
			Shallow Concentrated Flow, Shallow
			Nearly Bare & Untilled Kv= 10.0 fps

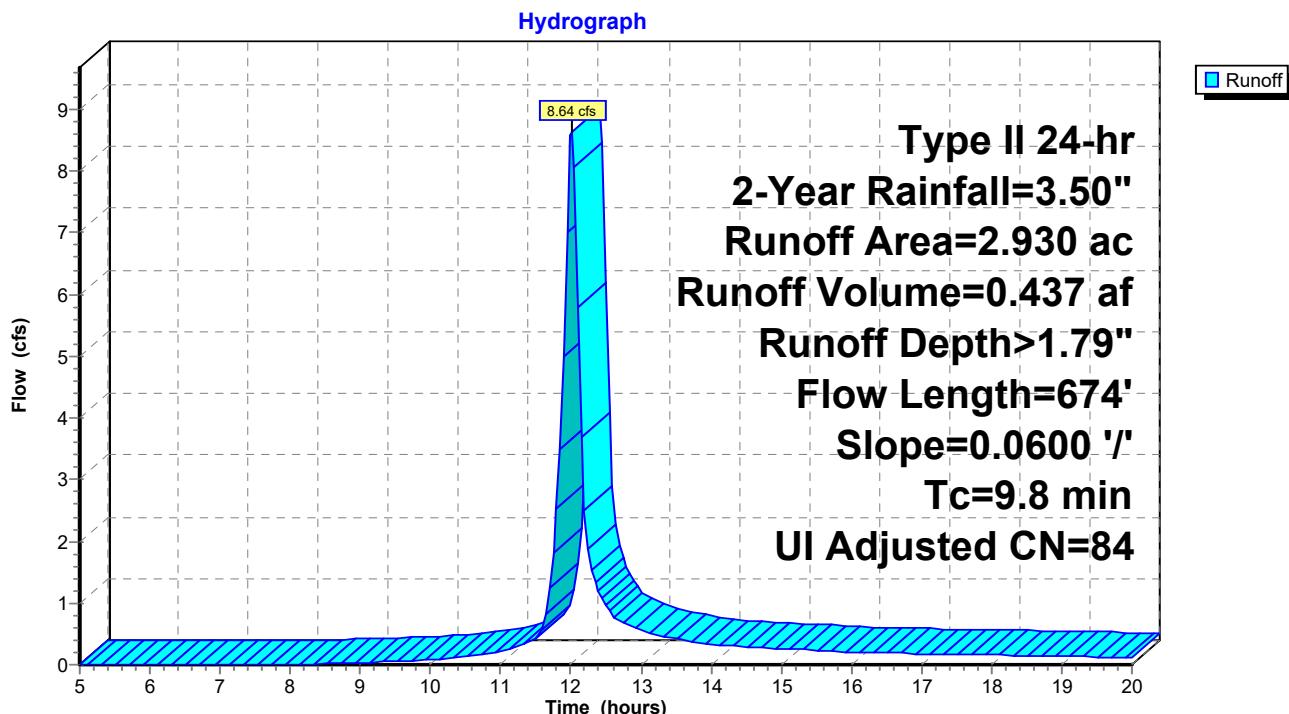Subcatchment EX. DA-A: Ex. Drainage Area A

Hydrograph for Subcatchment EX. DA-A: Ex. Drainage Area A

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.22	0.00	0.00	17.75	3.21	1.69	0.16
5.25	0.23	0.00	0.00	18.00	3.22	1.70	0.16
5.50	0.25	0.00	0.00	18.25	3.24	1.72	0.15
5.75	0.26	0.00	0.00	18.50	3.25	1.73	0.15
6.00	0.28	0.00	0.00	18.75	3.27	1.74	0.14
6.25	0.30	0.00	0.00	19.00	3.28	1.75	0.14
6.50	0.31	0.00	0.00	19.25	3.30	1.76	0.13
6.75	0.33	0.00	0.00	19.50	3.31	1.77	0.13
7.00	0.35	0.00	0.00	19.75	3.32	1.78	0.12
7.25	0.36	0.00	0.00	20.00	3.33	1.79	0.12
7.50	0.38	0.00	0.00				
7.75	0.40	0.00	0.00				
8.00	0.42	0.00	0.01				
8.25	0.44	0.00	0.01				
8.50	0.46	0.00	0.02				
8.75	0.49	0.01	0.03				
9.00	0.51	0.01	0.04				
9.25	0.54	0.01	0.04				
9.50	0.57	0.02	0.05				
9.75	0.60	0.02	0.06				
10.00	0.63	0.03	0.08				
10.25	0.67	0.04	0.10				
10.50	0.71	0.05	0.13				
10.75	0.76	0.06	0.17				
11.00	0.82	0.08	0.22				
11.25	0.90	0.11	0.30				
11.50	0.99	0.15	0.44				
11.75	1.35	0.33	1.82				
12.00	2.32	0.98	8.57				
12.25	2.47	1.09	1.88				
12.50	2.57	1.17	0.98				
12.75	2.64	1.23	0.67				
13.00	2.70	1.27	0.56				
13.25	2.75	1.32	0.48				
13.50	2.80	1.35	0.43				
13.75	2.84	1.38	0.38				
14.00	2.87	1.41	0.34				
14.25	2.90	1.44	0.31				
14.50	2.93	1.46	0.29				
14.75	2.96	1.48	0.28				
15.00	2.99	1.51	0.26				
15.25	3.01	1.53	0.25				
15.50	3.04	1.55	0.23				
15.75	3.06	1.57	0.22				
16.00	3.08	1.58	0.21				
16.25	3.10	1.60	0.20				
16.50	3.12	1.61	0.19				
16.75	3.14	1.63	0.19				
17.00	3.16	1.65	0.18				
17.25	3.17	1.66	0.17				
17.50	3.19	1.67	0.17				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
 Type II 24-hr 2-Year Rainfall=3.50"
 Printed 1/16/2019
 Page 7

Summary for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Runoff = 2.10 cfs @ 11.98 hrs, Volume= 0.095 af, Depth> 1.79"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.640	84	50-75% Grass cover, Fair, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.5	100	0.0710	0.30		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.2	296	0.0710	4.00		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
6.7	396				Total

Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Hydrograph

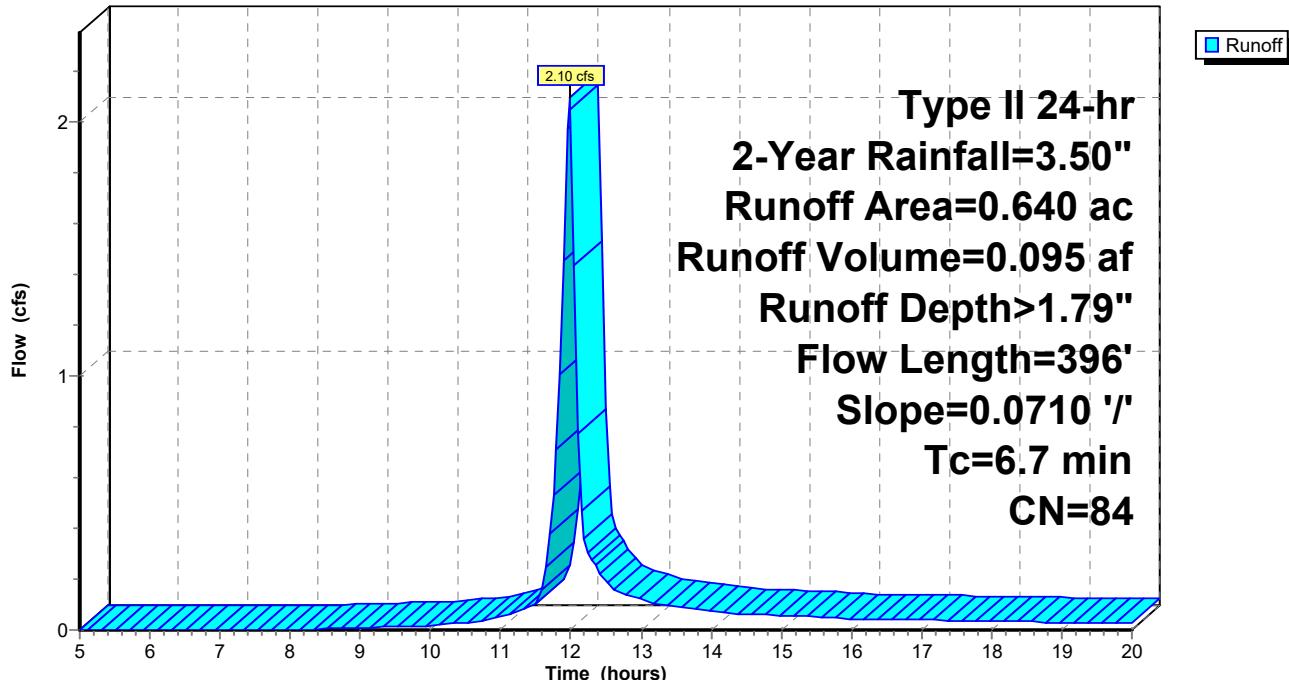

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 2-Year Rainfall=3.50"

Printed 1/16/2019

Page 8

Hydrograph for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.22	0.00	0.00	17.75	3.21	1.69	0.04
5.25	0.23	0.00	0.00	18.00	3.22	1.70	0.03
5.50	0.25	0.00	0.00	18.25	3.24	1.72	0.03
5.75	0.26	0.00	0.00	18.50	3.25	1.73	0.03
6.00	0.28	0.00	0.00	18.75	3.27	1.74	0.03
6.25	0.30	0.00	0.00	19.00	3.28	1.75	0.03
6.50	0.31	0.00	0.00	19.25	3.30	1.76	0.03
6.75	0.33	0.00	0.00	19.50	3.31	1.77	0.03
7.00	0.35	0.00	0.00	19.75	3.32	1.78	0.03
7.25	0.36	0.00	0.00	20.00	3.33	1.79	0.03
7.50	0.38	0.00	0.00				
7.75	0.40	0.00	0.00				
8.00	0.42	0.00	0.00				
8.25	0.44	0.00	0.00				
8.50	0.46	0.00	0.00				
8.75	0.49	0.01	0.01				
9.00	0.51	0.01	0.01				
9.25	0.54	0.01	0.01				
9.50	0.57	0.02	0.01				
9.75	0.60	0.02	0.01				
10.00	0.63	0.03	0.02				
10.25	0.67	0.04	0.02				
10.50	0.71	0.05	0.03				
10.75	0.76	0.06	0.04				
11.00	0.82	0.08	0.05				
11.25	0.90	0.11	0.07				
11.50	0.99	0.15	0.10				
11.75	1.35	0.33	0.53				
12.00	2.32	0.98	2.05				
12.25	2.47	1.09	0.30				
12.50	2.57	1.17	0.19				
12.75	2.64	1.23	0.14				
13.00	2.70	1.27	0.12				
13.25	2.75	1.32	0.10				
13.50	2.80	1.35	0.09				
13.75	2.84	1.38	0.08				
14.00	2.87	1.41	0.07				
14.25	2.90	1.44	0.07				
14.50	2.93	1.46	0.06				
14.75	2.96	1.48	0.06				
15.00	2.99	1.51	0.06				
15.25	3.01	1.53	0.05				
15.50	3.04	1.55	0.05				
15.75	3.06	1.57	0.05				
16.00	3.08	1.58	0.04				
16.25	3.10	1.60	0.04				
16.50	3.12	1.61	0.04				
16.75	3.14	1.63	0.04				
17.00	3.16	1.65	0.04				
17.25	3.17	1.66	0.04				
17.50	3.19	1.67	0.04				


Summary for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Runoff = 0.38 cfs @ 11.99 hrs, Volume= 0.018 af, Depth> 1.79"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	100	0.0434	0.25		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.4	269	0.0434	3.12		Shallow Concentrated Flow, Grassed Waterway Kv= 15.0 fps
8.1	369				Total

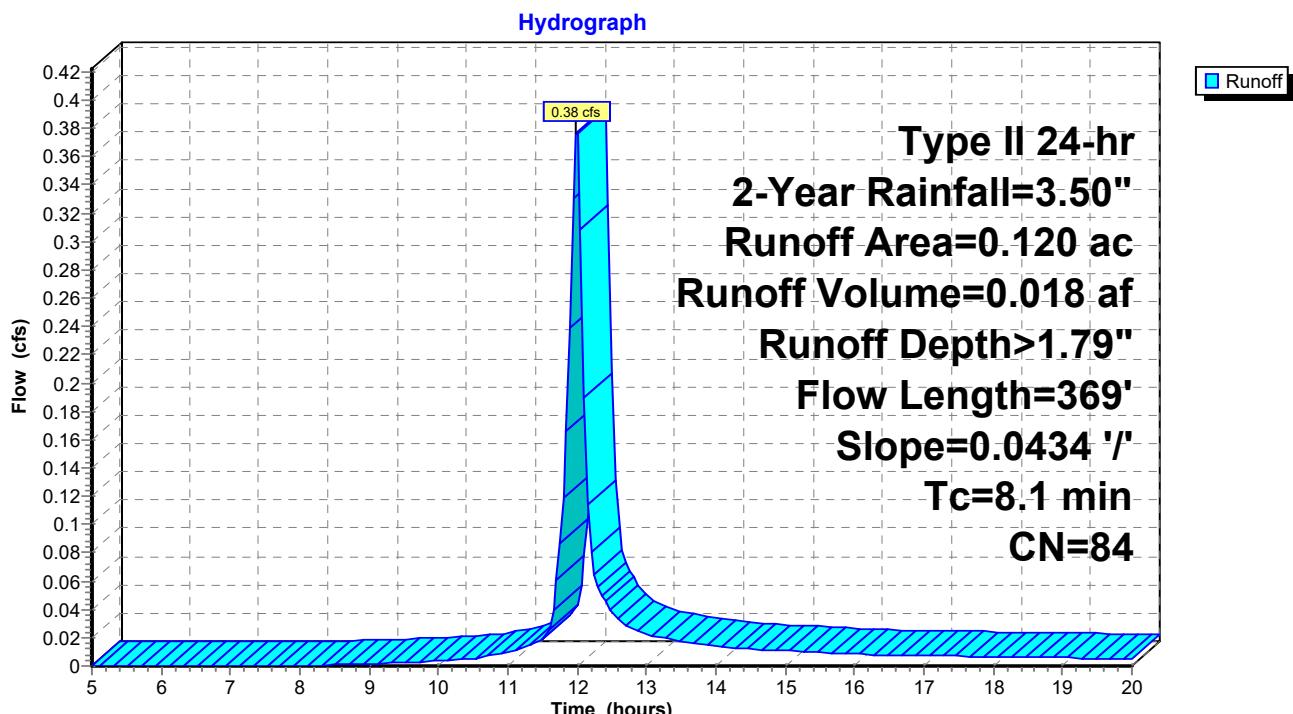Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C


Hydrograph for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.22	0.00	0.00	17.75	3.21	1.69	0.01
5.25	0.23	0.00	0.00	18.00	3.22	1.70	0.01
5.50	0.25	0.00	0.00	18.25	3.24	1.72	0.01
5.75	0.26	0.00	0.00	18.50	3.25	1.73	0.01
6.00	0.28	0.00	0.00	18.75	3.27	1.74	0.01
6.25	0.30	0.00	0.00	19.00	3.28	1.75	0.01
6.50	0.31	0.00	0.00	19.25	3.30	1.76	0.01
6.75	0.33	0.00	0.00	19.50	3.31	1.77	0.01
7.00	0.35	0.00	0.00	19.75	3.32	1.78	0.00
7.25	0.36	0.00	0.00	20.00	3.33	1.79	0.00
7.50	0.38	0.00	0.00				
7.75	0.40	0.00	0.00				
8.00	0.42	0.00	0.00				
8.25	0.44	0.00	0.00				
8.50	0.46	0.00	0.00				
8.75	0.49	0.01	0.00				
9.00	0.51	0.01	0.00				
9.25	0.54	0.01	0.00				
9.50	0.57	0.02	0.00				
9.75	0.60	0.02	0.00				
10.00	0.63	0.03	0.00				
10.25	0.67	0.04	0.00				
10.50	0.71	0.05	0.01				
10.75	0.76	0.06	0.01				
11.00	0.82	0.08	0.01				
11.25	0.90	0.11	0.01				
11.50	0.99	0.15	0.02				
11.75	1.35	0.33	0.09				
12.00	2.32	0.98	0.38				
12.25	2.47	1.09	0.06				
12.50	2.57	1.17	0.04				
12.75	2.64	1.23	0.03				
13.00	2.70	1.27	0.02				
13.25	2.75	1.32	0.02				
13.50	2.80	1.35	0.02				
13.75	2.84	1.38	0.02				
14.00	2.87	1.41	0.01				
14.25	2.90	1.44	0.01				
14.50	2.93	1.46	0.01				
14.75	2.96	1.48	0.01				
15.00	2.99	1.51	0.01				
15.25	3.01	1.53	0.01				
15.50	3.04	1.55	0.01				
15.75	3.06	1.57	0.01				
16.00	3.08	1.58	0.01				
16.25	3.10	1.60	0.01				
16.50	3.12	1.61	0.01				
16.75	3.14	1.63	0.01				
17.00	3.16	1.65	0.01				
17.25	3.17	1.66	0.01				
17.50	3.19	1.67	0.01				

Summary for Link RP-1: Release Point

Inflow Area = 3.690 ac, 4.07% Impervious, Inflow Depth > 1.79" for 2-Year event
Inflow = 11.01 cfs @ 12.00 hrs, Volume= 0.550 af
Primary = 11.01 cfs @ 12.00 hrs, Volume= 0.550 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

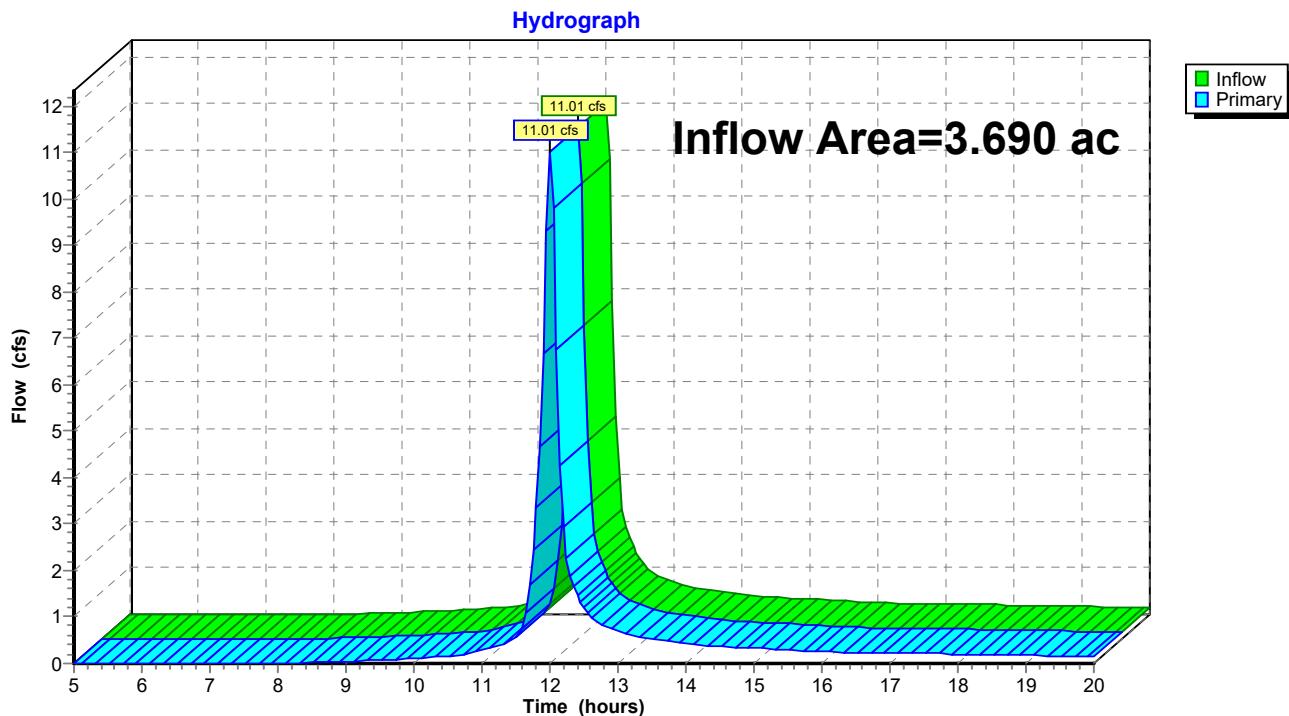Link RP-1: Release Point

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
5.00	0.00	0.00	0.00	17.75	0.21	0.00	0.21
5.25	0.00	0.00	0.00	18.00	0.20	0.00	0.20
5.50	0.00	0.00	0.00	18.25	0.19	0.00	0.19
5.75	0.00	0.00	0.00	18.50	0.19	0.00	0.19
6.00	0.00	0.00	0.00	18.75	0.18	0.00	0.18
6.25	0.00	0.00	0.00	19.00	0.17	0.00	0.17
6.50	0.00	0.00	0.00	19.25	0.17	0.00	0.17
6.75	0.00	0.00	0.00	19.50	0.16	0.00	0.16
7.00	0.00	0.00	0.00	19.75	0.15	0.00	0.15
7.25	0.00	0.00	0.00	20.00	0.15	0.00	0.15
7.50	0.00	0.00	0.00				
7.75	0.00	0.00	0.00				
8.00	0.01	0.00	0.01				
8.25	0.01	0.00	0.01				
8.50	0.02	0.00	0.02				
8.75	0.03	0.00	0.03				
9.00	0.05	0.00	0.05				
9.25	0.06	0.00	0.06				
9.50	0.07	0.00	0.07				
9.75	0.08	0.00	0.08				
10.00	0.10	0.00	0.10				
10.25	0.13	0.00	0.13				
10.50	0.16	0.00	0.16				
10.75	0.21	0.00	0.21				
11.00	0.28	0.00	0.28				
11.25	0.39	0.00	0.39				
11.50	0.55	0.00	0.55				
11.75	2.44	0.00	2.44				
12.00	10.99	0.00	10.99				
12.25	2.25	0.00	2.25				
12.50	1.21	0.00	1.21				
12.75	0.84	0.00	0.84				
13.00	0.71	0.00	0.71				
13.25	0.60	0.00	0.60				
13.50	0.53	0.00	0.53				
13.75	0.47	0.00	0.47				
14.00	0.42	0.00	0.42				
14.25	0.38	0.00	0.38				
14.50	0.37	0.00	0.37				
14.75	0.35	0.00	0.35				
15.00	0.33	0.00	0.33				
15.25	0.31	0.00	0.31				
15.50	0.30	0.00	0.30				
15.75	0.28	0.00	0.28				
16.00	0.26	0.00	0.26				
16.25	0.25	0.00	0.25				
16.50	0.24	0.00	0.24				
16.75	0.23	0.00	0.23				
17.00	0.23	0.00	0.23				
17.25	0.22	0.00	0.22				
17.50	0.21	0.00	0.21				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 10-Year Rainfall=5.30"
Printed 1/16/2019
Page 13

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment EX. DA-A: Ex. Drainage Area Runoff Area=2.930 ac 5.12% Impervious Runoff Depth>3.30"
Flow Length=674' Slope=0.0600 '/' Tc=9.8 min UI Adjusted CN=84 Runoff=15.53 cfs 0.807 af

Subcatchment Ex. Off DA-B: Ex. Offsite Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>3.31"
Flow Length=396' Slope=0.0710 '/' Tc=6.7 min CN=84 Runoff=3.75 cfs 0.176 af

Subcatchment Ex. Off DA-C: Ex. Offsite Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>3.31"
Flow Length=369' Slope=0.0434 '/' Tc=8.1 min CN=84 Runoff=0.68 cfs 0.033 af

Link RP-1: Release Point Inflow=19.77 cfs 1.016 af
Primary=19.77 cfs 1.016 af

Total Runoff Area = 3.690 ac Runoff Volume = 1.016 af Average Runoff Depth = 3.30"
95.93% Pervious = 3.540 ac 4.07% Impervious = 0.150 ac

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
 Type II 24-hr 10-Year Rainfall=5.30"
 Printed 1/16/2019
 Page 14


Summary for Subcatchment EX. DA-A: Ex. Drainage Area A

Runoff = 15.53 cfs @ 12.01 hrs, Volume= 0.807 af, Depth> 3.30"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Adj	Description
2.780	84		50-75% Grass cover, Fair, HSG D
0.150	98		Unconnected pavement, HSG D
2.930	85	84	Weighted Average, UI Adjusted
2.780			94.88% Pervious Area
0.150			5.12% Impervious Area
0.150			100.00% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.9	100	0.0600	0.28		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
3.9	574	0.0600	2.45		Shallow Concentrated Flow, Shallow Nearly Bare & Untilled Kv= 10.0 fps
9.8	674	Total			

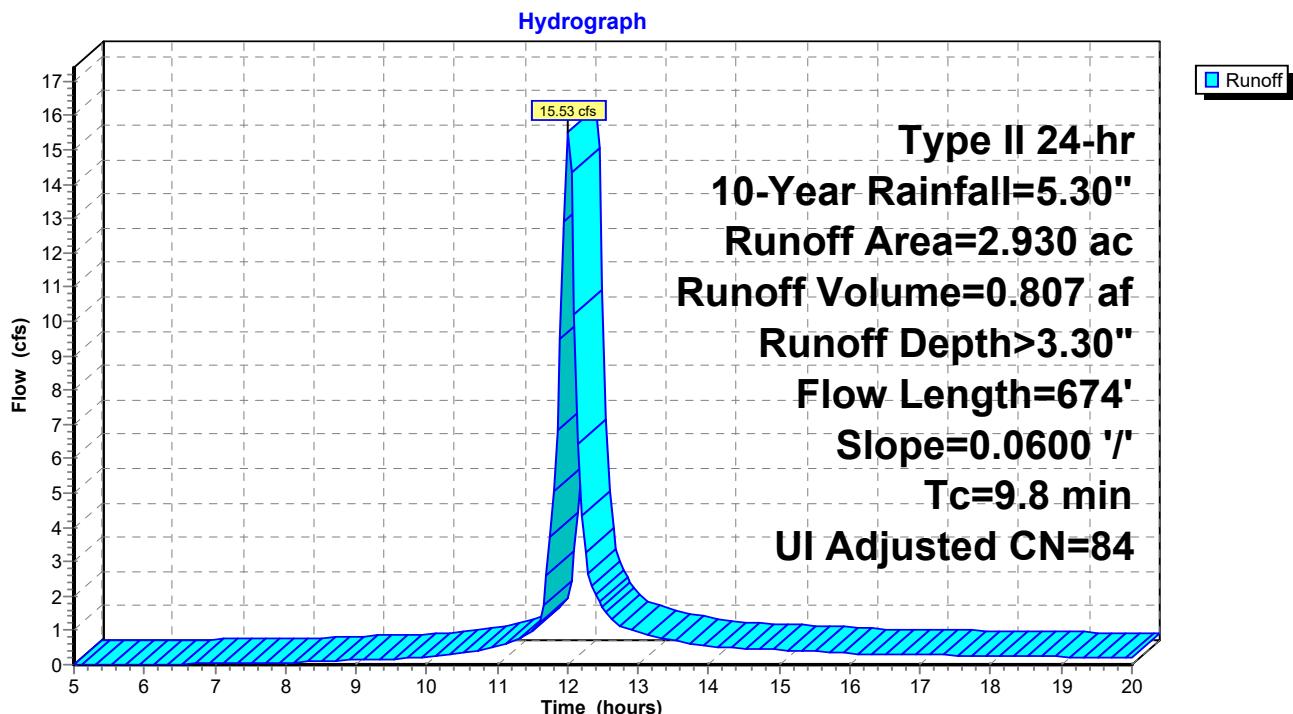Subcatchment EX. DA-A: Ex. Drainage Area A

Hydrograph for Subcatchment EX. DA-A: Ex. Drainage Area A

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.33	0.00	0.00	17.75	4.86	3.14	0.27
5.25	0.36	0.00	0.00	18.00	4.88	3.16	0.26
5.50	0.38	0.00	0.00	18.25	4.90	3.18	0.25
5.75	0.40	0.00	0.00	18.50	4.93	3.20	0.24
6.00	0.42	0.00	0.01	18.75	4.95	3.22	0.24
6.25	0.45	0.00	0.02	19.00	4.97	3.24	0.23
6.50	0.47	0.00	0.02	19.25	4.99	3.26	0.22
6.75	0.50	0.01	0.03	19.50	5.01	3.28	0.21
7.00	0.52	0.01	0.04	19.75	5.03	3.30	0.20
7.25	0.55	0.01	0.05	20.00	5.05	3.31	0.19
7.50	0.58	0.02	0.05				
7.75	0.61	0.02	0.06				
8.00	0.64	0.03	0.07				
8.25	0.67	0.04	0.08				
8.50	0.70	0.05	0.10				
8.75	0.74	0.06	0.12				
9.00	0.78	0.07	0.14				
9.25	0.82	0.08	0.16				
9.50	0.86	0.10	0.18				
9.75	0.91	0.11	0.20				
10.00	0.96	0.13	0.23				
10.25	1.02	0.16	0.28				
10.50	1.08	0.19	0.34				
10.75	1.16	0.22	0.42				
11.00	1.25	0.27	0.52				
11.25	1.36	0.33	0.69				
11.50	1.50	0.41	0.96				
11.75	2.05	0.78	3.73				
12.00	3.51	1.95	15.47				
12.25	3.74	2.15	3.25				
12.50	3.90	2.28	1.66				
12.75	4.00	2.37	1.14				
13.00	4.09	2.45	0.95				
13.25	4.17	2.52	0.81				
13.50	4.23	2.58	0.71				
13.75	4.29	2.63	0.63				
14.00	4.35	2.68	0.56				
14.25	4.39	2.72	0.51				
14.50	4.44	2.76	0.49				
14.75	4.48	2.80	0.46				
15.00	4.52	2.84	0.44				
15.25	4.56	2.87	0.41				
15.50	4.60	2.91	0.39				
15.75	4.63	2.94	0.37				
16.00	4.66	2.96	0.34				
16.25	4.69	2.99	0.32				
16.50	4.72	3.02	0.31				
16.75	4.75	3.04	0.31				
17.00	4.78	3.07	0.30				
17.25	4.81	3.09	0.29				
17.50	4.83	3.12	0.28				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 10-Year Rainfall=5.30"
Printed 1/16/2019
Page 16


Summary for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Runoff = 3.75 cfs @ 11.98 hrs, Volume= 0.176 af, Depth> 3.31"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.640	84	50-75% Grass cover, Fair, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.5	100	0.0710	0.30		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.2	296	0.0710	4.00		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
6.7	396				Total

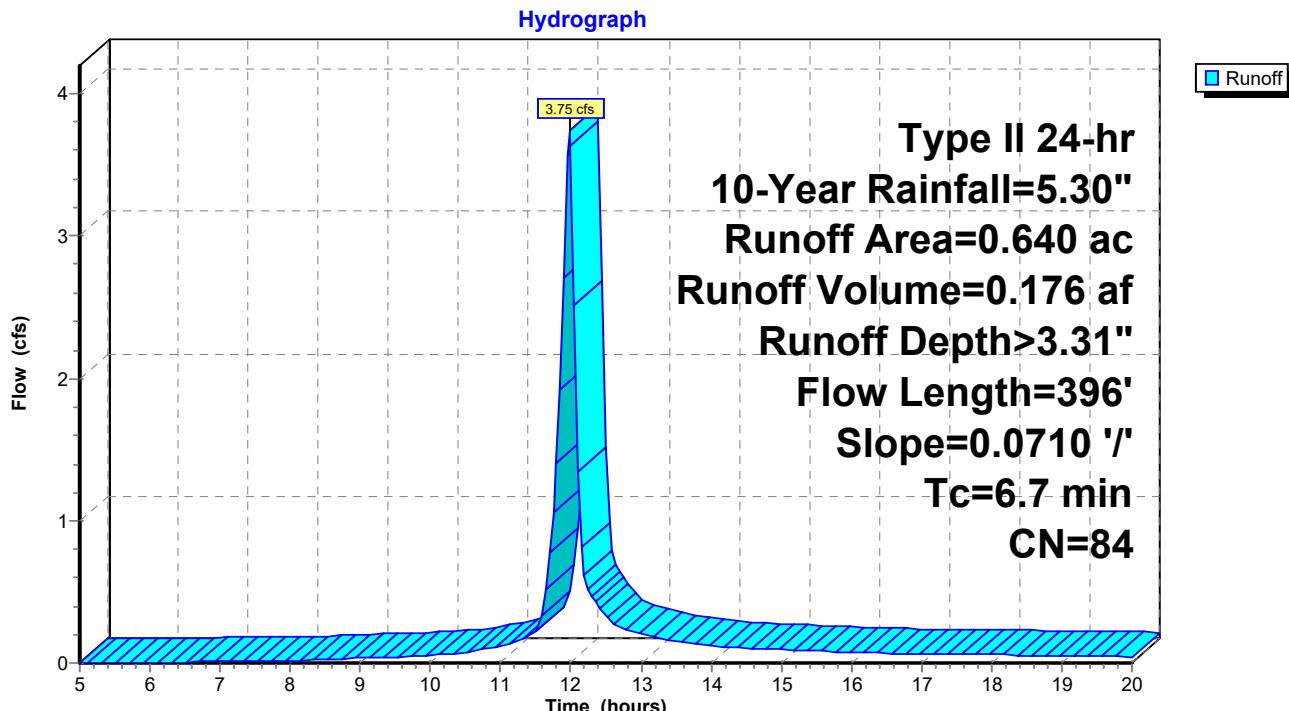Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Hydrograph for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.33	0.00	0.00	17.75	4.86	3.14	0.06
5.25	0.36	0.00	0.00	18.00	4.88	3.16	0.06
5.50	0.38	0.00	0.00	18.25	4.90	3.18	0.06
5.75	0.40	0.00	0.00	18.50	4.93	3.20	0.05
6.00	0.42	0.00	0.00	18.75	4.95	3.22	0.05
6.25	0.45	0.00	0.00	19.00	4.97	3.24	0.05
6.50	0.47	0.00	0.01	19.25	4.99	3.26	0.05
6.75	0.50	0.01	0.01	19.50	5.01	3.28	0.05
7.00	0.52	0.01	0.01	19.75	5.03	3.30	0.04
7.25	0.55	0.01	0.01	20.00	5.05	3.31	0.04
7.50	0.58	0.02	0.01				
7.75	0.61	0.02	0.01				
8.00	0.64	0.03	0.02				
8.25	0.67	0.04	0.02				
8.50	0.70	0.05	0.02				
8.75	0.74	0.06	0.03				
9.00	0.78	0.07	0.03				
9.25	0.82	0.08	0.04				
9.50	0.86	0.10	0.04				
9.75	0.91	0.11	0.04				
10.00	0.96	0.13	0.05				
10.25	1.02	0.16	0.06				
10.50	1.08	0.19	0.08				
10.75	1.16	0.22	0.10				
11.00	1.25	0.27	0.12				
11.25	1.36	0.33	0.16				
11.50	1.50	0.41	0.22				
11.75	2.05	0.78	1.06				
12.00	3.51	1.95	3.63				
12.25	3.74	2.15	0.52				
12.50	3.90	2.28	0.33				
12.75	4.00	2.37	0.24				
13.00	4.09	2.45	0.20				
13.25	4.17	2.52	0.17				
13.50	4.23	2.58	0.15				
13.75	4.29	2.63	0.13				
14.00	4.35	2.68	0.12				
14.25	4.39	2.72	0.11				
14.50	4.44	2.76	0.11				
14.75	4.48	2.80	0.10				
15.00	4.52	2.84	0.09				
15.25	4.56	2.87	0.09				
15.50	4.60	2.91	0.08				
15.75	4.63	2.94	0.08				
16.00	4.66	2.96	0.07				
16.25	4.69	2.99	0.07				
16.50	4.72	3.02	0.07				
16.75	4.75	3.04	0.07				
17.00	4.78	3.07	0.06				
17.25	4.81	3.09	0.06				
17.50	4.83	3.12	0.06				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 10-Year Rainfall=5.30"
Printed 1/16/2019
Page 18


Summary for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Runoff = 0.68 cfs @ 11.99 hrs, Volume= 0.033 af, Depth> 3.31"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	100	0.0434	0.25		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.4	269	0.0434	3.12		Shallow Concentrated Flow, Grassed Waterway Kv= 15.0 fps
8.1	369				Total

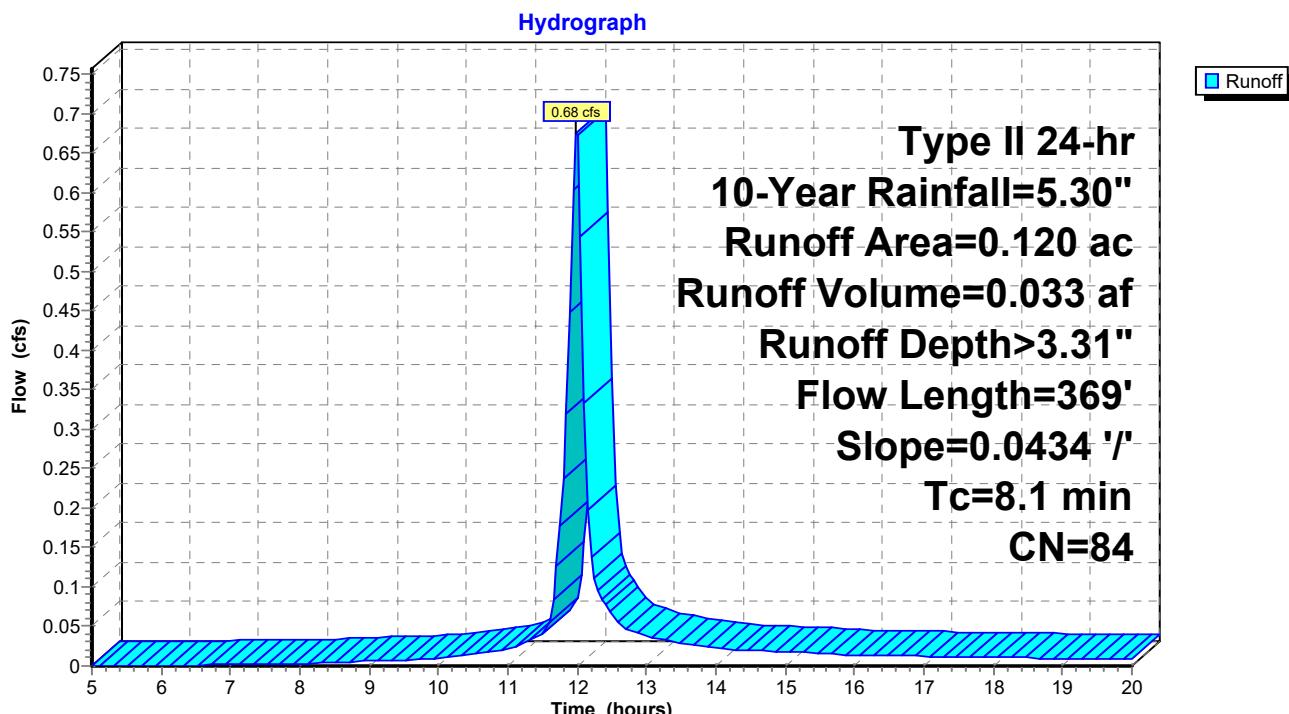Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C


Hydrograph for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.33	0.00	0.00	17.75	4.86	3.14	0.01
5.25	0.36	0.00	0.00	18.00	4.88	3.16	0.01
5.50	0.38	0.00	0.00	18.25	4.90	3.18	0.01
5.75	0.40	0.00	0.00	18.50	4.93	3.20	0.01
6.00	0.42	0.00	0.00	18.75	4.95	3.22	0.01
6.25	0.45	0.00	0.00	19.00	4.97	3.24	0.01
6.50	0.47	0.00	0.00	19.25	4.99	3.26	0.01
6.75	0.50	0.01	0.00	19.50	5.01	3.28	0.01
7.00	0.52	0.01	0.00	19.75	5.03	3.30	0.01
7.25	0.55	0.01	0.00	20.00	5.05	3.31	0.01
7.50	0.58	0.02	0.00				
7.75	0.61	0.02	0.00				
8.00	0.64	0.03	0.00				
8.25	0.67	0.04	0.00				
8.50	0.70	0.05	0.00				
8.75	0.74	0.06	0.01				
9.00	0.78	0.07	0.01				
9.25	0.82	0.08	0.01				
9.50	0.86	0.10	0.01				
9.75	0.91	0.11	0.01				
10.00	0.96	0.13	0.01				
10.25	1.02	0.16	0.01				
10.50	1.08	0.19	0.01				
10.75	1.16	0.22	0.02				
11.00	1.25	0.27	0.02				
11.25	1.36	0.33	0.03				
11.50	1.50	0.41	0.04				
11.75	2.05	0.78	0.18				
12.00	3.51	1.95	0.67				
12.25	3.74	2.15	0.11				
12.50	3.90	2.28	0.06				
12.75	4.00	2.37	0.05				
13.00	4.09	2.45	0.04				
13.25	4.17	2.52	0.03				
13.50	4.23	2.58	0.03				
13.75	4.29	2.63	0.03				
14.00	4.35	2.68	0.02				
14.25	4.39	2.72	0.02				
14.50	4.44	2.76	0.02				
14.75	4.48	2.80	0.02				
15.00	4.52	2.84	0.02				
15.25	4.56	2.87	0.02				
15.50	4.60	2.91	0.02				
15.75	4.63	2.94	0.01				
16.00	4.66	2.96	0.01				
16.25	4.69	2.99	0.01				
16.50	4.72	3.02	0.01				
16.75	4.75	3.04	0.01				
17.00	4.78	3.07	0.01				
17.25	4.81	3.09	0.01				
17.50	4.83	3.12	0.01				

Summary for Link RP-1: Release Point

Inflow Area = 3.690 ac, 4.07% Impervious, Inflow Depth > 3.30" for 10-Year event
Inflow = 19.77 cfs @ 12.00 hrs, Volume= 1.016 af
Primary = 19.77 cfs @ 12.00 hrs, Volume= 1.016 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

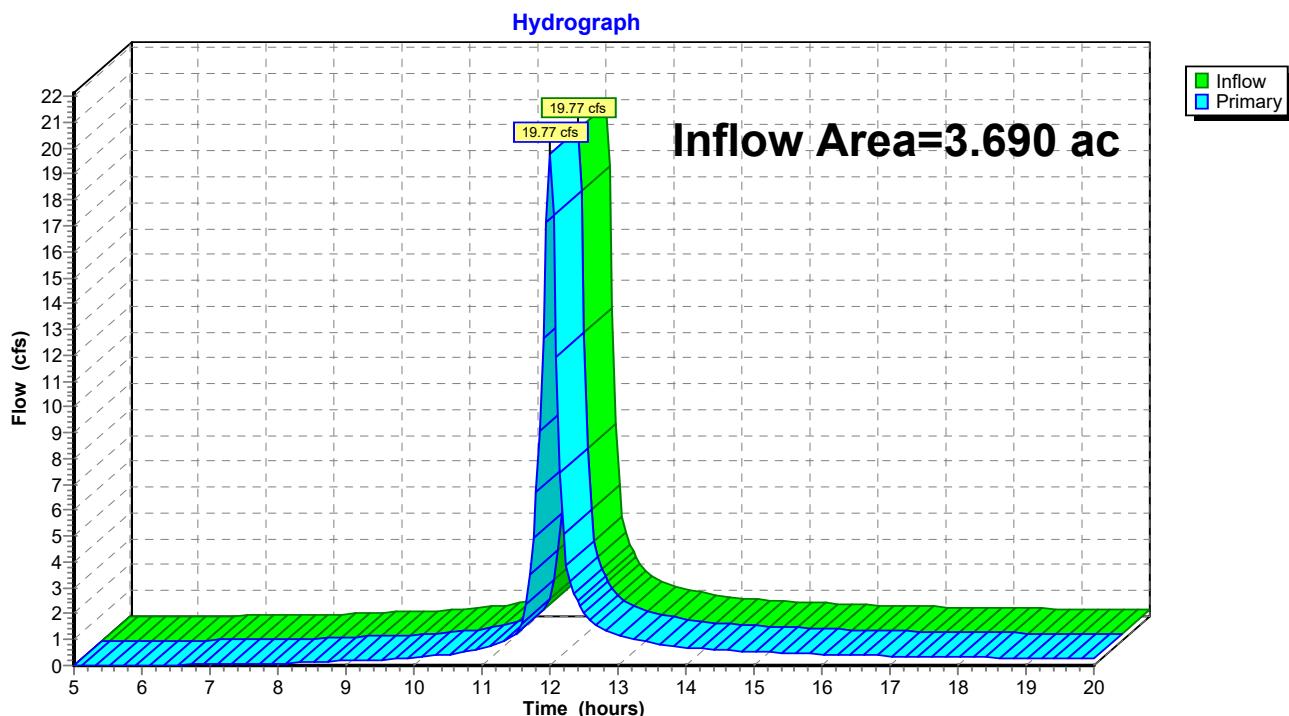Link RP-1: Release Point

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
5.00	0.00	0.00	0.00	17.75	0.34	0.00	0.34
5.25	0.00	0.00	0.00	18.00	0.33	0.00	0.33
5.50	0.00	0.00	0.00	18.25	0.32	0.00	0.32
5.75	0.00	0.00	0.00	18.50	0.31	0.00	0.31
6.00	0.01	0.00	0.01	18.75	0.30	0.00	0.30
6.25	0.02	0.00	0.02	19.00	0.29	0.00	0.29
6.50	0.03	0.00	0.03	19.25	0.27	0.00	0.27
6.75	0.04	0.00	0.04	19.50	0.26	0.00	0.26
7.00	0.05	0.00	0.05	19.75	0.25	0.00	0.25
7.25	0.06	0.00	0.06	20.00	0.24	0.00	0.24
7.50	0.07	0.00	0.07				
7.75	0.08	0.00	0.08				
8.00	0.09	0.00	0.09				
8.25	0.11	0.00	0.11				
8.50	0.13	0.00	0.13				
8.75	0.15	0.00	0.15				
9.00	0.18	0.00	0.18				
9.25	0.21	0.00	0.21				
9.50	0.22	0.00	0.22				
9.75	0.25	0.00	0.25				
10.00	0.30	0.00	0.30				
10.25	0.36	0.00	0.36				
10.50	0.43	0.00	0.43				
10.75	0.53	0.00	0.53				
11.00	0.67	0.00	0.67				
11.25	0.88	0.00	0.88				
11.50	1.22	0.00	1.22				
11.75	4.98	0.00	4.98				
12.00	19.77	0.00	19.77				
12.25	3.88	0.00	3.88				
12.50	2.06	0.00	2.06				
12.75	1.43	0.00	1.43				
13.00	1.19	0.00	1.19				
13.25	1.02	0.00	1.02				
13.50	0.89	0.00	0.89				
13.75	0.79	0.00	0.79				
14.00	0.70	0.00	0.70				
14.25	0.64	0.00	0.64				
14.50	0.61	0.00	0.61				
14.75	0.58	0.00	0.58				
15.00	0.55	0.00	0.55				
15.25	0.52	0.00	0.52				
15.50	0.49	0.00	0.49				
15.75	0.46	0.00	0.46				
16.00	0.43	0.00	0.43				
16.25	0.41	0.00	0.41				
16.50	0.40	0.00	0.40				
16.75	0.38	0.00	0.38				
17.00	0.37	0.00	0.37				
17.25	0.36	0.00	0.36				
17.50	0.35	0.00	0.35				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 100-Year Rainfall=7.70"

Printed 1/16/2019

Page 22

Time span=5.00-20.00 hrs, dt=0.05 hrs, 301 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

Subcatchment EX. DA-A: Ex. Drainage Area Runoff Area=2.930 ac 5.12% Impervious Runoff Depth>5.44"
Flow Length=674' Slope=0.0600 '/' Tc=9.8 min UI Adjusted CN=84 Runoff=24.83 cfs 1.328 af**Subcatchment Ex. Off DA-B: Ex. Offsite** Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>5.44"
Flow Length=396' Slope=0.0710 '/' Tc=6.7 min CN=84 Runoff=5.97 cfs 0.290 af**Subcatchment Ex. Off DA-C: Ex. Offsite** Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>5.44"
Flow Length=369' Slope=0.0434 '/' Tc=8.1 min CN=84 Runoff=1.08 cfs 0.054 af**Link RP-1: Release Point**Inflow=31.59 cfs 1.673 af
Primary=31.59 cfs 1.673 af**Total Runoff Area = 3.690 ac Runoff Volume = 1.673 af Average Runoff Depth = 5.44"**
95.93% Pervious = 3.540 ac 4.07% Impervious = 0.150 ac

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
 Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 23


Summary for Subcatchment EX. DA-A: Ex. Drainage Area A

Runoff = 24.83 cfs @ 12.01 hrs, Volume= 1.328 af, Depth> 5.44"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Adj	Description
2.780	84		50-75% Grass cover, Fair, HSG D
0.150	98		Unconnected pavement, HSG D
2.930	85	84	Weighted Average, UI Adjusted
2.780			94.88% Pervious Area
0.150			5.12% Impervious Area
0.150			100.00% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.9	100	0.0600	0.28		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
3.9	574	0.0600	2.45		Shallow Concentrated Flow, Shallow Nearly Bare & Untilled Kv= 10.0 fps
9.8	674	Total			

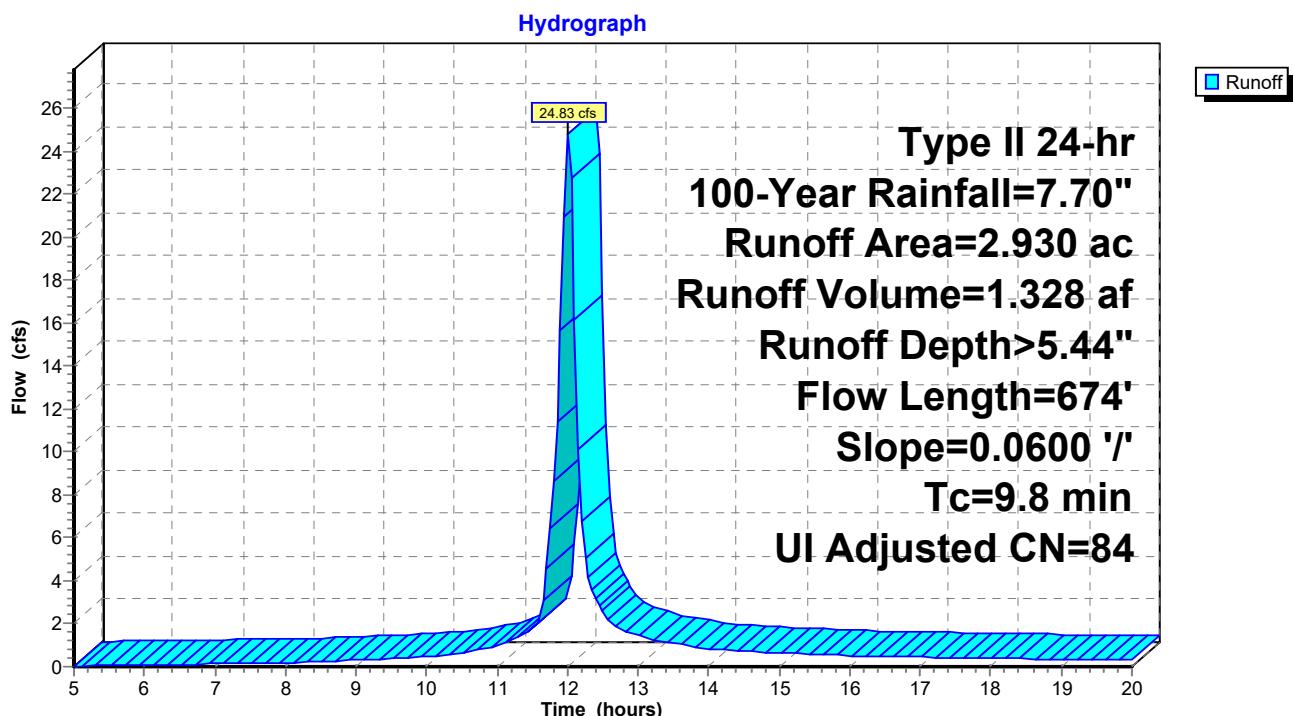Subcatchment EX. DA-A: Ex. Drainage Area A

Hydrograph for Subcatchment EX. DA-A: Ex. Drainage Area A

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.49	0.01	0.03	17.75	7.06	5.19	0.41
5.25	0.52	0.01	0.04	18.00	7.09	5.23	0.40
5.50	0.55	0.01	0.05	18.25	7.13	5.26	0.38
5.75	0.58	0.02	0.06	18.50	7.16	5.29	0.37
6.00	0.62	0.03	0.08	18.75	7.19	5.32	0.36
6.25	0.65	0.03	0.09	19.00	7.22	5.35	0.34
6.50	0.69	0.04	0.10	19.25	7.25	5.38	0.33
6.75	0.72	0.05	0.12	19.50	7.28	5.40	0.32
7.00	0.76	0.06	0.13	19.75	7.30	5.43	0.30
7.25	0.80	0.08	0.14	20.00	7.33	5.45	0.29
7.50	0.84	0.09	0.16				
7.75	0.88	0.10	0.17				
8.00	0.92	0.12	0.19				
8.25	0.97	0.14	0.21				
8.50	1.02	0.16	0.25				
8.75	1.07	0.18	0.29				
9.00	1.13	0.21	0.33				
9.25	1.19	0.24	0.36				
9.50	1.26	0.27	0.38				
9.75	1.32	0.31	0.41				
10.00	1.39	0.35	0.48				
10.25	1.48	0.40	0.56				
10.50	1.57	0.46	0.67				
10.75	1.68	0.53	0.80				
11.00	1.81	0.61	0.99				
11.25	1.97	0.72	1.28				
11.50	2.18	0.87	1.72				
11.75	2.98	1.50	6.44				
12.00	5.11	3.37	24.76				
12.25	5.44	3.67	5.07				
12.50	5.66	3.88	2.57				
12.75	5.81	4.02	1.76				
13.00	5.94	4.14	1.46				
13.25	6.06	4.25	1.24				
13.50	6.15	4.34	1.09				
13.75	6.24	4.42	0.96				
14.00	6.31	4.49	0.86				
14.25	6.38	4.56	0.78				
14.50	6.45	4.62	0.74				
14.75	6.51	4.68	0.70				
15.00	6.57	4.73	0.67				
15.25	6.63	4.79	0.63				
15.50	6.68	4.84	0.59				
15.75	6.73	4.88	0.56				
16.00	6.78	4.93	0.52				
16.25	6.82	4.97	0.49				
16.50	6.86	5.01	0.48				
16.75	6.90	5.05	0.46				
17.00	6.94	5.09	0.45				
17.25	6.98	5.12	0.44				
17.50	7.02	5.16	0.42				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
 Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 25


Summary for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Runoff = 5.97 cfs @ 11.98 hrs, Volume= 0.290 af, Depth> 5.44"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.640	84	50-75% Grass cover, Fair, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
5.5	100	0.0710	0.30		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.2	296	0.0710	4.00		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
6.7	396				Total

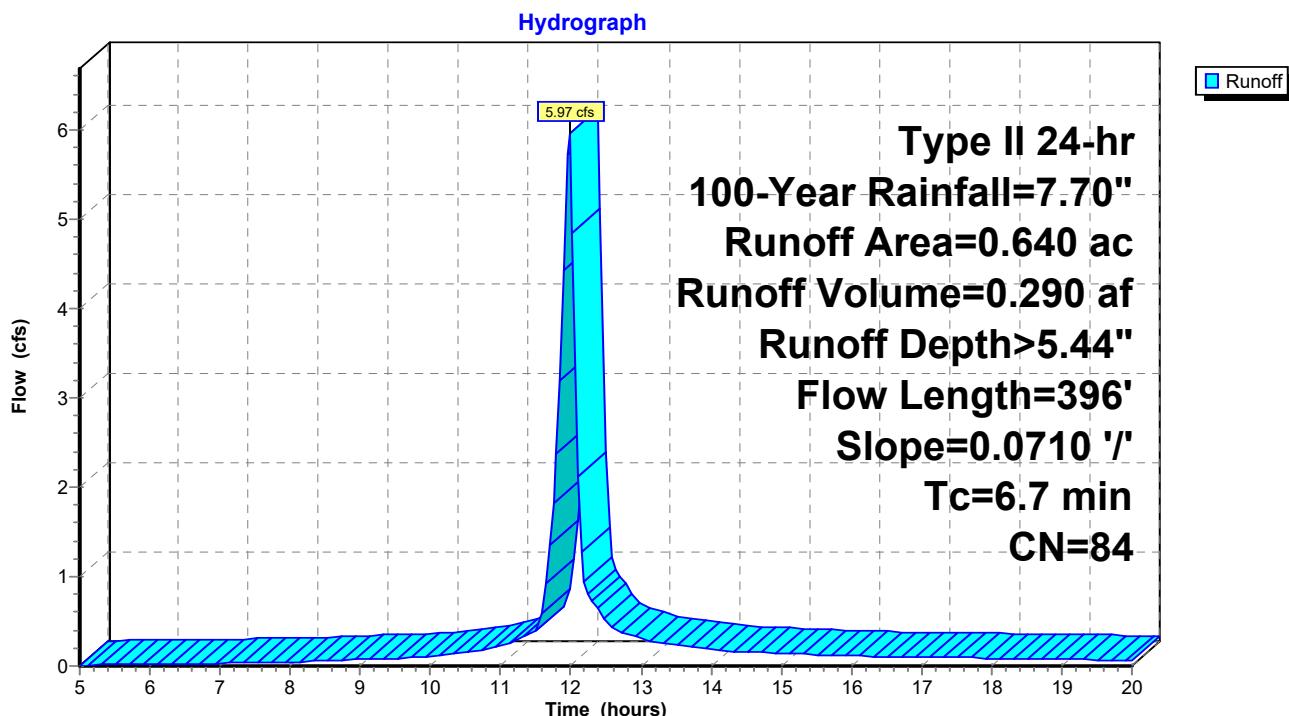Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 26

Hydrograph for Subcatchment Ex. Off DA-B: Ex. Offsite Drainage Area B

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.49	0.01	0.01	17.75	7.06	5.19	0.09
5.25	0.52	0.01	0.01	18.00	7.09	5.23	0.09
5.50	0.55	0.01	0.01	18.25	7.13	5.26	0.08
5.75	0.58	0.02	0.01	18.50	7.16	5.29	0.08
6.00	0.62	0.03	0.02	18.75	7.19	5.32	0.08
6.25	0.65	0.03	0.02	19.00	7.22	5.35	0.07
6.50	0.69	0.04	0.02	19.25	7.25	5.38	0.07
6.75	0.72	0.05	0.03	19.50	7.28	5.40	0.07
7.00	0.76	0.06	0.03	19.75	7.30	5.43	0.07
7.25	0.80	0.08	0.03	20.00	7.33	5.45	0.06
7.50	0.84	0.09	0.04				
7.75	0.88	0.10	0.04				
8.00	0.92	0.12	0.04				
8.25	0.97	0.14	0.05				
8.50	1.02	0.16	0.06				
8.75	1.07	0.18	0.06				
9.00	1.13	0.21	0.07				
9.25	1.19	0.24	0.08				
9.50	1.26	0.27	0.08				
9.75	1.32	0.31	0.09				
10.00	1.39	0.35	0.11				
10.25	1.48	0.40	0.13				
10.50	1.57	0.46	0.15				
10.75	1.68	0.53	0.18				
11.00	1.81	0.61	0.22				
11.25	1.97	0.72	0.30				
11.50	2.18	0.87	0.39				
11.75	2.98	1.50	1.82				
12.00	5.11	3.37	5.75				
12.25	5.44	3.67	0.81				
12.50	5.66	3.88	0.51				
12.75	5.81	4.02	0.37				
13.00	5.94	4.14	0.31				
13.25	6.06	4.25	0.26				
13.50	6.15	4.34	0.23				
13.75	6.24	4.42	0.21				
14.00	6.31	4.49	0.18				
14.25	6.38	4.56	0.17				
14.50	6.45	4.62	0.16				
14.75	6.51	4.68	0.15				
15.00	6.57	4.73	0.14				
15.25	6.63	4.79	0.14				
15.50	6.68	4.84	0.13				
15.75	6.73	4.88	0.12				
16.00	6.78	4.93	0.11				
16.25	6.82	4.97	0.11				
16.50	6.86	5.01	0.10				
16.75	6.90	5.05	0.10				
17.00	6.94	5.09	0.10				
17.25	6.98	5.12	0.10				
17.50	7.02	5.16	0.09				

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
 Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 27


Summary for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Runoff = 1.08 cfs @ 11.99 hrs, Volume= 0.054 af, Depth> 5.44"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs
 Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
6.7	100	0.0434	0.25		Sheet Flow, Sheet Grass: Short n= 0.150 P2= 3.71"
1.4	269	0.0434	3.12		Shallow Concentrated Flow, Grassed Waterway Kv= 15.0 fps
8.1	369				Total

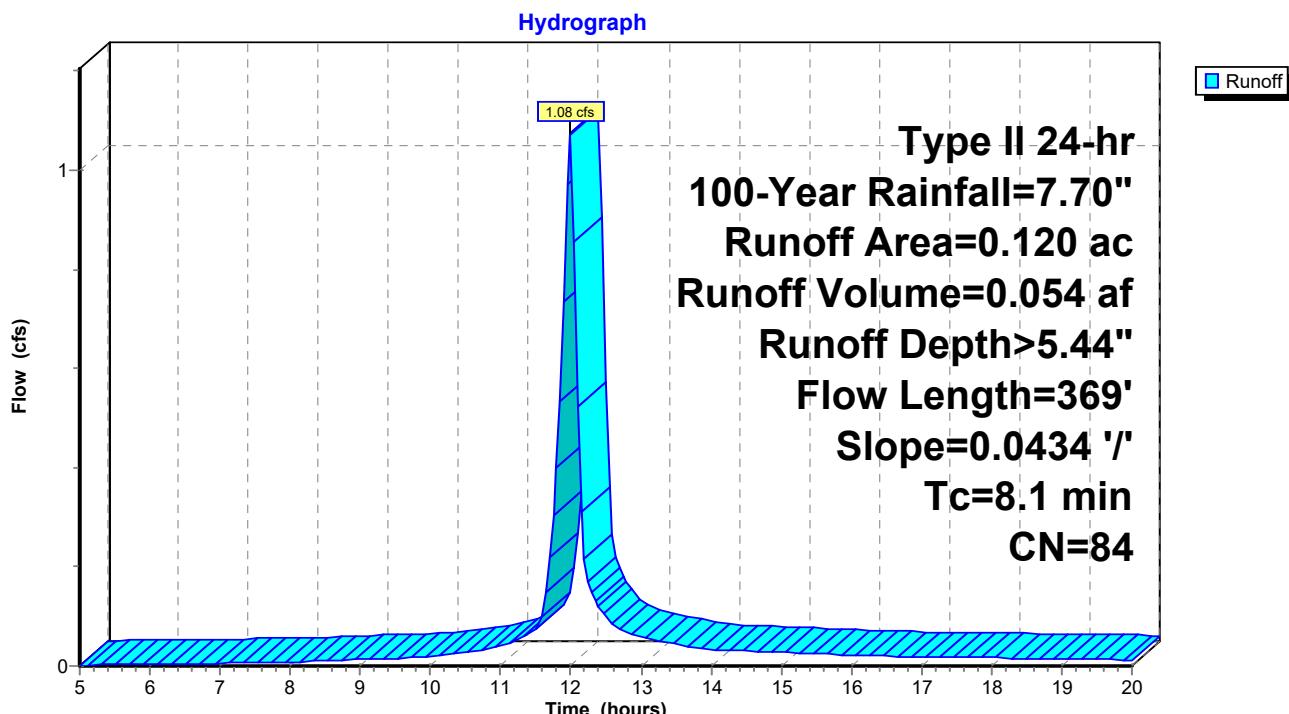Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

18-222-HydroCAD-EX

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 28

Hydrograph for Subcatchment Ex. Off DA-C: Ex. Offsite Drainage Area C

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
5.00	0.49	0.01	0.00	17.75	7.06	5.19	0.02
5.25	0.52	0.01	0.00	18.00	7.09	5.23	0.02
5.50	0.55	0.01	0.00	18.25	7.13	5.26	0.02
5.75	0.58	0.02	0.00	18.50	7.16	5.29	0.02
6.00	0.62	0.03	0.00	18.75	7.19	5.32	0.01
6.25	0.65	0.03	0.00	19.00	7.22	5.35	0.01
6.50	0.69	0.04	0.00	19.25	7.25	5.38	0.01
6.75	0.72	0.05	0.00	19.50	7.28	5.40	0.01
7.00	0.76	0.06	0.01	19.75	7.30	5.43	0.01
7.25	0.80	0.08	0.01	20.00	7.33	5.45	0.01
7.50	0.84	0.09	0.01				
7.75	0.88	0.10	0.01				
8.00	0.92	0.12	0.01				
8.25	0.97	0.14	0.01				
8.50	1.02	0.16	0.01				
8.75	1.07	0.18	0.01				
9.00	1.13	0.21	0.01				
9.25	1.19	0.24	0.01				
9.50	1.26	0.27	0.02				
9.75	1.32	0.31	0.02				
10.00	1.39	0.35	0.02				
10.25	1.48	0.40	0.02				
10.50	1.57	0.46	0.03				
10.75	1.68	0.53	0.03				
11.00	1.81	0.61	0.04				
11.25	1.97	0.72	0.05				
11.50	2.18	0.87	0.07				
11.75	2.98	1.50	0.30				
12.00	5.11	3.37	1.07				
12.25	5.44	3.67	0.17				
12.50	5.66	3.88	0.10				
12.75	5.81	4.02	0.07				
13.00	5.94	4.14	0.06				
13.25	6.06	4.25	0.05				
13.50	6.15	4.34	0.04				
13.75	6.24	4.42	0.04				
14.00	6.31	4.49	0.03				
14.25	6.38	4.56	0.03				
14.50	6.45	4.62	0.03				
14.75	6.51	4.68	0.03				
15.00	6.57	4.73	0.03				
15.25	6.63	4.79	0.03				
15.50	6.68	4.84	0.02				
15.75	6.73	4.88	0.02				
16.00	6.78	4.93	0.02				
16.25	6.82	4.97	0.02				
16.50	6.86	5.01	0.02				
16.75	6.90	5.05	0.02				
17.00	6.94	5.09	0.02				
17.25	6.98	5.12	0.02				
17.50	7.02	5.16	0.02				


Summary for Link RP-1: Release Point

Inflow Area = 3.690 ac, 4.07% Impervious, Inflow Depth > 5.44" for 100-Year event

Inflow = 31.59 cfs @ 12.00 hrs, Volume= 1.673 af

Primary = 31.59 cfs @ 12.00 hrs, Volume= 1.673 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 5.00-20.00 hrs, dt= 0.05 hrs

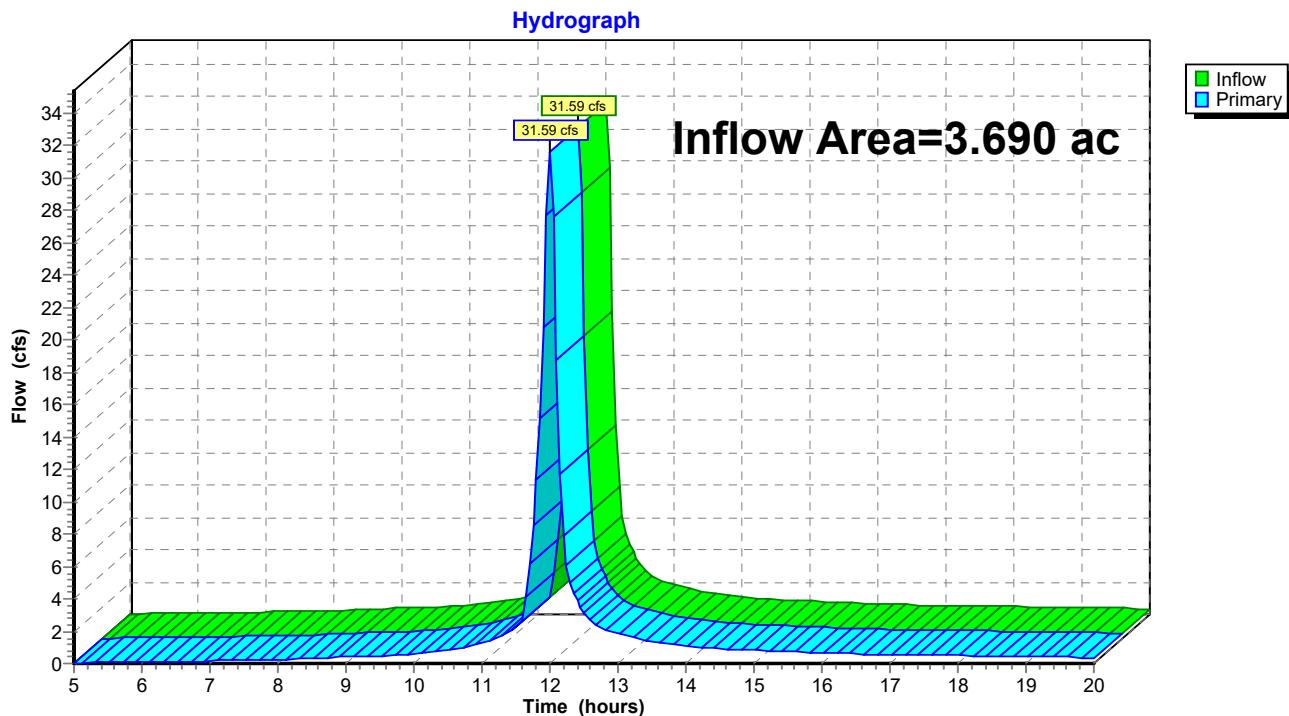Link RP-1: Release Point

18-222-HydroCAD-EX




Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

EXISTING RUNOFF CONDITIONS
Type II 24-hr 100-Year Rainfall=7.70"
 Printed 1/16/2019
 Page 30

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
5.00	0.04	0.00	0.04	17.75	0.52	0.00	0.52
5.25	0.05	0.00	0.05	18.00	0.50	0.00	0.50
5.50	0.07	0.00	0.07	18.25	0.48	0.00	0.48
5.75	0.08	0.00	0.08	18.50	0.47	0.00	0.47
6.00	0.10	0.00	0.10	18.75	0.45	0.00	0.45
6.25	0.11	0.00	0.11	19.00	0.43	0.00	0.43
6.50	0.13	0.00	0.13	19.25	0.42	0.00	0.42
6.75	0.15	0.00	0.15	19.50	0.40	0.00	0.40
7.00	0.17	0.00	0.17	19.75	0.38	0.00	0.38
7.25	0.18	0.00	0.18	20.00	0.36	0.00	0.36
7.50	0.20	0.00	0.20				
7.75	0.22	0.00	0.22				
8.00	0.24	0.00	0.24				
8.25	0.27	0.00	0.27				
8.50	0.31	0.00	0.31				
8.75	0.36	0.00	0.36				
9.00	0.41	0.00	0.41				
9.25	0.45	0.00	0.45				
9.50	0.47	0.00	0.47				
9.75	0.52	0.00	0.52				
10.00	0.61	0.00	0.61				
10.25	0.71	0.00	0.71				
10.50	0.85	0.00	0.85				
10.75	1.02	0.00	1.02				
11.00	1.25	0.00	1.25				
11.25	1.62	0.00	1.62				
11.50	2.19	0.00	2.19				
11.75	8.57	0.00	8.57				
12.00	31.59	0.00	31.59				
12.25	6.04	0.00	6.04				
12.50	3.18	0.00	3.18				
12.75	2.19	0.00	2.19				
13.00	1.83	0.00	1.83				
13.25	1.56	0.00	1.56				
13.50	1.37	0.00	1.37				
13.75	1.21	0.00	1.21				
14.00	1.07	0.00	1.07				
14.25	0.98	0.00	0.98				
14.50	0.93	0.00	0.93				
14.75	0.89	0.00	0.89				
15.00	0.84	0.00	0.84				
15.25	0.79	0.00	0.79				
15.50	0.74	0.00	0.74				
15.75	0.70	0.00	0.70				
16.00	0.65	0.00	0.65				
16.25	0.62	0.00	0.62				
16.50	0.60	0.00	0.60				
16.75	0.58	0.00	0.58				
17.00	0.57	0.00	0.57				
17.25	0.55	0.00	0.55				
17.50	0.53	0.00	0.53				

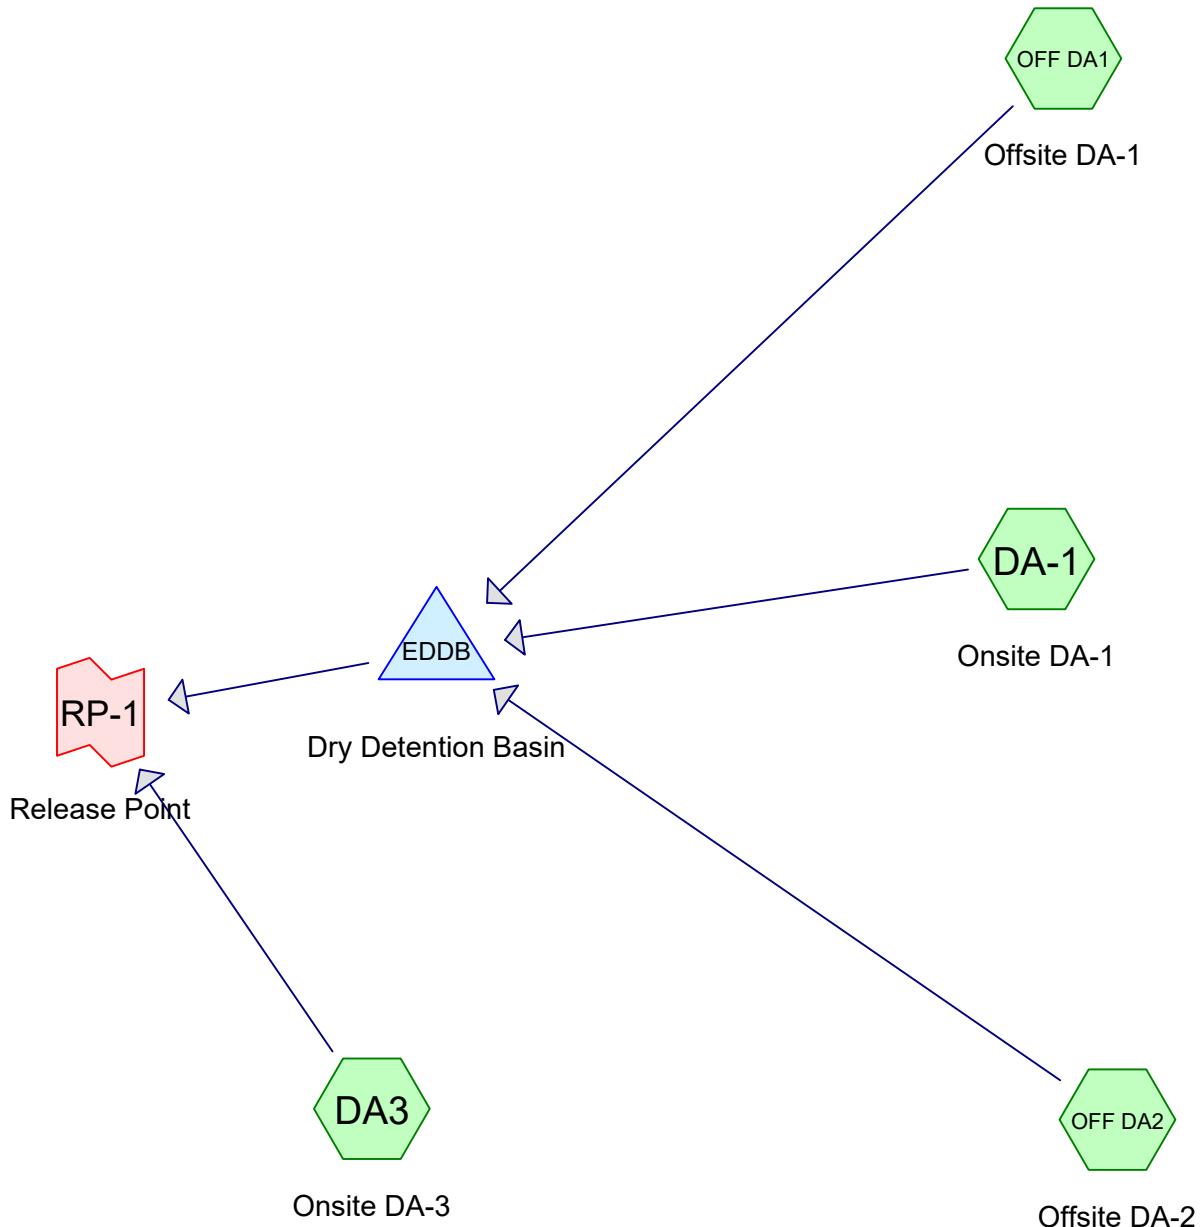

Routing Diagram for 18-222-HydroCAD-PRO
Prepared by {enter your company name here}, Printed 2/14/2019
HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

Printed 2/14/2019

Page 2

Area Listing (all nodes)

Area (acres)	CN	Description (subcatchment-numbers)
0.120	84	50-75% Grass cover, Fair, HSG D (OFF DA1)
2.250	80	>75% Grass cover, Good, HSG D (DA-1, DA3, OFF DA2)
0.770	98	Paved parking, HSG D (DA-1, DA3)
0.550	98	Unconnected roofs, HSG D (DA-1)
3.690	87	TOTAL AREA

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

Printed 2/14/2019

Page 3

Ground Covers (all nodes)

HSG-A (acres)	HSG-B (acres)	HSG-C (acres)	HSG-D (acres)	Other (acres)	Total (acres)	Ground Cover	Subcatchment Numbers
0.000	0.000	0.000	0.120	0.000	0.120	50-75% Grass cover, Fair	OFF DA1
0.000	0.000	0.000	2.250	0.000	2.250	>75% Grass cover, Good	DA-1, DA3, OFF DA2
0.000	0.000	0.000	0.770	0.000	0.770	Paved parking	DA-1, DA3
0.000	0.000	0.000	0.550	0.000	0.550	Unconnected roofs	DA-1
0.000	0.000	0.000	3.690	0.000	3.690	TOTAL AREA	

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 2-Year Rainfall=3.50"
Printed 2/14/2019
Page 4

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

SubcatchmentDA-1: Onsite DA-1 Runoff Area=2.590 ac 49.03% Impervious Runoff Depth>2.34"
Flow Length=244' Slope=0.0150 '/' Tc=24.1 min CN=89 Runoff=6.03 cfs 0.506 af

SubcatchmentDA3: Onsite DA-3 Runoff Area=0.340 ac 14.71% Impervious Runoff Depth>1.85"
Flow Length=292' Slope=0.0200 '/' Tc=14.8 min CN=83 Runoff=0.82 cfs 0.052 af

SubcatchmentOFF DA1: Offsite DA-1 Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>1.93"
Flow Length=369' Slope=0.0300 '/' Tc=13.0 min CN=84 Runoff=0.32 cfs 0.019 af

SubcatchmentOFF DA2: Offsite DA-2 Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>1.63"
Flow Length=396' Slope=0.0500 '/' Tc=10.7 min CN=80 Runoff=1.55 cfs 0.087 af

Pond EDDB: Dry Detention Basin Peak Elev=931.34' Storage=10,897 cf Inflow=7.04 cfs 0.612 af
Outflow=2.90 cfs 0.528 af

Link RP-1: Release Point Inflow=3.06 cfs 0.580 af
Primary=3.06 cfs 0.580 af

Total Runoff Area = 3.690 ac Runoff Volume = 0.665 af Average Runoff Depth = 2.16"
64.23% Pervious = 2.370 ac 35.77% Impervious = 1.320 ac

Summary for Subcatchment DA-1: Onsite DA-1


Runoff = 6.03 cfs @ 12.17 hrs, Volume= 0.506 af, Depth> 2.34"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.550	98	Unconnected roofs, HSG D
0.720	98	Paved parking, HSG D
1.320	80	>75% Grass cover, Good, HSG D
2.590	89	Weighted Average
1.320		50.97% Pervious Area
1.270		49.03% Impervious Area
0.550		43.31% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
22.8	100	0.0150	0.07		Sheet Flow, Sheet
1.3	144	0.0150	1.84		Shallow Concentrated Flow, Shallow
24.1	244	Total			Grassed Waterway Kv= 15.0 fps

Subcatchment DA-1: Onsite DA-1

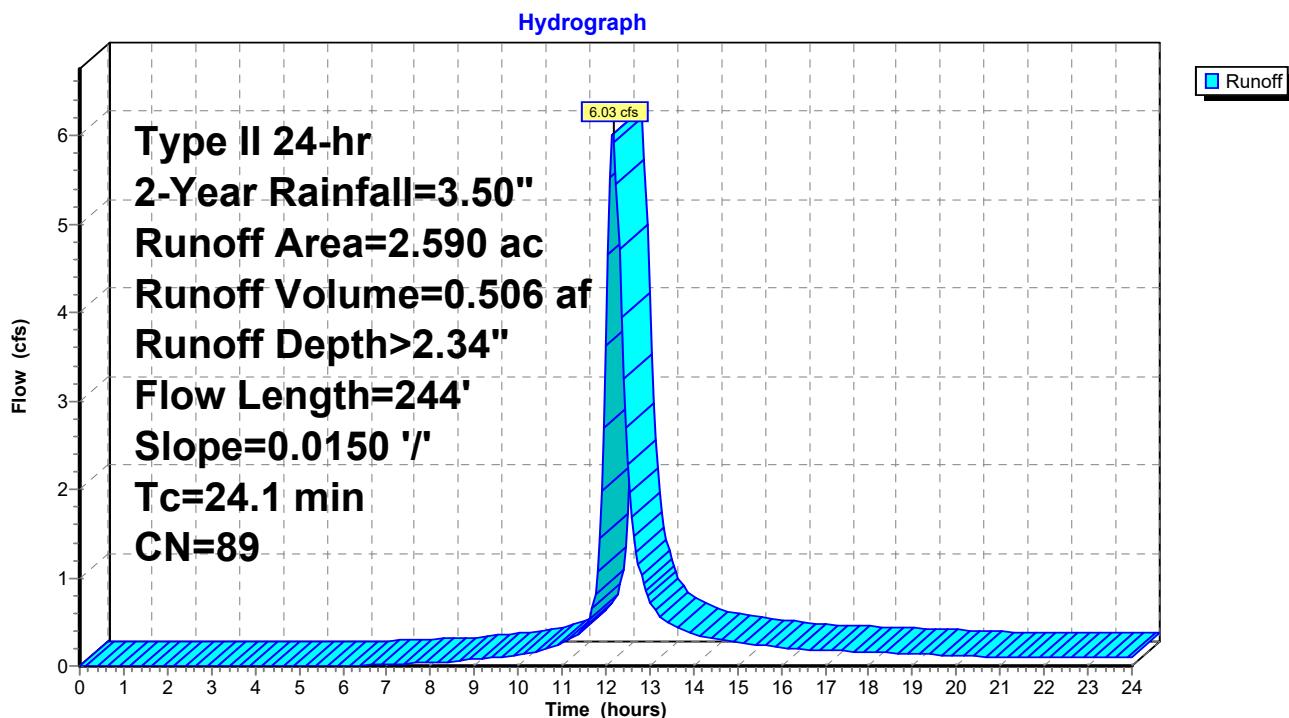

Hydrograph for Subcatchment DA-1: Onsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	2.64	1.58	1.14
0.25	0.01	0.00	0.00	13.00	2.70	1.63	0.74
0.50	0.02	0.00	0.00	13.25	2.75	1.68	0.56
0.75	0.03	0.00	0.00	13.50	2.80	1.72	0.47
1.00	0.04	0.00	0.00	13.75	2.84	1.75	0.41
1.25	0.05	0.00	0.00	14.00	2.87	1.78	0.37
1.50	0.06	0.00	0.00	14.25	2.90	1.81	0.33
1.75	0.07	0.00	0.00	14.50	2.93	1.84	0.30
2.00	0.08	0.00	0.00	14.75	2.96	1.86	0.28
2.25	0.09	0.00	0.00	15.00	2.99	1.89	0.27
2.50	0.10	0.00	0.00	15.25	3.01	1.91	0.25
2.75	0.11	0.00	0.00	15.50	3.04	1.93	0.24
3.00	0.12	0.00	0.00	15.75	3.06	1.95	0.23
3.25	0.13	0.00	0.00	16.00	3.08	1.97	0.21
3.50	0.14	0.00	0.00	16.25	3.10	1.99	0.20
3.75	0.16	0.00	0.00	16.50	3.12	2.01	0.19
4.00	0.17	0.00	0.00	16.75	3.14	2.02	0.18
4.25	0.18	0.00	0.00	17.00	3.16	2.04	0.18
4.50	0.19	0.00	0.00	17.25	3.17	2.06	0.17
4.75	0.21	0.00	0.00	17.50	3.19	2.07	0.17
5.00	0.22	0.00	0.00	17.75	3.21	2.09	0.16
5.25	0.23	0.00	0.00	18.00	3.22	2.10	0.16
5.50	0.25	0.00	0.00	18.25	3.24	2.12	0.15
5.75	0.26	0.00	0.00	18.50	3.25	2.13	0.15
6.00	0.28	0.00	0.00	18.75	3.27	2.14	0.14
6.25	0.30	0.00	0.01	19.00	3.28	2.16	0.14
6.50	0.31	0.00	0.01	19.25	3.30	2.17	0.13
6.75	0.33	0.01	0.01	19.50	3.31	2.18	0.13
7.00	0.35	0.01	0.02	19.75	3.32	2.19	0.12
7.25	0.36	0.01	0.02	20.00	3.33	2.20	0.12
7.50	0.38	0.01	0.03	20.25	3.34	2.21	0.11
7.75	0.40	0.02	0.03	20.50	3.35	2.22	0.11
8.00	0.42	0.02	0.04	20.75	3.37	2.23	0.11
8.25	0.44	0.03	0.04	21.00	3.38	2.24	0.11
8.50	0.46	0.03	0.05	21.25	3.39	2.25	0.11
8.75	0.49	0.04	0.06	21.50	3.40	2.26	0.10
9.00	0.51	0.05	0.07	21.75	3.41	2.27	0.10
9.25	0.54	0.06	0.09	22.00	3.42	2.28	0.10
9.50	0.57	0.07	0.10	22.25	3.43	2.29	0.10
9.75	0.60	0.08	0.11	22.50	3.44	2.30	0.10
10.00	0.63	0.09	0.12	22.75	3.45	2.31	0.10
10.25	0.67	0.11	0.14	23.00	3.46	2.32	0.10
10.50	0.71	0.13	0.17	23.25	3.47	2.33	0.10
10.75	0.76	0.15	0.21	23.50	3.48	2.34	0.10
11.00	0.82	0.18	0.26	23.75	3.49	2.35	0.10
11.25	0.90	0.22	0.32	24.00	3.50	2.36	0.09
11.50	0.99	0.28	0.44				
11.75	1.35	0.52	0.81				
12.00	2.32	1.30	3.63				
12.25	2.47	1.43	5.45				
12.50	2.57	1.52	2.28				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 2-Year Rainfall=3.50"
Printed 2/14/2019
Page 7


Summary for Subcatchment DA3: Onsite DA-3

Runoff = 0.82 cfs @ 12.07 hrs, Volume= 0.052 af, Depth> 1.85"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.290	80	>75% Grass cover, Good, HSG D
0.050	98	Paved parking, HSG D
0.340	83	Weighted Average
0.290		85.29% Pervious Area
0.050		14.71% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
13.3	100	0.0200	0.13		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	192	0.0200	2.12		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
14.8	292	Total			

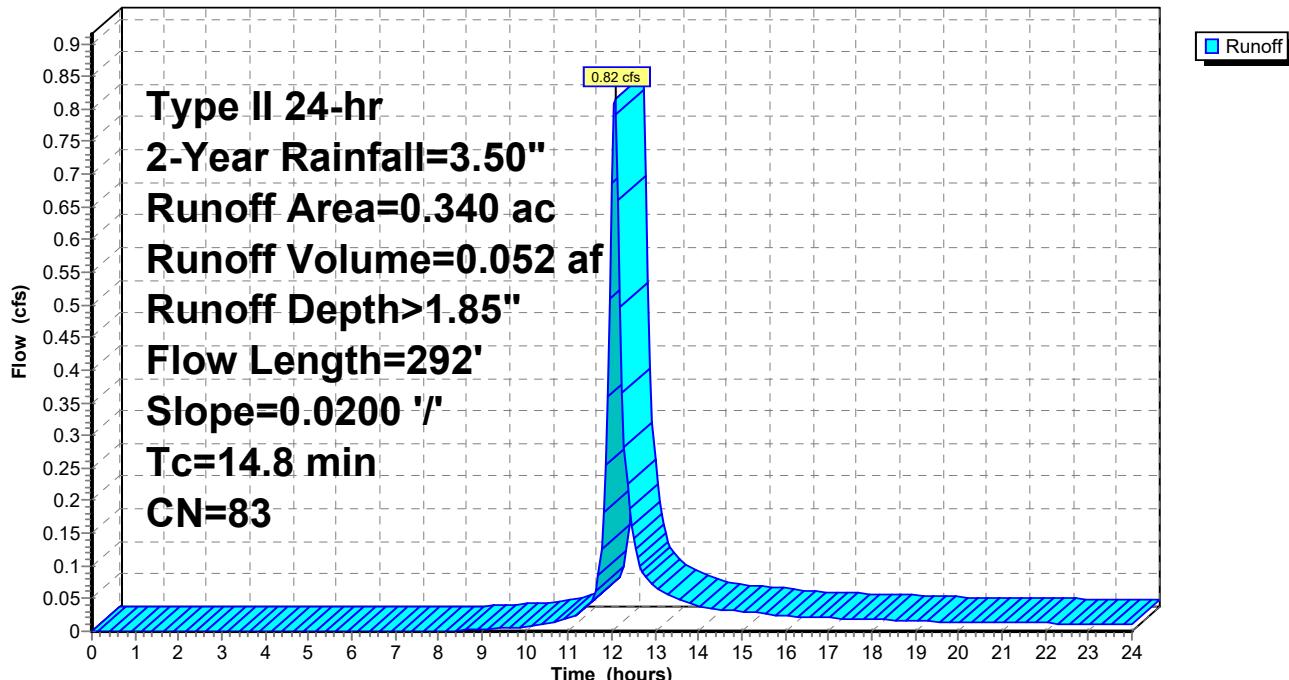Subcatchment DA3: Onsite DA-3**Hydrograph**

Hydrograph for Subcatchment DA3: Onsite DA-3

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	2.64	1.16	0.08
0.25	0.01	0.00	0.00	13.00	2.70	1.21	0.07
0.50	0.02	0.00	0.00	13.25	2.75	1.25	0.06
0.75	0.03	0.00	0.00	13.50	2.80	1.28	0.05
1.00	0.04	0.00	0.00	13.75	2.84	1.32	0.04
1.25	0.05	0.00	0.00	14.00	2.87	1.34	0.04
1.50	0.06	0.00	0.00	14.25	2.90	1.37	0.04
1.75	0.07	0.00	0.00	14.50	2.93	1.39	0.03
2.00	0.08	0.00	0.00	14.75	2.96	1.41	0.03
2.25	0.09	0.00	0.00	15.00	2.99	1.44	0.03
2.50	0.10	0.00	0.00	15.25	3.01	1.46	0.03
2.75	0.11	0.00	0.00	15.50	3.04	1.48	0.03
3.00	0.12	0.00	0.00	15.75	3.06	1.49	0.03
3.25	0.13	0.00	0.00	16.00	3.08	1.51	0.02
3.50	0.14	0.00	0.00	16.25	3.10	1.53	0.02
3.75	0.16	0.00	0.00	16.50	3.12	1.54	0.02
4.00	0.17	0.00	0.00	16.75	3.14	1.56	0.02
4.25	0.18	0.00	0.00	17.00	3.16	1.57	0.02
4.50	0.19	0.00	0.00	17.25	3.17	1.59	0.02
4.75	0.21	0.00	0.00	17.50	3.19	1.60	0.02
5.00	0.22	0.00	0.00	17.75	3.21	1.62	0.02
5.25	0.23	0.00	0.00	18.00	3.22	1.63	0.02
5.50	0.25	0.00	0.00	18.25	3.24	1.64	0.02
5.75	0.26	0.00	0.00	18.50	3.25	1.65	0.02
6.00	0.28	0.00	0.00	18.75	3.27	1.67	0.02
6.25	0.30	0.00	0.00	19.00	3.28	1.68	0.02
6.50	0.31	0.00	0.00	19.25	3.30	1.69	0.02
6.75	0.33	0.00	0.00	19.50	3.31	1.70	0.01
7.00	0.35	0.00	0.00	19.75	3.32	1.71	0.01
7.25	0.36	0.00	0.00	20.00	3.33	1.72	0.01
7.50	0.38	0.00	0.00	20.25	3.34	1.73	0.01
7.75	0.40	0.00	0.00	20.50	3.35	1.74	0.01
8.00	0.42	0.00	0.00	20.75	3.37	1.75	0.01
8.25	0.44	0.00	0.00	21.00	3.38	1.76	0.01
8.50	0.46	0.00	0.00	21.25	3.39	1.76	0.01
8.75	0.49	0.00	0.00	21.50	3.40	1.77	0.01
9.00	0.51	0.01	0.00	21.75	3.41	1.78	0.01
9.25	0.54	0.01	0.00	22.00	3.42	1.79	0.01
9.50	0.57	0.01	0.00	22.25	3.43	1.80	0.01
9.75	0.60	0.02	0.01	22.50	3.44	1.81	0.01
10.00	0.63	0.02	0.01	22.75	3.45	1.82	0.01
10.25	0.67	0.03	0.01	23.00	3.46	1.83	0.01
10.50	0.71	0.04	0.01	23.25	3.47	1.83	0.01
10.75	0.76	0.05	0.02	23.50	3.48	1.84	0.01
11.00	0.82	0.07	0.02	23.75	3.49	1.85	0.01
11.25	0.90	0.09	0.03	24.00	3.50	1.86	0.01
11.50	0.99	0.13	0.04				
11.75	1.35	0.30	0.13				
12.00	2.32	0.92	0.69				
12.25	2.47	1.03	0.37				
12.50	2.57	1.11	0.14				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 2-Year Rainfall=3.50"
Printed 2/14/2019
Page 9

Summary for Subcatchment OFF DA1: Offsite DA-1

Runoff = 0.32 cfs @ 12.05 hrs, Volume= 0.019 af, Depth> 1.93"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.3	100	0.0300	0.15		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.7	269	0.0300	2.60		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
13.0	369				Total

Subcatchment OFF DA1: Offsite DA-1

Hydrograph

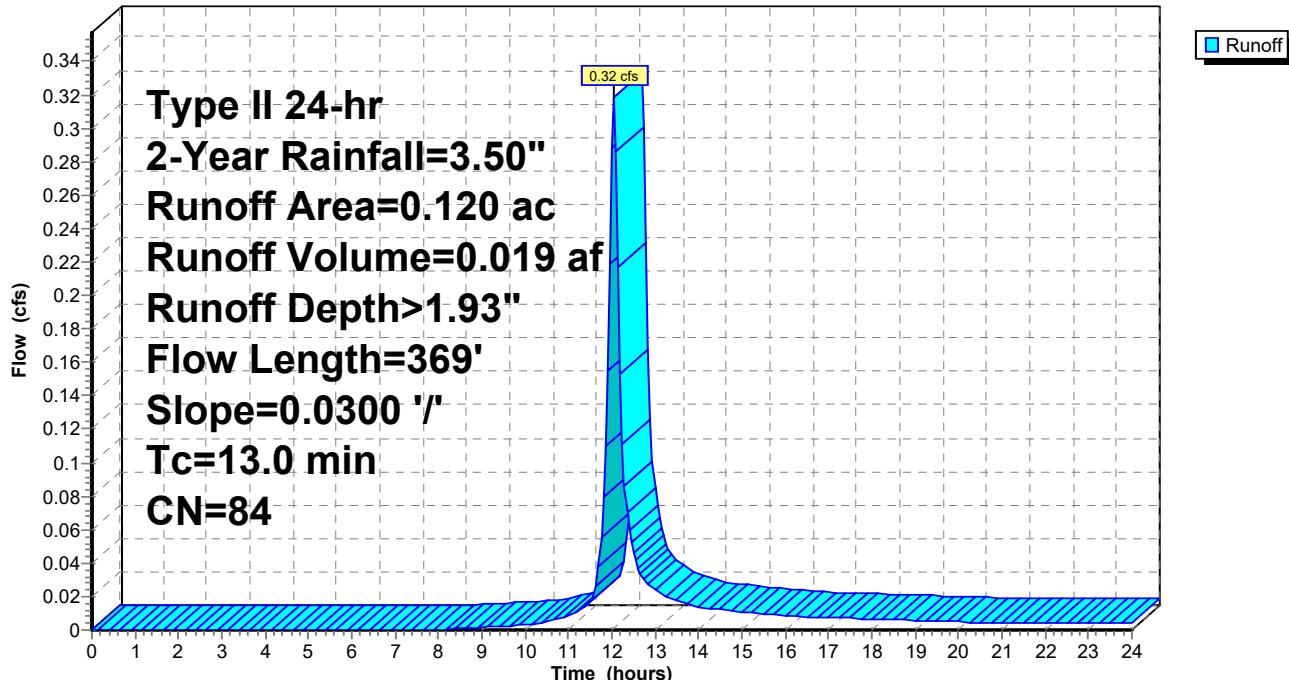

Hydrograph for Subcatchment OFF DA1: Offsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	2.64	1.23	0.03
0.25	0.01	0.00	0.00	13.00	2.70	1.27	0.02
0.50	0.02	0.00	0.00	13.25	2.75	1.32	0.02
0.75	0.03	0.00	0.00	13.50	2.80	1.35	0.02
1.00	0.04	0.00	0.00	13.75	2.84	1.38	0.02
1.25	0.05	0.00	0.00	14.00	2.87	1.41	0.01
1.50	0.06	0.00	0.00	14.25	2.90	1.44	0.01
1.75	0.07	0.00	0.00	14.50	2.93	1.46	0.01
2.00	0.08	0.00	0.00	14.75	2.96	1.48	0.01
2.25	0.09	0.00	0.00	15.00	2.99	1.51	0.01
2.50	0.10	0.00	0.00	15.25	3.01	1.53	0.01
2.75	0.11	0.00	0.00	15.50	3.04	1.55	0.01
3.00	0.12	0.00	0.00	15.75	3.06	1.57	0.01
3.25	0.13	0.00	0.00	16.00	3.08	1.58	0.01
3.50	0.14	0.00	0.00	16.25	3.10	1.60	0.01
3.75	0.16	0.00	0.00	16.50	3.12	1.61	0.01
4.00	0.17	0.00	0.00	16.75	3.14	1.63	0.01
4.25	0.18	0.00	0.00	17.00	3.16	1.65	0.01
4.50	0.19	0.00	0.00	17.25	3.17	1.66	0.01
4.75	0.21	0.00	0.00	17.50	3.19	1.67	0.01
5.00	0.22	0.00	0.00	17.75	3.21	1.69	0.01
5.25	0.23	0.00	0.00	18.00	3.22	1.70	0.01
5.50	0.25	0.00	0.00	18.25	3.24	1.72	0.01
5.75	0.26	0.00	0.00	18.50	3.25	1.73	0.01
6.00	0.28	0.00	0.00	18.75	3.27	1.74	0.01
6.25	0.30	0.00	0.00	19.00	3.28	1.75	0.01
6.50	0.31	0.00	0.00	19.25	3.30	1.76	0.01
6.75	0.33	0.00	0.00	19.50	3.31	1.77	0.01
7.00	0.35	0.00	0.00	19.75	3.32	1.78	0.01
7.25	0.36	0.00	0.00	20.00	3.33	1.79	0.00
7.50	0.38	0.00	0.00	20.25	3.34	1.80	0.00
7.75	0.40	0.00	0.00	20.50	3.35	1.81	0.00
8.00	0.42	0.00	0.00	20.75	3.37	1.82	0.00
8.25	0.44	0.00	0.00	21.00	3.38	1.83	0.00
8.50	0.46	0.00	0.00	21.25	3.39	1.84	0.00
8.75	0.49	0.01	0.00	21.50	3.40	1.85	0.00
9.00	0.51	0.01	0.00	21.75	3.41	1.86	0.00
9.25	0.54	0.01	0.00	22.00	3.42	1.87	0.00
9.50	0.57	0.02	0.00	22.25	3.43	1.88	0.00
9.75	0.60	0.02	0.00	22.50	3.44	1.89	0.00
10.00	0.63	0.03	0.00	22.75	3.45	1.89	0.00
10.25	0.67	0.04	0.00	23.00	3.46	1.90	0.00
10.50	0.71	0.05	0.01	23.25	3.47	1.91	0.00
10.75	0.76	0.06	0.01	23.50	3.48	1.92	0.00
11.00	0.82	0.08	0.01	23.75	3.49	1.93	0.00
11.25	0.90	0.11	0.01	24.00	3.50	1.94	0.00
11.50	0.99	0.15	0.02				
11.75	1.35	0.33	0.06				
12.00	2.32	0.98	0.29				
12.25	2.47	1.09	0.11				
12.50	2.57	1.17	0.05				

Summary for Subcatchment OFF DA2: Offsite DA-2

Runoff = 1.55 cfs @ 12.03 hrs, Volume= 0.087 af, Depth> 1.63"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 2-Year Rainfall=3.50"

Area (ac)	CN	Description
0.640	80	>75% Grass cover, Good, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
9.2	100	0.0500	0.18		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	296	0.0500	3.35		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
10.7	396				Total

Subcatchment OFF DA2: Offsite DA-2

Hydrograph

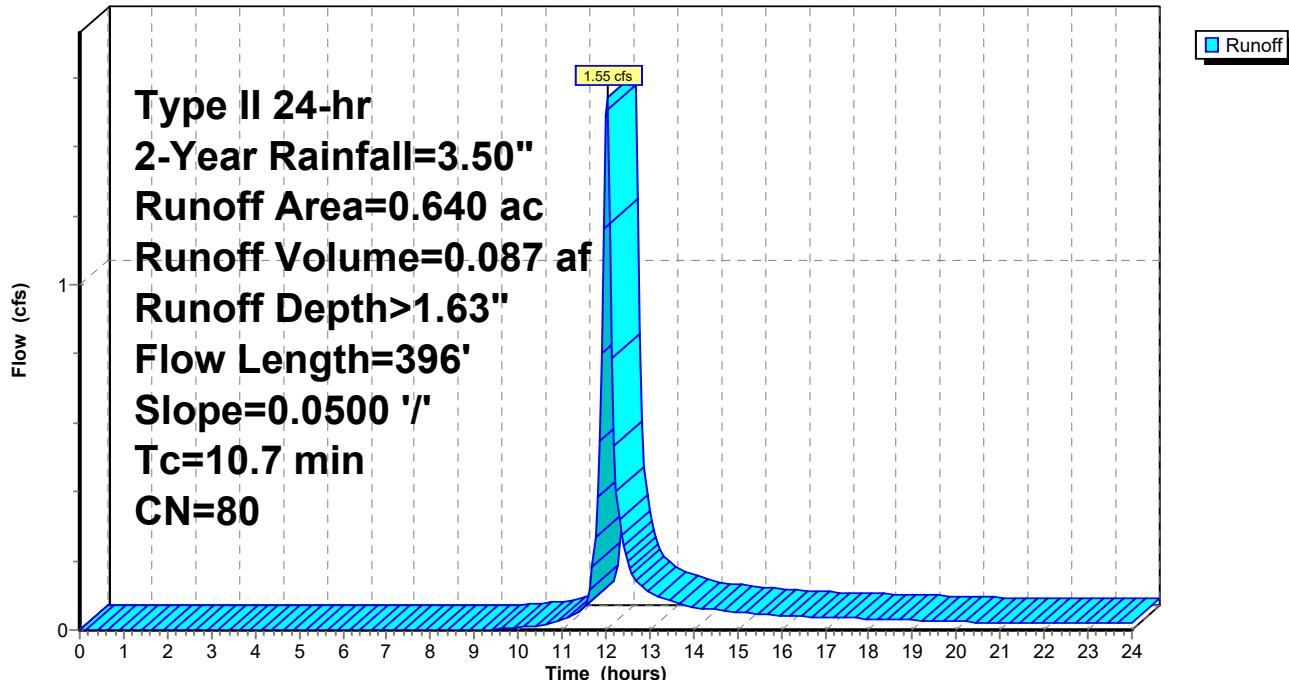

Hydrograph for Subcatchment OFF DA2: Offsite DA-2

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	2.64	0.99	0.13
0.25	0.01	0.00	0.00	13.00	2.70	1.03	0.11
0.50	0.02	0.00	0.00	13.25	2.75	1.07	0.10
0.75	0.03	0.00	0.00	13.50	2.80	1.10	0.08
1.00	0.04	0.00	0.00	13.75	2.84	1.13	0.07
1.25	0.05	0.00	0.00	14.00	2.87	1.15	0.07
1.50	0.06	0.00	0.00	14.25	2.90	1.18	0.06
1.75	0.07	0.00	0.00	14.50	2.93	1.20	0.06
2.00	0.08	0.00	0.00	14.75	2.96	1.22	0.06
2.25	0.09	0.00	0.00	15.00	2.99	1.24	0.05
2.50	0.10	0.00	0.00	15.25	3.01	1.26	0.05
2.75	0.11	0.00	0.00	15.50	3.04	1.28	0.05
3.00	0.12	0.00	0.00	15.75	3.06	1.29	0.04
3.25	0.13	0.00	0.00	16.00	3.08	1.31	0.04
3.50	0.14	0.00	0.00	16.25	3.10	1.33	0.04
3.75	0.16	0.00	0.00	16.50	3.12	1.34	0.04
4.00	0.17	0.00	0.00	16.75	3.14	1.35	0.04
4.25	0.18	0.00	0.00	17.00	3.16	1.37	0.04
4.50	0.19	0.00	0.00	17.25	3.17	1.38	0.04
4.75	0.21	0.00	0.00	17.50	3.19	1.39	0.03
5.00	0.22	0.00	0.00	17.75	3.21	1.41	0.03
5.25	0.23	0.00	0.00	18.00	3.22	1.42	0.03
5.50	0.25	0.00	0.00	18.25	3.24	1.43	0.03
5.75	0.26	0.00	0.00	18.50	3.25	1.44	0.03
6.00	0.28	0.00	0.00	18.75	3.27	1.45	0.03
6.25	0.30	0.00	0.00	19.00	3.28	1.47	0.03
6.50	0.31	0.00	0.00	19.25	3.30	1.48	0.03
6.75	0.33	0.00	0.00	19.50	3.31	1.49	0.03
7.00	0.35	0.00	0.00	19.75	3.32	1.50	0.02
7.25	0.36	0.00	0.00	20.00	3.33	1.50	0.02
7.50	0.38	0.00	0.00	20.25	3.34	1.51	0.02
7.75	0.40	0.00	0.00	20.50	3.35	1.52	0.02
8.00	0.42	0.00	0.00	20.75	3.37	1.53	0.02
8.25	0.44	0.00	0.00	21.00	3.38	1.54	0.02
8.50	0.46	0.00	0.00	21.25	3.39	1.55	0.02
8.75	0.49	0.00	0.00	21.50	3.40	1.56	0.02
9.00	0.51	0.00	0.00	21.75	3.41	1.56	0.02
9.25	0.54	0.00	0.00	22.00	3.42	1.57	0.02
9.50	0.57	0.00	0.00	22.25	3.43	1.58	0.02
9.75	0.60	0.00	0.00	22.50	3.44	1.59	0.02
10.00	0.63	0.01	0.01	22.75	3.45	1.60	0.02
10.25	0.67	0.01	0.01	23.00	3.46	1.61	0.02
10.50	0.71	0.02	0.01	23.25	3.47	1.61	0.02
10.75	0.76	0.03	0.02	23.50	3.48	1.62	0.02
11.00	0.82	0.04	0.03	23.75	3.49	1.63	0.02
11.25	0.90	0.05	0.04	24.00	3.50	1.64	0.02
11.50	0.99	0.08	0.06				
11.75	1.35	0.22	0.27				
12.00	2.32	0.77	1.50				
12.25	2.47	0.87	0.40				
12.50	2.57	0.94	0.20				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 2-Year Rainfall=3.50"
Printed 2/14/2019
Page 13

Summary for Pond EDDB: Dry Detention Basin

Inflow Area = 3.350 ac, 37.91% Impervious, Inflow Depth > 2.19" for 2-Year event
 Inflow = 7.04 cfs @ 12.13 hrs, Volume= 0.612 af
 Outflow = 2.90 cfs @ 12.46 hrs, Volume= 0.528 af, Atten= 59%, Lag= 20.1 min
 Primary = 2.90 cfs @ 12.46 hrs, Volume= 0.528 af

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs / 2
 Peak Elev= 931.34' @ 12.46 hrs Surf.Area= 3,280 sf Storage= 10,897 cf

Plug-Flow detention time= 168.7 min calculated for 0.527 af (86% of inflow)
 Center-of-Mass det. time= 106.0 min (927.0 - 821.0)

Volume	Invert	Avail.Storage	Storage Description
#1	926.00'	32,300 cf	Custom Stage Data (Prismatic) Listed below


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
926.00	863	0	0
928.00	1,656	2,519	2,519
930.00	2,578	4,234	6,753
932.00	3,630	6,208	12,961
934.00	4,810	8,440	21,401
936.00	6,089	10,899	32,300

Device	Routing	Invert	Outlet Devices
#1	Primary	925.50'	12.0" Round Culvert L= 50.0' CMP, end-section conforming to fill, Ke= 0.500 Inlet / Outlet Invert= 925.50' / 925.00' S= 0.0100 '/' Cc= 0.900 n= 0.012 Concrete pipe, finished, Flow Area= 0.79 sf
#2	Device 1	926.00'	1.0" Vert. Orifice/Grate X 7 rows with 4.0" cc spacing C= 0.600
#3	Device 1	930.00'	10.0" Vert. Orifice/Grate C= 0.600
#4	Device 1	932.00'	48.0" x 48.0" Horiz. Grate C= 0.600 Limited to weir flow at low heads


Primary OutFlow Max=2.89 cfs @ 12.46 hrs HW=931.33' (Free Discharge)

- ↑ 1=Culvert (Passes 2.89 cfs of 8.64 cfs potential flow)
- 2=Orifice/Grate (Orifice Controls 0.38 cfs @ 9.94 fps)
- 3=Orifice/Grate (Orifice Controls 2.51 cfs @ 4.61 fps)
- 4=Grate (Controls 0.00 cfs)

Pond EDDB: Dry Detention Basin

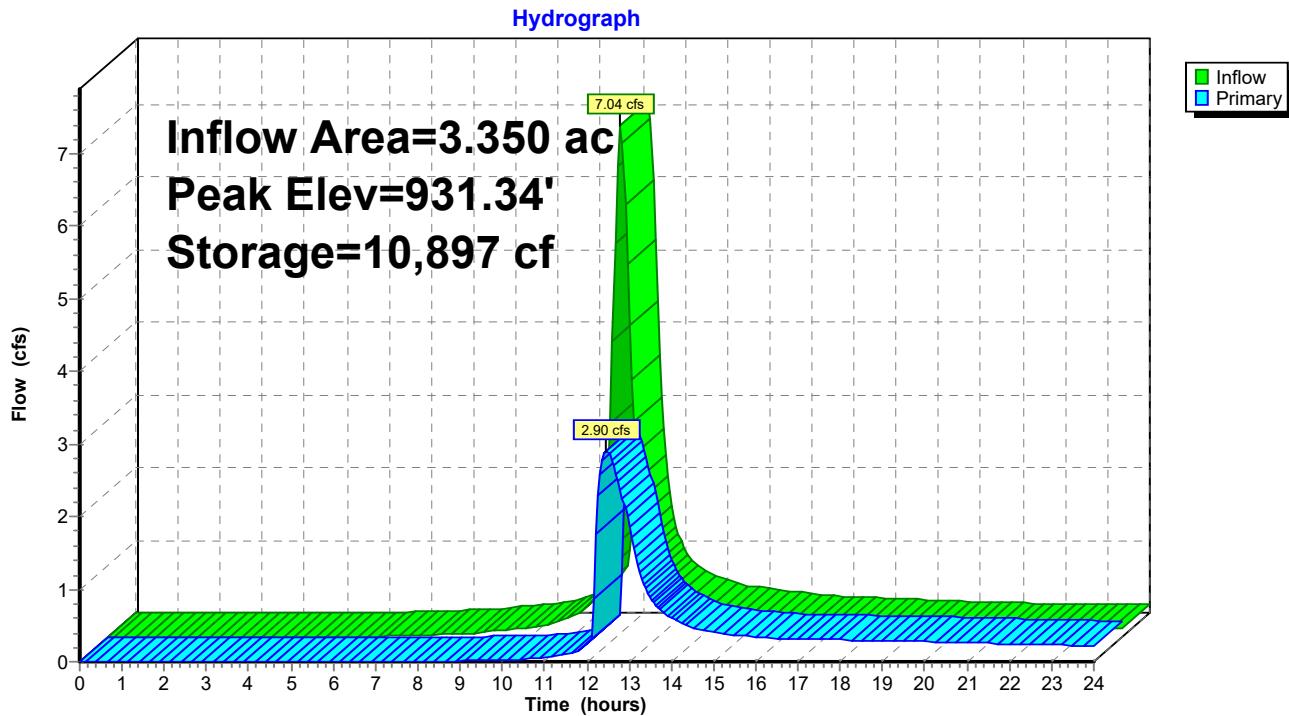

Pond EDDB: Dry Detention Basin

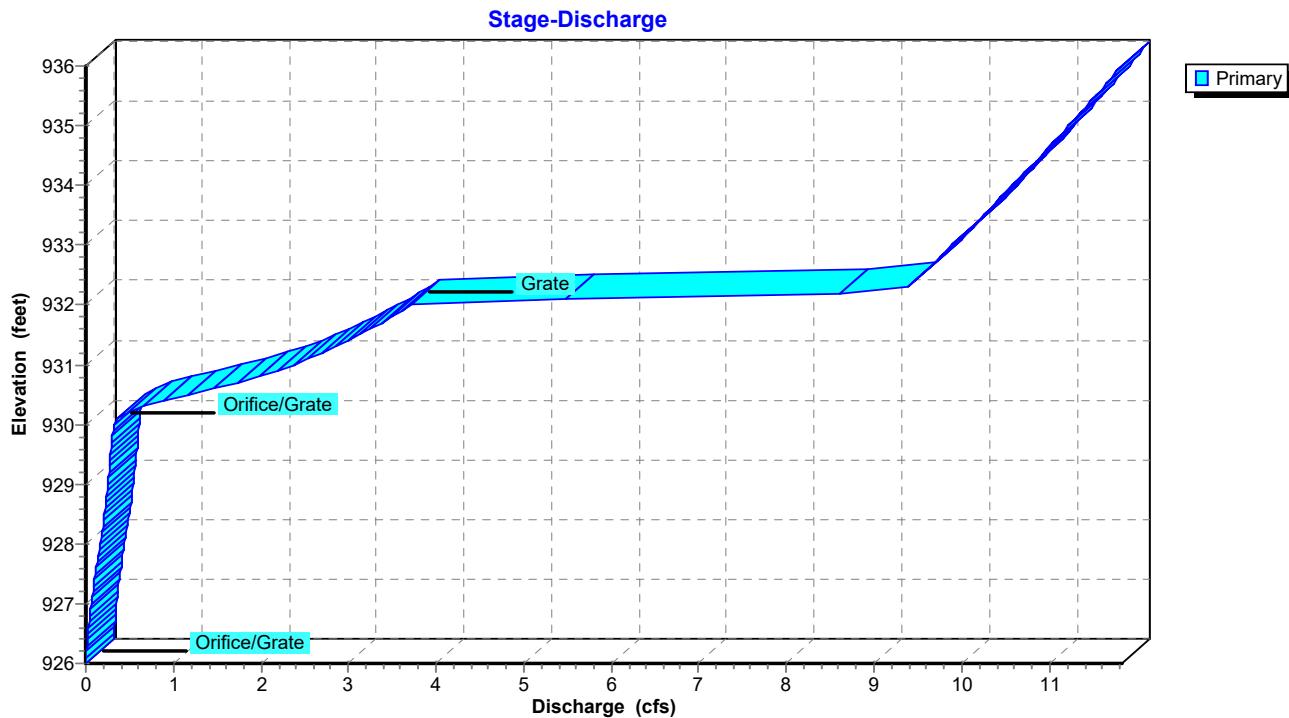


18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 2-Year Rainfall=3.50"
Printed 2/14/2019
Page 15

Pond EDDB: Dry Detention Basin

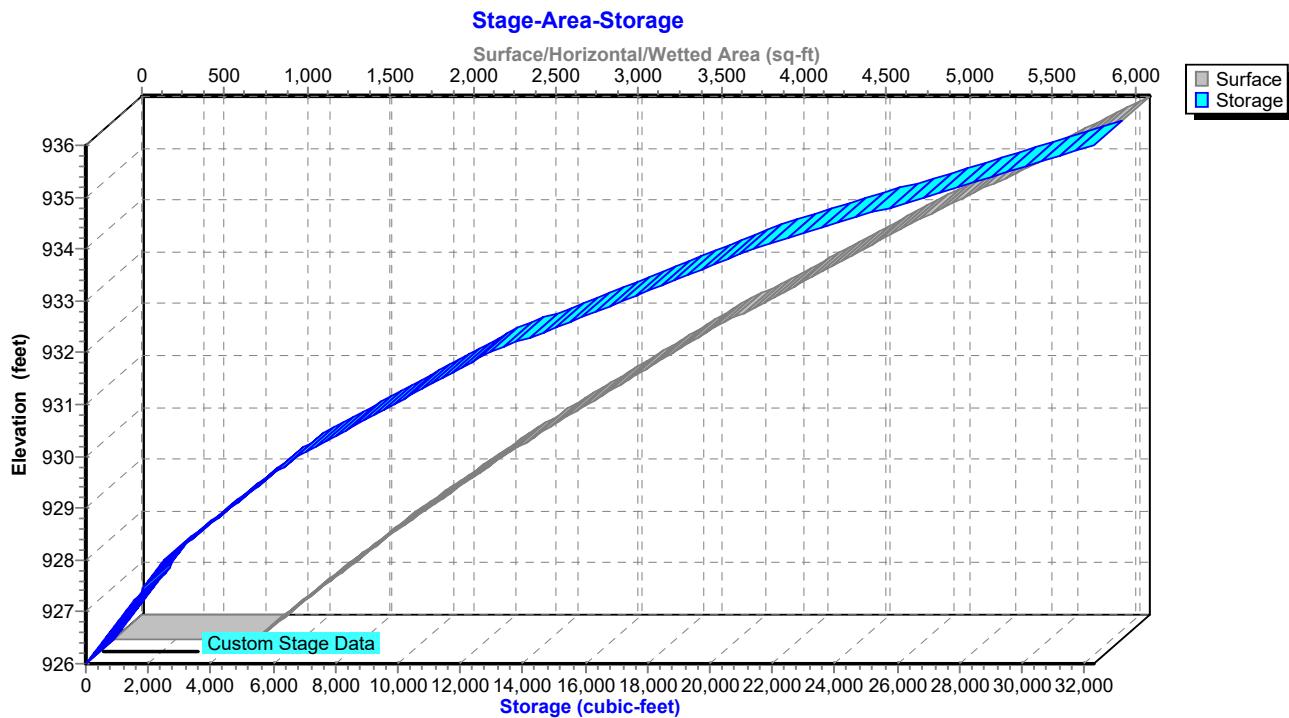

Hydrograph for Pond EDDB: Dry Detention Basin

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	0.00	0	926.00	0.00
0.50	0.00	0	926.00	0.00
1.00	0.00	0	926.00	0.00
1.50	0.00	0	926.00	0.00
2.00	0.00	0	926.00	0.00
2.50	0.00	0	926.00	0.00
3.00	0.00	0	926.00	0.00
3.50	0.00	0	926.00	0.00
4.00	0.00	0	926.00	0.00
4.50	0.00	0	926.00	0.00
5.00	0.00	0	926.00	0.00
5.50	0.00	0	926.00	0.00
6.00	0.00	1	926.00	0.00
6.50	0.01	13	926.01	0.00
7.00	0.02	37	926.03	0.00
7.50	0.03	75	926.06	0.00
8.00	0.04	127	926.10	0.01
8.50	0.05	194	926.15	0.01
9.00	0.08	291	926.23	0.01
9.50	0.10	430	926.34	0.02
10.00	0.13	600	926.48	0.03
10.50	0.19	831	926.66	0.04
11.00	0.30	1,177	926.93	0.06
11.50	0.52	1,742	927.38	0.10
12.00	5.42	4,615	928.99	0.25
12.50	2.52	10,869	931.33	2.88
13.00	0.87	9,053	930.74	1.85
13.50	0.58	7,996	930.40	0.89
14.00	0.45	7,597	930.27	0.61
14.50	0.37	7,360	930.20	0.47
15.00	0.33	7,198	930.14	0.41
15.50	0.30	7,070	930.10	0.36
16.00	0.26	6,941	930.06	0.34
16.50	0.24	6,790	930.01	0.32
17.00	0.22	6,636	929.94	0.31
17.50	0.21	6,468	929.87	0.31
18.00	0.20	6,285	929.78	0.30
18.50	0.18	6,089	929.69	0.30
19.00	0.17	5,880	929.59	0.29
19.50	0.16	5,659	929.48	0.28
20.00	0.15	5,426	929.37	0.28
20.50	0.14	5,185	929.26	0.27
21.00	0.13	4,947	929.15	0.26
21.50	0.13	4,718	929.04	0.26
22.00	0.13	4,497	928.93	0.25
22.50	0.13	4,285	928.83	0.24
23.00	0.12	4,081	928.74	0.23
23.50	0.12	3,885	928.65	0.23
24.00	0.12	3,698	928.56	0.22

Stage-Discharge for Pond EDDB: Dry Detention Basin

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
926.00	0.00	931.10	2.54
926.10	0.01	931.20	2.70
926.20	0.01	931.30	2.85
926.30	0.01	931.40	2.99
926.40	0.02	931.50	3.12
926.50	0.03	931.60	3.25
926.60	0.03	931.70	3.37
926.70	0.04	931.80	3.49
926.80	0.05	931.90	3.60
926.90	0.05	932.00	3.71
927.00	0.06	932.10	5.47
927.10	0.07	932.20	8.60
927.20	0.08	932.30	9.39
927.30	0.09	932.40	9.47
927.40	0.10	932.50	9.54
927.50	0.11	932.60	9.61
927.60	0.12	932.70	9.68
927.70	0.13	932.80	9.76
927.80	0.14	932.90	9.83
927.90	0.15	933.00	9.90
928.00	0.16	933.10	9.97
928.10	0.18	933.20	10.04
928.20	0.19	933.30	10.11
928.30	0.20	933.40	10.18
928.40	0.21	933.50	10.25
928.50	0.22	933.60	10.31
928.60	0.22	933.70	10.38
928.70	0.23	933.80	10.45
928.80	0.24	933.90	10.52
928.90	0.25	934.00	10.58
929.00	0.25	934.10	10.65
929.10	0.26	934.20	10.71
929.20	0.27	934.30	10.78
929.30	0.27	934.40	10.84
929.40	0.28	934.50	10.91
929.50	0.29	934.60	10.97
929.60	0.29	934.70	11.04
929.70	0.30	934.80	11.10
929.80	0.30	934.90	11.16
929.90	0.31	935.00	11.22
930.00	0.31	935.10	11.29
930.10	0.36	935.20	11.35
930.20	0.48	935.30	11.41
930.30	0.66	935.40	11.47
930.40	0.89	935.50	11.53
930.50	1.16	935.60	11.59
930.60	1.45	935.70	11.65
930.70	1.74	935.80	11.71
930.80	1.99	935.90	11.77
930.90	2.19	936.00	11.83
931.00	2.37		

Stage-Area-Storage for Pond EDDB: Dry Detention Basin


Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)	Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
926.00	863	0	931.10	3,157	10,167
926.10	903	126	931.20	3,209	10,478
926.20	942	252	931.30	3,262	10,788
926.30	982	378	931.40	3,314	11,099
926.40	1,022	504	931.50	3,367	11,409
926.50	1,061	630	931.60	3,420	11,719
926.60	1,101	756	931.70	3,472	12,030
926.70	1,141	882	931.80	3,525	12,340
926.80	1,180	1,008	931.90	3,577	12,651
926.90	1,220	1,134	932.00	3,630	12,961
927.00	1,260	1,260	932.10	3,689	13,383
927.10	1,299	1,385	932.20	3,748	13,805
927.20	1,339	1,511	932.30	3,807	14,227
927.30	1,378	1,637	932.40	3,866	14,649
927.40	1,418	1,763	932.50	3,925	15,071
927.50	1,458	1,889	932.60	3,984	15,493
927.60	1,497	2,015	932.70	4,043	15,915
927.70	1,537	2,141	932.80	4,102	16,337
927.80	1,577	2,267	932.90	4,161	16,759
927.90	1,616	2,393	933.00	4,220	17,181
928.00	1,656	2,519	933.10	4,279	17,603
928.10	1,702	2,731	933.20	4,338	18,025
928.20	1,748	2,942	933.30	4,397	18,447
928.30	1,794	3,154	933.40	4,456	18,869
928.40	1,840	3,366	933.50	4,515	19,291
928.50	1,887	3,578	933.60	4,574	19,713
928.60	1,933	3,789	933.70	4,633	20,135
928.70	1,979	4,001	933.80	4,692	20,557
928.80	2,025	4,213	933.90	4,751	20,979
928.90	2,071	4,424	934.00	4,810	21,401
929.00	2,117	4,636	934.10	4,874	21,946
929.10	2,163	4,848	934.20	4,938	22,491
929.20	2,209	5,059	934.30	5,002	23,036
929.30	2,255	5,271	934.40	5,066	23,581
929.40	2,301	5,483	934.50	5,130	24,126
929.50	2,348	5,695	934.60	5,194	24,671
929.60	2,394	5,906	934.70	5,258	25,216
929.70	2,440	6,118	934.80	5,322	25,761
929.80	2,486	6,330	934.90	5,386	26,306
929.90	2,532	6,541	935.00	5,450	26,851
930.00	2,578	6,753	935.10	5,513	27,395
930.10	2,631	7,063	935.20	5,577	27,940
930.20	2,683	7,374	935.30	5,641	28,485
930.30	2,736	7,684	935.40	5,705	29,030
930.40	2,788	7,995	935.50	5,769	29,575
930.50	2,841	8,305	935.60	5,833	30,120
930.60	2,894	8,615	935.70	5,897	30,665
930.70	2,946	8,926	935.80	5,961	31,210
930.80	2,999	9,236	935.90	6,025	31,755
930.90	3,051	9,547	936.00	6,089	32,300
931.00	3,104	9,857			

Summary for Link RP-1: Release Point

Inflow Area = 3.690 ac, 35.77% Impervious, Inflow Depth > 1.89" for 2-Year event
 Inflow = 3.06 cfs @ 12.43 hrs, Volume= 0.580 af
 Primary = 3.06 cfs @ 12.43 hrs, Volume= 0.580 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

Link RP-1: Release Point

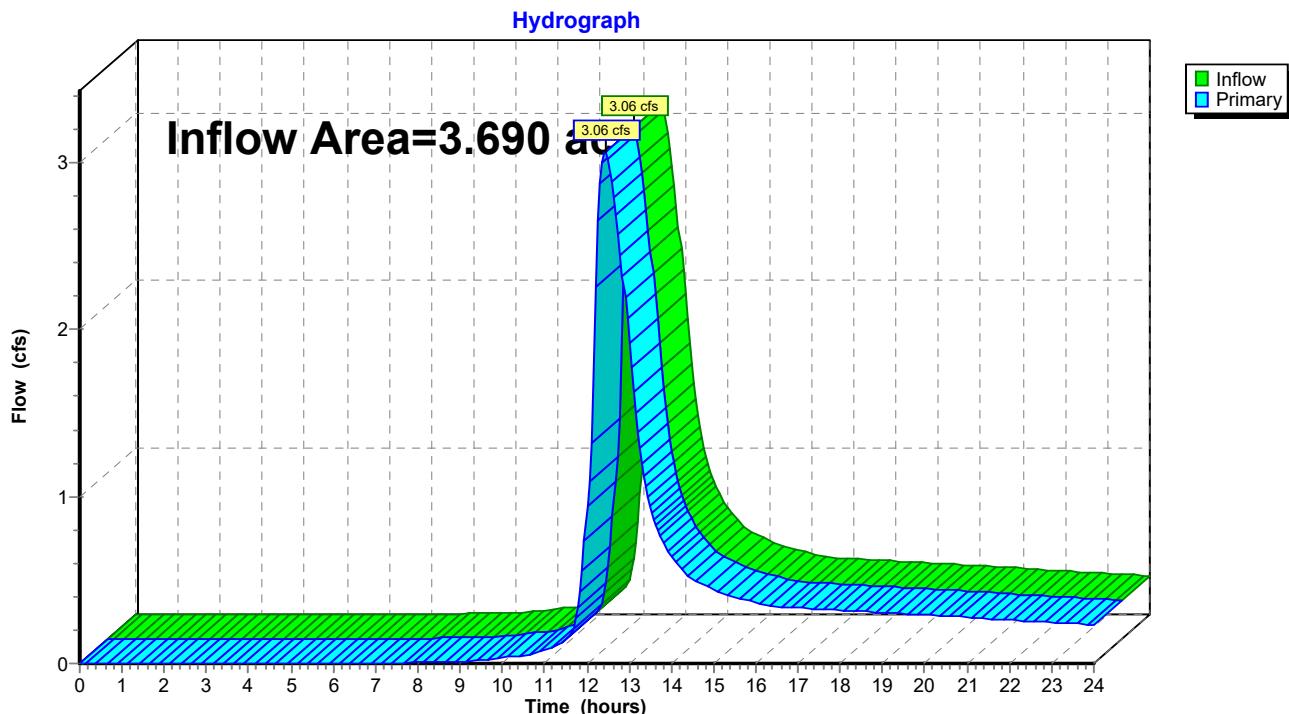

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
0.00	0.00	0.00	0.00	12.75	2.57	0.00	2.57
0.25	0.00	0.00	0.00	13.00	1.91	0.00	1.91
0.50	0.00	0.00	0.00	13.25	1.29	0.00	1.29
0.75	0.00	0.00	0.00	13.50	0.94	0.00	0.94
1.00	0.00	0.00	0.00	13.75	0.76	0.00	0.76
1.25	0.00	0.00	0.00	14.00	0.65	0.00	0.65
1.50	0.00	0.00	0.00	14.25	0.57	0.00	0.57
1.75	0.00	0.00	0.00	14.50	0.51	0.00	0.51
2.00	0.00	0.00	0.00	14.75	0.47	0.00	0.47
2.25	0.00	0.00	0.00	15.00	0.44	0.00	0.44
2.50	0.00	0.00	0.00	15.25	0.41	0.00	0.41
2.75	0.00	0.00	0.00	15.50	0.39	0.00	0.39
3.00	0.00	0.00	0.00	15.75	0.38	0.00	0.38
3.25	0.00	0.00	0.00	16.00	0.37	0.00	0.37
3.50	0.00	0.00	0.00	16.25	0.35	0.00	0.35
3.75	0.00	0.00	0.00	16.50	0.34	0.00	0.34
4.00	0.00	0.00	0.00	16.75	0.33	0.00	0.33
4.25	0.00	0.00	0.00	17.00	0.33	0.00	0.33
4.50	0.00	0.00	0.00	17.25	0.33	0.00	0.33
4.75	0.00	0.00	0.00	17.50	0.33	0.00	0.33
5.00	0.00	0.00	0.00	17.75	0.32	0.00	0.32
5.25	0.00	0.00	0.00	18.00	0.32	0.00	0.32
5.50	0.00	0.00	0.00	18.25	0.32	0.00	0.32
5.75	0.00	0.00	0.00	18.50	0.31	0.00	0.31
6.00	0.00	0.00	0.00	18.75	0.31	0.00	0.31
6.25	0.00	0.00	0.00	19.00	0.31	0.00	0.31
6.50	0.00	0.00	0.00	19.25	0.30	0.00	0.30
6.75	0.00	0.00	0.00	19.50	0.30	0.00	0.30
7.00	0.00	0.00	0.00	19.75	0.30	0.00	0.30
7.25	0.00	0.00	0.00	20.00	0.29	0.00	0.29
7.50	0.00	0.00	0.00	20.25	0.29	0.00	0.29
7.75	0.01	0.00	0.01	20.50	0.28	0.00	0.28
8.00	0.01	0.00	0.01	20.75	0.28	0.00	0.28
8.25	0.01	0.00	0.01	21.00	0.28	0.00	0.28
8.50	0.01	0.00	0.01	21.25	0.27	0.00	0.27
8.75	0.01	0.00	0.01	21.50	0.27	0.00	0.27
9.00	0.01	0.00	0.01	21.75	0.26	0.00	0.26
9.25	0.02	0.00	0.02	22.00	0.26	0.00	0.26
9.50	0.02	0.00	0.02	22.25	0.26	0.00	0.26
9.75	0.03	0.00	0.03	22.50	0.25	0.00	0.25
10.00	0.03	0.00	0.03	22.75	0.25	0.00	0.25
10.25	0.04	0.00	0.04	23.00	0.25	0.00	0.25
10.50	0.05	0.00	0.05	23.25	0.24	0.00	0.24
10.75	0.06	0.00	0.06	23.50	0.24	0.00	0.24
11.00	0.08	0.00	0.08	23.75	0.23	0.00	0.23
11.25	0.10	0.00	0.10	24.00	0.23	0.00	0.23
11.50	0.14	0.00	0.14				
11.75	0.27	0.00	0.27				
12.00	0.94	0.00	0.94				
12.25	2.65	0.00	2.65				
12.50	3.02	0.00	3.02				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"
Printed 2/14/2019
Page 21

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points
Runoff by SCS TR-20 method, UH=SCS, Weighted-CN
Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

SubcatchmentDA-1: Onsite DA-1 Runoff Area=2.590 ac 49.03% Impervious Runoff Depth>4.04"
Flow Length=244' Slope=0.0150 '/' Tc=24.1 min CN=89 Runoff=10.19 cfs 0.872 af

SubcatchmentDA3: Onsite DA-3 Runoff Area=0.340 ac 14.71% Impervious Runoff Depth>3.44"
Flow Length=292' Slope=0.0200 '/' Tc=14.8 min CN=83 Runoff=1.50 cfs 0.097 af

SubcatchmentOFF DA1: Offsite DA-1 Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>3.54"
Flow Length=369' Slope=0.0300 '/' Tc=13.0 min CN=84 Runoff=0.58 cfs 0.035 af

SubcatchmentOFF DA2: Offsite DA-2 Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>3.15"
Flow Length=396' Slope=0.0500 '/' Tc=10.7 min CN=80 Runoff=2.96 cfs 0.168 af

Pond EDDB: Dry Detention Basin Peak Elev=932.34' Storage=14,411 cf Inflow=12.20 cfs 1.075 af
Outflow=9.44 cfs 0.954 af

Link RP-1: Release Point Inflow=10.15 cfs 1.051 af
Primary=10.15 cfs 1.051 af

Total Runoff Area = 3.690 ac Runoff Volume = 1.173 af Average Runoff Depth = 3.81"
64.23% Pervious = 2.370 ac 35.77% Impervious = 1.320 ac

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"
Printed 2/14/2019
Page 22


Summary for Subcatchment DA-1: Onsite DA-1

Runoff = 10.19 cfs @ 12.17 hrs, Volume= 0.872 af, Depth> 4.04"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.550	98	Unconnected roofs, HSG D
0.720	98	Paved parking, HSG D
1.320	80	>75% Grass cover, Good, HSG D
2.590	89	Weighted Average
1.320		50.97% Pervious Area
1.270		49.03% Impervious Area
0.550		43.31% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
22.8	100	0.0150	0.07		Sheet Flow, Sheet
					Grass: Bermuda n= 0.410 P2= 3.71"
1.3	144	0.0150	1.84		Shallow Concentrated Flow, Shallow
					Grassed Waterway Kv= 15.0 fps
24.1	244	Total			

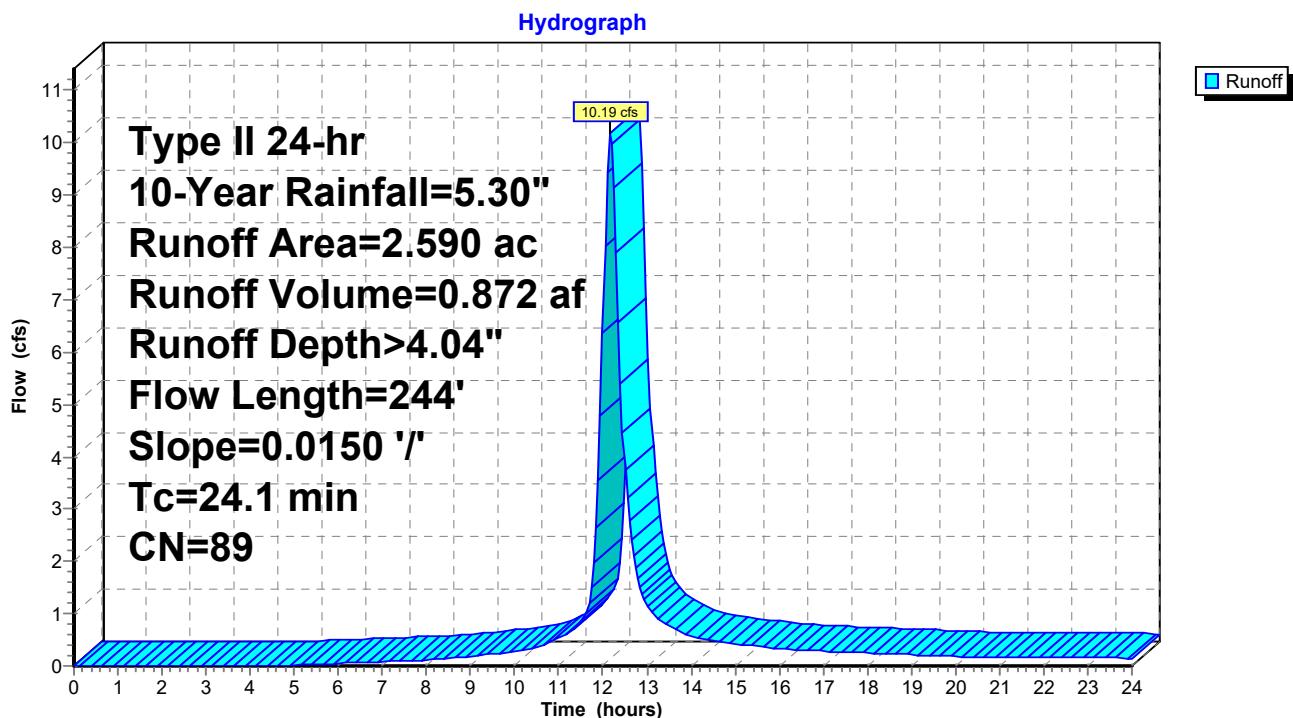Subcatchment DA-1: Onsite DA-1

Hydrograph for Subcatchment DA-1: Onsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	4.00	2.83	1.86
0.25	0.01	0.00	0.00	13.00	4.09	2.91	1.19
0.50	0.03	0.00	0.00	13.25	4.17	2.98	0.90
0.75	0.04	0.00	0.00	13.50	4.23	3.04	0.76
1.00	0.06	0.00	0.00	13.75	4.29	3.10	0.66
1.25	0.07	0.00	0.00	14.00	4.35	3.15	0.58
1.50	0.09	0.00	0.00	14.25	4.39	3.19	0.52
1.75	0.10	0.00	0.00	14.50	4.44	3.24	0.48
2.00	0.12	0.00	0.00	14.75	4.48	3.28	0.45
2.25	0.13	0.00	0.00	15.00	4.52	3.32	0.43
2.50	0.15	0.00	0.00	15.25	4.56	3.35	0.41
2.75	0.17	0.00	0.00	15.50	4.60	3.39	0.38
3.00	0.18	0.00	0.00	15.75	4.63	3.42	0.36
3.25	0.20	0.00	0.00	16.00	4.66	3.45	0.34
3.50	0.22	0.00	0.00	16.25	4.69	3.48	0.32
3.75	0.24	0.00	0.00	16.50	4.72	3.51	0.30
4.00	0.25	0.00	0.00	16.75	4.75	3.53	0.29
4.25	0.27	0.00	0.00	17.00	4.78	3.56	0.28
4.50	0.29	0.00	0.01	17.25	4.81	3.59	0.27
4.75	0.31	0.00	0.01	17.50	4.83	3.61	0.27
5.00	0.33	0.01	0.02	17.75	4.86	3.64	0.26
5.25	0.36	0.01	0.02	18.00	4.88	3.66	0.25
5.50	0.38	0.01	0.03	18.25	4.90	3.68	0.24
5.75	0.40	0.02	0.04	18.50	4.93	3.70	0.23
6.00	0.42	0.02	0.05	18.75	4.95	3.72	0.23
6.25	0.45	0.03	0.05	19.00	4.97	3.74	0.22
6.50	0.47	0.03	0.06	19.25	4.99	3.76	0.21
6.75	0.50	0.04	0.07	19.50	5.01	3.78	0.20
7.00	0.52	0.05	0.08	19.75	5.03	3.80	0.19
7.25	0.55	0.06	0.09	20.00	5.05	3.82	0.18
7.50	0.58	0.07	0.10	20.25	5.06	3.83	0.18
7.75	0.61	0.08	0.11	20.50	5.08	3.85	0.17
8.00	0.64	0.09	0.11	20.75	5.10	3.86	0.17
8.25	0.67	0.11	0.12	21.00	5.11	3.88	0.17
8.50	0.70	0.12	0.14	21.25	5.13	3.90	0.17
8.75	0.74	0.14	0.16	21.50	5.15	3.91	0.17
9.00	0.78	0.16	0.19	21.75	5.16	3.93	0.16
9.25	0.82	0.18	0.21	22.00	5.18	3.94	0.16
9.50	0.86	0.21	0.23	22.25	5.19	3.96	0.16
9.75	0.91	0.23	0.24	22.50	5.21	3.97	0.16
10.00	0.96	0.26	0.27	22.75	5.23	3.99	0.16
10.25	1.02	0.30	0.31	23.00	5.24	4.00	0.16
10.50	1.08	0.34	0.37	23.25	5.26	4.02	0.15
10.75	1.16	0.39	0.43	23.50	5.27	4.03	0.15
11.00	1.25	0.45	0.52	23.75	5.29	4.05	0.15
11.25	1.36	0.52	0.64	24.00	5.30	4.06	0.15
11.50	1.50	0.63	0.85				
11.75	2.05	1.07	1.51				
12.00	3.51	2.37	6.35				
12.25	3.74	2.58	9.13				
12.50	3.90	2.73	3.76				

Summary for Subcatchment DA3: Onsite DA-3

Runoff = 1.50 cfs @ 12.07 hrs, Volume= 0.097 af, Depth> 3.44"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.290	80	>75% Grass cover, Good, HSG D
0.050	98	Paved parking, HSG D
0.340	83	Weighted Average
0.290		85.29% Pervious Area
0.050		14.71% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
13.3	100	0.0200	0.13		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	192	0.0200	2.12		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
14.8	292	Total			

Subcatchment DA3: Onsite DA-3

Hydrograph

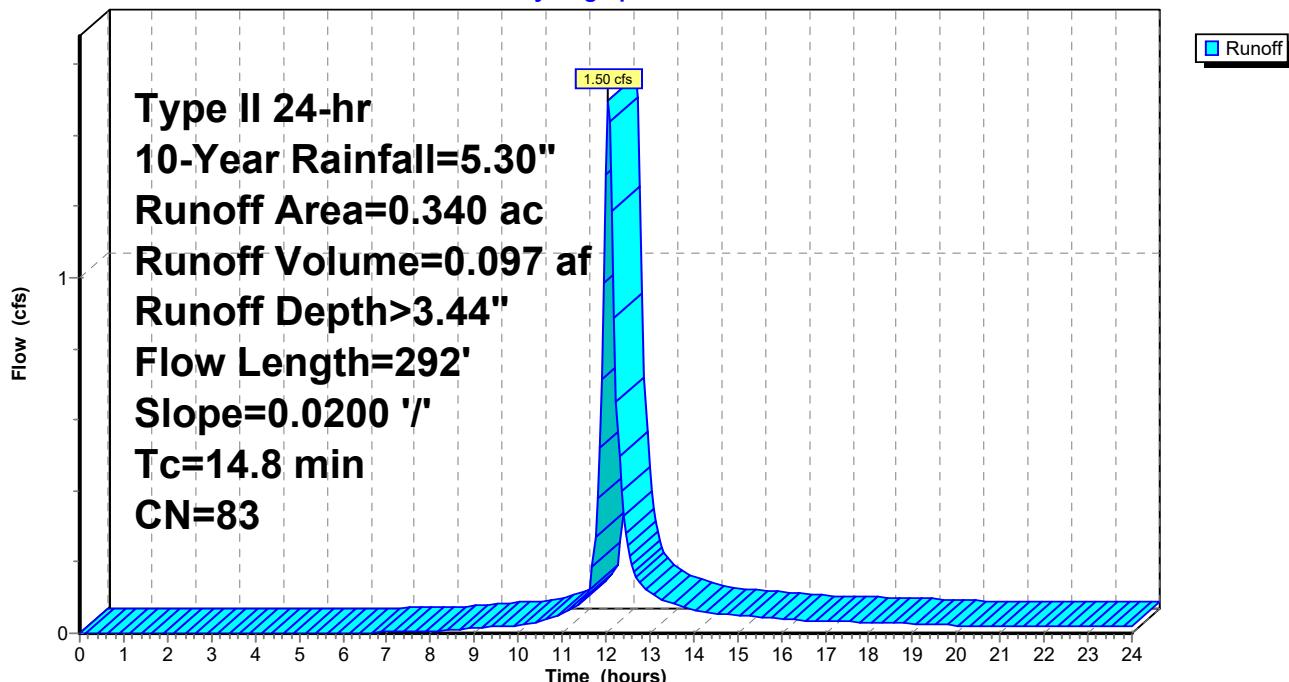

Hydrograph for Subcatchment DA3: Onsite DA-3

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	4.00	2.29	0.14
0.25	0.01	0.00	0.00	13.00	4.09	2.37	0.12
0.50	0.03	0.00	0.00	13.25	4.17	2.43	0.10
0.75	0.04	0.00	0.00	13.50	4.23	2.49	0.09
1.00	0.06	0.00	0.00	13.75	4.29	2.54	0.07
1.25	0.07	0.00	0.00	14.00	4.35	2.59	0.07
1.50	0.09	0.00	0.00	14.25	4.39	2.63	0.06
1.75	0.10	0.00	0.00	14.50	4.44	2.67	0.06
2.00	0.12	0.00	0.00	14.75	4.48	2.71	0.05
2.25	0.13	0.00	0.00	15.00	4.52	2.75	0.05
2.50	0.15	0.00	0.00	15.25	4.56	2.78	0.05
2.75	0.17	0.00	0.00	15.50	4.60	2.81	0.05
3.00	0.18	0.00	0.00	15.75	4.63	2.84	0.04
3.25	0.20	0.00	0.00	16.00	4.66	2.87	0.04
3.50	0.22	0.00	0.00	16.25	4.69	2.90	0.04
3.75	0.24	0.00	0.00	16.50	4.72	2.92	0.04
4.00	0.25	0.00	0.00	16.75	4.75	2.95	0.04
4.25	0.27	0.00	0.00	17.00	4.78	2.98	0.03
4.50	0.29	0.00	0.00	17.25	4.81	3.00	0.03
4.75	0.31	0.00	0.00	17.50	4.83	3.02	0.03
5.00	0.33	0.00	0.00	17.75	4.86	3.05	0.03
5.25	0.36	0.00	0.00	18.00	4.88	3.07	0.03
5.50	0.38	0.00	0.00	18.25	4.90	3.09	0.03
5.75	0.40	0.00	0.00	18.50	4.93	3.11	0.03
6.00	0.42	0.00	0.00	18.75	4.95	3.13	0.03
6.25	0.45	0.00	0.00	19.00	4.97	3.15	0.03
6.50	0.47	0.00	0.00	19.25	4.99	3.17	0.03
6.75	0.50	0.00	0.00	19.50	5.01	3.18	0.02
7.00	0.52	0.01	0.00	19.75	5.03	3.20	0.02
7.25	0.55	0.01	0.00	20.00	5.05	3.22	0.02
7.50	0.58	0.01	0.00	20.25	5.06	3.23	0.02
7.75	0.61	0.02	0.01	20.50	5.08	3.25	0.02
8.00	0.64	0.02	0.01	20.75	5.10	3.26	0.02
8.25	0.67	0.03	0.01	21.00	5.11	3.28	0.02
8.50	0.70	0.04	0.01	21.25	5.13	3.29	0.02
8.75	0.74	0.05	0.01	21.50	5.15	3.31	0.02
9.00	0.78	0.06	0.01	21.75	5.16	3.32	0.02
9.25	0.82	0.07	0.02	22.00	5.18	3.34	0.02
9.50	0.86	0.08	0.02	22.25	5.19	3.35	0.02
9.75	0.91	0.10	0.02	22.50	5.21	3.36	0.02
10.00	0.96	0.12	0.02	22.75	5.23	3.38	0.02
10.25	1.02	0.14	0.03	23.00	5.24	3.39	0.02
10.50	1.08	0.17	0.03	23.25	5.26	3.41	0.02
10.75	1.16	0.20	0.04	23.50	5.27	3.42	0.02
11.00	1.25	0.24	0.05	23.75	5.29	3.43	0.02
11.25	1.36	0.30	0.07	24.00	5.30	3.45	0.02
11.50	1.50	0.38	0.10				
11.75	2.05	0.73	0.27				
12.00	3.51	1.87	1.29				
12.25	3.74	2.06	0.65				
12.50	3.90	2.20	0.25				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"
Printed 2/14/2019
Page 26


Summary for Subcatchment OFF DA1: Offsite DA-1

Runoff = 0.58 cfs @ 12.05 hrs, Volume= 0.035 af, Depth> 3.54"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.3	100	0.0300	0.15		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.7	269	0.0300	2.60		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
13.0	369				Total

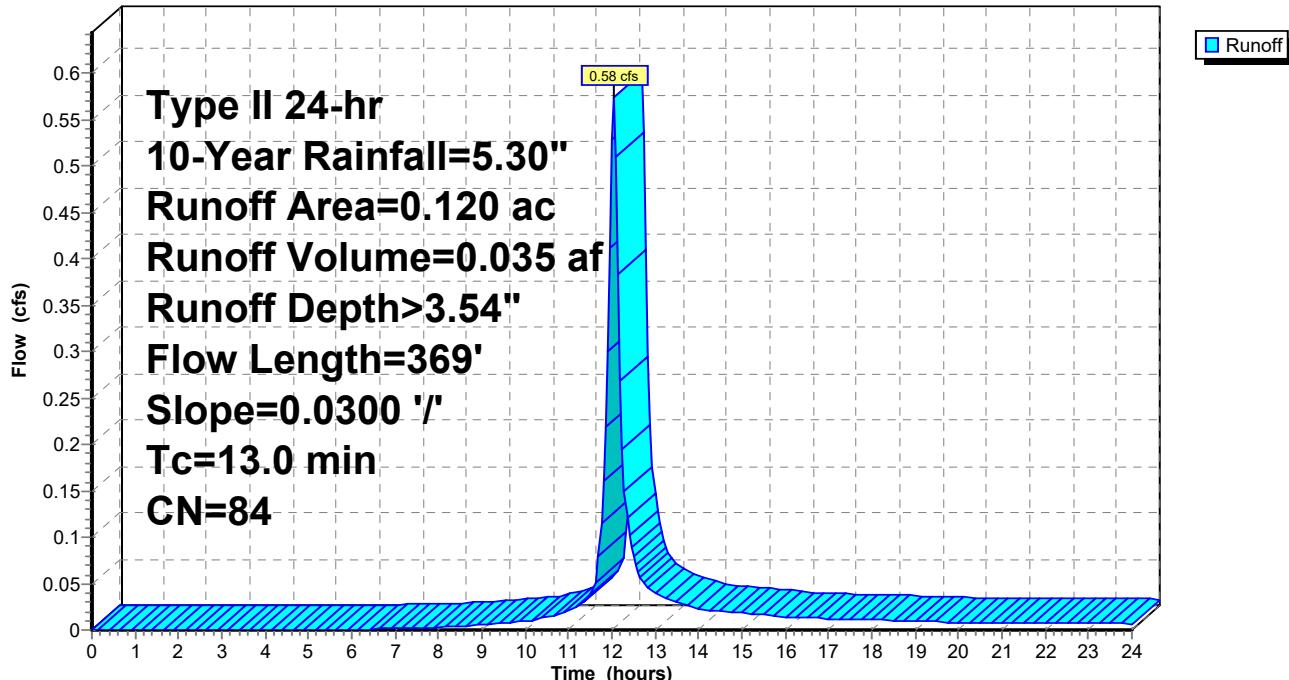Subcatchment OFF DA1: Offsite DA-1**Hydrograph**

Hydrograph for Subcatchment OFF DA1: Offsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	4.00	2.37	0.05
0.25	0.01	0.00	0.00	13.00	4.09	2.45	0.04
0.50	0.03	0.00	0.00	13.25	4.17	2.52	0.03
0.75	0.04	0.00	0.00	13.50	4.23	2.58	0.03
1.00	0.06	0.00	0.00	13.75	4.29	2.63	0.03
1.25	0.07	0.00	0.00	14.00	4.35	2.68	0.02
1.50	0.09	0.00	0.00	14.25	4.39	2.72	0.02
1.75	0.10	0.00	0.00	14.50	4.44	2.76	0.02
2.00	0.12	0.00	0.00	14.75	4.48	2.80	0.02
2.25	0.13	0.00	0.00	15.00	4.52	2.84	0.02
2.50	0.15	0.00	0.00	15.25	4.56	2.87	0.02
2.75	0.17	0.00	0.00	15.50	4.60	2.91	0.02
3.00	0.18	0.00	0.00	15.75	4.63	2.94	0.02
3.25	0.20	0.00	0.00	16.00	4.66	2.96	0.01
3.50	0.22	0.00	0.00	16.25	4.69	2.99	0.01
3.75	0.24	0.00	0.00	16.50	4.72	3.02	0.01
4.00	0.25	0.00	0.00	16.75	4.75	3.04	0.01
4.25	0.27	0.00	0.00	17.00	4.78	3.07	0.01
4.50	0.29	0.00	0.00	17.25	4.81	3.09	0.01
4.75	0.31	0.00	0.00	17.50	4.83	3.12	0.01
5.00	0.33	0.00	0.00	17.75	4.86	3.14	0.01
5.25	0.36	0.00	0.00	18.00	4.88	3.16	0.01
5.50	0.38	0.00	0.00	18.25	4.90	3.18	0.01
5.75	0.40	0.00	0.00	18.50	4.93	3.20	0.01
6.00	0.42	0.00	0.00	18.75	4.95	3.22	0.01
6.25	0.45	0.00	0.00	19.00	4.97	3.24	0.01
6.50	0.47	0.00	0.00	19.25	4.99	3.26	0.01
6.75	0.50	0.01	0.00	19.50	5.01	3.28	0.01
7.00	0.52	0.01	0.00	19.75	5.03	3.30	0.01
7.25	0.55	0.01	0.00	20.00	5.05	3.31	0.01
7.50	0.58	0.02	0.00	20.25	5.06	3.33	0.01
7.75	0.61	0.02	0.00	20.50	5.08	3.34	0.01
8.00	0.64	0.03	0.00	20.75	5.10	3.36	0.01
8.25	0.67	0.04	0.00	21.00	5.11	3.37	0.01
8.50	0.70	0.05	0.00	21.25	5.13	3.39	0.01
8.75	0.74	0.06	0.00	21.50	5.15	3.40	0.01
9.00	0.78	0.07	0.01	21.75	5.16	3.42	0.01
9.25	0.82	0.08	0.01	22.00	5.18	3.43	0.01
9.50	0.86	0.10	0.01	22.25	5.19	3.45	0.01
9.75	0.91	0.11	0.01	22.50	5.21	3.46	0.01
10.00	0.96	0.13	0.01	22.75	5.23	3.48	0.01
10.25	1.02	0.16	0.01	23.00	5.24	3.49	0.01
10.50	1.08	0.19	0.01	23.25	5.26	3.50	0.01
10.75	1.16	0.22	0.02	23.50	5.27	3.52	0.01
11.00	1.25	0.27	0.02	23.75	5.29	3.53	0.01
11.25	1.36	0.33	0.03	24.00	5.30	3.55	0.01
11.50	1.50	0.41	0.04				
11.75	2.05	0.78	0.12				
12.00	3.51	1.95	0.53				
12.25	3.74	2.15	0.19				
12.50	3.90	2.28	0.08				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"
Printed 2/14/2019
Page 28

Summary for Subcatchment OFF DA2: Offsite DA-2

Runoff = 2.96 cfs @ 12.02 hrs, Volume= 0.168 af, Depth> 3.15"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 10-Year Rainfall=5.30"

Area (ac)	CN	Description
0.640	80	>75% Grass cover, Good, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
9.2	100	0.0500	0.18		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	296	0.0500	3.35		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
10.7	396				Total

Subcatchment OFF DA2: Offsite DA-2

Hydrograph

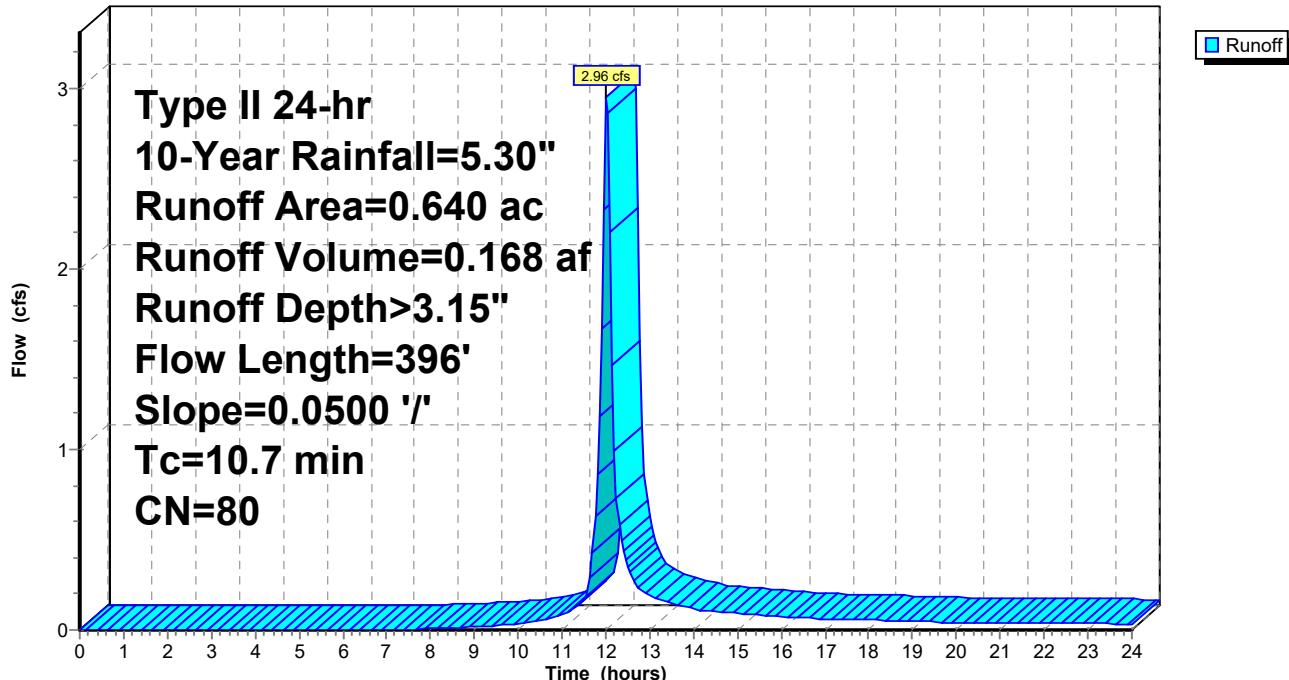

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"
 Printed 2/14/2019
 Page 29

Hydrograph for Subcatchment OFF DA2: Offsite DA-2

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	4.00	2.04	0.24
0.25	0.01	0.00	0.00	13.00	4.09	2.12	0.20
0.50	0.03	0.00	0.00	13.25	4.17	2.18	0.17
0.75	0.04	0.00	0.00	13.50	4.23	2.24	0.15
1.00	0.06	0.00	0.00	13.75	4.29	2.29	0.13
1.25	0.07	0.00	0.00	14.00	4.35	2.33	0.12
1.50	0.09	0.00	0.00	14.25	4.39	2.37	0.11
1.75	0.10	0.00	0.00	14.50	4.44	2.41	0.10
2.00	0.12	0.00	0.00	14.75	4.48	2.45	0.10
2.25	0.13	0.00	0.00	15.00	4.52	2.48	0.09
2.50	0.15	0.00	0.00	15.25	4.56	2.51	0.09
2.75	0.17	0.00	0.00	15.50	4.60	2.55	0.08
3.00	0.18	0.00	0.00	15.75	4.63	2.57	0.08
3.25	0.20	0.00	0.00	16.00	4.66	2.60	0.07
3.50	0.22	0.00	0.00	16.25	4.69	2.63	0.07
3.75	0.24	0.00	0.00	16.50	4.72	2.65	0.07
4.00	0.25	0.00	0.00	16.75	4.75	2.68	0.06
4.25	0.27	0.00	0.00	17.00	4.78	2.70	0.06
4.50	0.29	0.00	0.00	17.25	4.81	2.72	0.06
4.75	0.31	0.00	0.00	17.50	4.83	2.75	0.06
5.00	0.33	0.00	0.00	17.75	4.86	2.77	0.06
5.25	0.36	0.00	0.00	18.00	4.88	2.79	0.05
5.50	0.38	0.00	0.00	18.25	4.90	2.81	0.05
5.75	0.40	0.00	0.00	18.50	4.93	2.83	0.05
6.00	0.42	0.00	0.00	18.75	4.95	2.85	0.05
6.25	0.45	0.00	0.00	19.00	4.97	2.87	0.05
6.50	0.47	0.00	0.00	19.25	4.99	2.88	0.05
6.75	0.50	0.00	0.00	19.50	5.01	2.90	0.04
7.00	0.52	0.00	0.00	19.75	5.03	2.92	0.04
7.25	0.55	0.00	0.00	20.00	5.05	2.93	0.04
7.50	0.58	0.00	0.00	20.25	5.06	2.95	0.04
7.75	0.61	0.00	0.00	20.50	5.08	2.96	0.04
8.00	0.64	0.01	0.01	20.75	5.10	2.98	0.04
8.25	0.67	0.01	0.01	21.00	5.11	2.99	0.04
8.50	0.70	0.01	0.01	21.25	5.13	3.01	0.04
8.75	0.74	0.02	0.01	21.50	5.15	3.02	0.04
9.00	0.78	0.03	0.02	21.75	5.16	3.03	0.04
9.25	0.82	0.04	0.02	22.00	5.18	3.05	0.04
9.50	0.86	0.05	0.02	22.25	5.19	3.06	0.04
9.75	0.91	0.06	0.03	22.50	5.21	3.08	0.04
10.00	0.96	0.07	0.03	22.75	5.23	3.09	0.04
10.25	1.02	0.09	0.04	23.00	5.24	3.10	0.03
10.50	1.08	0.11	0.05	23.25	5.26	3.12	0.03
10.75	1.16	0.14	0.07	23.50	5.27	3.13	0.03
11.00	1.25	0.17	0.09	23.75	5.29	3.14	0.03
11.25	1.36	0.22	0.12	24.00	5.30	3.16	0.03
11.50	1.50	0.29	0.16				
11.75	2.05	0.59	0.63				
12.00	3.51	1.65	2.90				
12.25	3.74	1.83	0.73				
12.50	3.90	1.96	0.35				

Summary for Pond EDDB: Dry Detention Basin

Inflow Area = 3.350 ac, 37.91% Impervious, Inflow Depth > 3.85" for 10-Year event
 Inflow = 12.20 cfs @ 12.12 hrs, Volume= 1.075 af
 Outflow = 9.44 cfs @ 12.27 hrs, Volume= 0.954 af, Atten= 23%, Lag= 9.5 min
 Primary = 9.44 cfs @ 12.27 hrs, Volume= 0.954 af

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs / 2
 Peak Elev= 932.34' @ 12.27 hrs Surf.Area= 3,833 sf Storage= 14,411 cf

Plug-Flow detention time= 115.4 min calculated for 0.954 af (89% of inflow)
 Center-of-Mass det. time= 60.9 min (866.5 - 805.6)


Volume	Invert	Avail.Storage	Storage Description	
#1	926.00'	32,300 cf	Custom Stage Data (Prismatic)	Listed below
Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)	
926.00	863	0	0	
928.00	1,656	2,519	2,519	
930.00	2,578	4,234	6,753	
932.00	3,630	6,208	12,961	
934.00	4,810	8,440	21,401	
936.00	6,089	10,899	32,300	

Device	Routing	Invert	Outlet Devices
#1	Primary	925.50'	12.0" Round Culvert L= 50.0' CMP, end-section conforming to fill, Ke= 0.500 Inlet / Outlet Invert= 925.50' / 925.00' S= 0.0100 '/' Cc= 0.900 n= 0.012 Concrete pipe, finished, Flow Area= 0.79 sf
#2	Device 1	926.00'	1.0" Vert. Orifice/Grate X 7 rows with 4.0" cc spacing C= 0.600
#3	Device 1	930.00'	10.0" Vert. Orifice/Grate C= 0.600
#4	Device 1	932.00'	48.0" x 48.0" Horiz. Grate C= 0.600 Limited to weir flow at low heads


Primary OutFlow Max=9.42 cfs @ 12.27 hrs HW=932.34' (Free Discharge)

- ↑ 1=Culvert (Barrel Controls 9.42 cfs @ 11.99 fps)
- 2=Orifice/Grate (Passes < 0.42 cfs potential flow)
- 3=Orifice/Grate (Passes < 3.64 cfs potential flow)
- 4=Grate (Passes < 10.20 cfs potential flow)

Pond EDDB: Dry Detention Basin

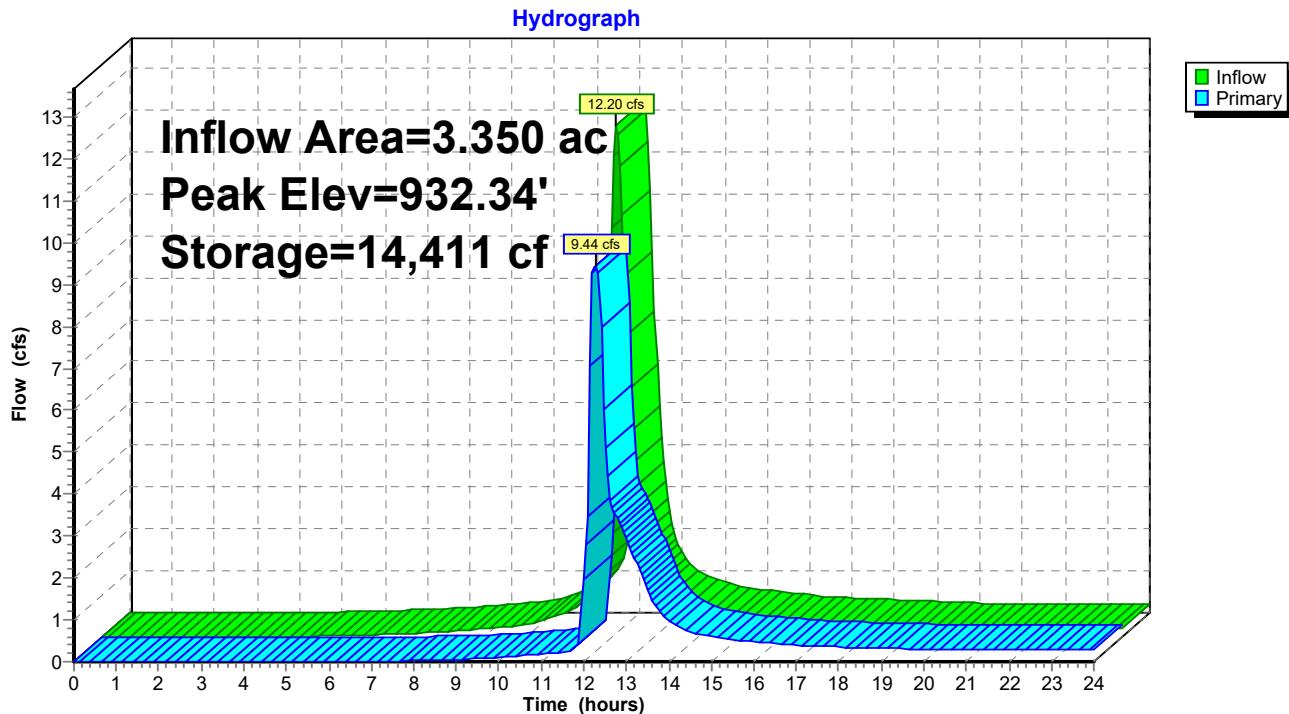

Pond EDDB: Dry Detention Basin

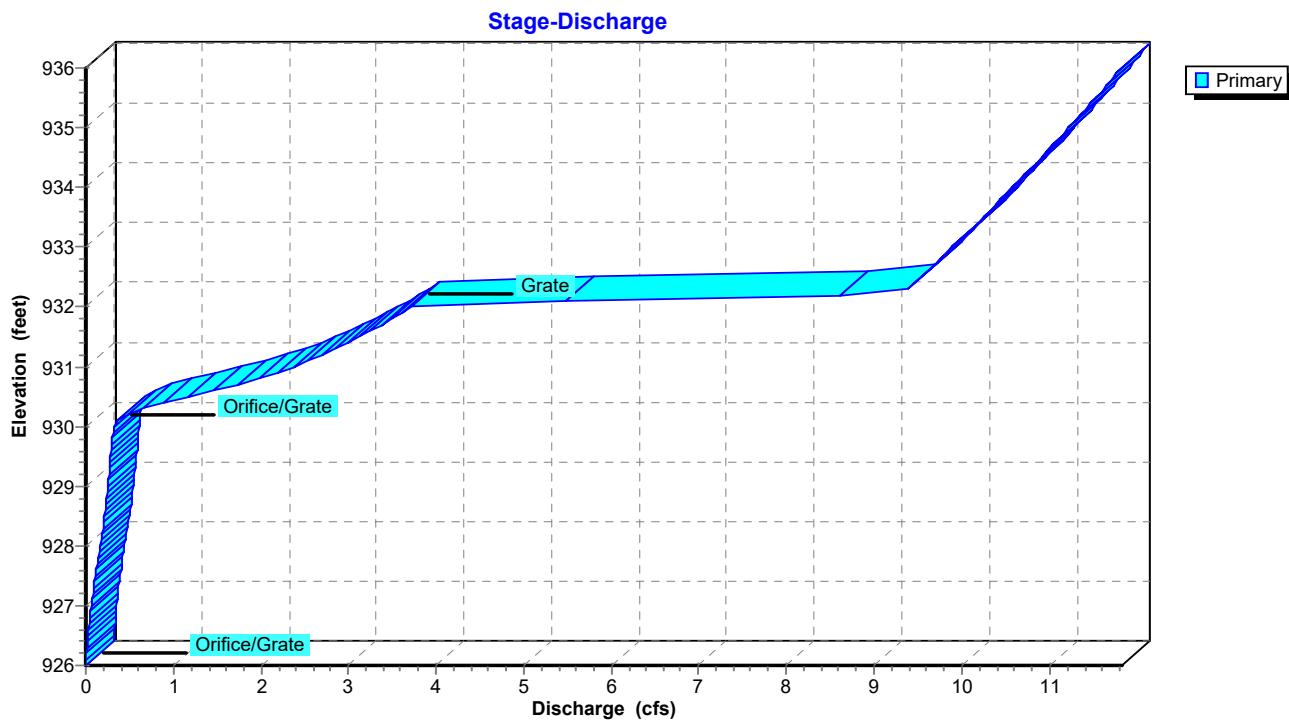

18-222-HydroCAD-PRO

Prepared by {enter your company name here}


HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 10-Year Rainfall=5.30"

Printed 2/14/2019

Page 32

Pond EDDB: Dry Detention Basin

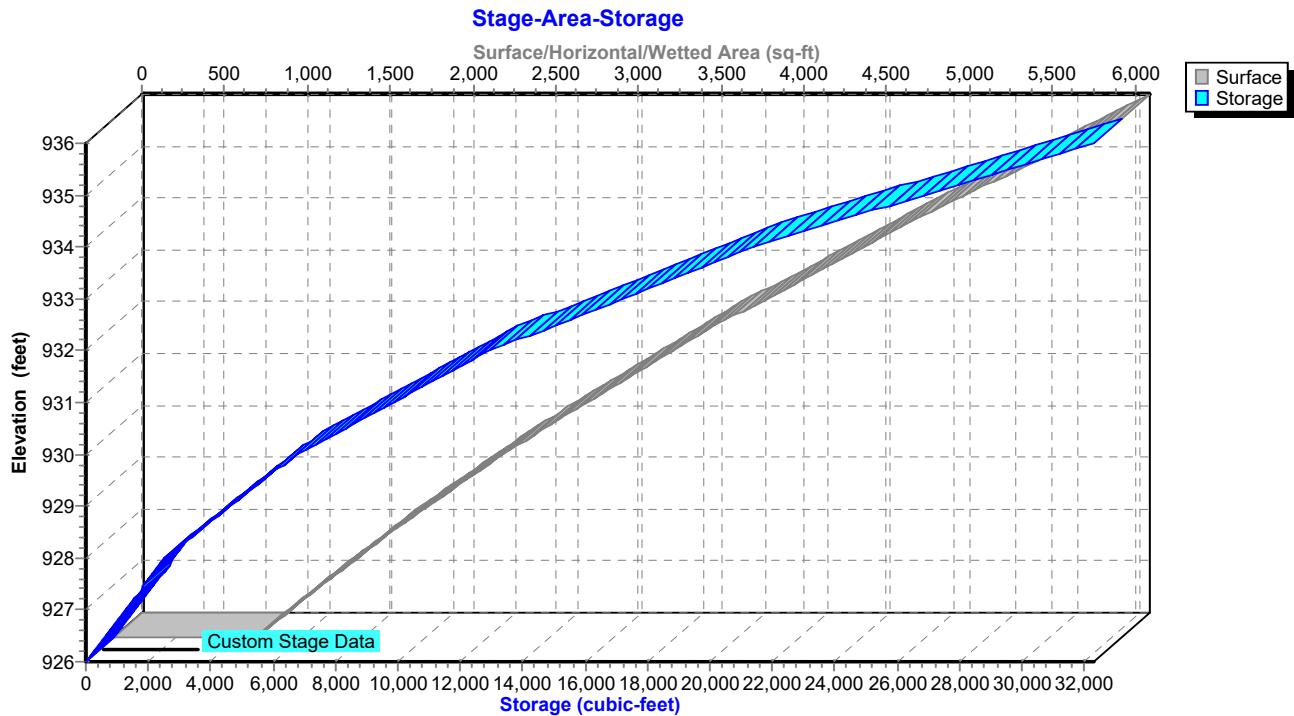

Hydrograph for Pond EDDB: Dry Detention Basin

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	0.00	0	926.00	0.00
0.50	0.00	0	926.00	0.00
1.00	0.00	0	926.00	0.00
1.50	0.00	0	926.00	0.00
2.00	0.00	0	926.00	0.00
2.50	0.00	0	926.00	0.00
3.00	0.00	0	926.00	0.00
3.50	0.00	0	926.00	0.00
4.00	0.00	0	926.00	0.00
4.50	0.01	3	926.00	0.00
5.00	0.02	23	926.02	0.00
5.50	0.03	64	926.05	0.00
6.00	0.05	126	926.10	0.01
6.50	0.06	212	926.17	0.01
7.00	0.08	322	926.26	0.01
7.50	0.10	462	926.37	0.02
8.00	0.12	625	926.50	0.03
8.50	0.16	818	926.65	0.03
9.00	0.21	1,070	926.85	0.05
9.50	0.26	1,391	927.10	0.07
10.00	0.31	1,748	927.39	0.10
10.50	0.43	2,203	927.75	0.13
11.00	0.63	2,856	928.16	0.18
11.50	1.05	3,938	928.67	0.23
12.00	9.78	9,207	930.79	1.97
12.50	4.20	13,291	932.08	5.09
13.00	1.42	11,053	931.39	2.97
13.50	0.94	8,885	930.69	1.71
14.00	0.72	8,088	930.43	0.97
14.50	0.60	7,767	930.33	0.72
15.00	0.54	7,602	930.27	0.61
15.50	0.48	7,482	930.23	0.54
16.00	0.42	7,376	930.20	0.48
16.50	0.38	7,267	930.17	0.44
17.00	0.36	7,175	930.14	0.40
17.50	0.34	7,101	930.11	0.37
18.00	0.32	7,035	930.09	0.36
18.50	0.30	6,955	930.07	0.34
19.00	0.27	6,861	930.03	0.33
19.50	0.25	6,756	930.00	0.31
20.00	0.23	6,631	929.94	0.31
20.50	0.22	6,478	929.87	0.31
21.00	0.21	6,318	929.79	0.30
21.50	0.21	6,157	929.72	0.30
22.00	0.21	5,997	929.64	0.29
22.50	0.20	5,838	929.57	0.29
23.00	0.20	5,679	929.49	0.29
23.50	0.19	5,521	929.42	0.28
24.00	0.19	5,364	929.34	0.28

Stage-Discharge for Pond EDDB: Dry Detention Basin

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
926.00	0.00	931.10	2.54
926.10	0.01	931.20	2.70
926.20	0.01	931.30	2.85
926.30	0.01	931.40	2.99
926.40	0.02	931.50	3.12
926.50	0.03	931.60	3.25
926.60	0.03	931.70	3.37
926.70	0.04	931.80	3.49
926.80	0.05	931.90	3.60
926.90	0.05	932.00	3.71
927.00	0.06	932.10	5.47
927.10	0.07	932.20	8.60
927.20	0.08	932.30	9.39
927.30	0.09	932.40	9.47
927.40	0.10	932.50	9.54
927.50	0.11	932.60	9.61
927.60	0.12	932.70	9.68
927.70	0.13	932.80	9.76
927.80	0.14	932.90	9.83
927.90	0.15	933.00	9.90
928.00	0.16	933.10	9.97
928.10	0.18	933.20	10.04
928.20	0.19	933.30	10.11
928.30	0.20	933.40	10.18
928.40	0.21	933.50	10.25
928.50	0.22	933.60	10.31
928.60	0.22	933.70	10.38
928.70	0.23	933.80	10.45
928.80	0.24	933.90	10.52
928.90	0.25	934.00	10.58
929.00	0.25	934.10	10.65
929.10	0.26	934.20	10.71
929.20	0.27	934.30	10.78
929.30	0.27	934.40	10.84
929.40	0.28	934.50	10.91
929.50	0.29	934.60	10.97
929.60	0.29	934.70	11.04
929.70	0.30	934.80	11.10
929.80	0.30	934.90	11.16
929.90	0.31	935.00	11.22
930.00	0.31	935.10	11.29
930.10	0.36	935.20	11.35
930.20	0.48	935.30	11.41
930.30	0.66	935.40	11.47
930.40	0.89	935.50	11.53
930.50	1.16	935.60	11.59
930.60	1.45	935.70	11.65
930.70	1.74	935.80	11.71
930.80	1.99	935.90	11.77
930.90	2.19	936.00	11.83
931.00	2.37		

Stage-Area-Storage for Pond EDDB: Dry Detention Basin


Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)	Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
926.00	863	0	931.10	3,157	10,167
926.10	903	126	931.20	3,209	10,478
926.20	942	252	931.30	3,262	10,788
926.30	982	378	931.40	3,314	11,099
926.40	1,022	504	931.50	3,367	11,409
926.50	1,061	630	931.60	3,420	11,719
926.60	1,101	756	931.70	3,472	12,030
926.70	1,141	882	931.80	3,525	12,340
926.80	1,180	1,008	931.90	3,577	12,651
926.90	1,220	1,134	932.00	3,630	12,961
927.00	1,260	1,260	932.10	3,689	13,383
927.10	1,299	1,385	932.20	3,748	13,805
927.20	1,339	1,511	932.30	3,807	14,227
927.30	1,378	1,637	932.40	3,866	14,649
927.40	1,418	1,763	932.50	3,925	15,071
927.50	1,458	1,889	932.60	3,984	15,493
927.60	1,497	2,015	932.70	4,043	15,915
927.70	1,537	2,141	932.80	4,102	16,337
927.80	1,577	2,267	932.90	4,161	16,759
927.90	1,616	2,393	933.00	4,220	17,181
928.00	1,656	2,519	933.10	4,279	17,603
928.10	1,702	2,731	933.20	4,338	18,025
928.20	1,748	2,942	933.30	4,397	18,447
928.30	1,794	3,154	933.40	4,456	18,869
928.40	1,840	3,366	933.50	4,515	19,291
928.50	1,887	3,578	933.60	4,574	19,713
928.60	1,933	3,789	933.70	4,633	20,135
928.70	1,979	4,001	933.80	4,692	20,557
928.80	2,025	4,213	933.90	4,751	20,979
928.90	2,071	4,424	934.00	4,810	21,401
929.00	2,117	4,636	934.10	4,874	21,946
929.10	2,163	4,848	934.20	4,938	22,491
929.20	2,209	5,059	934.30	5,002	23,036
929.30	2,255	5,271	934.40	5,066	23,581
929.40	2,301	5,483	934.50	5,130	24,126
929.50	2,348	5,695	934.60	5,194	24,671
929.60	2,394	5,906	934.70	5,258	25,216
929.70	2,440	6,118	934.80	5,322	25,761
929.80	2,486	6,330	934.90	5,386	26,306
929.90	2,532	6,541	935.00	5,450	26,851
930.00	2,578	6,753	935.10	5,513	27,395
930.10	2,631	7,063	935.20	5,577	27,940
930.20	2,683	7,374	935.30	5,641	28,485
930.30	2,736	7,684	935.40	5,705	29,030
930.40	2,788	7,995	935.50	5,769	29,575
930.50	2,841	8,305	935.60	5,833	30,120
930.60	2,894	8,615	935.70	5,897	30,665
930.70	2,946	8,926	935.80	5,961	31,210
930.80	2,999	9,236	935.90	6,025	31,755
930.90	3,051	9,547	936.00	6,089	32,300
931.00	3,104	9,857			

Summary for Link RP-1: Release Point

Inflow Area = 3.690 ac, 35.77% Impervious, Inflow Depth > 3.42" for 10-Year event
 Inflow = 10.15 cfs @ 12.20 hrs, Volume= 1.051 af
 Primary = 10.15 cfs @ 12.20 hrs, Volume= 1.051 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

Link RP-1: Release Point

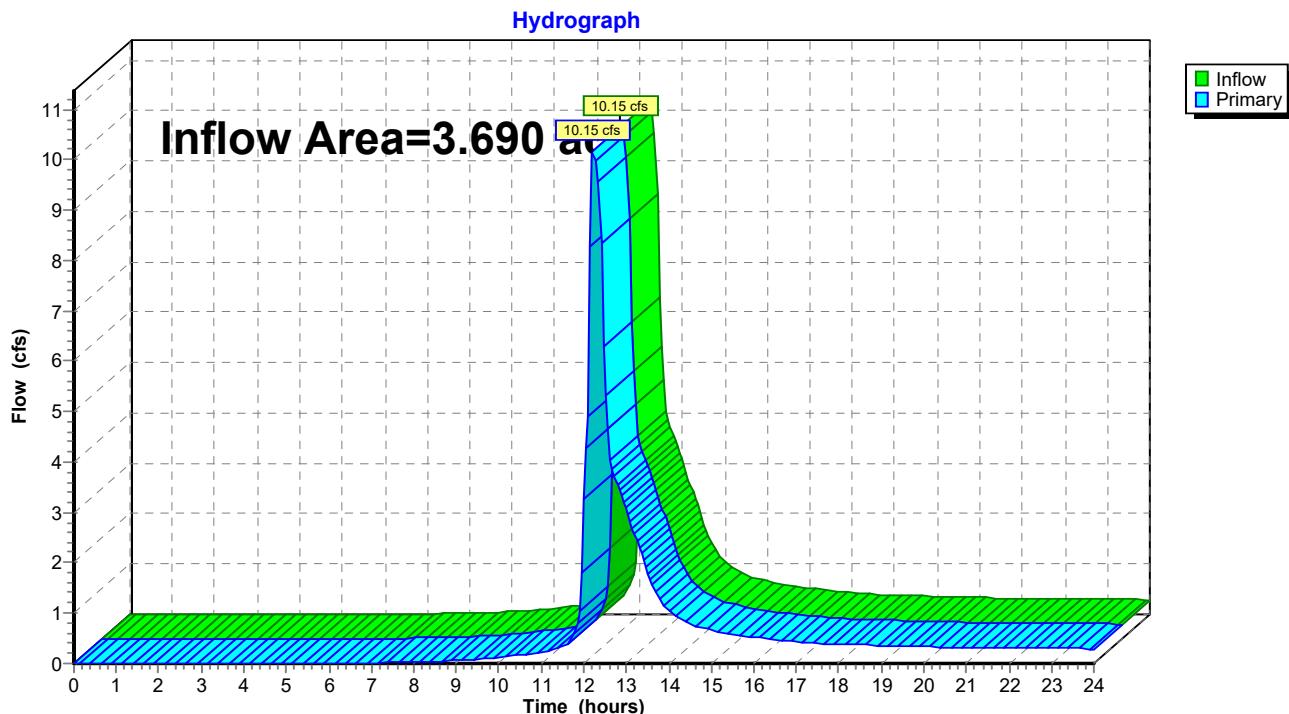

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
0.00	0.00	0.00	0.00	12.75	3.67	0.00	3.67
0.25	0.00	0.00	0.00	13.00	3.08	0.00	3.08
0.50	0.00	0.00	0.00	13.25	2.43	0.00	2.43
0.75	0.00	0.00	0.00	13.50	1.79	0.00	1.79
1.00	0.00	0.00	0.00	13.75	1.30	0.00	1.30
1.25	0.00	0.00	0.00	14.00	1.04	0.00	1.04
1.50	0.00	0.00	0.00	14.25	0.88	0.00	0.88
1.75	0.00	0.00	0.00	14.50	0.78	0.00	0.78
2.00	0.00	0.00	0.00	14.75	0.71	0.00	0.71
2.25	0.00	0.00	0.00	15.00	0.66	0.00	0.66
2.50	0.00	0.00	0.00	15.25	0.62	0.00	0.62
2.75	0.00	0.00	0.00	15.50	0.59	0.00	0.59
3.00	0.00	0.00	0.00	15.75	0.55	0.00	0.55
3.25	0.00	0.00	0.00	16.00	0.52	0.00	0.52
3.50	0.00	0.00	0.00	16.25	0.50	0.00	0.50
3.75	0.00	0.00	0.00	16.50	0.47	0.00	0.47
4.00	0.00	0.00	0.00	16.75	0.45	0.00	0.45
4.25	0.00	0.00	0.00	17.00	0.44	0.00	0.44
4.50	0.00	0.00	0.00	17.25	0.42	0.00	0.42
4.75	0.00	0.00	0.00	17.50	0.41	0.00	0.41
5.00	0.00	0.00	0.00	17.75	0.39	0.00	0.39
5.25	0.00	0.00	0.00	18.00	0.39	0.00	0.39
5.50	0.00	0.00	0.00	18.25	0.38	0.00	0.38
5.75	0.00	0.00	0.00	18.50	0.37	0.00	0.37
6.00	0.01	0.00	0.01	18.75	0.36	0.00	0.36
6.25	0.01	0.00	0.01	19.00	0.36	0.00	0.36
6.50	0.01	0.00	0.01	19.25	0.35	0.00	0.35
6.75	0.01	0.00	0.01	19.50	0.34	0.00	0.34
7.00	0.02	0.00	0.02	19.75	0.34	0.00	0.34
7.25	0.02	0.00	0.02	20.00	0.33	0.00	0.33
7.50	0.02	0.00	0.02	20.25	0.33	0.00	0.33
7.75	0.03	0.00	0.03	20.50	0.33	0.00	0.33
8.00	0.03	0.00	0.03	20.75	0.33	0.00	0.33
8.25	0.04	0.00	0.04	21.00	0.32	0.00	0.32
8.50	0.04	0.00	0.04	21.25	0.32	0.00	0.32
8.75	0.05	0.00	0.05	21.50	0.32	0.00	0.32
9.00	0.07	0.00	0.07	21.75	0.32	0.00	0.32
9.25	0.08	0.00	0.08	22.00	0.31	0.00	0.31
9.50	0.09	0.00	0.09	22.25	0.31	0.00	0.31
9.75	0.10	0.00	0.10	22.50	0.31	0.00	0.31
10.00	0.12	0.00	0.12	22.75	0.31	0.00	0.31
10.25	0.14	0.00	0.14	23.00	0.30	0.00	0.30
10.50	0.17	0.00	0.17	23.25	0.30	0.00	0.30
10.75	0.20	0.00	0.20	23.50	0.30	0.00	0.30
11.00	0.24	0.00	0.24	23.75	0.30	0.00	0.30
11.25	0.27	0.00	0.27	24.00	0.29	0.00	0.29
11.50	0.33	0.00	0.33				
11.75	0.53	0.00	0.53				
12.00	3.26	0.00	3.26				
12.25	10.07	0.00	10.07				
12.50	5.33	0.00	5.33				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD

Type II 24-hr 100-Year Rainfall=7.70"

Printed 2/14/2019

Page 38

Time span=0.00-24.00 hrs, dt=0.05 hrs, 481 points

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN

Reach routing by Stor-Ind+Trans method - Pond routing by Stor-Ind method

SubcatchmentDA-1: Onsite DA-1 Runoff Area=2.590 ac 49.03% Impervious Runoff Depth>6.36"
Flow Length=244' Slope=0.0150 '/' Tc=24.1 min CN=89 Runoff=15.71 cfs 1.373 af**SubcatchmentDA3: Onsite DA-3** Runoff Area=0.340 ac 14.71% Impervious Runoff Depth>5.67"
Flow Length=292' Slope=0.0200 '/' Tc=14.8 min CN=83 Runoff=2.43 cfs 0.161 af**SubcatchmentOFF DA1: Offsite DA-1** Runoff Area=0.120 ac 0.00% Impervious Runoff Depth>5.79"
Flow Length=369' Slope=0.0300 '/' Tc=13.0 min CN=84 Runoff=0.92 cfs 0.058 af**SubcatchmentOFF DA2: Offsite DA-2** Runoff Area=0.640 ac 0.00% Impervious Runoff Depth>5.33"
Flow Length=396' Slope=0.0500 '/' Tc=10.7 min CN=80 Runoff=4.92 cfs 0.284 af**Pond EDDB: Dry Detention Basin** Peak Elev=934.08' Storage=21,863 cf Inflow=19.08 cfs 1.716 af
Outflow=10.64 cfs 1.565 af**Link RP-1: Release Point** Inflow=12.16 cfs 1.726 af
Primary=12.16 cfs 1.726 af**Total Runoff Area = 3.690 ac Runoff Volume = 1.877 af Average Runoff Depth = 6.10"**
64.23% Pervious = 2.370 ac 35.77% Impervious = 1.320 ac

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 100-Year Rainfall=7.70"
Printed 2/14/2019
Page 39


Summary for Subcatchment DA-1: Onsite DA-1

Runoff = 15.71 cfs @ 12.16 hrs, Volume= 1.373 af, Depth> 6.36"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.550	98	Unconnected roofs, HSG D
0.720	98	Paved parking, HSG D
1.320	80	>75% Grass cover, Good, HSG D
2.590	89	Weighted Average
1.320		50.97% Pervious Area
1.270		49.03% Impervious Area
0.550		43.31% Unconnected

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
22.8	100	0.0150	0.07		Sheet Flow, Sheet
					Grass: Bermuda n= 0.410 P2= 3.71"
1.3	144	0.0150	1.84		Shallow Concentrated Flow, Shallow
					Grassed Waterway Kv= 15.0 fps
24.1	244	Total			

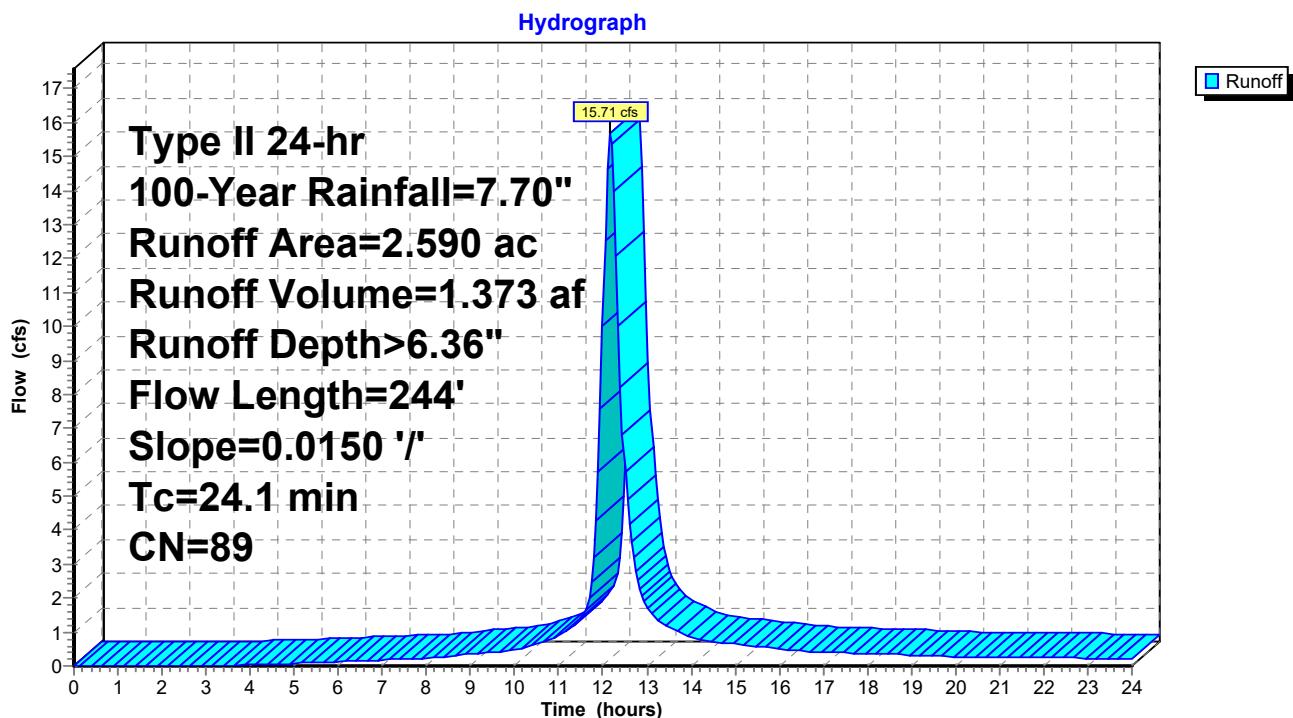Subcatchment DA-1: Onsite DA-1

Hydrograph for Subcatchment DA-1: Onsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	5.81	4.56	2.81
0.25	0.02	0.00	0.00	13.00	5.94	4.68	1.78
0.50	0.04	0.00	0.00	13.25	6.06	4.79	1.35
0.75	0.06	0.00	0.00	13.50	6.15	4.88	1.14
1.00	0.08	0.00	0.00	13.75	6.24	4.97	0.99
1.25	0.10	0.00	0.00	14.00	6.31	5.04	0.87
1.50	0.12	0.00	0.00	14.25	6.38	5.11	0.78
1.75	0.15	0.00	0.00	14.50	6.45	5.17	0.71
2.00	0.17	0.00	0.00	14.75	6.51	5.23	0.67
2.25	0.19	0.00	0.00	15.00	6.57	5.29	0.64
2.50	0.22	0.00	0.00	15.25	6.63	5.35	0.60
2.75	0.24	0.00	0.00	15.50	6.68	5.40	0.57
3.00	0.27	0.00	0.00	15.75	6.73	5.44	0.54
3.25	0.29	0.00	0.00	16.00	6.78	5.49	0.50
3.50	0.32	0.00	0.01	16.25	6.82	5.53	0.47
3.75	0.34	0.01	0.02	16.50	6.86	5.57	0.45
4.00	0.37	0.01	0.03	16.75	6.90	5.61	0.43
4.25	0.40	0.02	0.04	17.00	6.94	5.65	0.42
4.50	0.43	0.02	0.05	17.25	6.98	5.69	0.41
4.75	0.45	0.03	0.07	17.50	7.02	5.73	0.40
5.00	0.49	0.04	0.08	17.75	7.06	5.76	0.38
5.25	0.52	0.05	0.09	18.00	7.09	5.80	0.37
5.50	0.55	0.06	0.10	18.25	7.13	5.83	0.36
5.75	0.58	0.07	0.11	18.50	7.16	5.86	0.35
6.00	0.62	0.08	0.13	18.75	7.19	5.89	0.34
6.25	0.65	0.10	0.14	19.00	7.22	5.92	0.32
6.50	0.69	0.12	0.15	19.25	7.25	5.95	0.31
6.75	0.72	0.13	0.17	19.50	7.28	5.98	0.30
7.00	0.76	0.15	0.18	19.75	7.30	6.01	0.29
7.25	0.80	0.17	0.20	20.00	7.33	6.03	0.27
7.50	0.84	0.19	0.21	20.25	7.36	6.06	0.26
7.75	0.88	0.22	0.22	20.50	7.38	6.08	0.26
8.00	0.92	0.24	0.24	20.75	7.40	6.10	0.25
8.25	0.97	0.27	0.25	21.00	7.43	6.13	0.25
8.50	1.02	0.30	0.28	21.25	7.45	6.15	0.25
8.75	1.07	0.33	0.32	21.50	7.48	6.17	0.24
9.00	1.13	0.37	0.36	21.75	7.50	6.20	0.24
9.25	1.19	0.41	0.40	22.00	7.52	6.22	0.24
9.50	1.26	0.45	0.43	22.25	7.55	6.24	0.24
9.75	1.32	0.50	0.45	22.50	7.57	6.26	0.23
10.00	1.39	0.55	0.49	22.75	7.59	6.29	0.23
10.25	1.48	0.61	0.56	23.00	7.61	6.31	0.23
10.50	1.57	0.68	0.65	23.25	7.64	6.33	0.23
10.75	1.68	0.77	0.75	23.50	7.66	6.35	0.23
11.00	1.81	0.87	0.90	23.75	7.68	6.37	0.22
11.25	1.97	1.00	1.09	24.00	7.70	6.39	0.22
11.50	2.18	1.18	1.41				
11.75	2.98	1.88	2.48				
12.00	5.11	3.87	9.99				
12.25	5.44	4.19	13.99				
12.50	5.66	4.41	5.72				

Summary for Subcatchment DA3: Onsite DA-3

Runoff = 2.43 cfs @ 12.06 hrs, Volume= 0.161 af, Depth> 5.67"


Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.290	80	>75% Grass cover, Good, HSG D
0.050	98	Paved parking, HSG D
0.340	83	Weighted Average
0.290		85.29% Pervious Area
0.050		14.71% Impervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
13.3	100	0.0200	0.13		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	192	0.0200	2.12		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
14.8	292	Total			

Subcatchment DA3: Onsite DA-3

Hydrograph

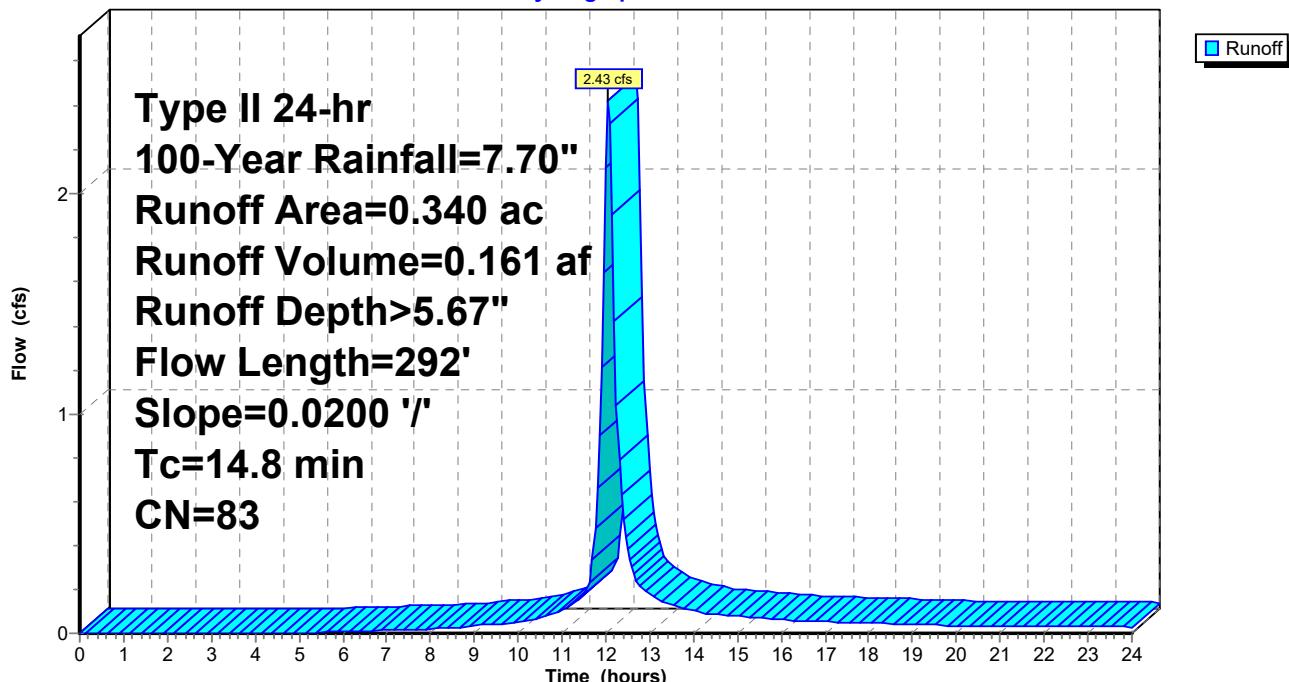

Hydrograph for Subcatchment DA3: Onsite DA-3

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	5.81	3.92	0.22
0.25	0.02	0.00	0.00	13.00	5.94	4.04	0.18
0.50	0.04	0.00	0.00	13.25	6.06	4.14	0.15
0.75	0.06	0.00	0.00	13.50	6.15	4.23	0.13
1.00	0.08	0.00	0.00	13.75	6.24	4.31	0.12
1.25	0.10	0.00	0.00	14.00	6.31	4.38	0.10
1.50	0.12	0.00	0.00	14.25	6.38	4.45	0.09
1.75	0.15	0.00	0.00	14.50	6.45	4.51	0.09
2.00	0.17	0.00	0.00	14.75	6.51	4.57	0.08
2.25	0.19	0.00	0.00	15.00	6.57	4.63	0.08
2.50	0.22	0.00	0.00	15.25	6.63	4.68	0.07
2.75	0.24	0.00	0.00	15.50	6.68	4.73	0.07
3.00	0.27	0.00	0.00	15.75	6.73	4.77	0.07
3.25	0.29	0.00	0.00	16.00	6.78	4.82	0.06
3.50	0.32	0.00	0.00	16.25	6.82	4.86	0.06
3.75	0.34	0.00	0.00	16.50	6.86	4.90	0.06
4.00	0.37	0.00	0.00	16.75	6.90	4.94	0.05
4.25	0.40	0.00	0.00	17.00	6.94	4.97	0.05
4.50	0.43	0.00	0.00	17.25	6.98	5.01	0.05
4.75	0.45	0.00	0.00	17.50	7.02	5.05	0.05
5.00	0.49	0.00	0.00	17.75	7.06	5.08	0.05
5.25	0.52	0.01	0.00	18.00	7.09	5.11	0.05
5.50	0.55	0.01	0.00	18.25	7.13	5.15	0.04
5.75	0.58	0.01	0.01	18.50	7.16	5.18	0.04
6.00	0.62	0.02	0.01	18.75	7.19	5.21	0.04
6.25	0.65	0.03	0.01	19.00	7.22	5.24	0.04
6.50	0.69	0.03	0.01	19.25	7.25	5.26	0.04
6.75	0.72	0.04	0.01	19.50	7.28	5.29	0.04
7.00	0.76	0.05	0.01	19.75	7.30	5.32	0.04
7.25	0.80	0.06	0.01	20.00	7.33	5.34	0.03
7.50	0.84	0.08	0.02	20.25	7.36	5.36	0.03
7.75	0.88	0.09	0.02	20.50	7.38	5.39	0.03
8.00	0.92	0.10	0.02	20.75	7.40	5.41	0.03
8.25	0.97	0.12	0.02	21.00	7.43	5.43	0.03
8.50	1.02	0.14	0.03	21.25	7.45	5.46	0.03
8.75	1.07	0.16	0.03	21.50	7.48	5.48	0.03
9.00	1.13	0.19	0.03	21.75	7.50	5.50	0.03
9.25	1.19	0.22	0.04	22.00	7.52	5.52	0.03
9.50	1.26	0.25	0.04	22.25	7.55	5.54	0.03
9.75	1.32	0.28	0.04	22.50	7.57	5.57	0.03
10.00	1.39	0.32	0.05	22.75	7.59	5.59	0.03
10.25	1.48	0.37	0.06	23.00	7.61	5.61	0.03
10.50	1.57	0.42	0.07	23.25	7.64	5.63	0.03
10.75	1.68	0.49	0.08	23.50	7.66	5.65	0.03
11.00	1.81	0.57	0.10	23.75	7.68	5.67	0.03
11.25	1.97	0.68	0.13	24.00	7.70	5.69	0.03
11.50	2.18	0.82	0.18				
11.75	2.98	1.43	0.48				
12.00	5.11	3.27	2.12				
12.25	5.44	3.57	1.03				
12.50	5.66	3.78	0.38				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD

Type II 24-hr 100-Year Rainfall=7.70"

Printed 2/14/2019

Page 43


Summary for Subcatchment OFF DA1: Offsite DA-1

Runoff = 0.92 cfs @ 12.04 hrs, Volume= 0.058 af, Depth> 5.79"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.120	84	50-75% Grass cover, Fair, HSG D
0.120		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
11.3	100	0.0300	0.15		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.7	269	0.0300	2.60		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
13.0	369				Total

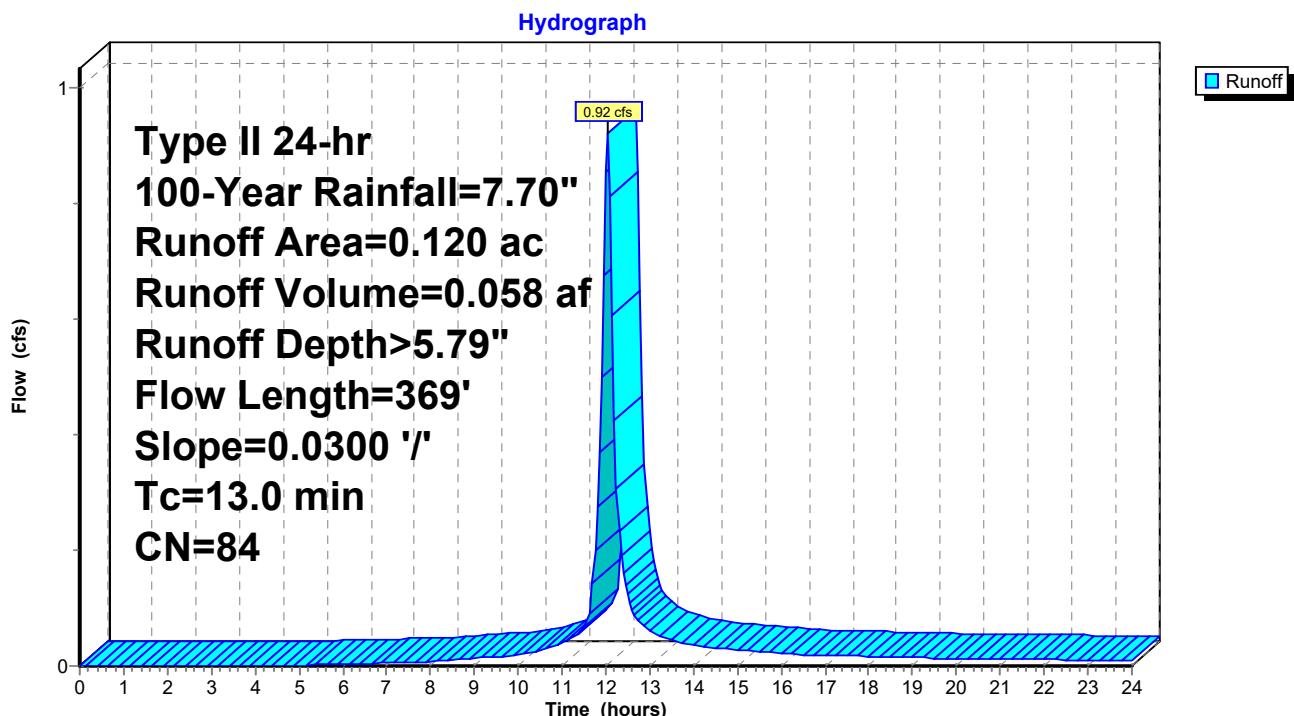Subcatchment OFF DA1: Offsite DA-1

Hydrograph for Subcatchment OFF DA1: Offsite DA-1

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	5.81	4.02	0.08
0.25	0.02	0.00	0.00	13.00	5.94	4.14	0.06
0.50	0.04	0.00	0.00	13.25	6.06	4.25	0.05
0.75	0.06	0.00	0.00	13.50	6.15	4.34	0.05
1.00	0.08	0.00	0.00	13.75	6.24	4.42	0.04
1.25	0.10	0.00	0.00	14.00	6.31	4.49	0.04
1.50	0.12	0.00	0.00	14.25	6.38	4.56	0.03
1.75	0.15	0.00	0.00	14.50	6.45	4.62	0.03
2.00	0.17	0.00	0.00	14.75	6.51	4.68	0.03
2.25	0.19	0.00	0.00	15.00	6.57	4.73	0.03
2.50	0.22	0.00	0.00	15.25	6.63	4.79	0.03
2.75	0.24	0.00	0.00	15.50	6.68	4.84	0.02
3.00	0.27	0.00	0.00	15.75	6.73	4.88	0.02
3.25	0.29	0.00	0.00	16.00	6.78	4.93	0.02
3.50	0.32	0.00	0.00	16.25	6.82	4.97	0.02
3.75	0.34	0.00	0.00	16.50	6.86	5.01	0.02
4.00	0.37	0.00	0.00	16.75	6.90	5.05	0.02
4.25	0.40	0.00	0.00	17.00	6.94	5.09	0.02
4.50	0.43	0.00	0.00	17.25	6.98	5.12	0.02
4.75	0.45	0.00	0.00	17.50	7.02	5.16	0.02
5.00	0.49	0.01	0.00	17.75	7.06	5.19	0.02
5.25	0.52	0.01	0.00	18.00	7.09	5.23	0.02
5.50	0.55	0.01	0.00	18.25	7.13	5.26	0.02
5.75	0.58	0.02	0.00	18.50	7.16	5.29	0.02
6.00	0.62	0.03	0.00	18.75	7.19	5.32	0.01
6.25	0.65	0.03	0.00	19.00	7.22	5.35	0.01
6.50	0.69	0.04	0.00	19.25	7.25	5.38	0.01
6.75	0.72	0.05	0.00	19.50	7.28	5.40	0.01
7.00	0.76	0.06	0.01	19.75	7.30	5.43	0.01
7.25	0.80	0.08	0.01	20.00	7.33	5.45	0.01
7.50	0.84	0.09	0.01	20.25	7.36	5.48	0.01
7.75	0.88	0.10	0.01	20.50	7.38	5.50	0.01
8.00	0.92	0.12	0.01	20.75	7.40	5.53	0.01
8.25	0.97	0.14	0.01	21.00	7.43	5.55	0.01
8.50	1.02	0.16	0.01	21.25	7.45	5.57	0.01
8.75	1.07	0.18	0.01	21.50	7.48	5.59	0.01
9.00	1.13	0.21	0.01	21.75	7.50	5.62	0.01
9.25	1.19	0.24	0.01	22.00	7.52	5.64	0.01
9.50	1.26	0.27	0.02	22.25	7.55	5.66	0.01
9.75	1.32	0.31	0.02	22.50	7.57	5.68	0.01
10.00	1.39	0.35	0.02	22.75	7.59	5.70	0.01
10.25	1.48	0.40	0.02	23.00	7.61	5.72	0.01
10.50	1.57	0.46	0.03	23.25	7.64	5.75	0.01
10.75	1.68	0.53	0.03	23.50	7.66	5.77	0.01
11.00	1.81	0.61	0.04	23.75	7.68	5.79	0.01
11.25	1.97	0.72	0.05	24.00	7.70	5.81	0.01
11.50	2.18	0.87	0.07				
11.75	2.98	1.50	0.20				
12.00	5.11	3.37	0.85				
12.25	5.44	3.67	0.31				
12.50	5.66	3.88	0.12				

18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 100-Year Rainfall=7.70"
Printed 2/14/2019
Page 45


Summary for Subcatchment OFF DA2: Offsite DA-2

Runoff = 4.92 cfs @ 12.02 hrs, Volume= 0.284 af, Depth> 5.33"

Runoff by SCS TR-20 method, UH=SCS, Weighted-CN, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs
Type II 24-hr 100-Year Rainfall=7.70"

Area (ac)	CN	Description
0.640	80	>75% Grass cover, Good, HSG D
0.640		100.00% Pervious Area

Tc (min)	Length (feet)	Slope (ft/ft)	Velocity (ft/sec)	Capacity (cfs)	Description
9.2	100	0.0500	0.18		Sheet Flow, Sheet Grass: Dense n= 0.240 P2= 3.71"
1.5	296	0.0500	3.35		Shallow Concentrated Flow, Shallow Grassed Waterway Kv= 15.0 fps
10.7	396				Total

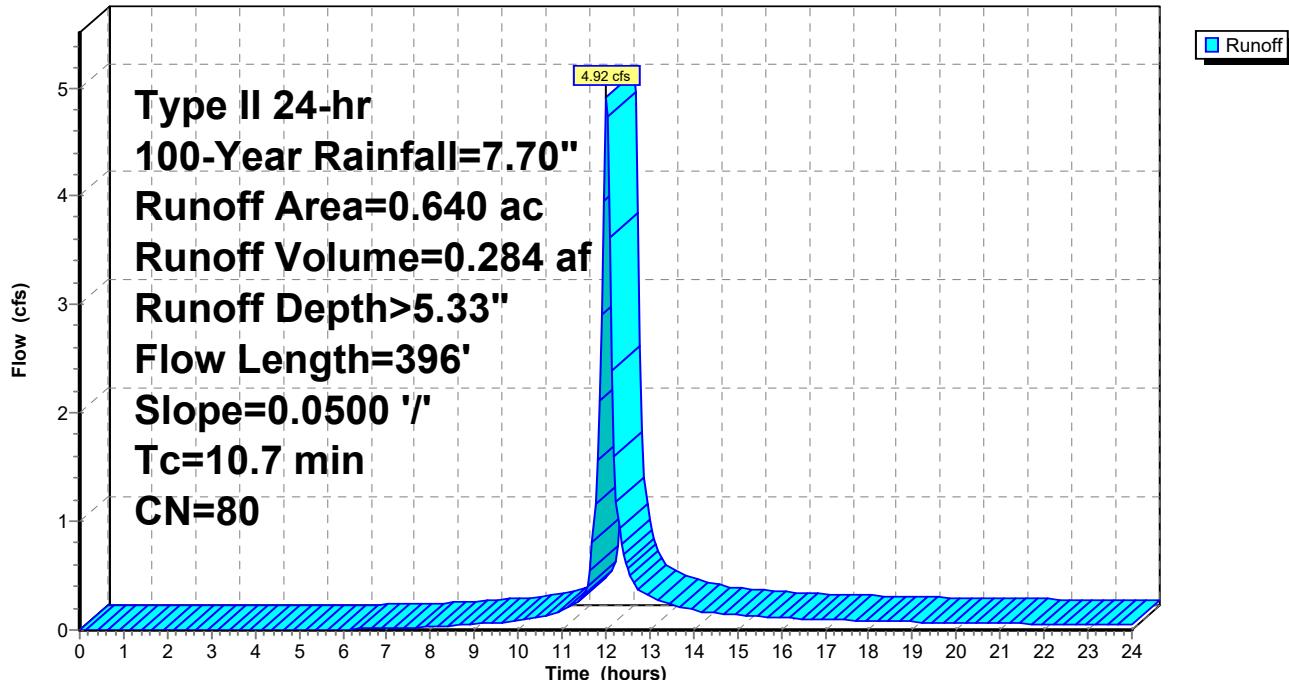Subcatchment OFF DA2: Offsite DA-2**Hydrograph**

Hydrograph for Subcatchment OFF DA2: Offsite DA-2

Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)	Time (hours)	Precip. (inches)	Excess (inches)	Runoff (cfs)
0.00	0.00	0.00	0.00	12.75	5.81	3.61	0.37
0.25	0.02	0.00	0.00	13.00	5.94	3.73	0.31
0.50	0.04	0.00	0.00	13.25	6.06	3.83	0.26
0.75	0.06	0.00	0.00	13.50	6.15	3.92	0.23
1.00	0.08	0.00	0.00	13.75	6.24	4.00	0.20
1.25	0.10	0.00	0.00	14.00	6.31	4.07	0.18
1.50	0.12	0.00	0.00	14.25	6.38	4.13	0.17
1.75	0.15	0.00	0.00	14.50	6.45	4.19	0.16
2.00	0.17	0.00	0.00	14.75	6.51	4.25	0.15
2.25	0.19	0.00	0.00	15.00	6.57	4.30	0.14
2.50	0.22	0.00	0.00	15.25	6.63	4.35	0.13
2.75	0.24	0.00	0.00	15.50	6.68	4.40	0.13
3.00	0.27	0.00	0.00	15.75	6.73	4.45	0.12
3.25	0.29	0.00	0.00	16.00	6.78	4.49	0.11
3.50	0.32	0.00	0.00	16.25	6.82	4.53	0.10
3.75	0.34	0.00	0.00	16.50	6.86	4.57	0.10
4.00	0.37	0.00	0.00	16.75	6.90	4.61	0.10
4.25	0.40	0.00	0.00	17.00	6.94	4.64	0.10
4.50	0.43	0.00	0.00	17.25	6.98	4.68	0.09
4.75	0.45	0.00	0.00	17.50	7.02	4.71	0.09
5.00	0.49	0.00	0.00	17.75	7.06	4.75	0.09
5.25	0.52	0.00	0.00	18.00	7.09	4.78	0.08
5.50	0.55	0.00	0.00	18.25	7.13	4.81	0.08
5.75	0.58	0.00	0.00	18.50	7.16	4.84	0.08
6.00	0.62	0.01	0.01	18.75	7.19	4.87	0.08
6.25	0.65	0.01	0.01	19.00	7.22	4.90	0.07
6.50	0.69	0.01	0.01	19.25	7.25	4.93	0.07
6.75	0.72	0.02	0.01	19.50	7.28	4.95	0.07
7.00	0.76	0.02	0.02	19.75	7.30	4.98	0.06
7.25	0.80	0.03	0.02	20.00	7.33	5.00	0.06
7.50	0.84	0.04	0.02	20.25	7.36	5.02	0.06
7.75	0.88	0.05	0.02	20.50	7.38	5.05	0.06
8.00	0.92	0.06	0.03	20.75	7.40	5.07	0.06
8.25	0.97	0.07	0.03	21.00	7.43	5.09	0.06
8.50	1.02	0.09	0.04	21.25	7.45	5.11	0.06
8.75	1.07	0.11	0.04	21.50	7.48	5.14	0.06
9.00	1.13	0.13	0.05	21.75	7.50	5.16	0.06
9.25	1.19	0.15	0.06	22.00	7.52	5.18	0.06
9.50	1.26	0.18	0.06	22.25	7.55	5.20	0.06
9.75	1.32	0.20	0.07	22.50	7.57	5.22	0.05
10.00	1.39	0.24	0.08	22.75	7.59	5.24	0.05
10.25	1.48	0.27	0.10	23.00	7.61	5.26	0.05
10.50	1.57	0.32	0.12	23.25	7.64	5.28	0.05
10.75	1.68	0.38	0.14	23.50	7.66	5.30	0.05
11.00	1.81	0.45	0.18	23.75	7.68	5.32	0.05
11.25	1.97	0.55	0.23	24.00	7.70	5.34	0.05
11.50	2.18	0.67	0.32				
11.75	2.98	1.23	1.16				
12.00	5.11	2.98	4.85				
12.25	5.44	3.28	1.18				
12.50	5.66	3.48	0.56				

Summary for Pond EDDB: Dry Detention Basin

Inflow Area = 3.350 ac, 37.91% Impervious, Inflow Depth > 6.15" for 100-Year event
 Inflow = 19.08 cfs @ 12.11 hrs, Volume= 1.716 af
 Outflow = 10.64 cfs @ 12.36 hrs, Volume= 1.565 af, Atten= 44%, Lag= 15.1 min
 Primary = 10.64 cfs @ 12.36 hrs, Volume= 1.565 af

Routing by Stor-Ind method, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs / 2
 Peak Elev= 934.08' @ 12.36 hrs Surf.Area= 4,864 sf Storage= 21,863 cf

Plug-Flow detention time= 88.6 min calculated for 1.565 af (91% of inflow)
 Center-of-Mass det. time= 43.3 min (836.3 - 793.0)

Volume	Invert	Avail.Storage	Storage Description
#1	926.00'	32,300 cf	Custom Stage Data (Prismatic) Listed below


Elevation (feet)	Surf.Area (sq-ft)	Inc.Store (cubic-feet)	Cum.Store (cubic-feet)
926.00	863	0	0
928.00	1,656	2,519	2,519
930.00	2,578	4,234	6,753
932.00	3,630	6,208	12,961
934.00	4,810	8,440	21,401
936.00	6,089	10,899	32,300

Device	Routing	Invert	Outlet Devices
#1	Primary	925.50'	12.0" Round Culvert L= 50.0' CMP, end-section conforming to fill, Ke= 0.500 Inlet / Outlet Invert= 925.50' / 925.00' S= 0.0100 '/' Cc= 0.900 n= 0.012 Concrete pipe, finished, Flow Area= 0.79 sf
#2	Device 1	926.00'	1.0" Vert. Orifice/Grate X 7 rows with 4.0" cc spacing C= 0.600
#3	Device 1	930.00'	10.0" Vert. Orifice/Grate C= 0.600
#4	Device 1	932.00'	48.0" x 48.0" Horiz. Grate C= 0.600 Limited to weir flow at low heads


Primary OutFlow Max=10.63 cfs @ 12.36 hrs HW=934.08' (Free Discharge)

- ↑ 1=Culvert (Barrel Controls 10.63 cfs @ 13.54 fps)
- 2=Orifice/Grate (Passes < 0.49 cfs potential flow)
- 3=Orifice/Grate (Passes < 5.03 cfs potential flow)
- 4=Grate (Passes < 111.08 cfs potential flow)

Pond EDDB: Dry Detention Basin

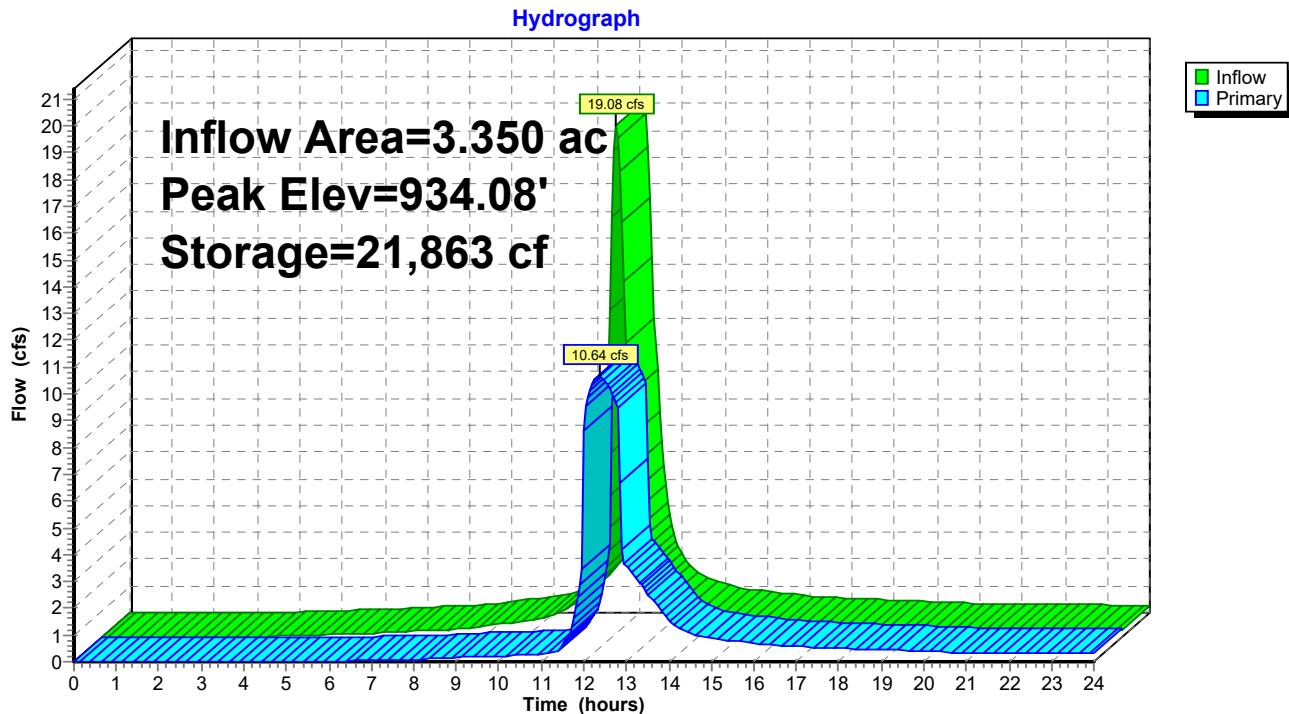

Pond EDDB: Dry Detention Basin

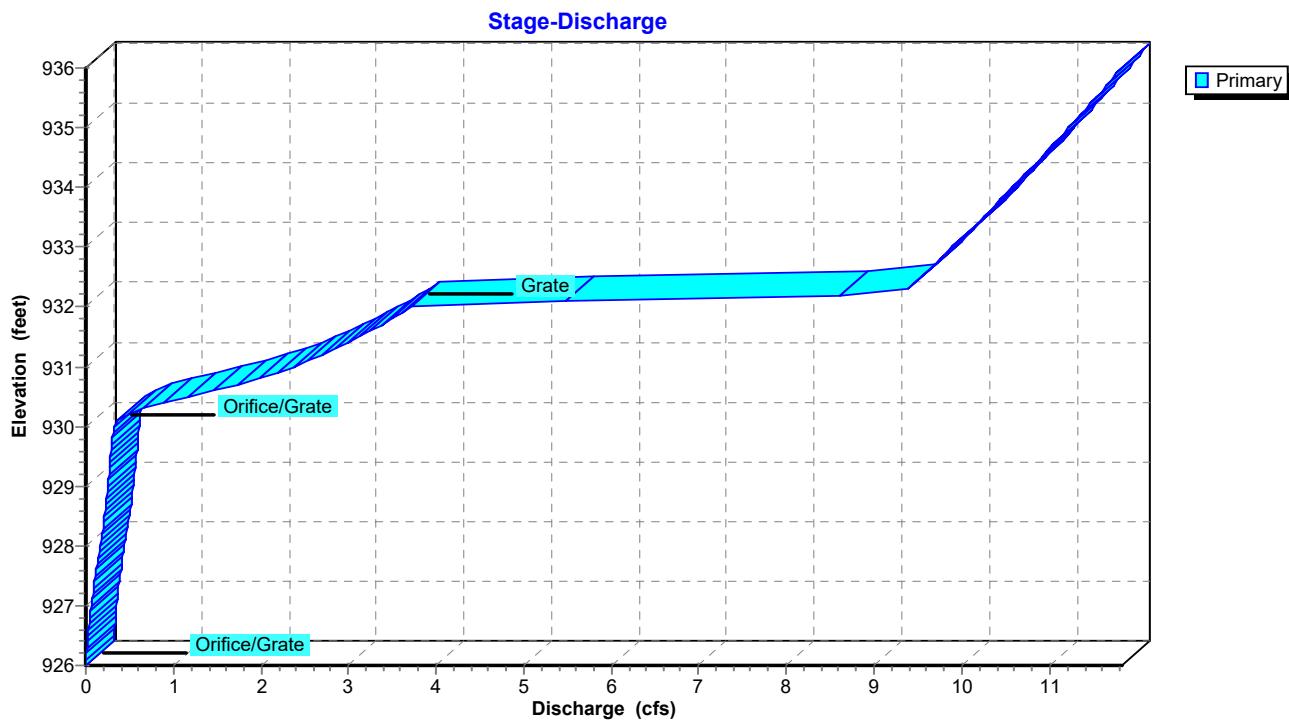


18-222-HydroCAD-PRO

Prepared by {enter your company name here}

HydroCAD® 10.00-13 s/n 08303 © 2014 HydroCAD Software Solutions LLC

PROPOSED HYDROCAD
Type II 24-hr 100-Year Rainfall=7.70"
Printed 2/14/2019
Page 49

Pond EDDB: Dry Detention Basin

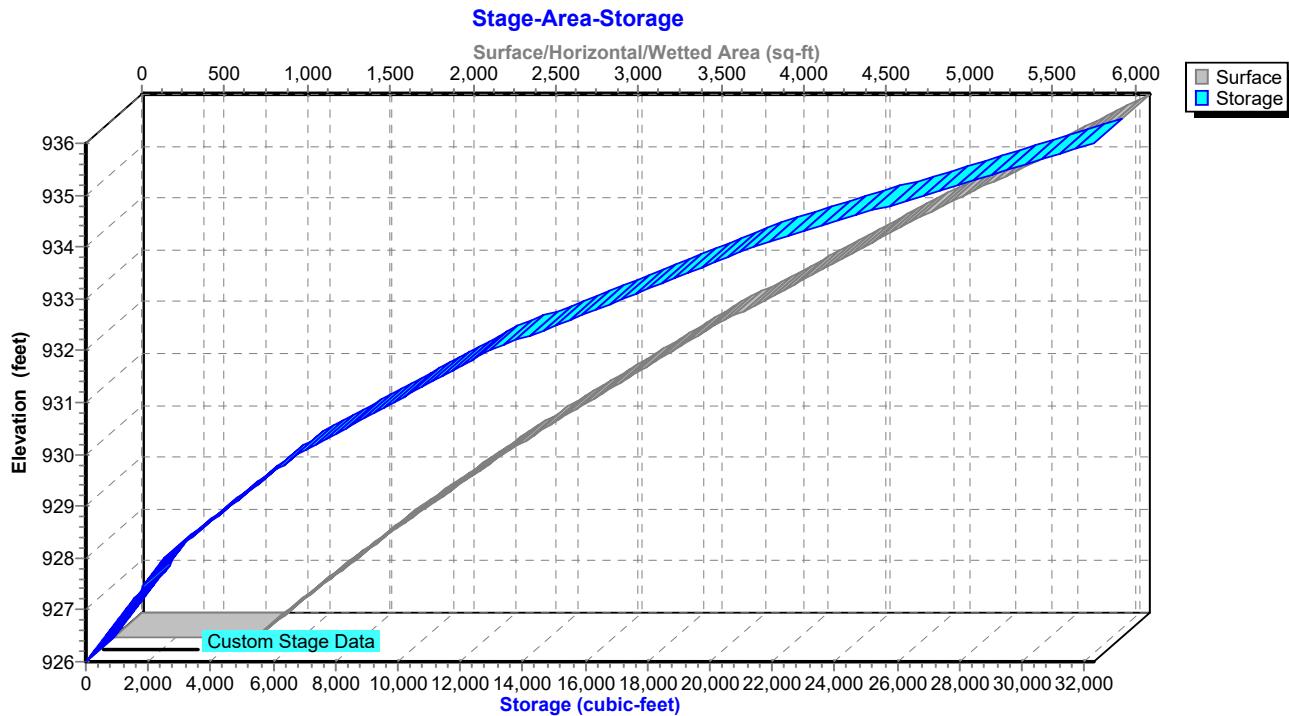

Hydrograph for Pond EDDB: Dry Detention Basin

Time (hours)	Inflow (cfs)	Storage (cubic-feet)	Elevation (feet)	Primary (cfs)
0.00	0.00	0	926.00	0.00
0.50	0.00	0	926.00	0.00
1.00	0.00	0	926.00	0.00
1.50	0.00	0	926.00	0.00
2.00	0.00	0	926.00	0.00
2.50	0.00	0	926.00	0.00
3.00	0.00	0	926.00	0.00
3.50	0.01	9	926.01	0.00
4.00	0.03	49	926.04	0.00
4.50	0.05	120	926.10	0.01
5.00	0.08	225	926.18	0.01
5.50	0.11	370	926.29	0.01
6.00	0.14	556	926.44	0.02
6.50	0.17	781	926.62	0.03
7.00	0.20	1,043	926.83	0.05
7.50	0.24	1,335	927.06	0.07
8.00	0.27	1,650	927.31	0.09
8.50	0.33	1,995	927.58	0.12
9.00	0.42	2,427	927.93	0.15
9.50	0.51	2,965	928.21	0.19
10.00	0.59	3,570	928.50	0.22
10.50	0.79	4,383	928.88	0.24
11.00	1.12	5,598	929.45	0.28
11.50	1.80	7,524	930.25	0.57
12.00	15.69	13,834	932.21	8.66
12.50	6.40	20,692	933.83	10.47
13.00	2.15	12,566	931.87	3.57
13.50	1.41	10,135	931.09	2.52
14.00	1.09	8,725	930.64	1.56
14.50	0.90	8,201	930.47	1.07
15.00	0.81	7,991	930.40	0.89
15.50	0.72	7,857	930.36	0.79
16.00	0.63	7,737	930.32	0.70
16.50	0.57	7,624	930.28	0.62
17.00	0.53	7,539	930.25	0.57
17.50	0.50	7,474	930.23	0.54
18.00	0.47	7,417	930.21	0.50
18.50	0.44	7,362	930.20	0.47
19.00	0.41	7,298	930.18	0.45
19.50	0.38	7,225	930.15	0.42
20.00	0.35	7,147	930.13	0.39
20.50	0.33	7,072	930.10	0.36
21.00	0.32	7,011	930.08	0.35
21.50	0.31	6,954	930.06	0.34
22.00	0.31	6,900	930.05	0.34
22.50	0.30	6,849	930.03	0.33
23.00	0.29	6,800	930.02	0.32
23.50	0.29	6,752	930.00	0.31
24.00	0.28	6,700	929.98	0.31

Stage-Discharge for Pond EDDB: Dry Detention Basin

Elevation (feet)	Primary (cfs)	Elevation (feet)	Primary (cfs)
926.00	0.00	931.10	2.54
926.10	0.01	931.20	2.70
926.20	0.01	931.30	2.85
926.30	0.01	931.40	2.99
926.40	0.02	931.50	3.12
926.50	0.03	931.60	3.25
926.60	0.03	931.70	3.37
926.70	0.04	931.80	3.49
926.80	0.05	931.90	3.60
926.90	0.05	932.00	3.71
927.00	0.06	932.10	5.47
927.10	0.07	932.20	8.60
927.20	0.08	932.30	9.39
927.30	0.09	932.40	9.47
927.40	0.10	932.50	9.54
927.50	0.11	932.60	9.61
927.60	0.12	932.70	9.68
927.70	0.13	932.80	9.76
927.80	0.14	932.90	9.83
927.90	0.15	933.00	9.90
928.00	0.16	933.10	9.97
928.10	0.18	933.20	10.04
928.20	0.19	933.30	10.11
928.30	0.20	933.40	10.18
928.40	0.21	933.50	10.25
928.50	0.22	933.60	10.31
928.60	0.22	933.70	10.38
928.70	0.23	933.80	10.45
928.80	0.24	933.90	10.52
928.90	0.25	934.00	10.58
929.00	0.25	934.10	10.65
929.10	0.26	934.20	10.71
929.20	0.27	934.30	10.78
929.30	0.27	934.40	10.84
929.40	0.28	934.50	10.91
929.50	0.29	934.60	10.97
929.60	0.29	934.70	11.04
929.70	0.30	934.80	11.10
929.80	0.30	934.90	11.16
929.90	0.31	935.00	11.22
930.00	0.31	935.10	11.29
930.10	0.36	935.20	11.35
930.20	0.48	935.30	11.41
930.30	0.66	935.40	11.47
930.40	0.89	935.50	11.53
930.50	1.16	935.60	11.59
930.60	1.45	935.70	11.65
930.70	1.74	935.80	11.71
930.80	1.99	935.90	11.77
930.90	2.19	936.00	11.83
931.00	2.37		

Stage-Area-Storage for Pond EDDB: Dry Detention Basin

Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)	Elevation (feet)	Surface (sq-ft)	Storage (cubic-feet)
926.00	863	0	931.10	3,157	10,167
926.10	903	126	931.20	3,209	10,478
926.20	942	252	931.30	3,262	10,788
926.30	982	378	931.40	3,314	11,099
926.40	1,022	504	931.50	3,367	11,409
926.50	1,061	630	931.60	3,420	11,719
926.60	1,101	756	931.70	3,472	12,030
926.70	1,141	882	931.80	3,525	12,340
926.80	1,180	1,008	931.90	3,577	12,651
926.90	1,220	1,134	932.00	3,630	12,961
927.00	1,260	1,260	932.10	3,689	13,383
927.10	1,299	1,385	932.20	3,748	13,805
927.20	1,339	1,511	932.30	3,807	14,227
927.30	1,378	1,637	932.40	3,866	14,649
927.40	1,418	1,763	932.50	3,925	15,071
927.50	1,458	1,889	932.60	3,984	15,493
927.60	1,497	2,015	932.70	4,043	15,915
927.70	1,537	2,141	932.80	4,102	16,337
927.80	1,577	2,267	932.90	4,161	16,759
927.90	1,616	2,393	933.00	4,220	17,181
928.00	1,656	2,519	933.10	4,279	17,603
928.10	1,702	2,731	933.20	4,338	18,025
928.20	1,748	2,942	933.30	4,397	18,447
928.30	1,794	3,154	933.40	4,456	18,869
928.40	1,840	3,366	933.50	4,515	19,291
928.50	1,887	3,578	933.60	4,574	19,713
928.60	1,933	3,789	933.70	4,633	20,135
928.70	1,979	4,001	933.80	4,692	20,557
928.80	2,025	4,213	933.90	4,751	20,979
928.90	2,071	4,424	934.00	4,810	21,401
929.00	2,117	4,636	934.10	4,874	21,946
929.10	2,163	4,848	934.20	4,938	22,491
929.20	2,209	5,059	934.30	5,002	23,036
929.30	2,255	5,271	934.40	5,066	23,581
929.40	2,301	5,483	934.50	5,130	24,126
929.50	2,348	5,695	934.60	5,194	24,671
929.60	2,394	5,906	934.70	5,258	25,216
929.70	2,440	6,118	934.80	5,322	25,761
929.80	2,486	6,330	934.90	5,386	26,306
929.90	2,532	6,541	935.00	5,450	26,851
930.00	2,578	6,753	935.10	5,513	27,395
930.10	2,631	7,063	935.20	5,577	27,940
930.20	2,683	7,374	935.30	5,641	28,485
930.30	2,736	7,684	935.40	5,705	29,030
930.40	2,788	7,995	935.50	5,769	29,575
930.50	2,841	8,305	935.60	5,833	30,120
930.60	2,894	8,615	935.70	5,897	30,665
930.70	2,946	8,926	935.80	5,961	31,210
930.80	2,999	9,236	935.90	6,025	31,755
930.90	3,051	9,547	936.00	6,089	32,300
931.00	3,104	9,857			

Summary for Link RP-1: Release Point


Inflow Area = 3.690 ac, 35.77% Impervious, Inflow Depth > 5.61" for 100-Year event

Inflow = 12.16 cfs @ 12.10 hrs, Volume= 1.726 af

Primary = 12.16 cfs @ 12.10 hrs, Volume= 1.726 af, Atten= 0%, Lag= 0.0 min

Primary outflow = Inflow, Time Span= 0.00-24.00 hrs, dt= 0.05 hrs

Link RP-1: Release Point

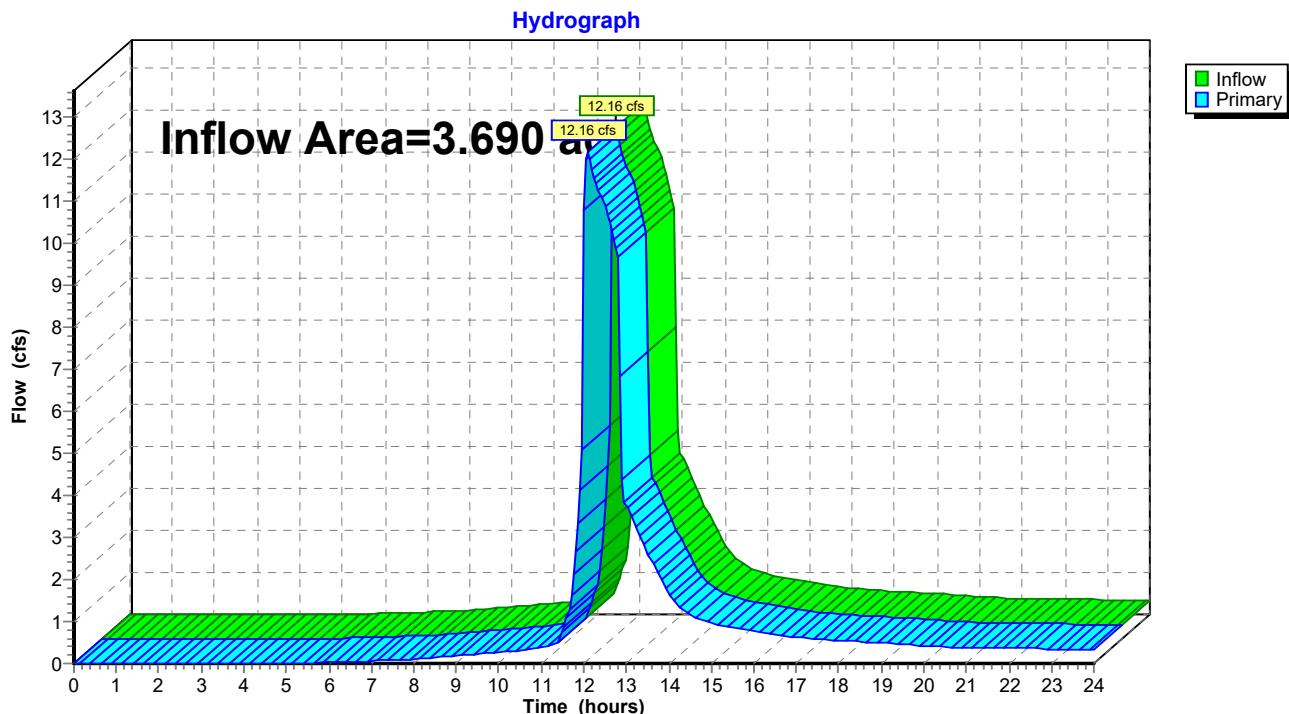

Hydrograph for Link RP-1: Release Point

Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)	Time (hours)	Inflow (cfs)	Elevation (feet)	Primary (cfs)
0.00	0.00	0.00	0.00	12.75	9.88	0.00	9.88
0.25	0.00	0.00	0.00	13.00	3.75	0.00	3.75
0.50	0.00	0.00	0.00	13.25	3.21	0.00	3.21
0.75	0.00	0.00	0.00	13.50	2.65	0.00	2.65
1.00	0.00	0.00	0.00	13.75	2.14	0.00	2.14
1.25	0.00	0.00	0.00	14.00	1.66	0.00	1.66
1.50	0.00	0.00	0.00	14.25	1.34	0.00	1.34
1.75	0.00	0.00	0.00	14.50	1.16	0.00	1.16
2.00	0.00	0.00	0.00	14.75	1.05	0.00	1.05
2.25	0.00	0.00	0.00	15.00	0.97	0.00	0.97
2.50	0.00	0.00	0.00	15.25	0.91	0.00	0.91
2.75	0.00	0.00	0.00	15.50	0.86	0.00	0.86
3.00	0.00	0.00	0.00	15.75	0.81	0.00	0.81
3.25	0.00	0.00	0.00	16.00	0.76	0.00	0.76
3.50	0.00	0.00	0.00	16.25	0.71	0.00	0.71
3.75	0.00	0.00	0.00	16.50	0.68	0.00	0.68
4.00	0.00	0.00	0.00	16.75	0.65	0.00	0.65
4.25	0.00	0.00	0.00	17.00	0.63	0.00	0.63
4.50	0.01	0.00	0.01	17.25	0.61	0.00	0.61
4.75	0.01	0.00	0.01	17.50	0.59	0.00	0.59
5.00	0.01	0.00	0.01	17.75	0.57	0.00	0.57
5.25	0.01	0.00	0.01	18.00	0.55	0.00	0.55
5.50	0.02	0.00	0.02	18.25	0.53	0.00	0.53
5.75	0.02	0.00	0.02	18.50	0.52	0.00	0.52
6.00	0.03	0.00	0.03	18.75	0.50	0.00	0.50
6.25	0.04	0.00	0.04	19.00	0.49	0.00	0.49
6.50	0.04	0.00	0.04	19.25	0.47	0.00	0.47
6.75	0.05	0.00	0.05	19.50	0.46	0.00	0.46
7.00	0.06	0.00	0.06	19.75	0.44	0.00	0.44
7.25	0.07	0.00	0.07	20.00	0.43	0.00	0.43
7.50	0.08	0.00	0.08	20.25	0.41	0.00	0.41
7.75	0.10	0.00	0.10	20.50	0.39	0.00	0.39
8.00	0.11	0.00	0.11	20.75	0.39	0.00	0.39
8.25	0.13	0.00	0.13	21.00	0.38	0.00	0.38
8.50	0.14	0.00	0.14	21.25	0.38	0.00	0.38
8.75	0.16	0.00	0.16	21.50	0.37	0.00	0.37
9.00	0.19	0.00	0.19	21.75	0.37	0.00	0.37
9.25	0.21	0.00	0.21	22.00	0.37	0.00	0.37
9.50	0.23	0.00	0.23	22.25	0.36	0.00	0.36
9.75	0.25	0.00	0.25	22.50	0.36	0.00	0.36
10.00	0.27	0.00	0.27	22.75	0.35	0.00	0.35
10.25	0.29	0.00	0.29	23.00	0.35	0.00	0.35
10.50	0.31	0.00	0.31	23.25	0.35	0.00	0.35
10.75	0.35	0.00	0.35	23.50	0.34	0.00	0.34
11.00	0.39	0.00	0.39	23.75	0.34	0.00	0.34
11.25	0.44	0.00	0.44	24.00	0.34	0.00	0.34
11.50	0.74	0.00	0.74				
11.75	2.11	0.00	2.11				
12.00	10.78	0.00	10.78				
12.25	11.54	0.00	11.54				
12.50	10.85	0.00	10.85				