

June 10, 2022

Planning and Development Services
Engineering Services - Stormwater
City of Lee's Summit, Missouri
220 SE Green
Lee's Summit, MO 64063



**Re: Stormwater Memorandum for Macadoodles 1499 SW Market Street
Preliminary Development Plan**

This document serves as a stormwater memorandum in support of the stormwater requirements regarding the proposed modification to an existing 12,000 square-foot tenant space within a commercial retail development, located in the City of Lee's Summit, Missouri. The project is 0.77-acres in size and proposes to remodel the internal tenant building and modify the external parking lot.

The parking lot will be modified to add a drive-through component, requiring the removal of six parking stalls. To offset the loss in parking count, six additional parking stalls are proposed to be constructed. Where feasible, green space was added to offset the additional impervious area. **Table 1** summarizes the existing and proposed impervious areas within the site.

Table 1: Existing vs. Proposed Impervious Area

	Area (SF)	Area (AC)
Site Area	33,580	0.77
Total Existing Impervious Area	31,210	0.72
Added Impervious Area	1,155	0.03
Added Green Space	366	0.01
Net Added Impervious Area	790	0.02
Total Proposed Impervious Area	32,000	0.73
Total Existing Percent Impervious	92.9%	
Total Proposed Percent Impervious	95.3%	
Increase in Percent Impervious	2.35%	

Per the City of Lee's Summit adoption of Section 5600 of the Kansas City Metropolitan Chapter of APWA Design Criteria, Section 5601.3.A.3, this project is exempt from stormwater requirements, as the project consists of

"remodeling, repair, replacement, or other improvements to any existing structure of facility and appurtenances on sites smaller than two acres that does not cause an increased area of impervious surface on the site in excess of 10 percent of that previously existing."

The proposed modification to the existing parking will result in an increase of 2.35% impervious surface to the project location site, less than the 10% allowable increases in impervious surface. The project area is 0.77-acres, less than the 2-acre allowable site size for this exception.

In conclusion, the modification project, remodeling the internal tenant building and modification of the external parking lot, shall not be required to implement on-site stormwater requirements per the City of Lee's Summit adoption of Section 5600 of the Kansas City Metropolitan Chapter of APWA Design Criteria, Section 5601.3.A.3. Please let me know if you have any questions or concerns regarding anything in the above memorandum.

Thank you,



Carlie Aksamit, P.E.
Associate Engineer
(816) 777-0400

Attachments:

- Exhibit 1: Overview
- Exhibit 2: Site Plan
- Exhibit 3: Grading Plan

Jun 09, 2022 - 5:07pm Plotted By: caks G:\Shared drives\VC10 - Land Development\Projects\2022\22KC10004 MacDoodles 1499 SW Market LSW\01 CIV\03-DWG\Sheet\Pop\22KC10004 - SPTS - OVERVIEW.dwg Layout: OVERVIEW



ANDERSON

ENGINEERING

EMPLOYEE OWNED

ENGINEERS • SURVEYORS • LABORATORIES • DRILLING

941 W 141ST TERR. STE. A • KANSAS CITY, MO 64145 • PHONE (816) 777-0400

A LICENSED MISSOURI ENGINEERING & SURVEYING CORPORATION - LC 62

DRAWING INFO.		REVISIONS	
NO.	DESCRIPTION	DATE	BY
	DRAWN BY: CMA		
	CHECK BY: PJJ		
	LICENSE NO. PE-2021027777		
	DATE: 06/10/2022		
	ISSUED FOR: PDP		
	JOB NUMBER: 22KC10004		

PRELIMINARY DEVELOPMENT PLAN
MACADOODLES 1499 SW MARKET STREET

OVERVIEW

1499 SW MARKET ST, LEE'S SUMMIT, MO 64081

SHEET NUMBER

C102

2 OF 6

Jun 09, 2022 - 5:01pm Plotted By: caks G:\Shared drives\VC10 - Land Development\Projects\2022\22KC10004 MacDoodles 1499 SW Market LSW\01 CIVL\03-DWG\Sheet\DDP\22KC10004 - SHTS - SITE PLAN.dwg Layout: SITE PLAN

CURRENT USE

CHURCH

PROPOSED USE

LIQUOR STORE
(APPROVED IN CP-2 ZONING PER CITY OF LEE'S SUMMIT UDO SEC. 6.040 TABLE 6-1).

ZONING

EXISTING: CP-2 (PLANNED COMMUNITY COMMERCIAL)
PROPOSED: CP-2

SITE DATA


PARCEL AREA: 157,955 S.F. (3.63 AC)		
SITE AREA: 33,580 S.F. (0.77-AC)		
SITE	EXISTING	PROPOSED
IMPERVIOUS AREA:	31,210 S.F. (92.9%)	32,000 S.F. (95.3%)
OPEN SPACE:	2,370 S.F. (7.1%)	1,580 S.F. (4.70%)
INCREASED IMPERVIOUS AREA	N/A	790 S.F. (+2.35%)
BUILDING		
TOTAL COMMERCIAL BUILDING AREA:	30,000 S.F.	SAME AS EXISTING
SITE BUILDING AREA:	12,200 S.F.	SAME AS EXISTING
HEIGHT:	30.52 FEET	SAME AS EXISTING
TOTAL COMMERCIAL BUILDING FLOOR AREA RATIO:	0.19 FAR (MAX 0.55 FAR FOR CP-2 ZONING)	
SITE FLOOR AREA RATIO:	0.08 FAR (MAX 0.55 FAR FOR CP-2 ZONING)	
PARKING	SHOPPING CENTER*	
TOTAL STALL COUNT	150	150
ADA STALL COUNT	6 (1 VAN ACCESSIBLE)	5 (1 VAN ACCESSIBLE)
*FOR SHOPPING CENTERS BETWEEN 25,000 S.F. AND 399,999 S.F., 5 PARKING STALLS ARE REQUIRED PER 1,000 S.F. OF GROSS FLOOR AREA. FOR A 150-STALL PARKING LOT, THE MINIMUM NUMBER OF ADA ACCESSIBLE STALLS IS FIVE (5) AND THE MINIMUM NUMBER OF ADA VAN-ACCESSIBLE STALLS IS ONE (1).		

SITE PLAN KEY NOTES

- 01 EXISTING ASPHALTIC PAVEMENT TO BE REMOVED.
- 02 EXISTING CONCRETE SIDEWALK TO BE REMOVED.
- 03 EXISTING WATER MAIN.
- 04 EXISTING FIRE HYDRANT.
- 05 EXISTING GAS LINE.
- 06 EXISTING OVERHEAD UTILITIES.
- 07 EXISTING CONCRETE PAVEMENT TO REMAIN. DO NOT DISTURB.
- 08 EXISTING LIGHT POLE.
- 09 EXISTING PARKING SIGNS TO BE REMOVED.
- 10 EXISTING TREE TO BE REMOVED.
- 11 EXISTING CURB CUT FOR DRAINAGE.
- 12 EXISTING STORM SEWER.
- 13 EXISTING ASPHALTIC PAVEMENT TO REMAIN.
- 14 EXISTING BUILDING. SEE ARCHITECTURAL PLANS FOR MODIFICATION DETAILS.
- 15 CONCRETE PAVEMENT SECTION PER DETAIL ON SHEET C201.
- 16 CONCRETE SIDEWALK, WIDTH VARIES.
- 17 STRAIGHT BACK CURB & GUTTER (TYPE CG-1) PER CITY OF LEE'S SUMMIT STANDARD DETAIL.
- 18 STRAIGHT BACK DRY CURB & GUTTER (TYPE CG-1 DRY) PER CITY OF LEE'S SUMMIT STANDARD DETAIL.
- 19 8" STRAIGHT BACK DRY CURB & GUTTER PER DETAIL ON SHEET C201.
- 20 DRIVE-THROUGH LANE.
- 21 TYPE A ADA RAMP PER CITY OF LEE'S SUMMIT STANDARD DETAIL.
- 22 ADA ACCESSIBLE ROUTE.
- 23 PARKING BLOCKS (TYP.).
- 24 SAWCUT EXISTING PAVEMENT.

GENERAL NOTE

ALL EXISTING UTILITIES TO THE EXISTING BUILDING WILL BE USED IN PLACE. NO ADDITIONAL EXTERNAL UTILITIES ARE ANTICIPATED.

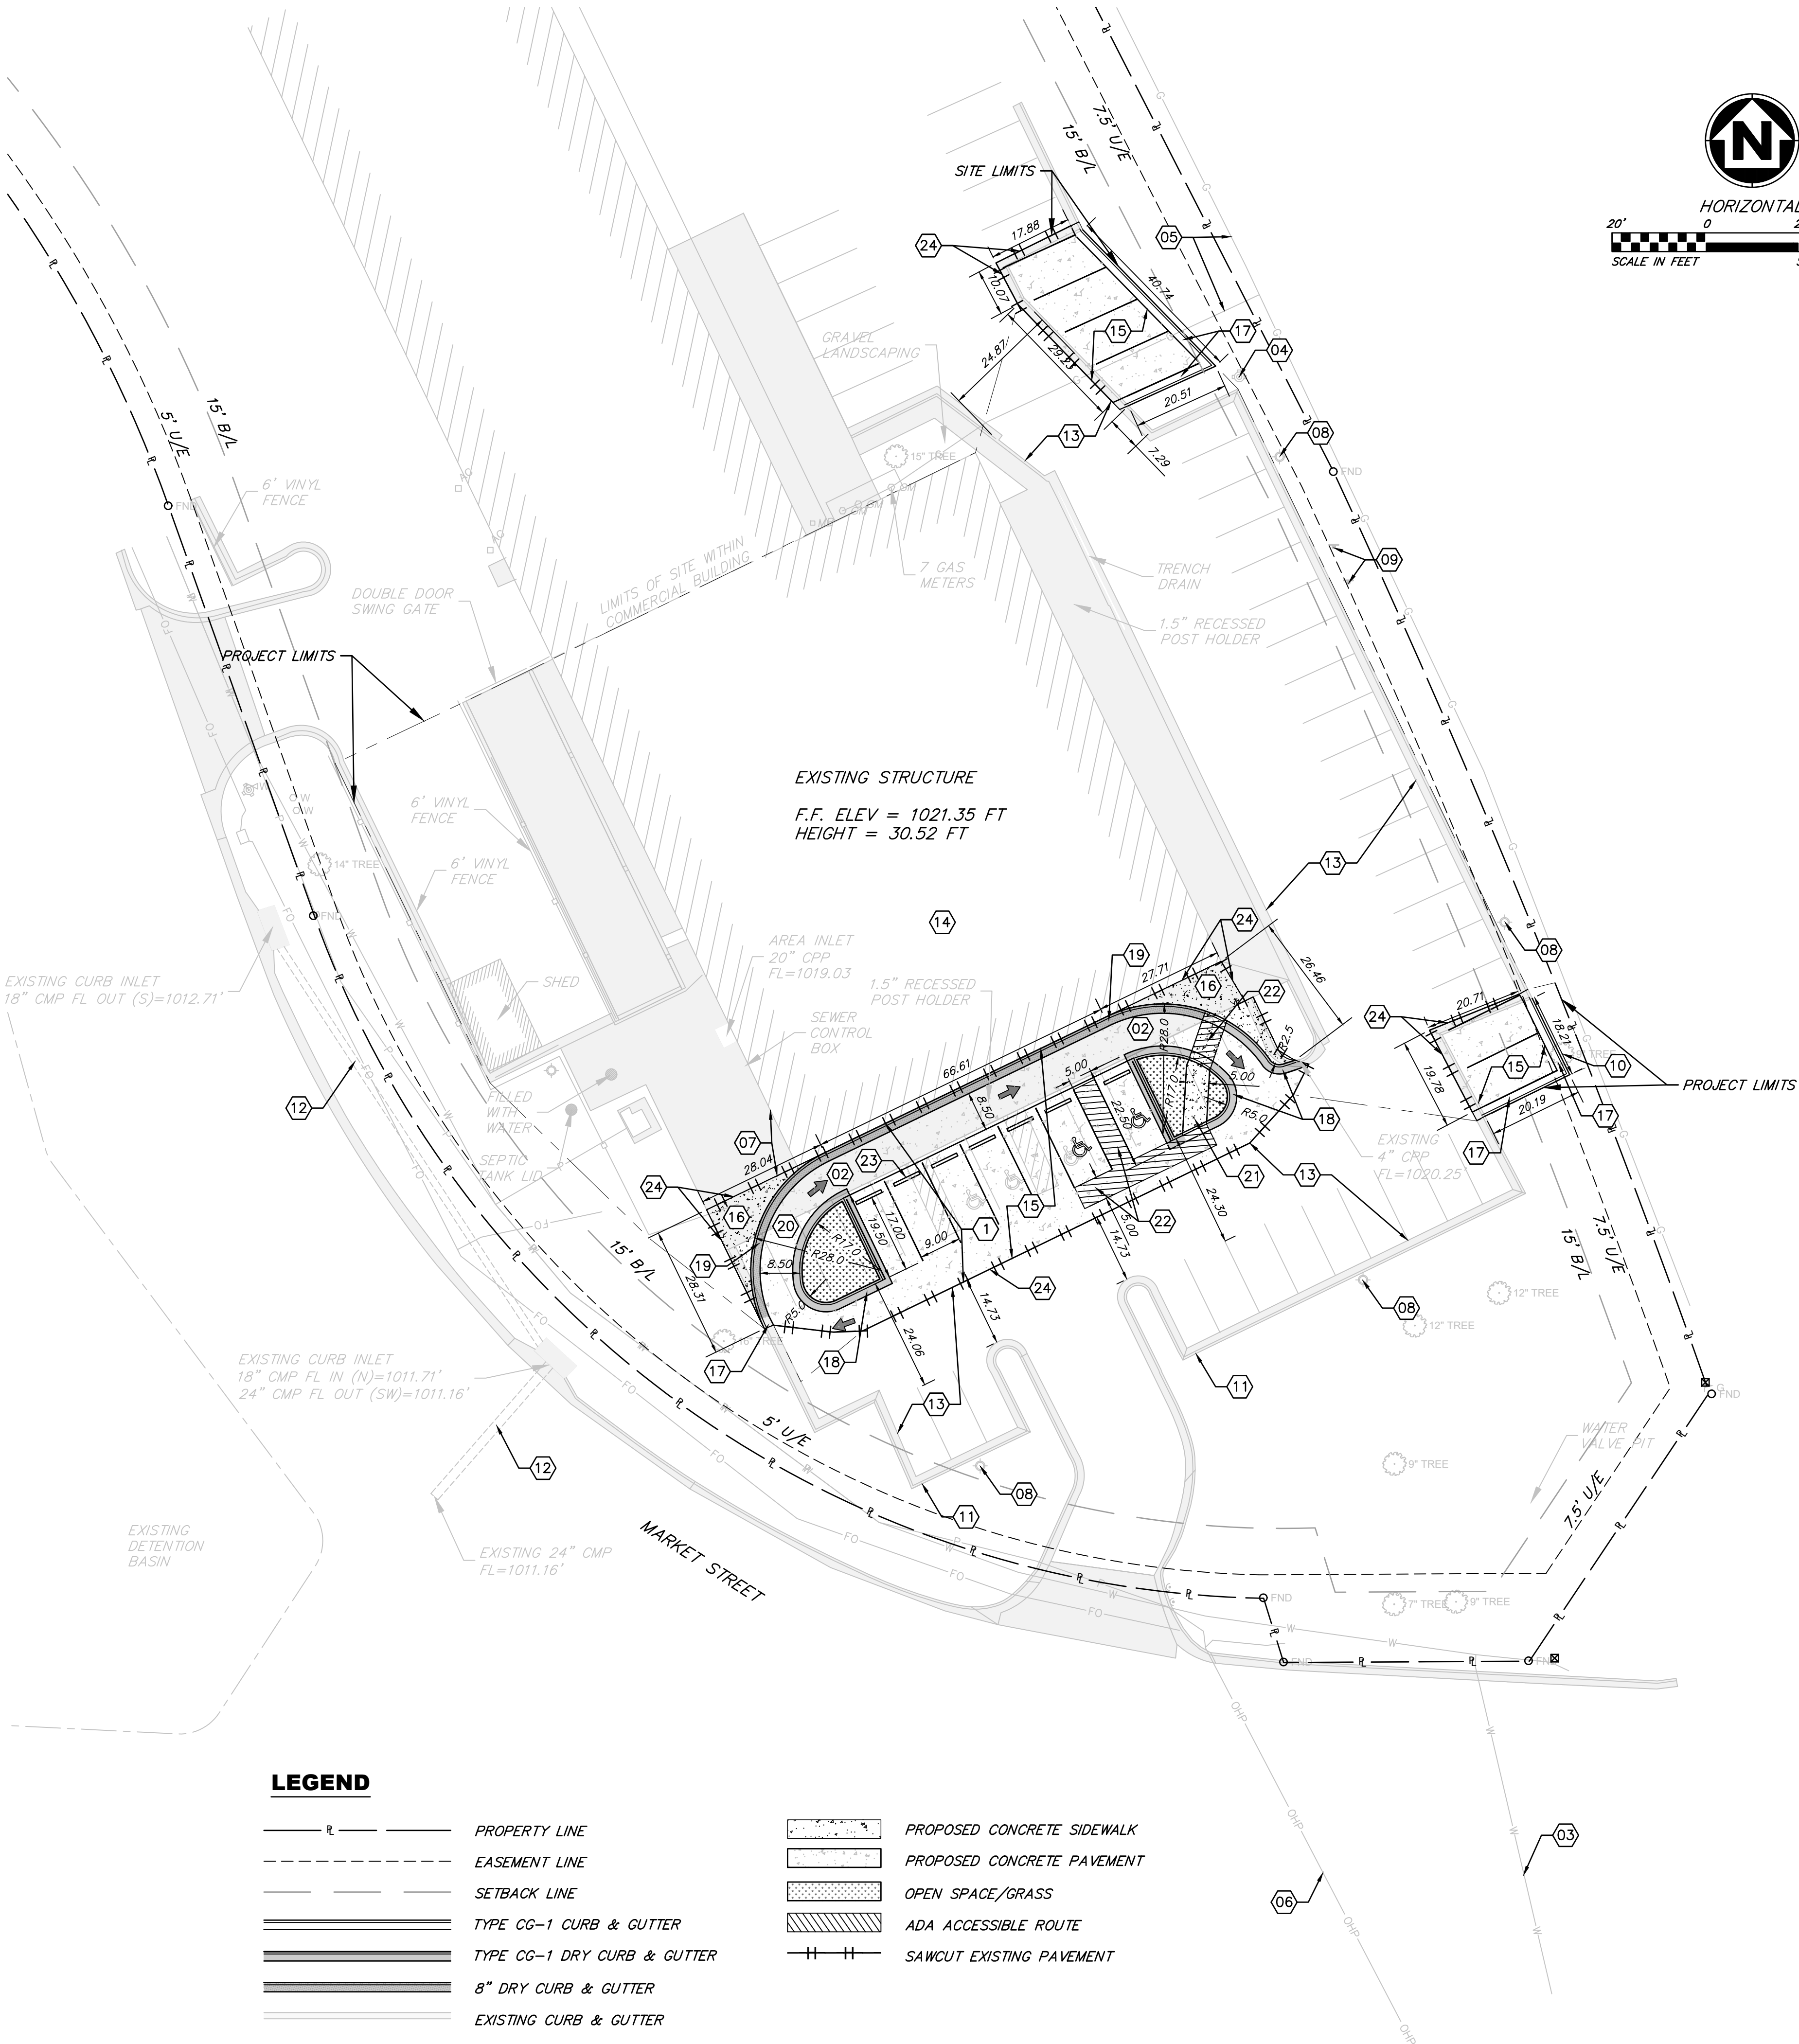

LEGEND

- PROPERTY LINE
- EASEMENT LINE
- SETBACK LINE
- TYPE CG-1 CURB & GUTTER
- TYPE CG-1 DRY CURB & GUTTER
- 8" DRY CURB & GUTTER
- EXISTING CURB & GUTTER

- PROPOSED CONCRETE SIDEWALK
- PROPOSED CONCRETE PAVEMENT
- OPEN SPACE/GRASS
- ADA ACCESSIBLE ROUTE
- SAWCUT EXISTING PAVEMENT

PRELIMINARY DEVELOPMENT PLAN
MACADOODLES 1499 SW MARKET STREET

SITE PLAN

1499 SW MARKET ST, LEE'S SUMMIT, MO 64081

SHEET NUMBER
C103
3 OF 6


REVISIONS		DRAWING INFO.	
NO.	DESCRIPTION	BY	DATE
		DRAWN BY:	CMA
		CHECK BY:	PJJ
		LICENSE NO.	PE-2021027777
		DATE:	06/10/2022
		ISSUED FOR:	PDP
		JOB NUMBER:	22KC10004

© COPYRIGHT ANDERSON ENGINEERING, INC. 2021

ANDERSON ENGINEERING
EMPLOYEE OWNED

ENGINEERS • SURVEYORS • LABORATORIES • DRILLING
941 W 141ST TERR. STE. A • KANSAS CITY, MO 64145 • PHONE (816) 777-0400
A LICENSED MISSOURI ENGINEERING & SURVEYING CORPORATION - LC 62

————— LIMITS OF DISTURBANCE
 ————— 850 ————— FINISH GRADE 5' CONTOUR
 ————— 849 ————— FINISH GRADE 1' CONTOUR
 ————— 850 ————— EXISTING GRADE 5' CONTOUR
 ————— 849 ————— EXISTING GRADE 1' CONTOUR
 ————— PROPOSED FLOW DIRECTION
 ————— EXISTING FLOW DIRECTION

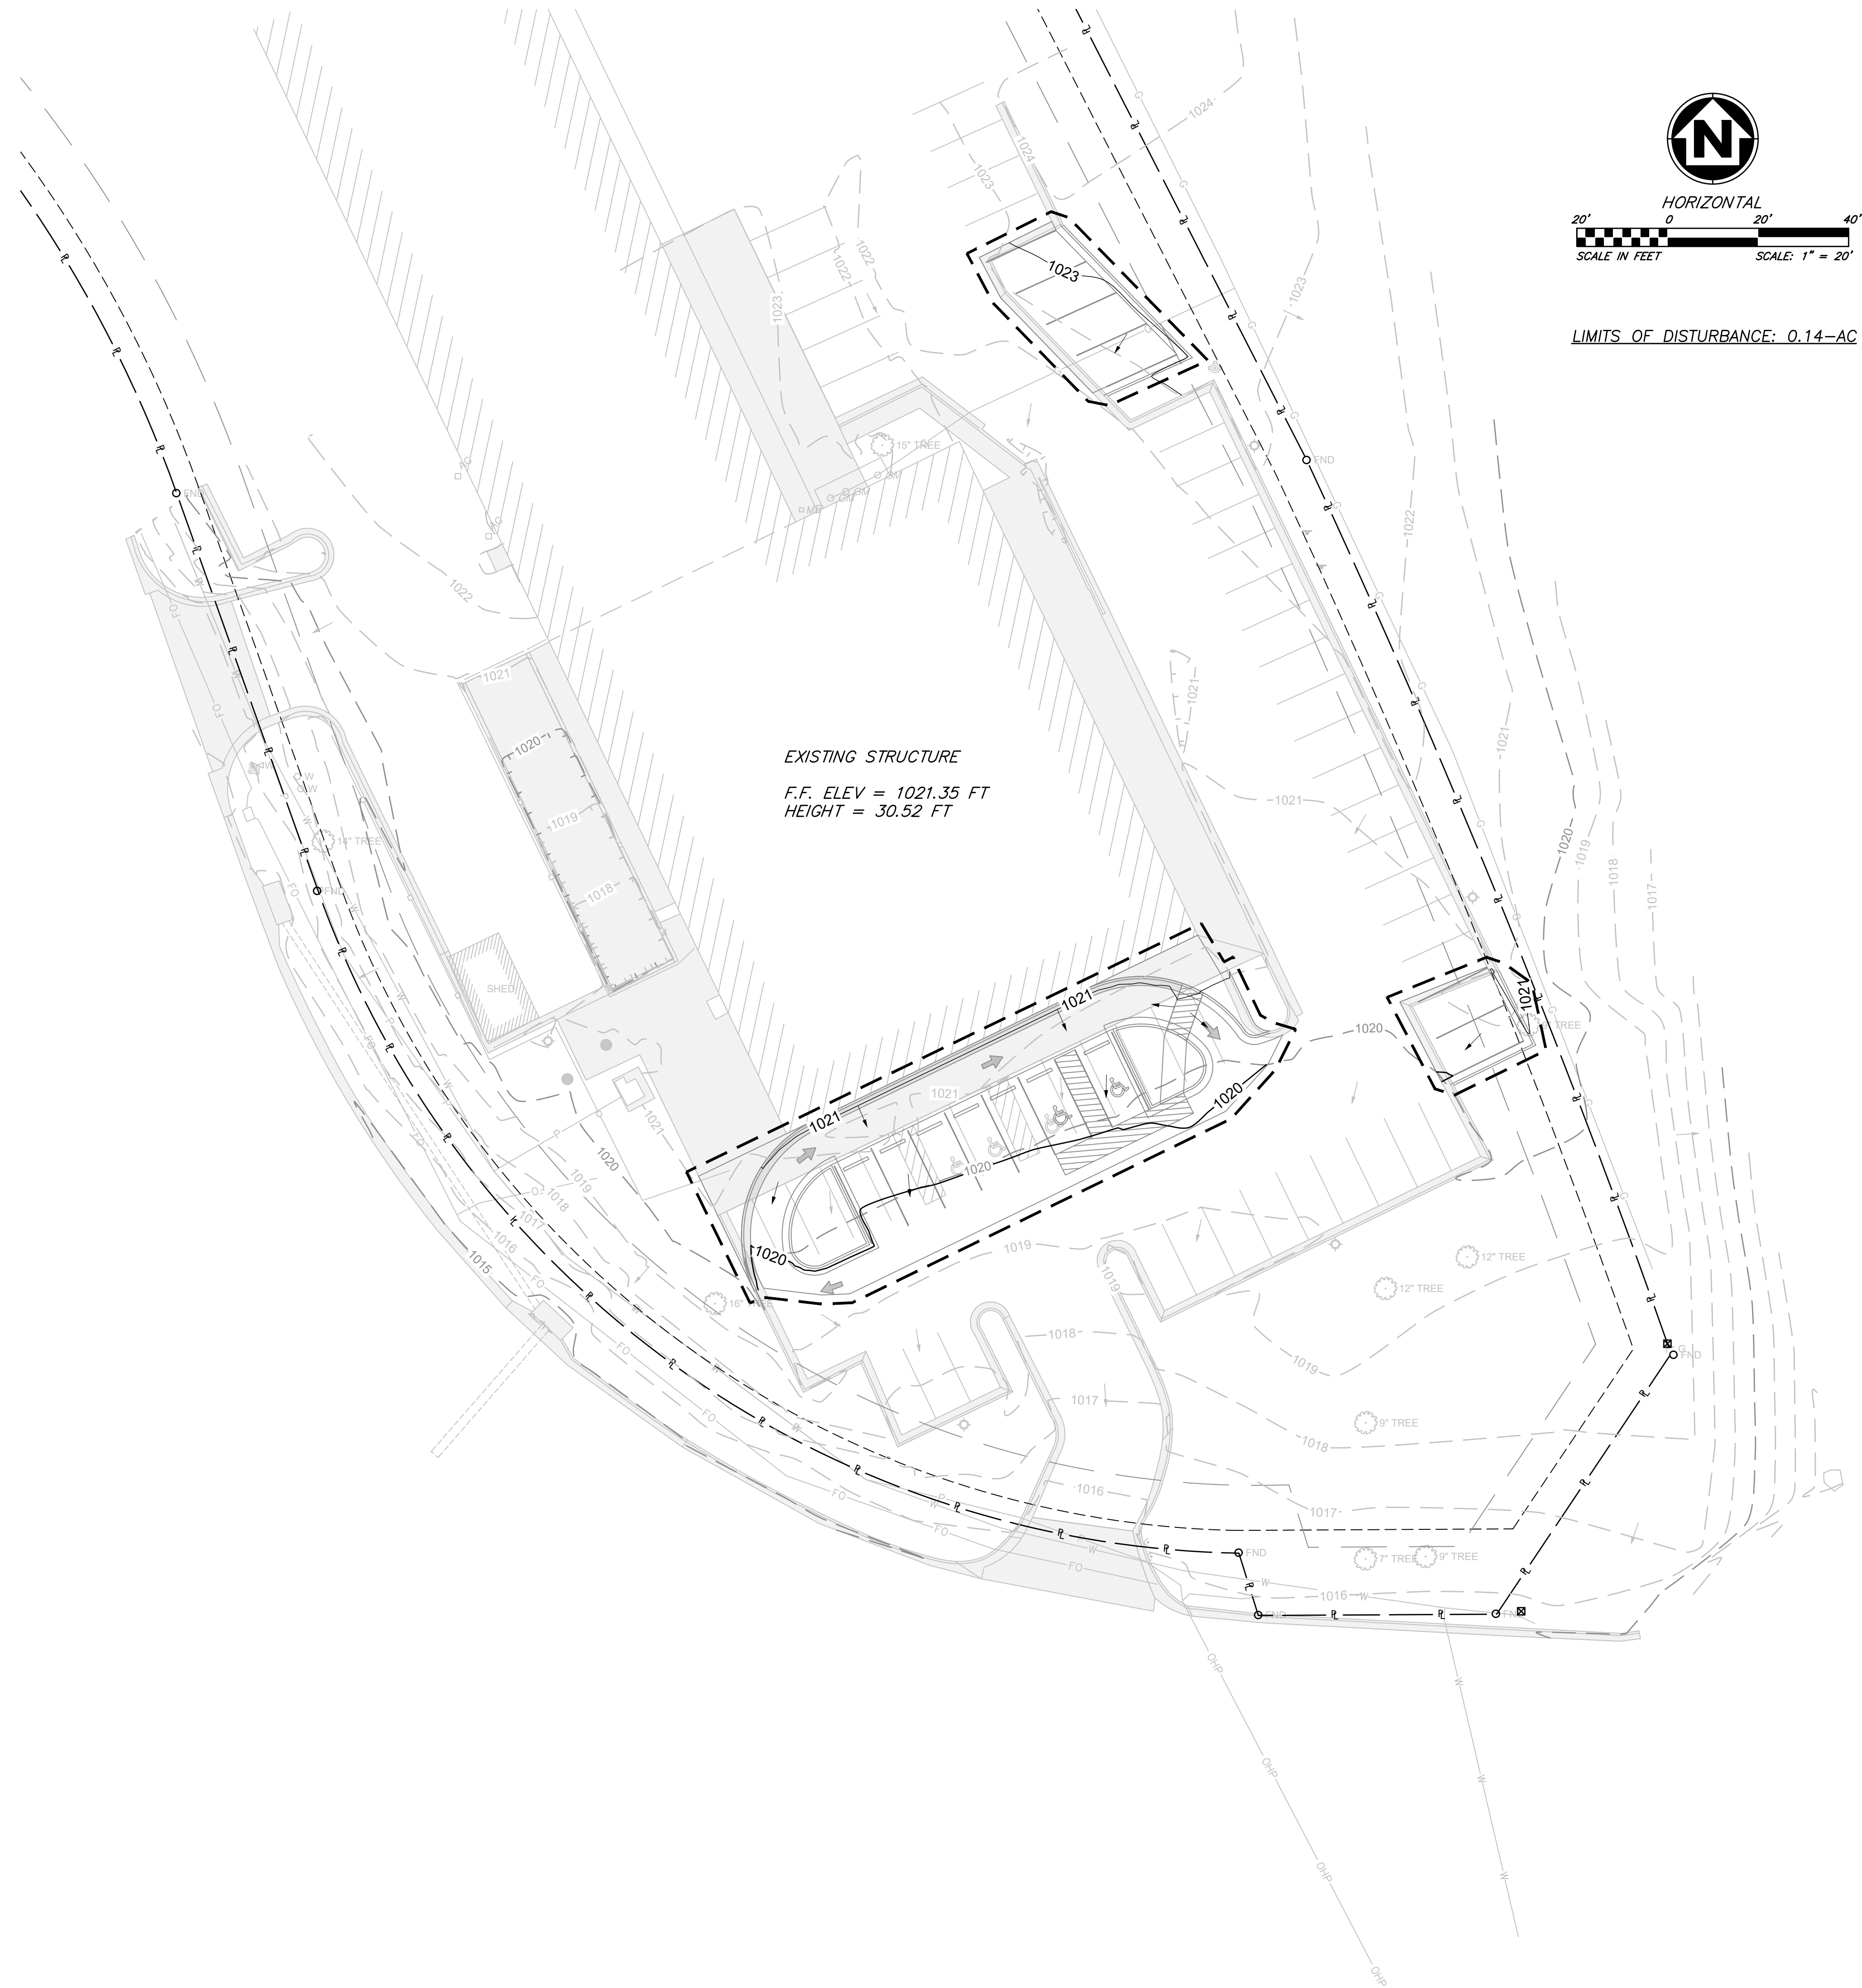

PRELIMINARY DEVELOPMENT PLAN MACADOODLES 1499 SW MARKET STREET		SHEET NUMBER C104 4 OF 6
GRADING PLAN		1499 SW MARKET ST, LEE'S SUMMIT, MO 64081

REVIEWS			DRAWING INFO.	
NO.	DESCRIPTION	BY	DATE	
				DRAWN BY: CMA
				CHECK BY: PJJ
				LICENSE NO. PE-2021027777
				DATE: 06/10/2022
				ISSUED FOR: PDP
				JOB NUMBER: 22KC10004
© COPYRIGHT ANDERSON ENGINEERING, INC. 2021				



**ANDERSON
ENGINEERING**
EMPLOYEE OWNED

ENGINEERS • SURVEYORS • LABORATORIES • DRILLING
941 W 141ST TERR. STE. A • KANSAS CITY, MO 64145 • PHONE (816) 777-0400
A LICENSED MISSOURI ENGINEERING & SURVEYING CORPORATION - LC 62