## OUR LADY OF THE PRESENTATION CHURCH -SCHOOL ADDITION AND RENOVATION

Cu. Yds. Sq. Yds.	178(C)	
	178(C)	
Sa. Yds.	170(0)	
3q. 1 as.	824	
Sq. Yds.	83	
Lin. Ft.	243	
Lin. Ft.	85	
Ea.	6	
Ea.	1	
Lin. Ft.	453	
Sq.Ft.	438	
	· -	
	_	
Lin. Ft.	150	
Ea.	1	
Sq. Yds.	950	
Lin. Ft.	158	
Lin. Ft.	44	
	Lin. Ft. Lin. Ft. Ea. Ea. Lin. Ft. Sq.Ft. Lin. Ft. Lin. Ft. Lin. Ft. Sq. Yds. Lin. Ft.	Lin. Ft. 243 Lin. Ft. 85 Ea. 6 Ea. 1 Lin. Ft. 453 Sq.Ft. 438 Lin. Ft. 93 Lin. Ft. 25 Lin. Ft. 150 Ea. 1  Sq. Yds. 950 Lin. Ft. 158

<sup>\*</sup> No shrimkage or swell calculated for earthwork quantities.

### UTILITIES INVOLVED


Kansas City Power & Light	471-0060
Southwestern Bell Telephone	871-9900
KPL Gas Service Company	221-2200
Public Works	969-1800
American Cablevision	231-1444
Water Pollution Control Dept	513-0303
Missouri One-Call System	1-800-DIG-RITE
City Planning & Development	969-1600
Fire Department	969-1300

#### **UTILITIES:**

THE INFORMATION CONCERNING LOCATIONS OF UNDERGROUND UTILITIES SHOWN HEREON WHICH ARE NOT VISIBLE FROM THE SURFACE, HAS BEEN TAKEN FROM THE RECORDS AND FIELD LOCATIONS OF THE VARIOUS UTILITY COMPANIES AND HAS NOT BEEN FIELD VERIFIED BY THIS COMPANY. THESE LOCATIONS ARE NOT TO BE CONSTRUED AS ACCURATE OR EXACT. CONTRACTOR SHALL FIELD VERIFY ALL LOCATIONS AND ELEVATIONS. IF A MAJOR DISCREPANCY IS ENCOUNTERED. NOTIFY ENGINEER.

CITY OF LEE'S SUMMIT, JACKSON COUNTY, MISSOURI


### FINAL DEVELOPMENT PLANS

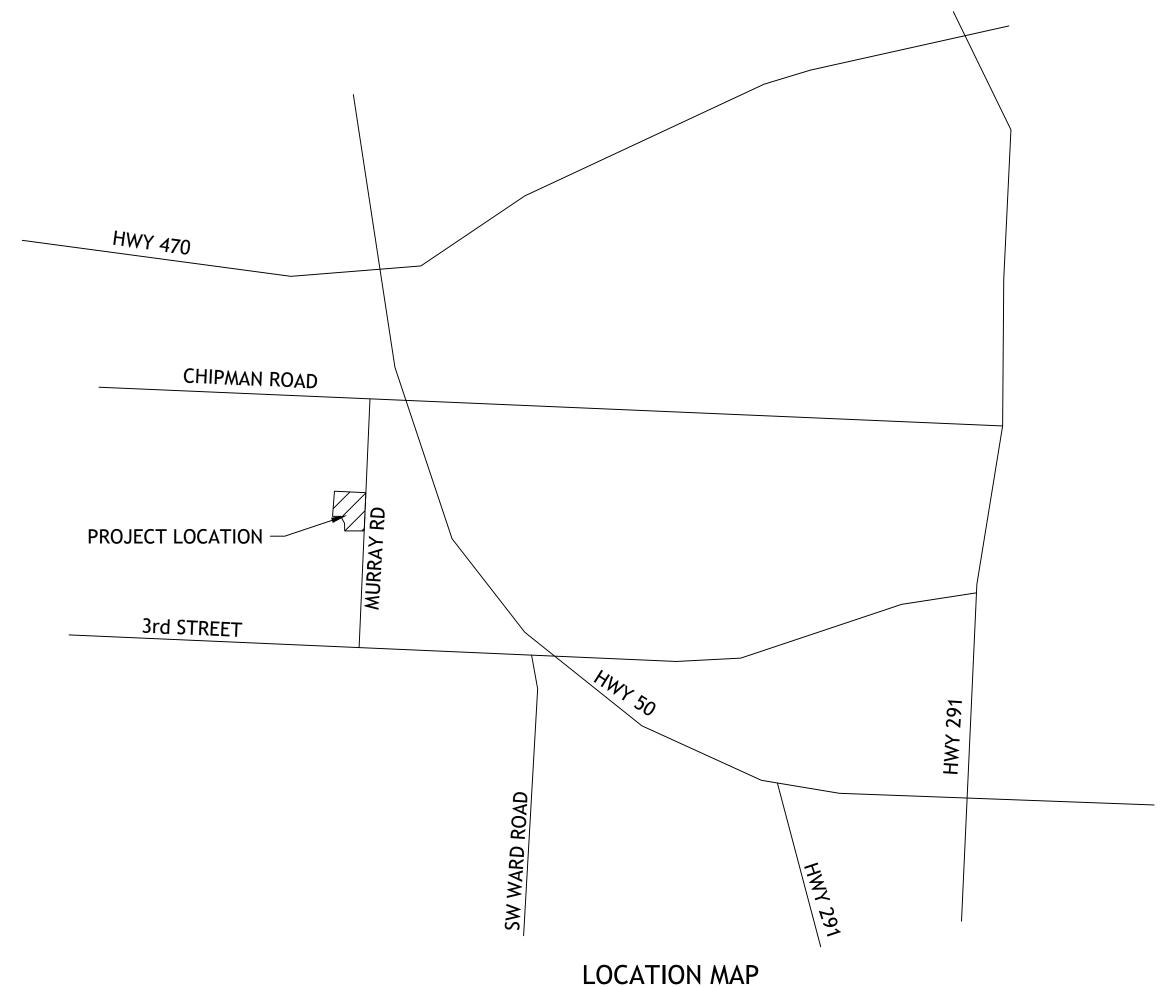

SECTION 6, TOWNSHIP 47, RANGE 31

#### STANDARD LEGEND

	PROPOSED			PROPOSED	EXISTING
SANITARY SEWER	—— S —	—— S —	CATCH BASIN OR INLET		
SHRUB		more	ELECTRIC CABLE	E E	E E
SPAN GUY	$\longrightarrow\!$	<b>- ₩</b> -	FENCE	××	××
STORM SEWER	—— ST ——	— ST —	FIRE HYDRANT	•	abla
STREET LIGHT POLE	<b>-</b> ∳-	- <b>\( -</b>	GAS MAIN	GG	GG
STREET SIGN	•	$\overline{}$	GAS OR WATER METER	<u> </u>	—G—G—
STUMP		$\Delta$	GAS OR WATER VALVE	W	_G⋈—
TELEPHONE DUCT	TT	_TT_	GUY ANCHOR	<del></del>	$\longrightarrow$
TELEPHONE OR POWER	P P	$T \rightarrow T$	MANHOLE	0	0
TELEPHONE POLE	-	$\rightarrow$	POWER POLE	-	
TELEPHONE POLE WITH P	OWER -O-	-0-			-0-
TRAFFIC SIGNAL	K	Þ			
TREE	ec.				
WATER MAIN	W	—— W——			

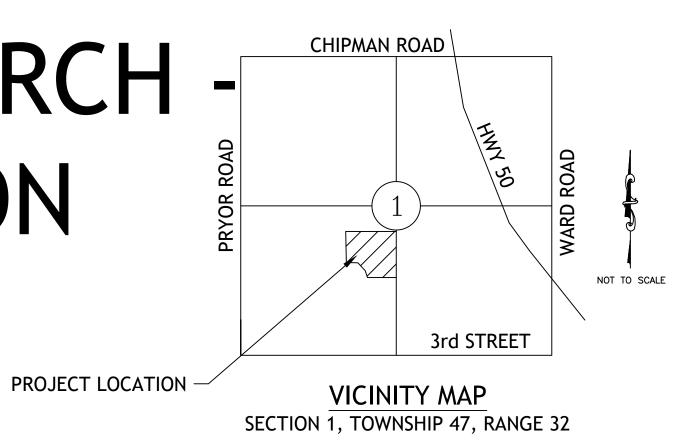

#### SHEET INDEX:

C001	COVER SHEET
C002	GENERAL NOTES

C003 DEMOLITION PLAN

C004 DIMENSION PLAN AND EROSION CONTROL PLAN

C005 UTILITY PLAN C006 GRADING PLAN

C007 STORM LINE A PLAN AND PROFILE

C008 DETAILS C009 DETAILS

C010 DRAINAGE AREA MAP





**DEVELOPMENT PLANS** 

19-102 BASE 19-102 FINAL PLAN

MARCH 15, 2019 *JOB NO.* 19-102

C001

**COVER SHEET** 

#### GENERAL NOTES

- 1. Refer to the current version of the City of Lee's Summit Design and Construction (D&C) Manual not the 2004 KCMO APWA, for construction of these plans.
- 2. All workmanship and materials shall be subject to the inspection and approval of the Engineering Department of the City of Lee's Summit, Missouri.
- 3. Lineal foot measurements shown on these plans are horizontal measurements, not slope measurements. All payments shall be made on horizontal measurements.
- 4. No Geological Investigation was performed on this project.
- 5. The Utility locations shown on these plans are taken from Utility Company records and are approximate only. They do not constitute actual field locations. The Contractor shall verify the location and depth of all utilities prior to construction.
- 6. Clearing and Grubbing operations and disposal of all debris therefrom shall be performed by the contractor in strict accordance with all state and local codes and ordinances.
- 7. All waste material shall be disposed of at a location to be selected by the owner or his authorized representative, such location to be on the site.
- 8. The Contractor shall control the erosion and siltation during all phases of construction, he shall keep the streets clean of mud and debris and follow the erosion control plan prepared by the design engineer.
- 9. All existing manholes, catch basins, utility valves and meter pits to be adjusted or rebuilt to grade as required.
- 10. Subgrade soil for all concrete structures, regardless of the type or location, shall be firm, dense and thoroughly compacted and consolidated; shall be free from muck and mud; and shall be sufficiently stable to remain firm and intact under the feet of the workman or machinery engaged in subgrade, laying reinforcing steel, and depositing concrete thereon. In all cases where subsoil is mucky or works into mud or muck during such operation, a seal course of either concrete or rock shall be placed below subgrade to provide a firm base for working and for placing the floor slab.
- 11. A minimum horizontal distance of ten (10') shall be maintained between parallel water and sanitary sewer lines. At any point where sanitary sewer lines cross water main, the sanitary sewer shall be constructed of cast iron pipe or pipe encased in concrete for a distance of ten feet (10') in each direction from the crossing unless the water is a minimum of eighteen inches (18") above the top of the sanitary sewer line.
- 12. Contractor shall provide testing and inspection per SECTION 2200 - PAVING, CITY OF LEE'S SUMMIT, MISSOURI STANDARD **SPECIFICATIONS**
- Development plans are approved initially for one (1) year, after which they automatically become void and must be updated and approved by the City Engineer before any construction will be permitted.
- 14. The City of Lee's Summit plan review is only for general conformance with the City of Lee's Summit Design Criteria and the City Code. The City is not responsible for the accuracy and adequacy of the design, or dimensions and elevations which shall be confirmed and correlated at the job site. The City of Lee's Summit through approval of this document assumes no responsibility other than as stated above for the completeness and/or accuracy of this document.
- 15. The Contractor shall have one (1) signed copy of the plans (approved by the City of Lee's Summit) and one (1) copy of the appropriate Construction Standards and Specifications at the job site at all times.
- 16. Construction of the improvements shown or implied by this set of drawings shall not be initiated or any part thereof undertaken until the City Engineer is notified of such intent and all required and properly executed bonds and permit fees are received and approved by the City Engineer.
- 17. Contractor shall not be allowed to work on Saturdays, Sundays, or Holidays without prior approval of the City Engineer.
- 18. Relocation of any water line, sewer line or service line thereof required for the construction of this project shall be the responsibility of the contractor and shall be at his expense.
- 19. The Contractor shall install and properly maintain a mechanical plug at all connection points with existing lines until such time that the new line is tested and approved.



4/12/19


ATION PARISH **VELOPMENT PLANS** ON AND RENOVA DE FINAL SCJ UR

> 19-102 BASE DRAWING NO. 19-102 FINAL PLAN MARCH 15, 2019

> > JOB NO. 19-102

C002

GENERAL NOTES

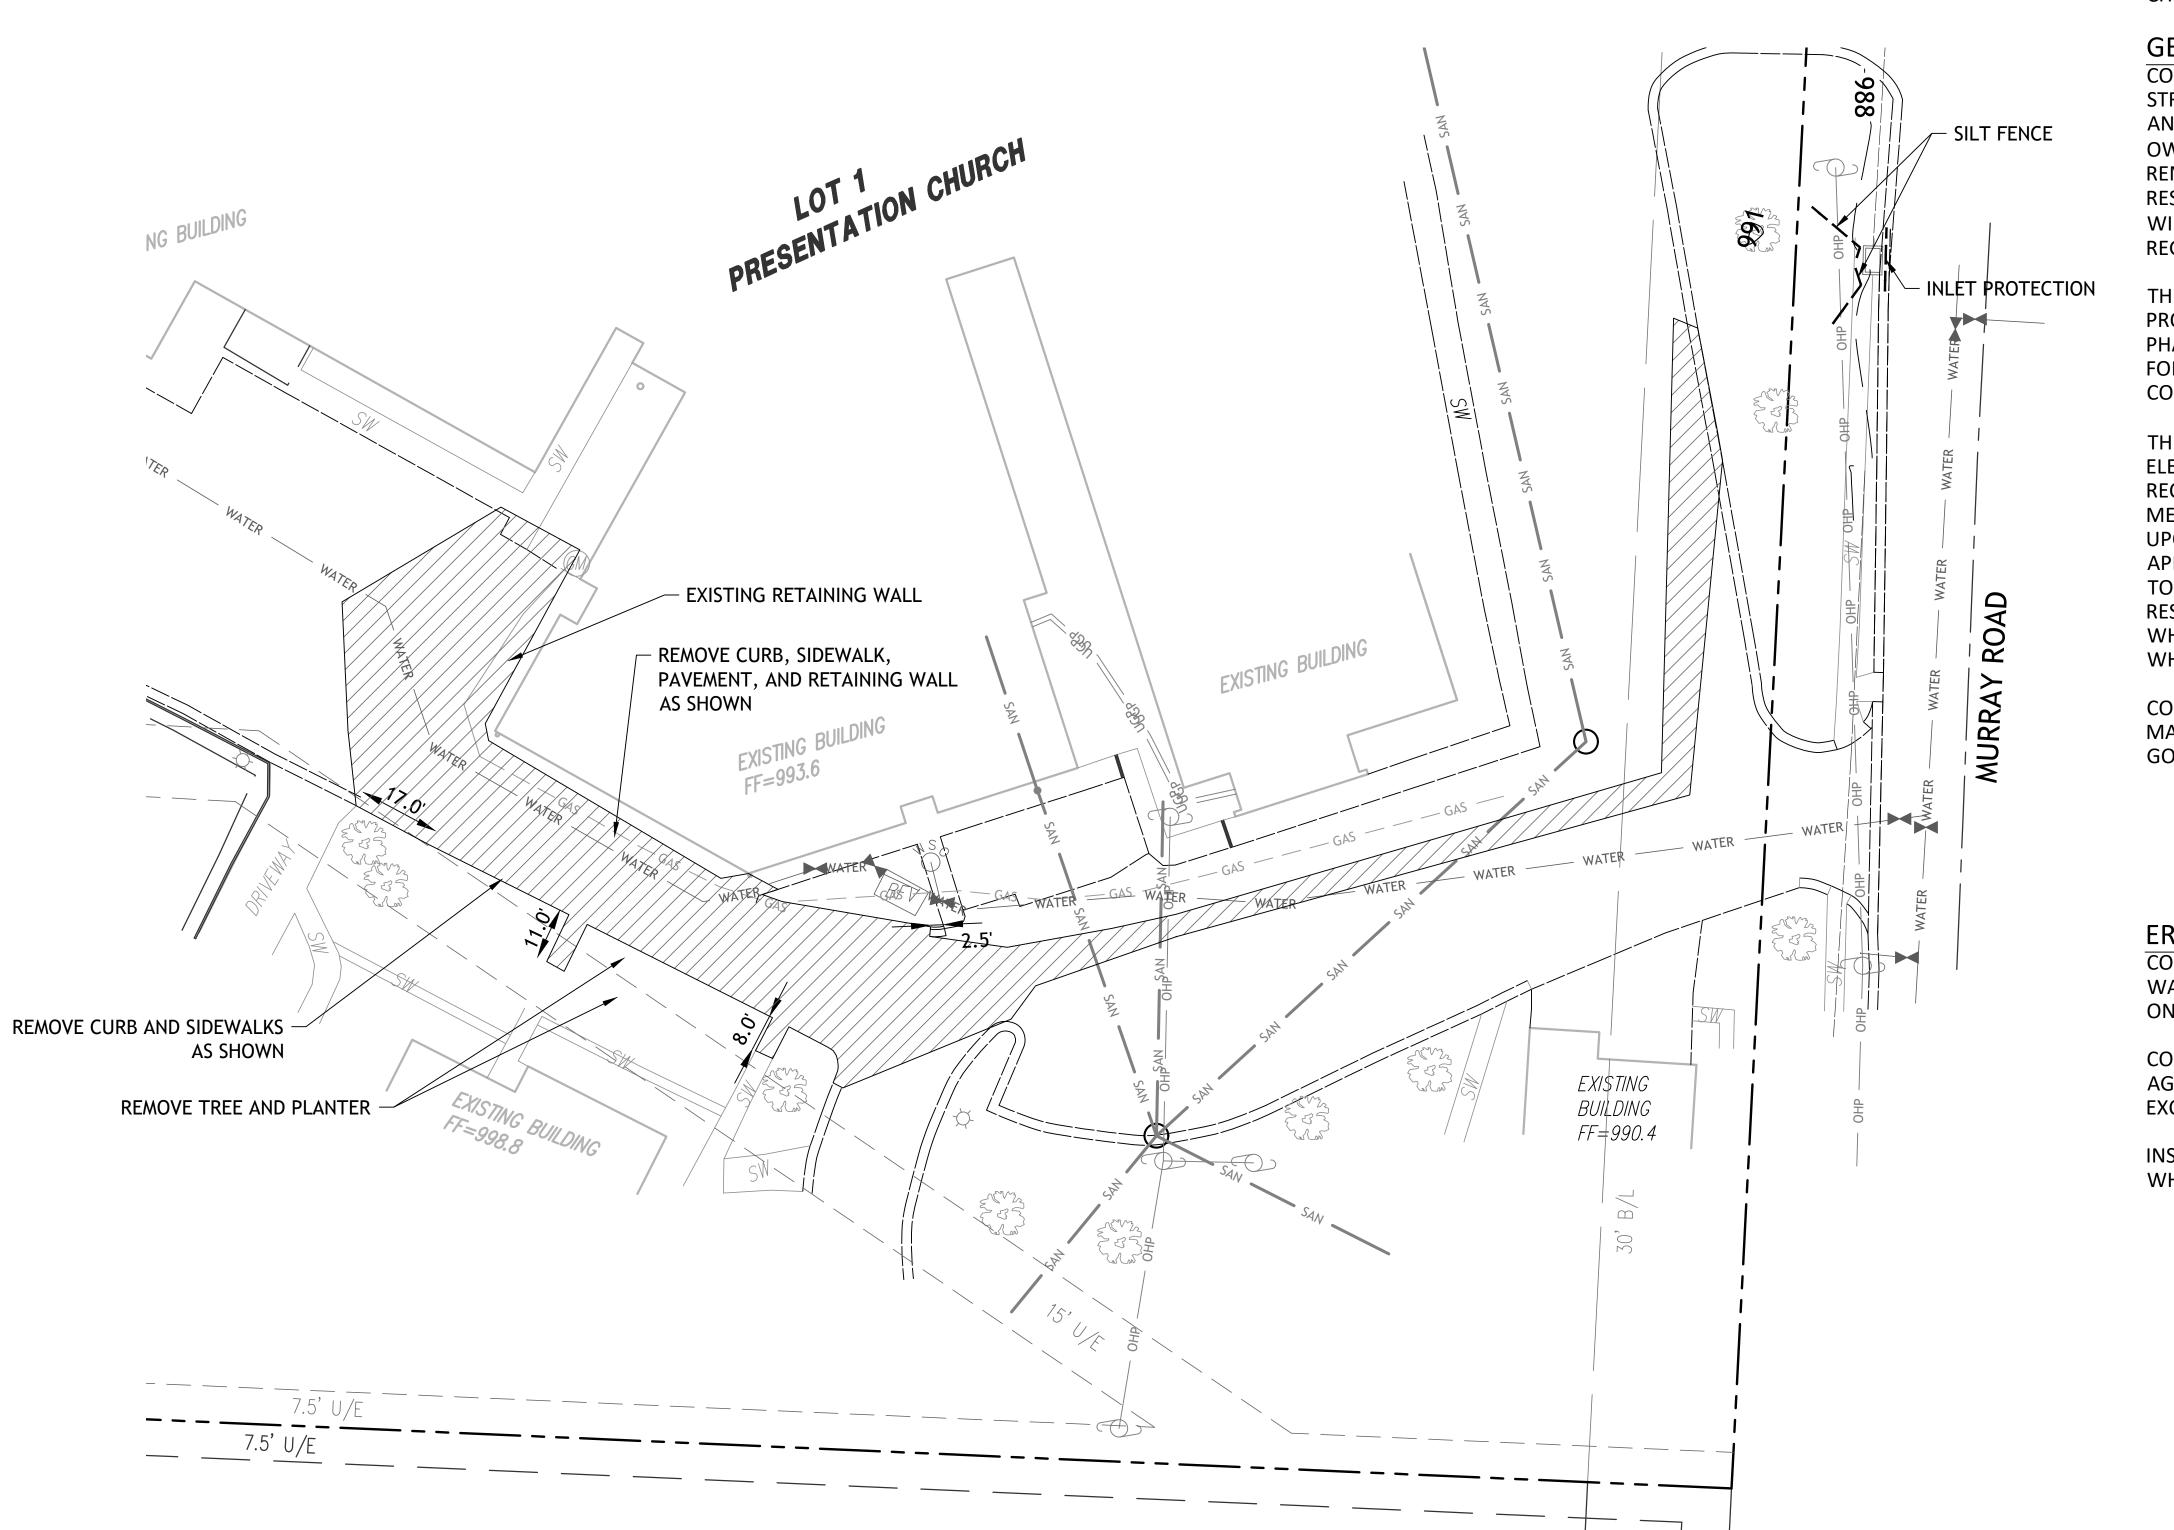

#### SITE DEMOLITION NOTES

1. ALL ONSITE STRUCTURES, BEING REMOVED IN ACCORDANCE WITH THE SPECIFICATIONS OF THE CITY OF LEE'S SUMMIT AND STATE REGULATIONS

2. CONTRACTOR RESPONSIBLE FOR VERIFYING THAT ALL UTILITIES HAVE BEEN DISCONNECTED PER THE INDIVIDUAL UTILITY COMPANY'S CRITERIA. ALL UTILITY PIPES TO BE ABANDONED SHALL BE PLUGGED PER STATE REGULATIONS

3. ALL ONSITE DEMOLISHED MATERIAL SHALL BE REMOVED AND DISPOSED OF PER STATE AND LOCAL REQUIREMENTS.

4. CONTRACTOR SHALL INSTALL A CONSTRUCTION FENCE AROUND THE PERIMETER OF THE SITE DURING DEMOLISHING ACTIVITIES.

#### **UTILITY NOTES**

1. CONTRACTOR TO COORDINATE WITH GAS COMPANY AND CITY FOR RELOCATION OF SERVICE.

2. CONTRACTOR TO REMOVE EXISTING WATER SERVICE CONNECTIONS PER CITY REQUIREMENTS.

#### GENERAL DEMOLITION NOTES

CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL OF THE EXISTING STRUCTURES, RELATED UTILITIES, PAVING, UNDERGROUND STORAGE TANKS AND ANY OTHER EXISTING IMPROVEMENTS AS NOTED. SEE THE OWNER'S/DEVELOPER'S SITE WORK SPECIFICATIONS. CONTRACTOR IS TO REMOVE AND DISPOSE OF ALL DEBRIS, RUBBISH AND OTHER MATERIALS RESULTING FROM PREVIOUS AND CURRENT DEMOLITION OPERATIONS. DISPOSAL WILL BE IN ACCORDANCE WITH ALL LOCAL, STATE AND/OR FEDERAL REGULATIONS GOVERNING SUCH OPERATIONS.

THE GENERAL CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO AVOID PROPERTY DAMAGE TO ADJACENT PROPERTIES DURING THE CONSTRUCTION PHASES OF THIS PROJECT. THE CONTRACTOR WILL BE HELD SOLELY RESPONSIBLE FOR ANY DAMAGES TO THE ADJACENT PROPERTIES OCCURRING DURING THE CONSTRUCTION PHASES OF THIS PROJECT.

THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES, AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THE INFORMATION IS NOT TO BE RELIED UPON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AT LEAST 48 HOURS BEFORE ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS, WHETHER SHOWN OR NOT SHOWN AT NO ADDITIONAL COST TO THE OWNER.


CONTRACTOR SHALL INSPECT AND TEST AS NECESSARY FOR ASBESTOS MATERIALS. REMOVAL OF ASBESTOS MATERIAL WILL MEET ALL LOCAL GOVERNING REQUIREMENTS.

#### **EROSION CONTROL NOTES**

CONTRACTOR TO SURROUND EXCAVATED STOCKPILES OF DIRT AND ROCK WITH WATTLES FOR CONTAINMENT AS NECESSARY TO PREVENT SILT FROM RUNNING ON PAVEMENT SURFACE.

CONTRACTOR TO COMPACT SUBGRADE, INSTALL GEOGRID AND INSTALL AGGREGATE BASE AS SOON AS POSSIBLE TO CONTAIN EXCAVATED DIRT WITHIN EXCAVATED AREAS.

INSTALL SILT FENCE AND INLET PROTECTION AROUND THE EXISTING CURB INLET WHEN EXCAVATION IN THAT AREA COMMENCES,

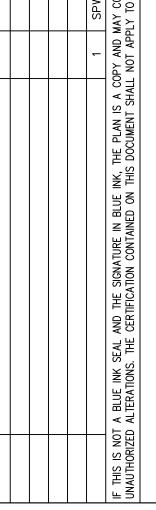



12/19

H

11010 Haskell Street, Suite 210, Kansas 66

CORPORATE LICENSE No. E201000573 (MO.) / E-1736 (KS.)

FINAL DEVELOPMENT PLANS
SCHOOL ADDITION AND RENOVATION
OUR LADY OF THE PRESENTATION PARIS

X-REF NO.
19-102 BASE


DRAWING NO.
19-102 PRELIMINARY PLAN


DATE

MARCH 15, 2019

C003

*JOB NO.* 19-102

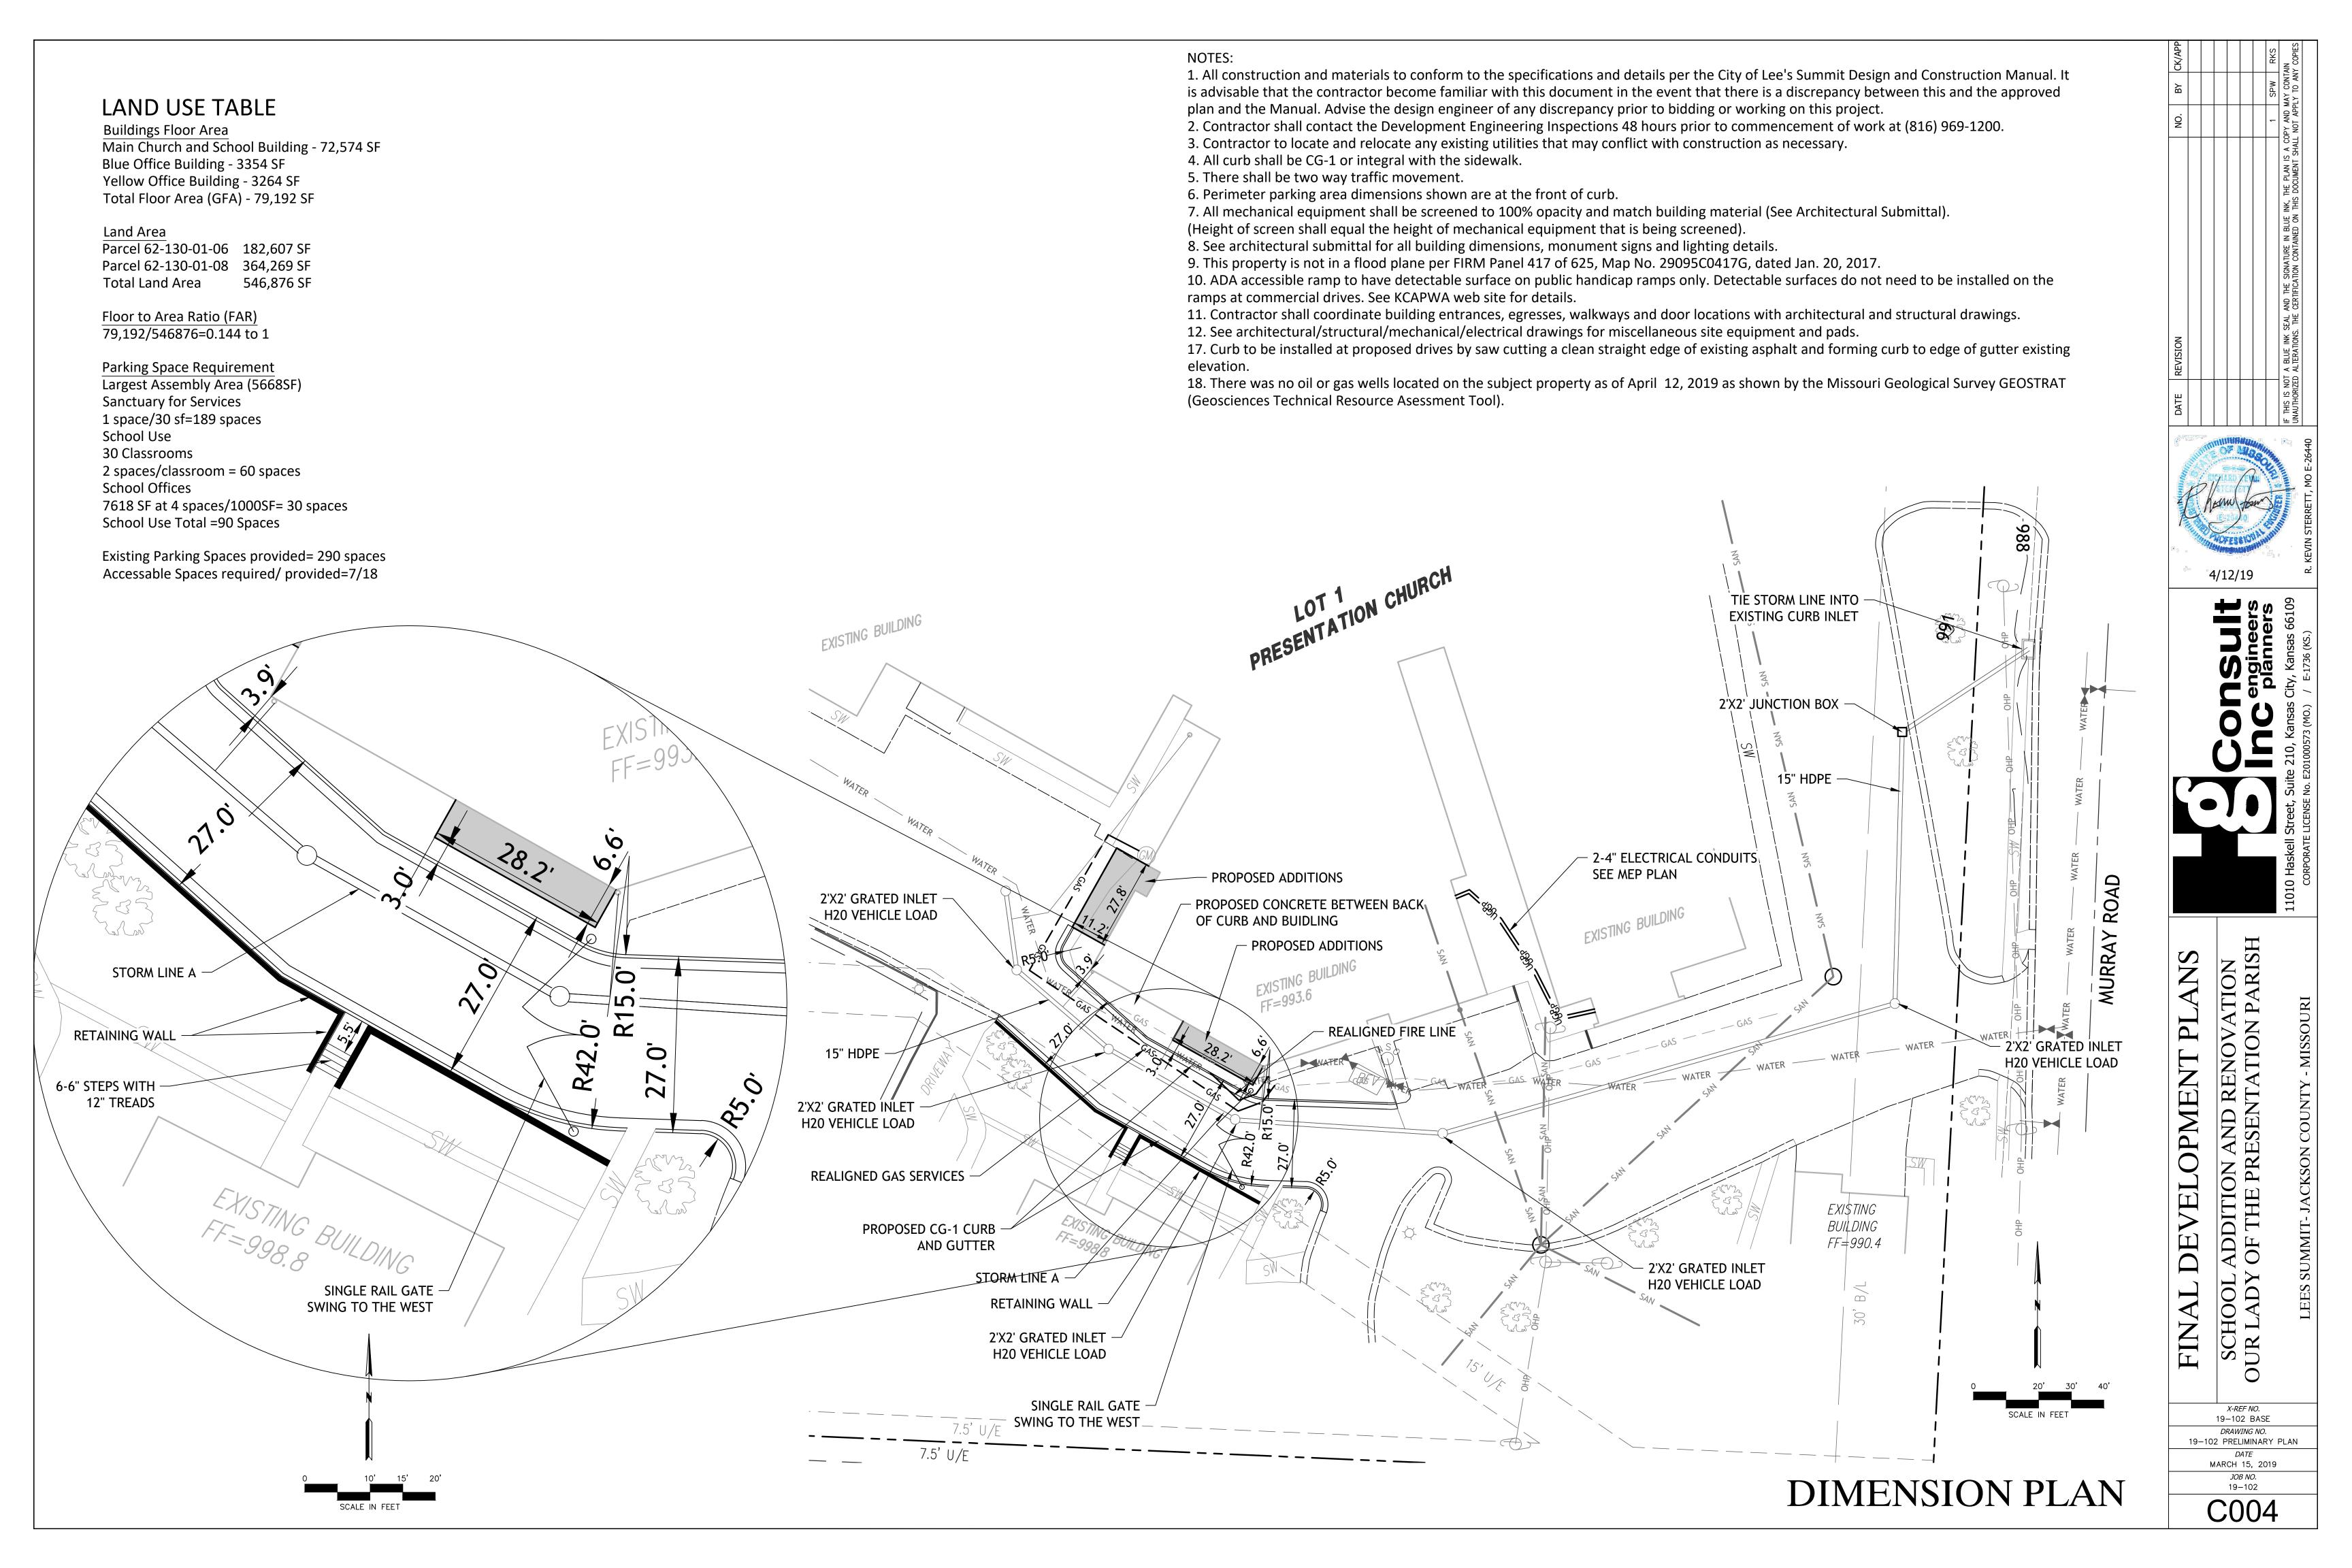

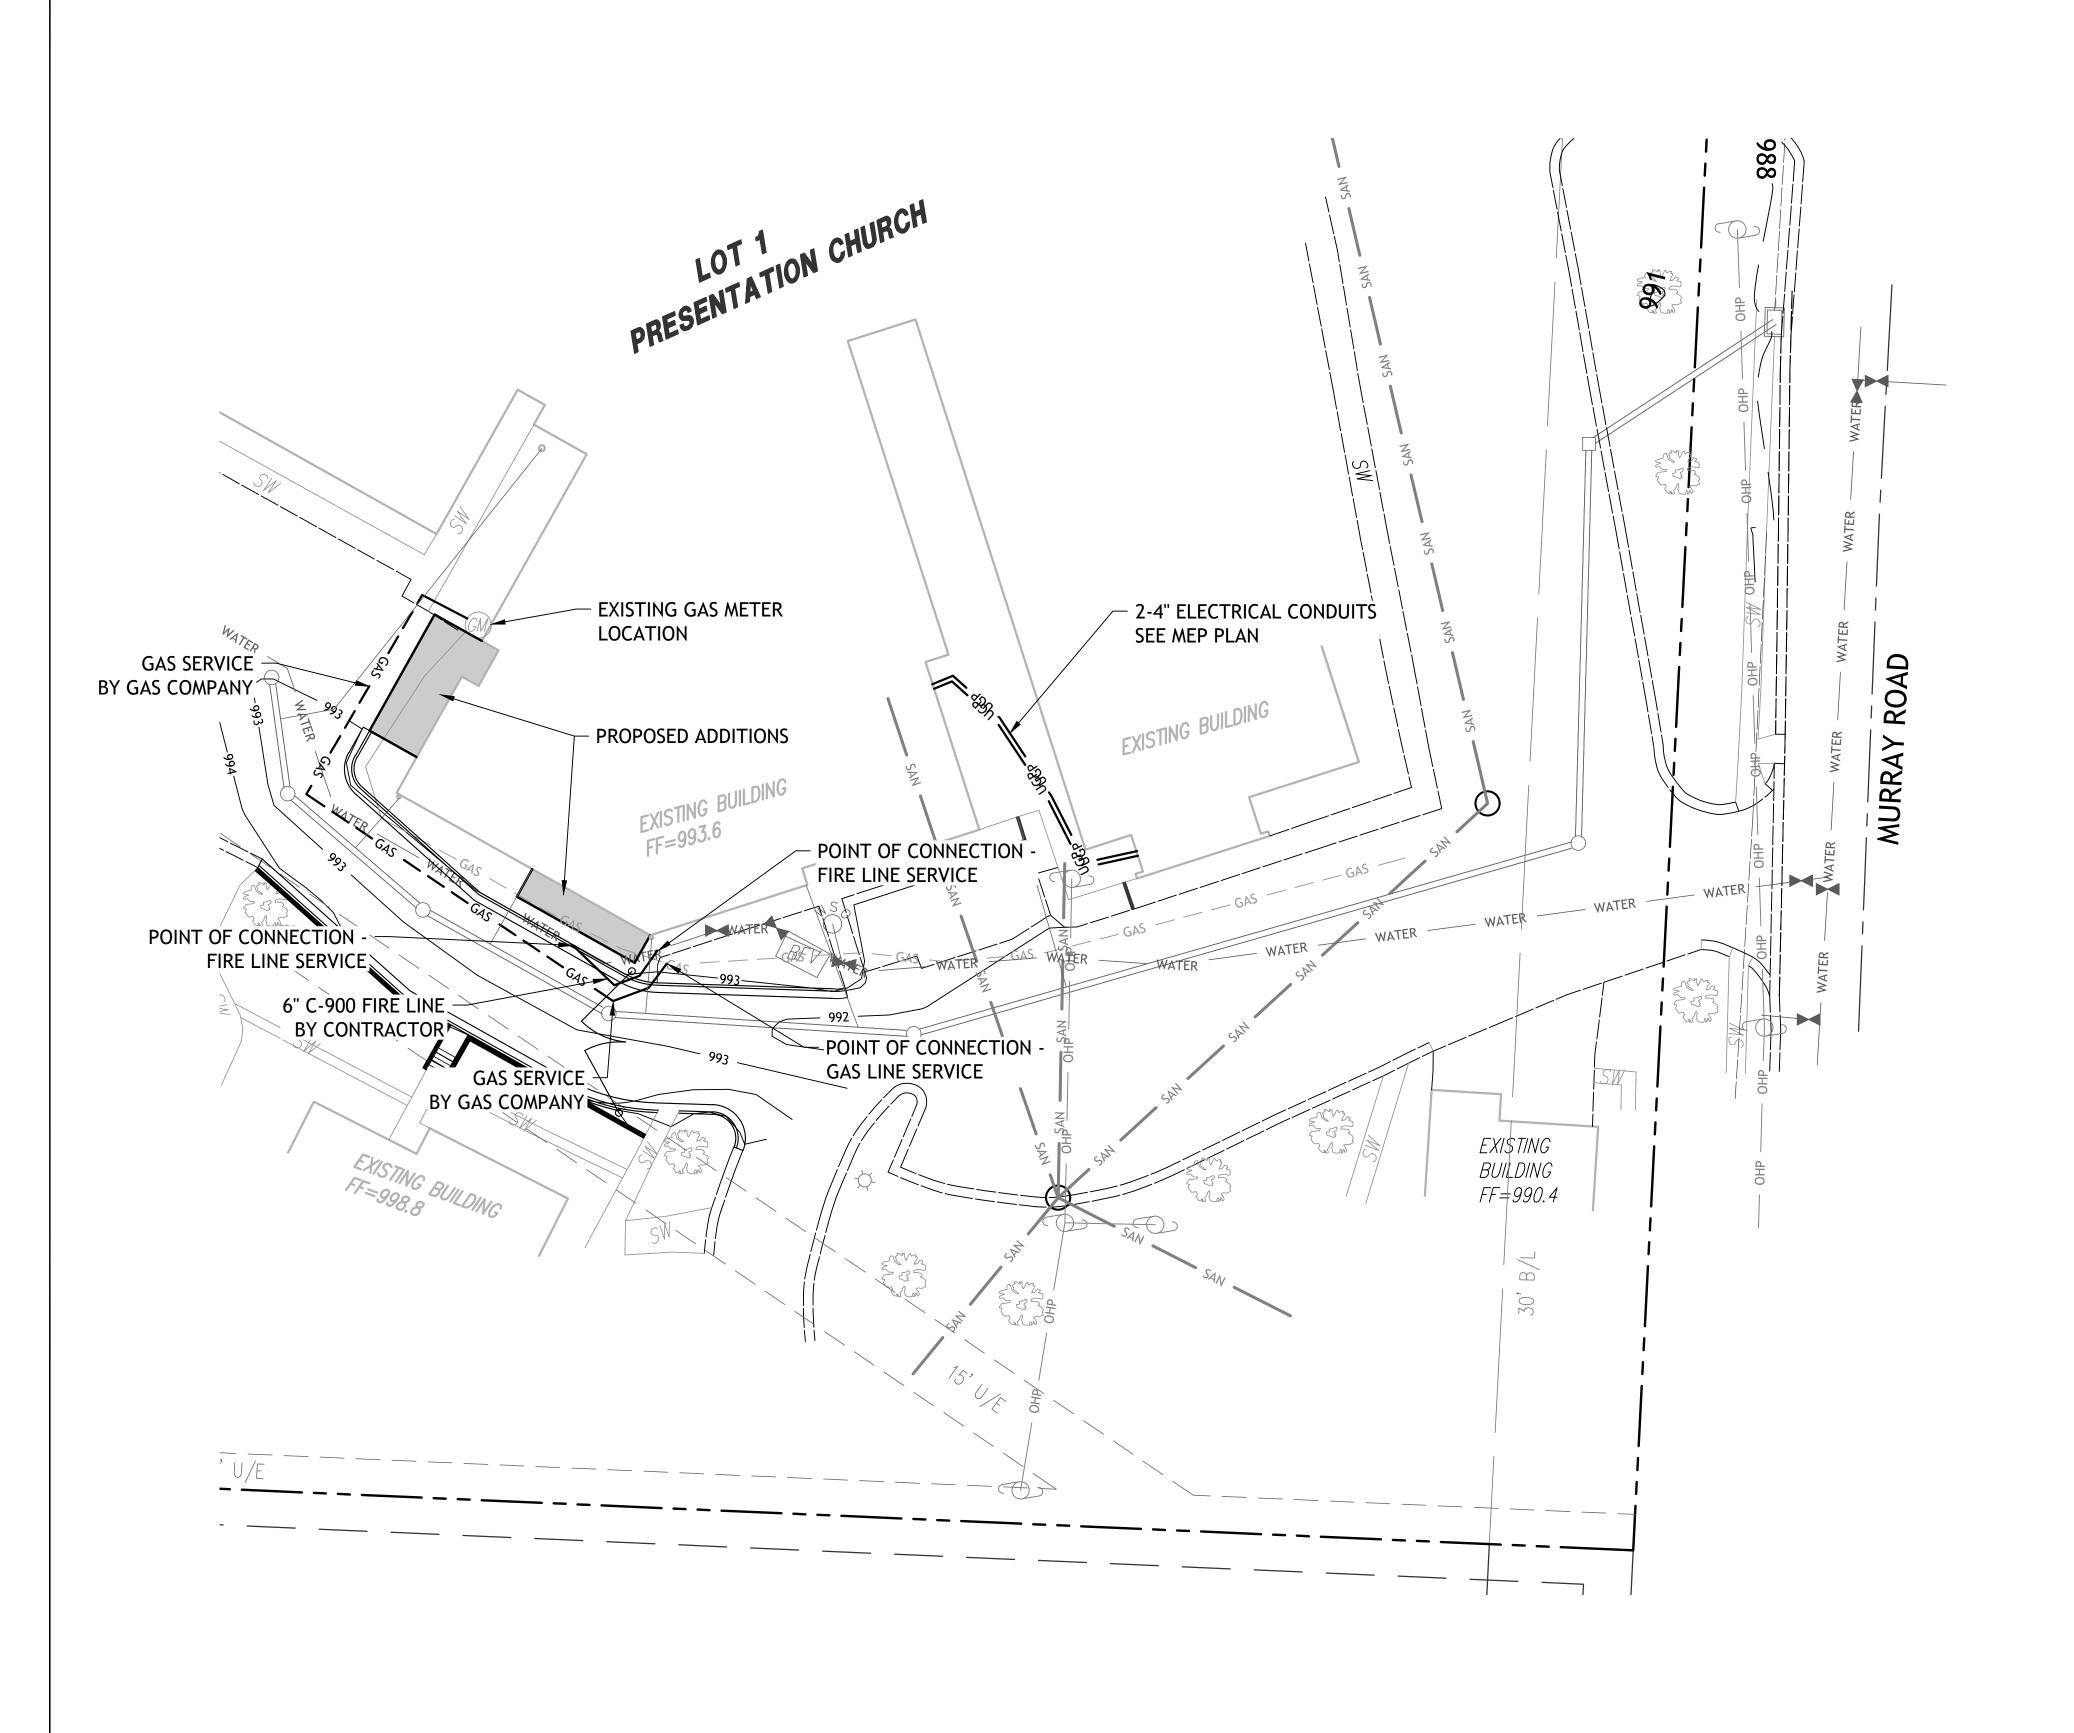


#### **UTILITY NOTES:**

- 1. CONSTRUCTION SHALL NOT START ON ANY PUBLIC WATER OR SANITARY SEWER SYSTEM UNTIL WRITTEN APPROVAL OR PERMITS HAVE BEEN RECEIVED FROM THE ENGINEER.
- 2. ALL UTILITY AND STORM SEWER TRENCHES CONSTRUCTED UNDER AREAS THAT RECEIVE PAVING SHALL BE BACKFILLED TO 18 INCHES ABOVE THE TOP OF THE PIPE WITH SELECT GRANULAR MATERIAL PLACED ON EIGHT-INCH LIFTS, AND COMPACTED TO 95% MODIFIED PROCTOR DENSITY.
- 3. CONTRACTOR SHALL NOT OPEN, TURN OFF, INTERFERE WITH, OR ATTACH ANY PIPE OR HOSE TO OR TAP ANY WATER MAIN BELONGING TO THE CITY UNLESS DULY AUTHORIZED TO DO SO BY THE CITY. ANY ADVERSE CONSEQUENCE OF ANY SCHEDULED OR UNSCHEDULED DISRUPTIONS OF SERVICE TO THE PUBLIC ARE TO BE THE LIABILITY OF THE CONTRACTOR. HG ENGINEERING AND OWNER ARE TO BE HELD HARMLESS.
- 4. DISINFECTION AND PRESSURE TESTING OF WATER LINES SHALL BE PERFORMED AND PAID FOR WATER DEPARTMENT 24 HOURS MINIMUM, PRIOR TO ANY TESTING.
- 5. ALL WATER AND SANITARY SEWER SYSTEMS THAT ARE TO BE PUBLIC LINES SHALL BE CONSTRUCTED IN ACCORDANCE WITH SPECIFICATIONS PREVIOUSLY APPROVED BY THE CITY OF LEES SUMMIT AND THE STATE OF MISSOURI AND SHALL BE INSPECTED BY THE CITY. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ASSURE THAT THIS INSPECTION OCCURS.
- 6. LOCATIONS SHOWN FOR PROPOSED WATER AND GAS LINES ARE APPROXIMATE. VARIATIONS MAY BE MADE, WITH APPROVAL OF THE ENGINEER, TO AVOID CONFLICTS.
- 7. CONTRACTOR TO INSTALL TRACING TAPE ALONG ALL NON-METALLIC WATER MAINS AND SERVICE LINES PER SPECIFICATIONS.
- 8. CONTRACTOR SHALL EXPOSE EXISTING UTILITIES AT LOCATIONS OF POSSIBLE CONFLICT AND POINTS OF CONNECTION PRIOR TO ANY CONSTRUCTION OF NEW UTILITIES.
- WATER LINES SHALL HAVE A MINIMUM COVER OF 42 INCHES. ALL VALVES ON MAINS AND FIRE HYDRANT LEADS SHALL BE WITH VALVE BOX ASSEMBLIES. THE SIZE OF VALVE BOX ASSEMBLY TO BE INSTALLED IS DETERMINED BY THE TYPE AND SIZE OF VALVE. VALVE BOX CAPS SHALL HAVE THE WORD "WATER".
- 10. A MINIMUM HORIZONTAL DISTANCE OF 10 FEET SHALL BE MAINTAINED BETWEEN PARALLEL WATER AND SANITARY SEWER LINES. WHEN IT IS NECESSARY FOR ANY WATER LINE TO CROSS A SANITARY SEWER LINE, THE SEWER LINE SHALL BE CONSTRUCTED OF DUCTILE IRON PIPE AT LEAST 10 FEET EITHER SIDE OF THE WATER LINE UNLESS THE WATER LINE IS AT LEAST 2 FEET CLEAR DISTANCE ABOVE THE SANITARY SEWER LINE.

#### **UTILITY STATEMENT:**


THE UNDERGROUND UTILITIES SHOWN HEREON ARE FROM FIELD SURVEY INFORMATION OF ONE-CALL LOCATED UTILITIES, FIELD SURVEY INFORMATION OF ABOVE GROUND OBSERVABLE EVIDENCE, AND/OR THE SCALING AND PLOTTING OF EXISTING UTILITY MAPS AND DRAWINGS AVAILABLE TO THE SURVEYOR AT THE TIME OF SURVEY. THE SURVEYOR MAKES NO GUARANTEE THAT THE UNDERGROUND UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED. FURTHERMORE, THE SURVEYOR DOES NOT WARRANT THAT THE UNDERGROUND UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED ALTHOUGH HE DOES CERTIFY THAT THEY ARE LOCATED AS ACCURATELY AS POSSIBLE FROM INFORMATION AVAILABLE. THE SURVEYOR HAS NOT PHYSICALLY LOCATED THE UNDERGROUND UTILITIES BY EXCAVATION UNLESS OTHERWISE NOTED ON THIS SURVEY.

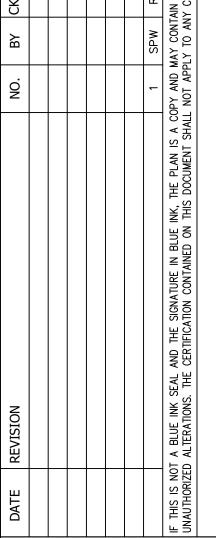



4/12/19

ATION PARISH ANS VELOPMENT

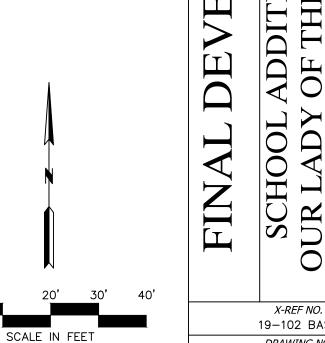


19-102 BASE DRAWING NO. 19-102 PRELIMINARY PLAN DATE MARCH 15, 2019 JOB NO.

19-102

C005

UTILITY PLAN

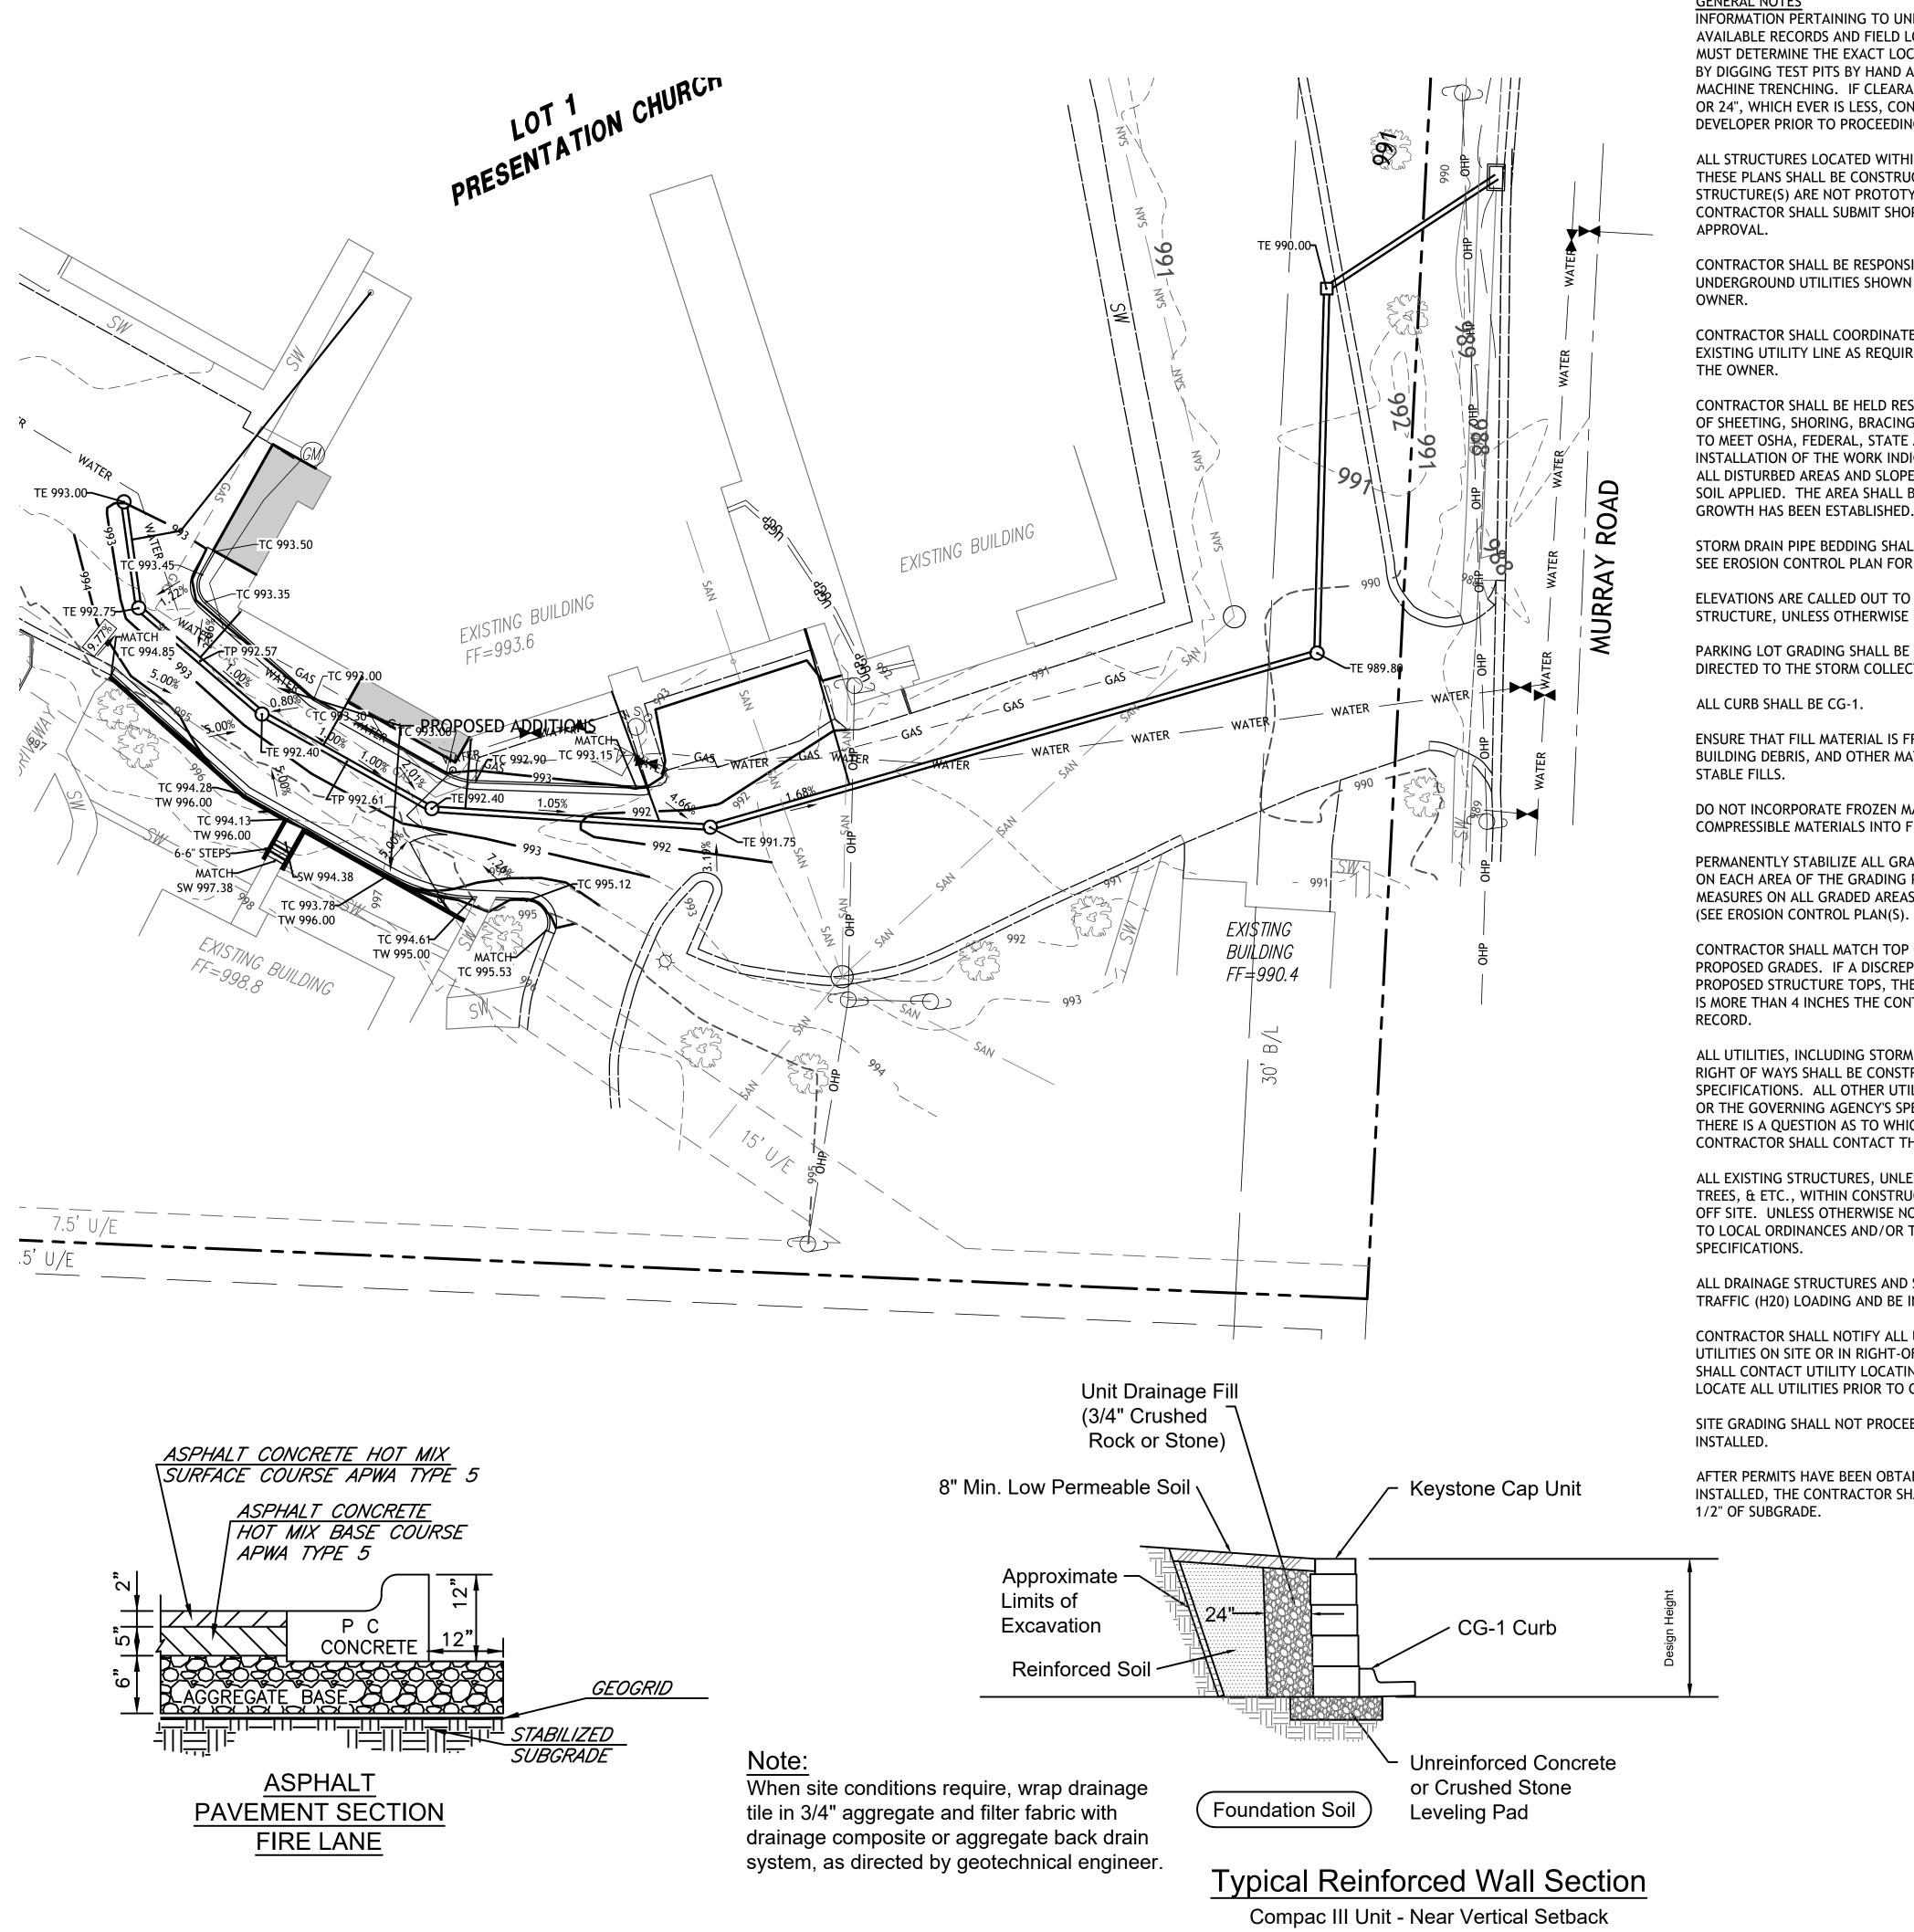

#### GENERAL NO

INFORMATION PERTAINING TO UNDER GROUND UTILITIES WAS OBTAINED FROM AVAILABLE RECORDS AND FIELD LOCATIONS WHEN POSSIBLE, BUT THE CONTRACTOR MUST DETERMINE THE EXACT LOCATION AND ELEVATION OF ALL EXISTING UTILITIES BY DIGGING TEST PITS BY HAND AT ALL UTILITY CROSSINGS IN ADVANCE OF MACHINE TRENCHING. IF CLEARANCES ARE LESS THAN SPECIFIED ON THESE PLANS OR 24", WHICH EVER IS LESS, CONTACT THE ENGINEER AND THE OWNER/DEVELOPER PRIOR TO PROCEEDING WITH CONSTRUCTION.

ALL STRUCTURES LOCATED WITHIN RIGHT OF WAY OR OTHERWISE NOTED ON THE THESE PLANS SHALL BE CONSTRUCTED PER HIGHWAY DEPARTMENT STANDARDS. IF STRUCTURE(S) ARE NOT PROTOTYPICAL OR CONSTRUCTION CANNOT BE ACHIEVED CONTRACTOR SHALL SUBMIT SHOP DRAWING TO HG CONSULT, FOR REVIEW AND APPROVAL.

CONTRACTOR SHALL BE RESPONSIBLE FOR RELOCATION OR REMOVAL OF EXISTING UNDERGROUND UTILITIES SHOWN OR NOT SHOWN AT NO ADDITIONAL COST TO THE OWNER.

CONTRACTOR SHALL COORDINATE WITH UTILITY COMPANIES ON ADJUSTING EXISTING UTILITY LINE AS REQUIRED BY CUT AND FILL AT NO ADDITIONAL COST TO THE OWNER.

CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE DESIGN AND IMPLEMENTATION OF SHEETING, SHORING, BRACING AND SPECIAL EXCAVATION MEASURES REQUIRED TO MEET OSHA, FEDERAL, STATE AND LOCAL REGULATIONS PURSUANT TO THE INSTALLATION OF THE WORK INDICATED ON THESE DRAWINGS.
ALL DISTURBED AREAS AND SLOPES SHALL BE GRADED SMOOTH AND (4") OF TOP SOIL APPLIED. THE AREA SHALL BE SEEDED AND WATERED UNTIL HARDY GRASS GROWTH HAS BEEN ESTABLISHED.

STORM DRAIN PIPE BEDDING SHALL BE INSTALLED PER APWA, SECTION 2100. SEE EROSION CONTROL PLAN FOR RIP RAP PAD SIZES.

ELEVATIONS ARE CALLED OUT TO TOP OF CURB, TOP OF PAVEMENT, OR TOP OF STRUCTURE, UNLESS OTHERWISE NOTED.

PARKING LOT GRADING SHALL BE PERFORMED TO ROUTE STORM WATER AS DIRECTED TO THE STORM COLLECTION SYSTEM.

ENSURE THAT FILL MATERIAL IS FREE OF BRUSH, RUBBISH, ROCKS, LOGS, STUMPS, BUILDING DEBRIS, AND OTHER MATERIALS INAPPROPRIATE FOR CONSTRUCTING STABLE FILLS.

DO NOT INCORPORATE FROZEN MATERIAL OR SOFT, MUCK, OR HIGHLY COMPRESSIBLE MATERIALS INTO FILL SLOPES.

PERMANENTLY STABILIZE ALL GRADED AREAS AFTER FINAL GRADING IS COMPLETED ON EACH AREA OF THE GRADING PLAN. APPLY TEMPORARY STABILIZATION MEASURES ON ALL GRADED AREAS WHEN WORK IS TO BE INTERRUPTED OR DELAYED (SEE EROSION CONTROL PLAN(S).

CONTRACTOR SHALL MATCH TOP OF PROPOSED DRAINAGE STRUCTURES WITH PROPOSED GRADES. IF A DISCREPANCY OCCURS BETWEEN PROPOSED GRADES AND PROPOSED STRUCTURE TOPS, THE GRADING SHALL GOVERN. IF THE DISCREPANCY IS MORE THAN 4 INCHES THE CONTRACTOR SHALL CONTACT THE ENGINEER OF RECORD.

ALL UTILITIES, INCLUDING STORM SEWER, SHOWN WITHIN PUBLIC EASEMENTS OR RIGHT OF WAYS SHALL BE CONSTRUCTED TO THE GOVERNING AGENCY'S SPECIFICATIONS. ALL OTHER UTILITIES SHALL BE CONSTRUCTED TO THE CLIENT'S OR THE GOVERNING AGENCY'S SPECIFICATIONS, WHICHEVER IS MORE STRINGENT, IF THERE IS A QUESTION AS TO WHICH SPECIFICATIONS SHOULD APPLY THE CONTRACTOR SHALL CONTACT THE ENGINEER OF RECORD.

ALL EXISTING STRUCTURES, UNLESS OTHERWISE NOTED TO REMAIN. ALL FENCING, TREES, & ETC., WITHIN CONSTRUCTION AREA SHALL BE REMOVED & DISPOSED OF OFF SITE. UNLESS OTHERWISE NOTED. ANY BURNING ON SITE SHALL BE SUBJECT TO LOCAL ORDINANCES AND/OR THE OWNER/DEVELOPERS STANDARDS AND SPECIFICATIONS.

ALL DRAINAGE STRUCTURES AND STORM SEWER PIPES SHALL MEET HEAVY DUTY TRAFFIC (H20) LOADING AND BE INSTALLED ACCORDINGLY.

CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES HAVING UNDERGROUND UTILITIES ON SITE OR IN RIGHT-OF-WAY PRIOR TO EXCAVATION. CONTRACTOR SHALL CONTACT UTILITY LOCATING COMPANY (STATE ONE CALL SYSTEM) AND LOCATE ALL UTILITIES PRIOR TO GRADING START.


SITE GRADING SHALL NOT PROCEED UNTIL EROSION CONTROL MEASURES HAVE BEEN INSTALLED.

AFTER PERMITS HAVE BEEN OBTAINED AND EROSION CONTROL MEASURES INSTALLED, THE CONTRACTOR SHALL GRADE BUILDING PAD & APRONS TO 0" TO - 1/2" OF SUBGRADE.

#### **GRADING NOTES:**

1. EARTHWORK UNDER THE BUILDING SHALL COMPLY WITH THE PROJECT ARCHITECTURAL PLANS. OTHER FILL MATERIAL SHALL BE MADE IN LIFTS NOT TO EXCEED EIGHT INCHES DEPTH COMPACTED TO 95% STANDARD PROCTOR DENSITY. FILL MATERIAL MAY INCLUDE ROCK FROM ON-SITE EXCAVATION IF CAREFULLY PLACED SO THAT LARGE STONES ARE WELL DISTRIBUTED AND VOIDS ARE COMPLETELY FILLED WITH SMALLER STONES, EARTH, SAND OR GRAVEL TO FURNISH A SOLID EMBANKMENT. NO ROCK LARGER THAN THREE INCHES IN ANY DIMENSION NOR ANY SHALE SHALL BE PLACED IN THE TOP 12 INCHES OF EMBANKMENT.

- 2. AREAS THAT ARE TO BE CUT TO SUBGRADE LEVELS SHALL BE PROOF ROLLED WITH A MODERATELY HEAVY LOADED DUMP TRUCK OR SIMILAR APPROVED CONSTRUCTION EQUIPMENT TO DETECT UNSUITABLE SOIL CONDITIONS.
- 3. IN ALL AREAS OF EXCAVATION, IF UNSUITABLE SOIL CONDITIONS ARE ENCOUNTERED. A QUALIFIED GEOTECHNICAL ENGINEER SHALL RECOMMEND TO THE OWNER THE METHODS OF UNDERCUTTING AND REPLACEMENT OF PROPERLY COMPACTED, APPROVED FILL MATERIAL. ALL PROOF ROLLING AND UNDERCUTTING SHOULD BE PERFORMED DURING A PERIOD OF DRY WEATHER.
- 4. CONTRACTOR SHALL USE SILT FENCE OR OTHER MEANS OF CONTROLLING EROSION ALONG THE EDGE OF THE PROPERTY OR OTHER BOTTOM OF SLOPE LOCATIONS.
- 5. CONTRACTOR IS TO REMOVE AND DISPOSE OF ALL DEBRIS, RUBBISH AND OTHER MATERIALS RESULTING FROM PREVIOUS AND CURRENT DEMOLITION OPERATIONS.
- 6. THE CONTRACTOR SHALL TAKE ALL PRECAUTIONS NECESSARY TO AVOID PROPERTY DAMAGE TO ADJACENT PROPERTIES DURING THE CONSTRUCTION PHASES OF THIS PROJECT. THE CONTRACTOR WILL BE HELD SOLELY RESPONSIBLE FOR ANY DAMAGES TO THE ADJACENT PROPERTIES OCCURRING DURING THE CONSTRUCTION PHASES OF THIS PROJECT.
- 7. IT IS NOT THE DUTY OF THE ENGINEER OR THE OWNER TO REVIEW THE ADEQUACY OF THE CONTRACTOR'S SAFETY MEASURES, IN, ON OR NEAR THE CONSTRUCTION SITE AT ANY TIME DURING CONSTRUCTION.
- 8. THE SITEWORK FOR THIS PROJECT SHALL MEET OR EXCEED STANDARD SITEWORK SPECIFICATIONS.
- 9. PIPE LENGTHS ARE CENTER TO CENTER OF STRUCTURE OR TO END OF END SECTIONS.
- 10. HANDICAP STALLS SHALL MEET ADA REQUIREMENTS AND SHALL NOT EXCEED 2% SLOPE IN ANY DIRECTION AT THE BUILDING ENTRY AND ACCESSIBLE PARKING STALLS. SLOPES EXCEEDING 2.0% WILL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
- 1. CONTRACTOR TO ADJUST DEPTHS OF EXISTING SERVICE LINES AS NECESSARY

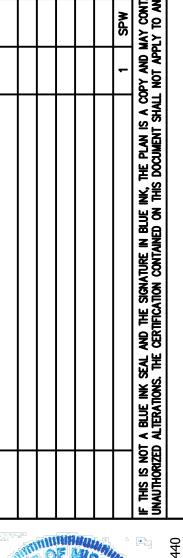



/12/19

CORPORATE LICENSE No. E201000573 (MO.) / E-1736 (KS.)

L DEVELOPMENT PLANS
OL ADDITION AND RENOVATION
DY OF THE PRESENTATION PARISH


AO'


THE PROPERTY OF THE PROPE


C006


O 20' 30' 40'
SCALE IN FEET


GRADING PLAN

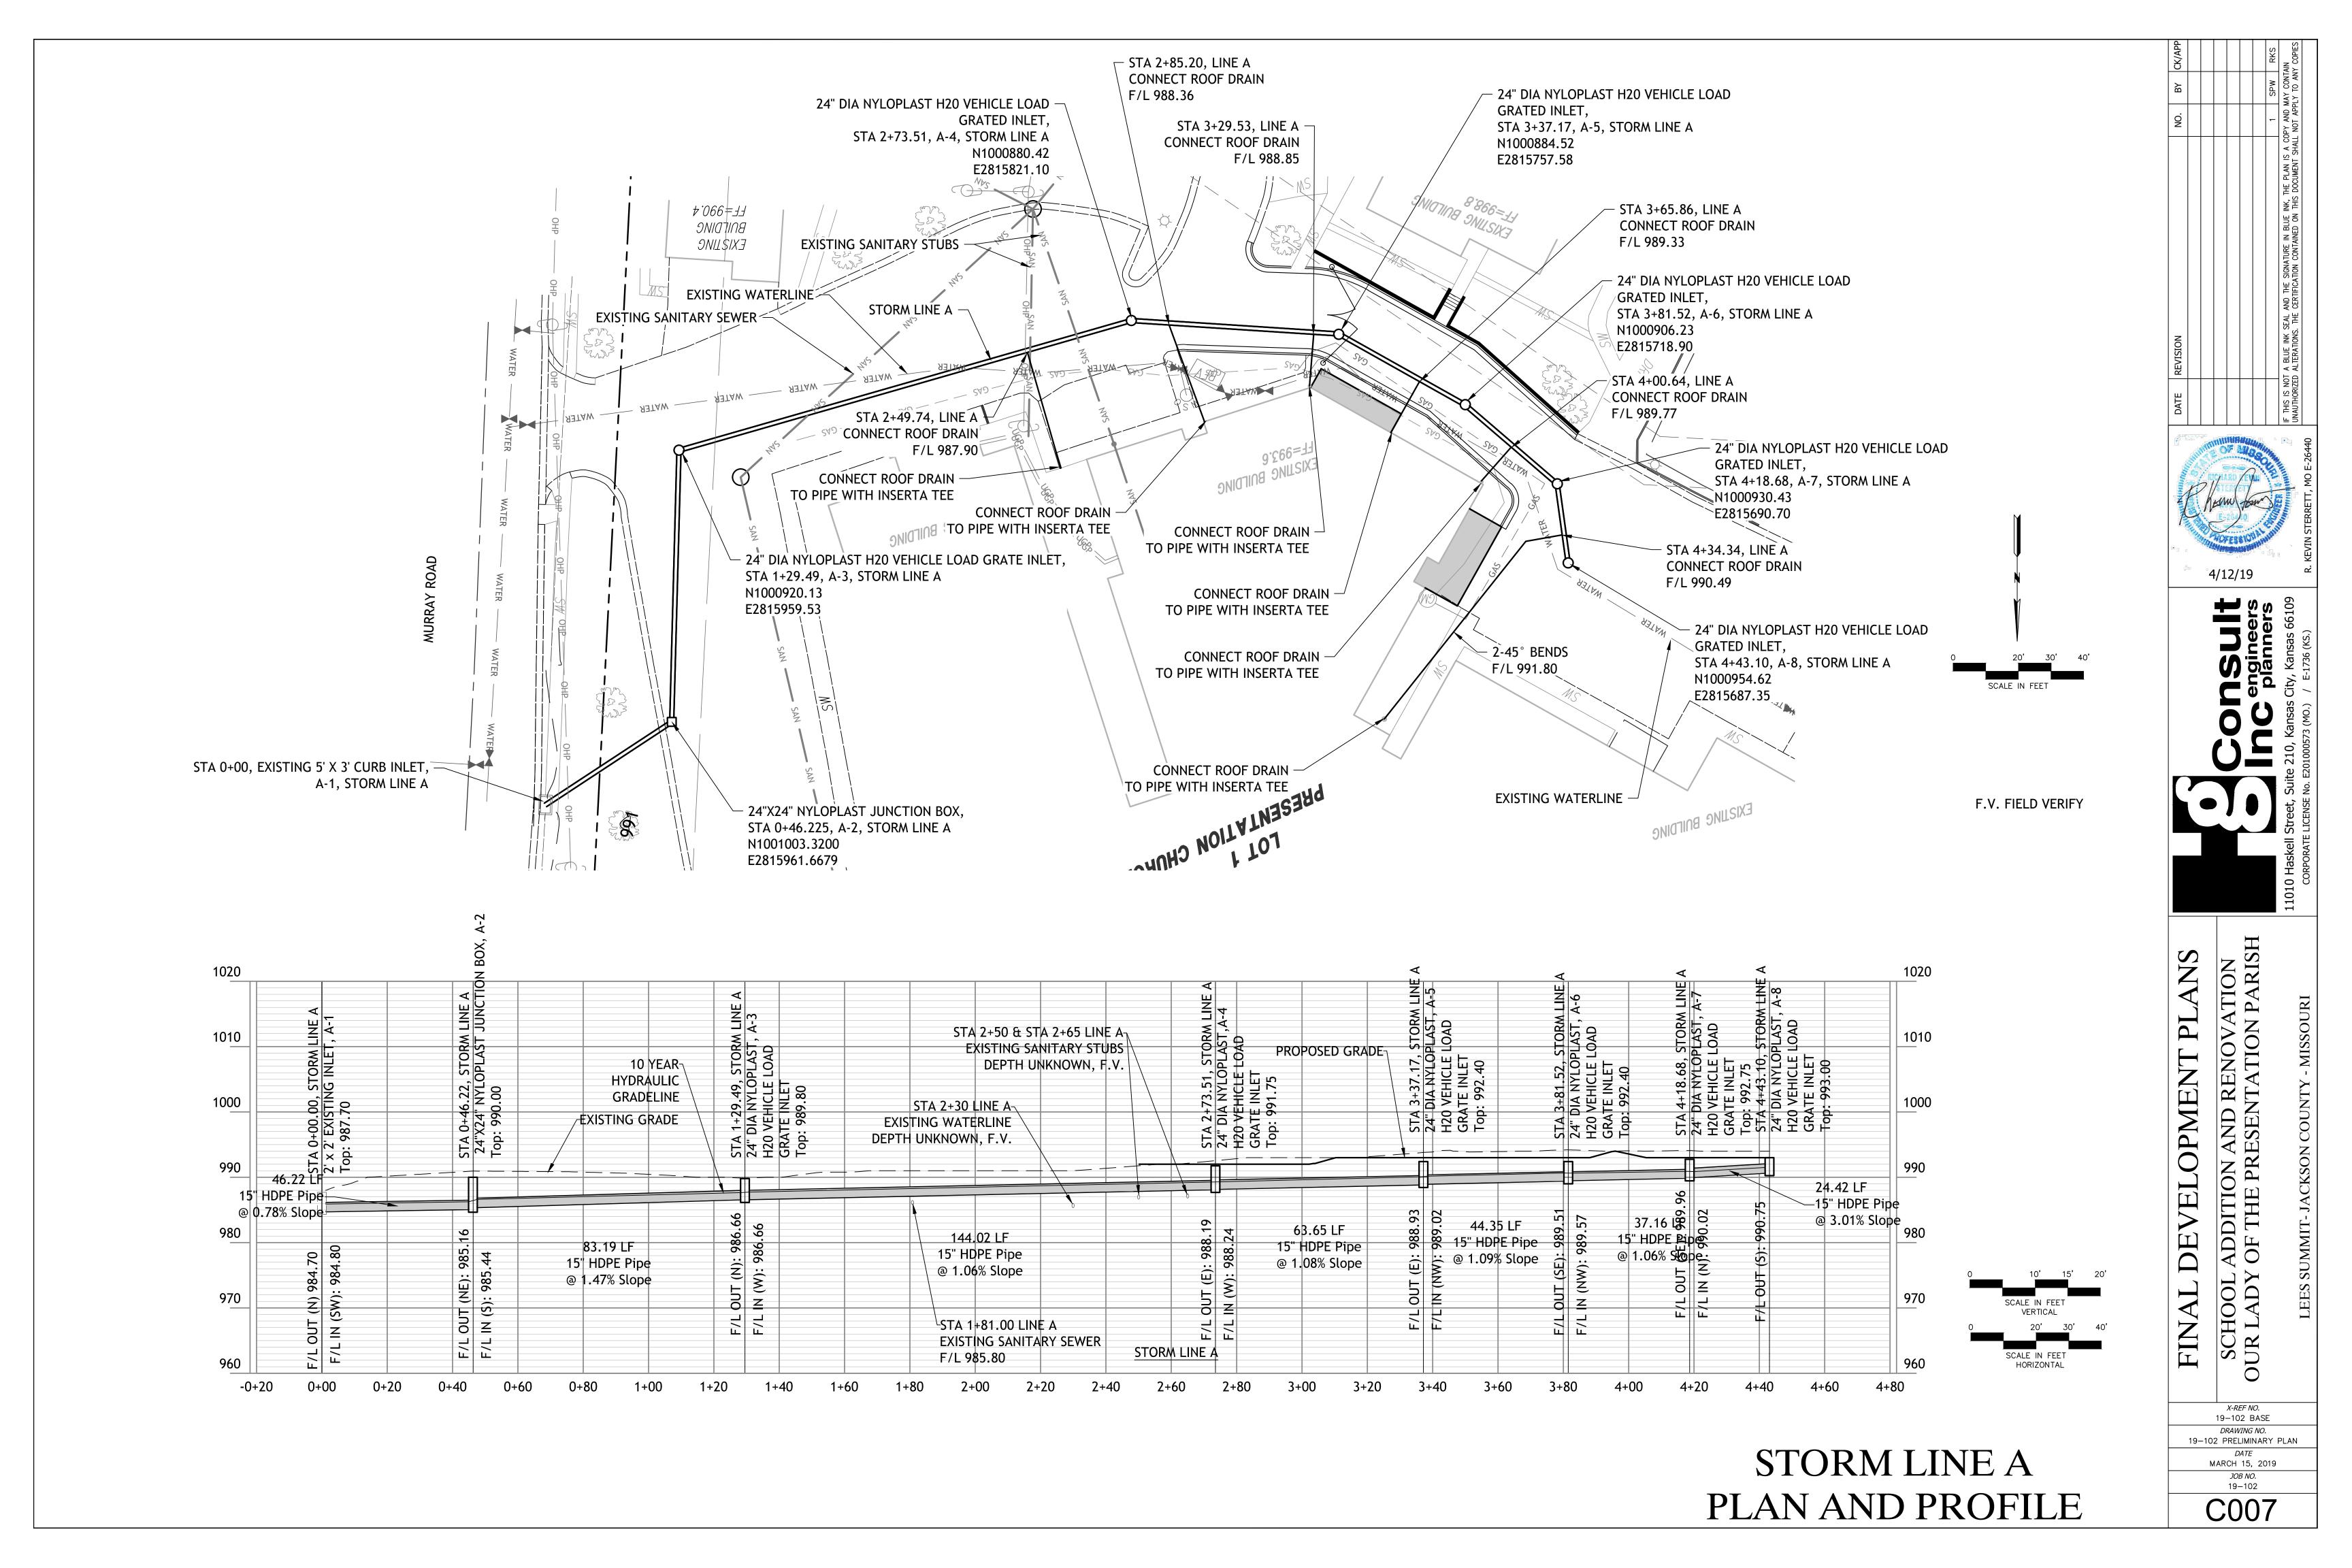

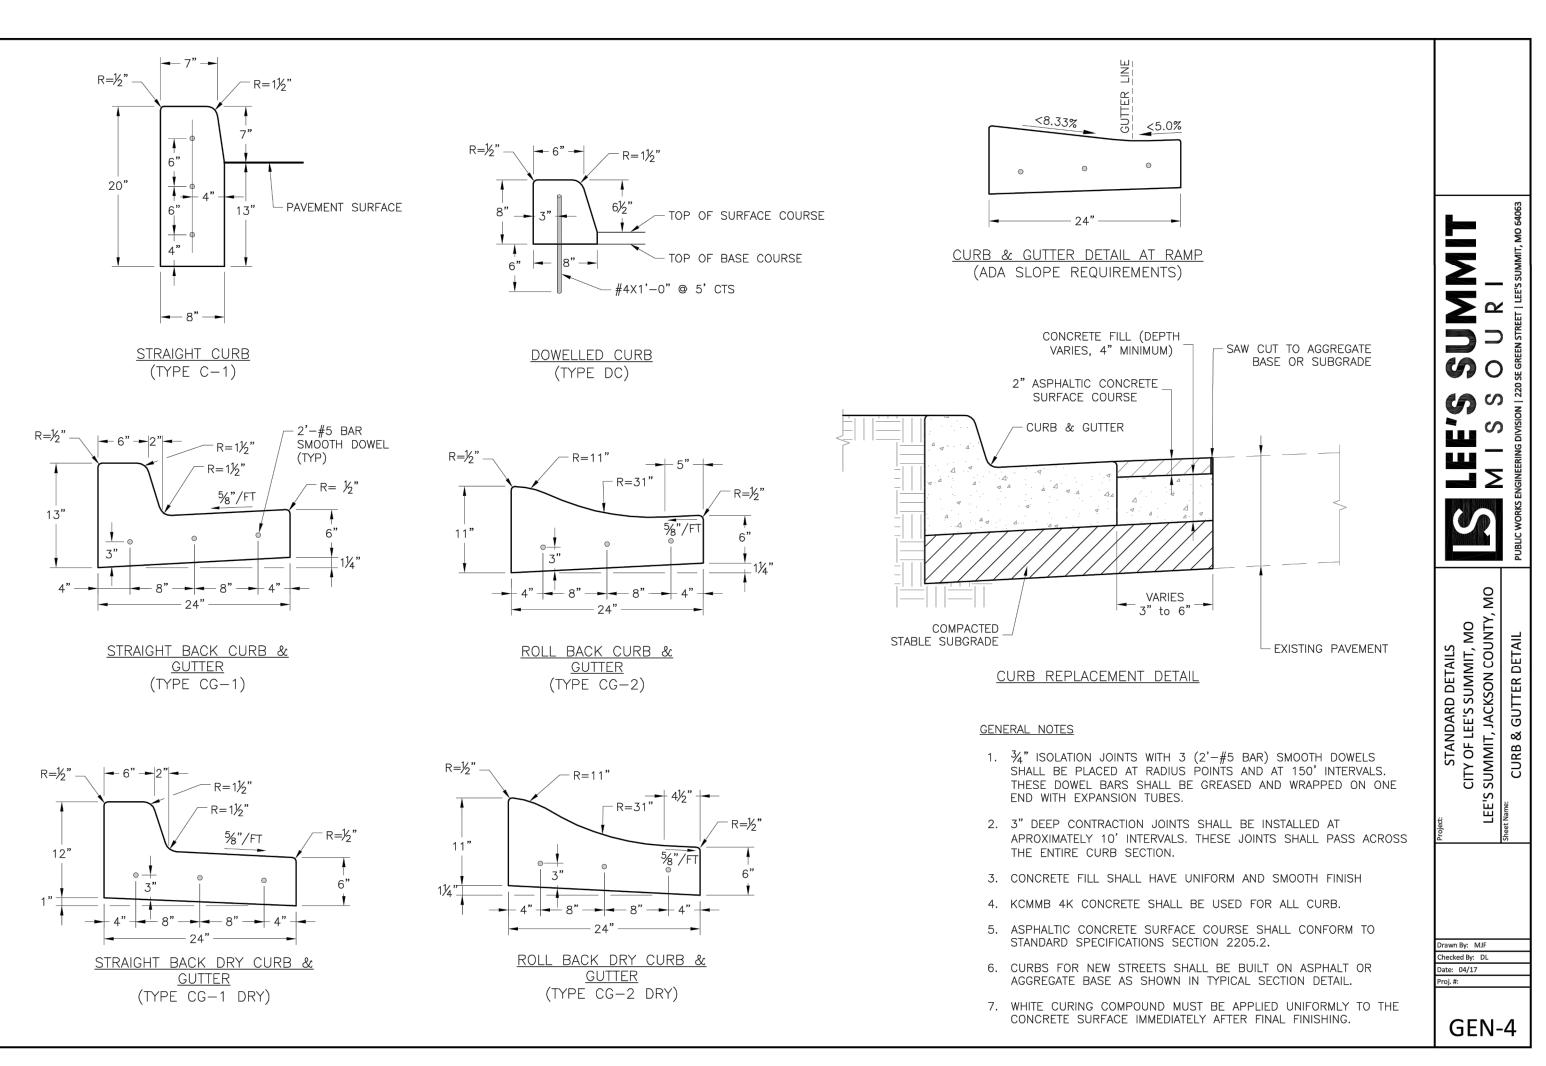

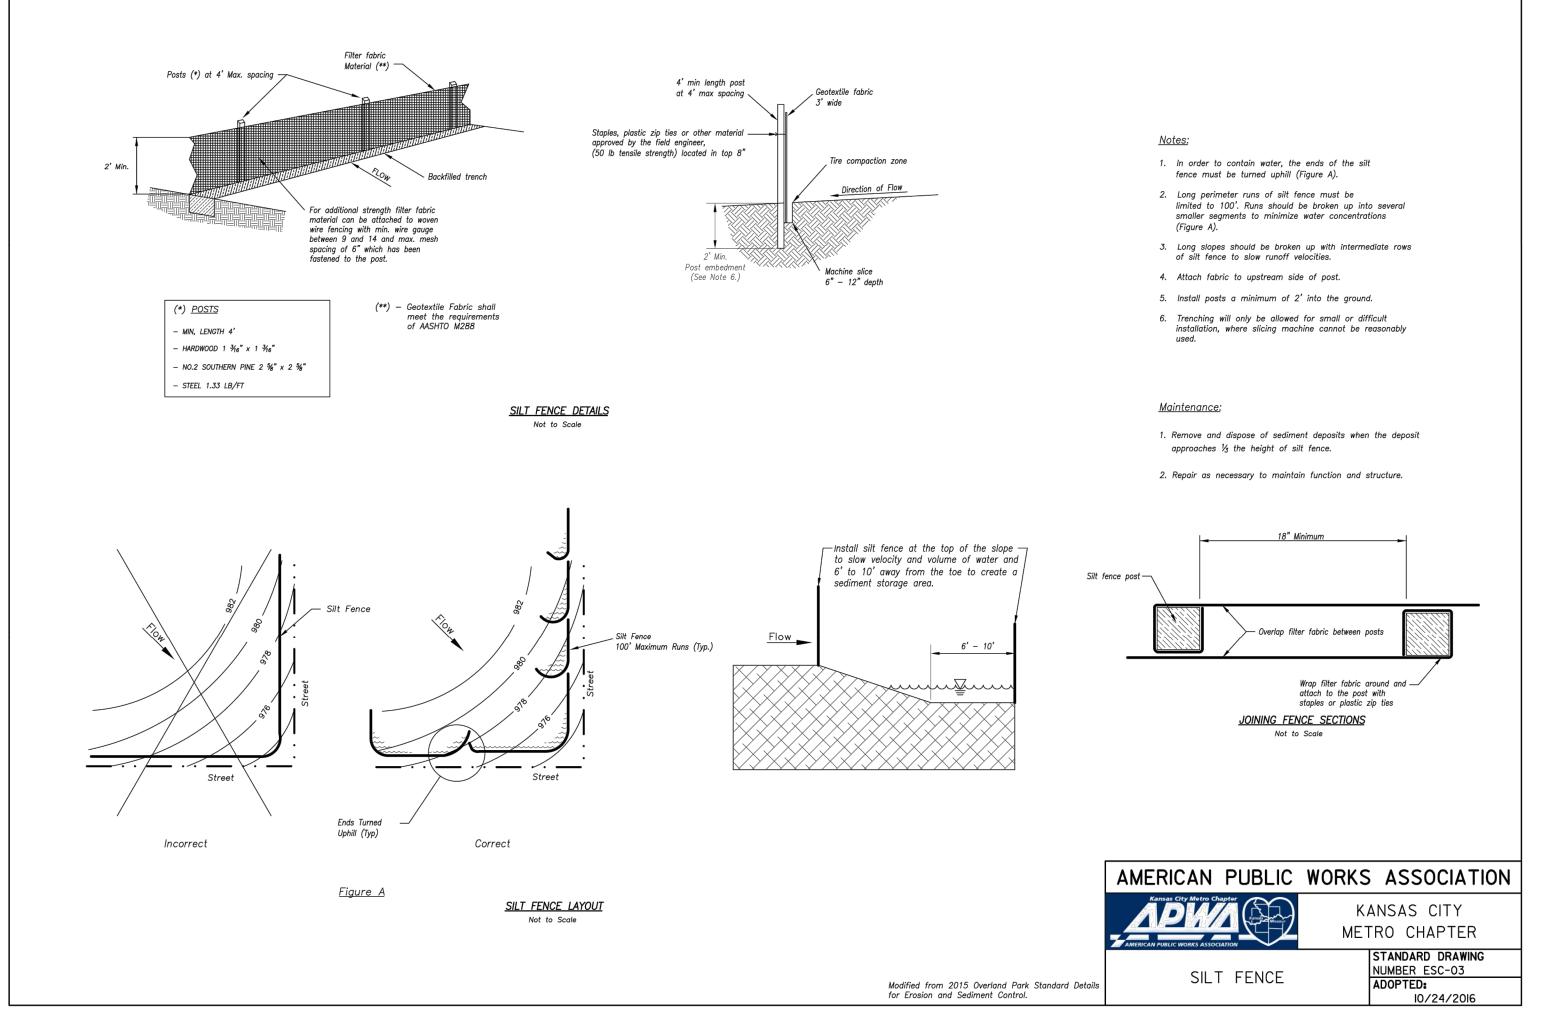

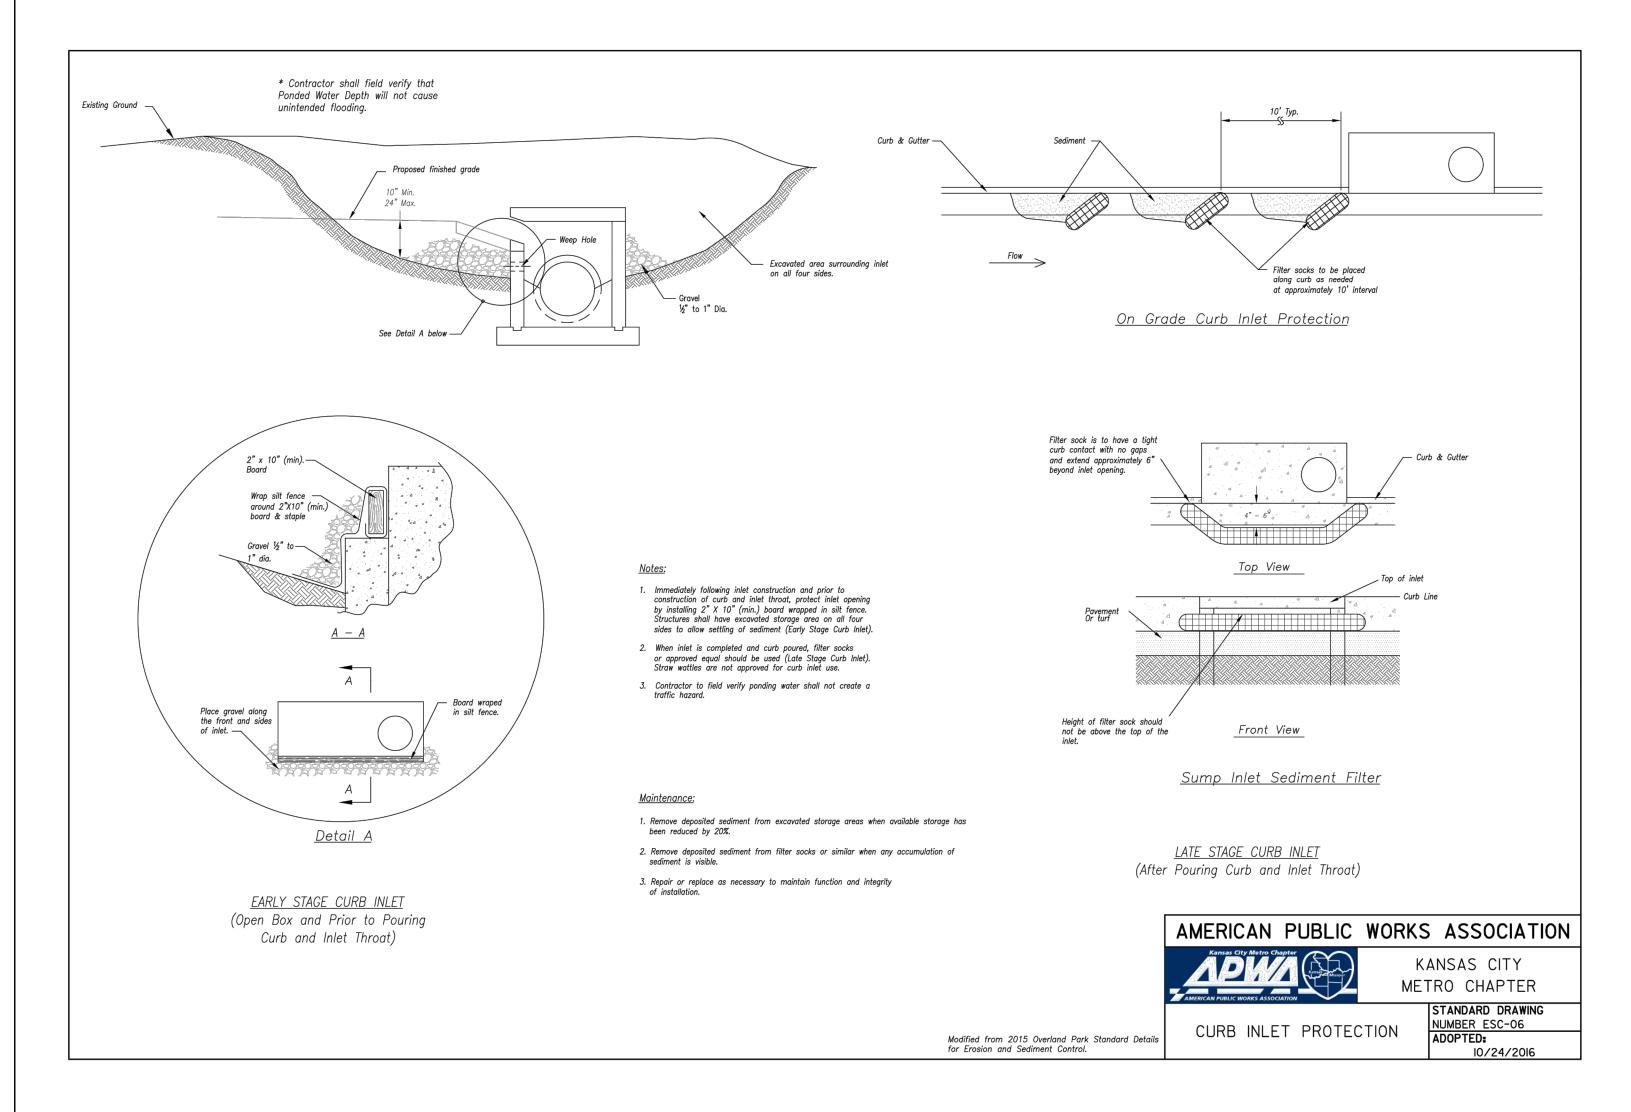

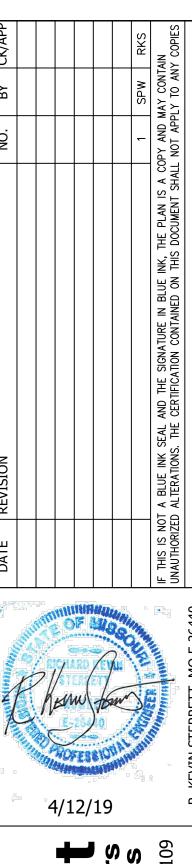





# ATION PARISH **VELOPMENT PLANS** ON A PRE DE FINAL


19-102 BASE DRAWING NO. 19-102 PRELIMINARY PLAN DATE MARCH 15, 2019 JOB NO. 19-102


SC]

C008

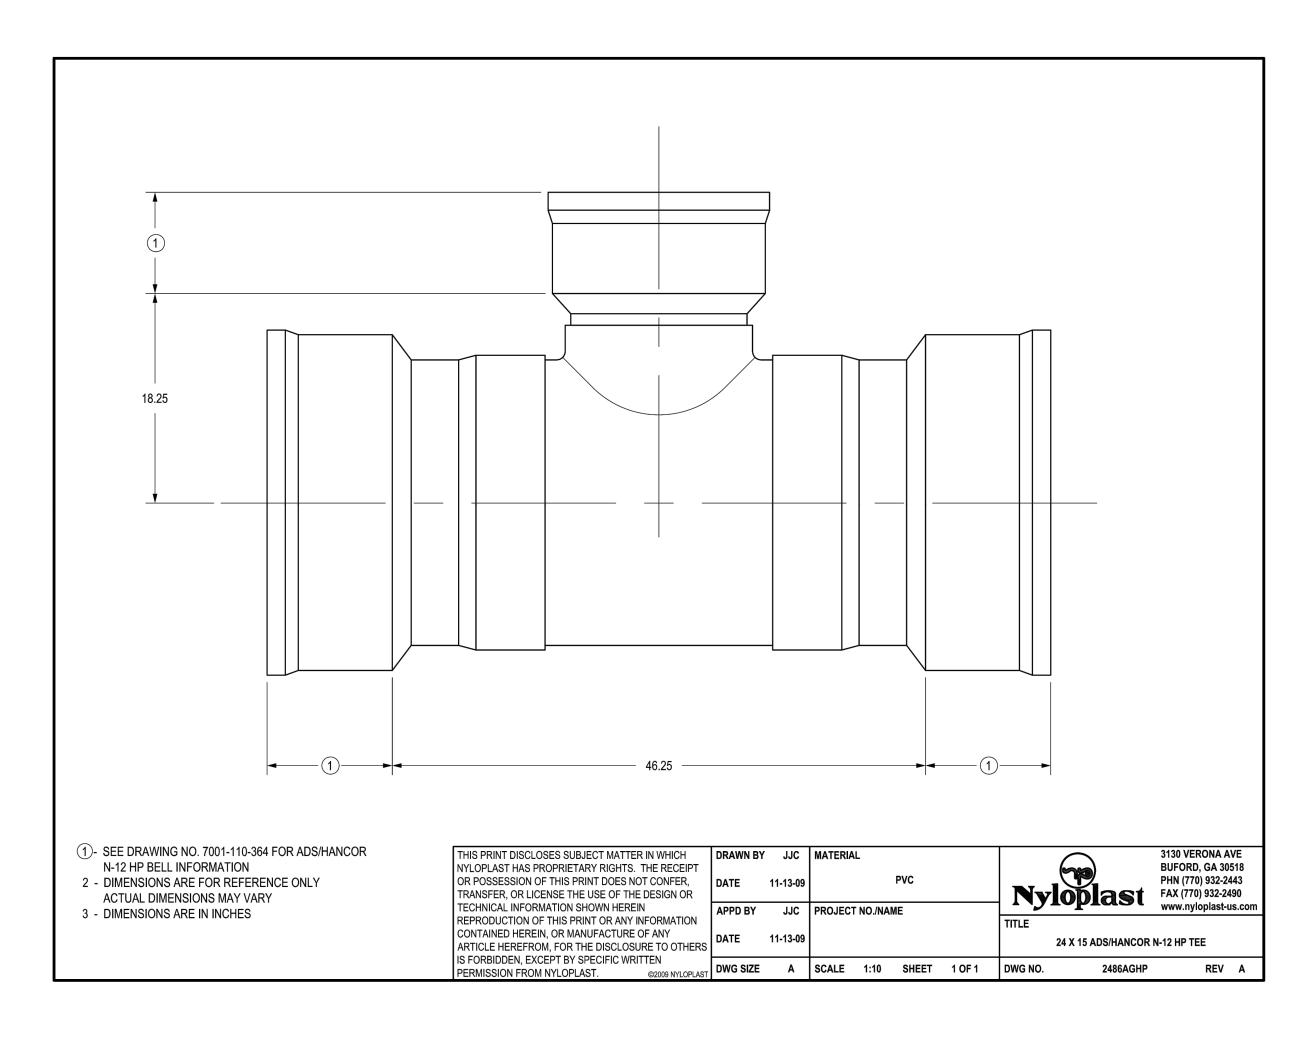

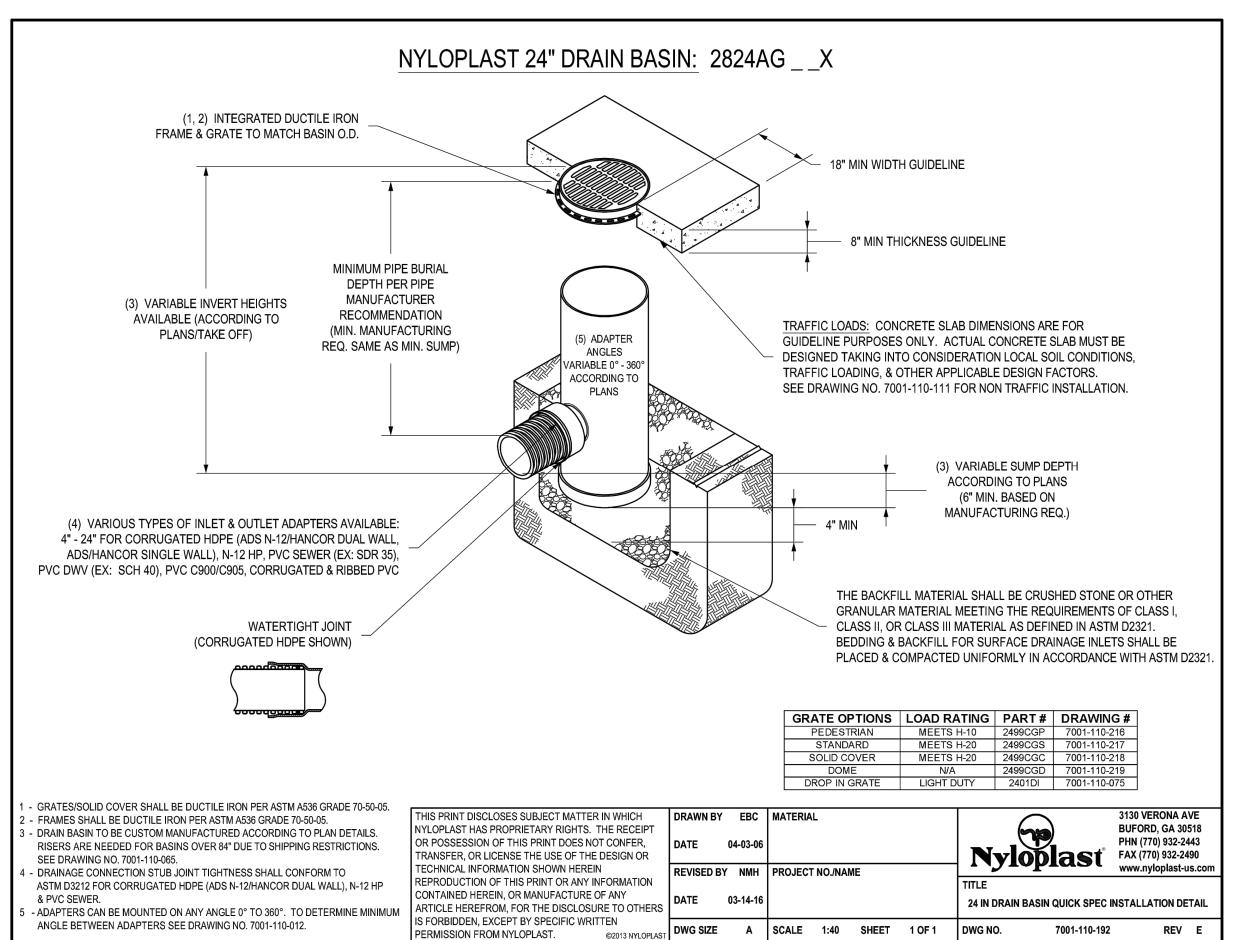

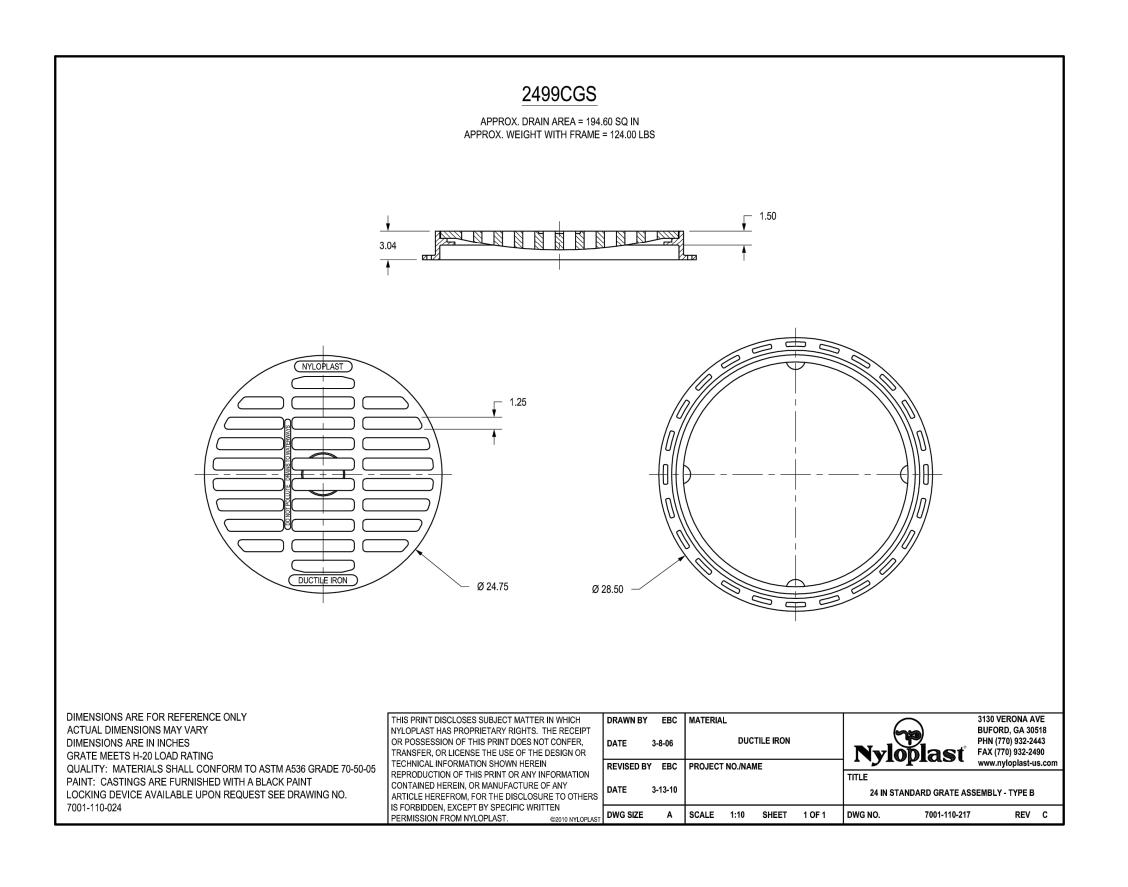

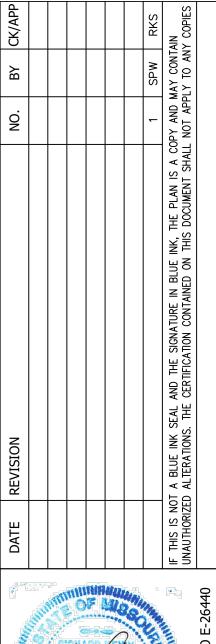



CODE COLORD SULT (21/4)

CODE COLORD SULT (210, Kansas G6109)

TOTAL SULT (210, Kansas G6109)

VELOPMENT PLANS
DITION AND RENOVATION
THE PRESENTATION PARISH

DE

FINAL

X-REF NO.
19-102 BASE

DRAWING NO.
19-102 PRELIMINARY PLAN

DATE

MARCH 15, 2019

JOB NO.
19-102

C009

SC]



## DRAINAGE AREA MAP

					STOR	M SEW		CAL(		ION	S																		L DE	ADY OI ADDITION
	SEWEF	R LOCATION	TRIBU	TARY AR	EA (AC.)			OF FLOW			100	YEAR DESI	IGN					CURB INLE	ET					PIPE	DESIGN					
STORM SEWER NO.	FROM STRUCTUR NO.	TO RE STRUCTURE NO.	DESIG	REA NATION RES	TOTAL	COMPOSITE RUNOFF COEFFICIENT	Ті	Tt Tc	INTENSITY [in/hr] I[100]	AREA ୁ[100]	RUNOFI In Pipe Upstream (cfs)		TOTAL ್ಲ[100]	In Pipe Downstream [cfs]	By Pass Out [cfs]	GUTTER SLOPE [%]	GUTTER CAPACITY [cfs]	Inlet Length	INLET CAPACITY [cfs]	INLET CAPACITY 80% [cfs]	Pipe Size [in]	Pipe Slope [%]	Pipe Type	Rough Coeff [MANNG]	Design Velocity [fps]	Depth Flow (inches) Q[100]	Full Velocity [fps]	Full Flow [cfs]	FIN	OUR
1	DI 1H	DI 1G	7	0.61	0.61	0.89		5.0	10.32	6.39	0.0	1.8	4.6	4.6	0.0	SUMP	-	24" dia	4.6	3.7	15"	3.01	HDPE	0.012	10.28	8.3	9.9	7.2		<i>X-REF NO.</i> 19–102 BASE
1	DI 1G	DI 1F	6	0.12	0.73	0.88		5.0	10.32	1.36	4.6	0.0	7.8	7.2	0.6	SUMP	-	24" dia	4.6	3.7	15"	1.06	HDPE	0.012	5.8	15.0	5.8	7.2		DRAWING NO.
1	DI 1F	DI 1E	5	0.11	0.84	0.92		5.0	10.32	1.31	7.8	0.0	9.1	7.2	1.9	SUMP	-	24" dia	4.6	3.7	15"	1.09	HDPE	0.012	5.8	15.0	5.8	7.2	19-102	2 PRELIMINARY PI DATE
1	DI 1E	DI 1D	4	0.19	1.03	0.73		5.0	10.32	1.79	9.1	0.0	10.9	7.2	3.7	SUMP	-	24" dia	4.6	3.7	15"	1.08	HDPE	0.012	5.8	15.0	5.8	7.2	M	MARCH 4, 2019
1	DI 1D	DI 1C	3	0.21	1.24	0.76		5.0	10.32	1.81	10.9	0.0	12.7	7.2	5.5	SUMP	-	24" dia	4.6	3.7	15"	1.06	HDPE	0.012	5.8	15.0	5.8	7.2		<i>JOB NO.</i> 19–102
1	DI 1C	DI 1B	2	0.57	1.81	0.75		5.0	10.32	4.80	12.7	0.0	17.5	7.2	10.3	SUMP	-	24" dia	4.6	3.7	15"	1.13	HDPE	0.012	5.8	15.0	5.8	7.2	(	C010
1	DI 1B	CB 1A	1	1.25	3.06	0.85		5.0	10.32	12.48	17.5	0.0	30.0	7.2	22.8	SUMP	-	5'	16.3	13.0	15"	1.18	HDPE	0.012	5.8	15.0	5.8	7.2		ノロコロ