



Incandescent

6" Cylinders
Wall


Outdoor

TYPE D5

	Type			
	-20	-30	-31	-82
P5641	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P5642	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish				Lamping	Dimensions (Inches)			
	Bronze	White	Black	Gray		A	B	C	D
P5641	-20	-30	-31	-82	1-250w QPAR38, 150w BR40	6	12	8-7/8	4-1/2
P5642	-20	-30	-31	-82	2-250w QPAR38	6	18	8-7/8	8

WITH 17W LED PAR38 LAMP

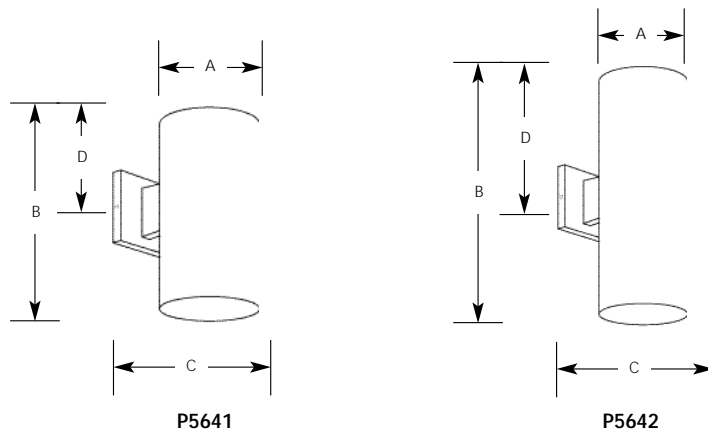

Specifications:

General

- Extruded aluminum .125 wall thickness one piece cylinder
- Cast aluminum wall bracket
- P5641 - Down lighting
- P5642 - Up/Down lighting. P8798-31 top cover lens recommended when unit is used outdoors
- Interior finish matches exterior finish

Mounting

- Covers any outlet box
- Cast mounting bracket is 4-1/2" square
- Outlet box mounting bracket supplied permitting attachment of unit to wall with one almost invisible set screw

Electrical

- Medium base porcelain socket with nickel plated brass screw shell

Accessories

- P8798-31 Top lens cover for P5642 fixture

Options

- Bronze finish - specify "20" suffix
- White finish - specify "30" suffix
- Black finish - specify "31" suffix
- Metallic Gray finish - specify "82" suffix

Labeling

- UL-CUL wet location listed (5642 only with top cover lens)

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 1/04



Client:		Type: S
Fixture Manufacturer: PROGRESS	Lamp Manufacturer:	
Cat #: P5642	Cat #:	
Capitol Light is not responsible for inaccuracies in manufacturers published specifications		