

# Brackets and Tenons

Rev. Date: V8 03/12/2020

## Product Specifications

### FINISH

- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available

### LIMITED WARRANTY†

- 7 years on tenon/7 years on Colorfast DeltaGuard® finish






† See <http://creelighting.com/warranty> for warranty terms



## PB Series





### Square Internal Mount Vertical Steel Tenons (for use with Adjustable Arm & Horizontal/Vertical Tenon Mounts)

The square base of the PB Series steel brackets is designed to be inserted into square, non-tapered steel or aluminum poles ranging in size from 3" (76mm) to 6" (152mm) square with a maximum wall thickness of 0.188" (5mm). Square PB tenons are supplied with end caps to enclose the wiring chamber. Tenon base secures to pole with four 5/16" (8mm) hex head stainless steel black oxide bolts. Vertical tenons measure 2-3/8" (60mm) O.D. x 3.75" (95mm) tall and are made of steel tubing. Luminaires mounted to these tenons can be adjusted both vertically and horizontally.

PB	-				
Product	-	Mounting Configurations	Pole Size (O.D.)	Color Options	
PB	-	1A Single 2A 180° Twin 3A 180° Triple 4A(90) 90° Quad - Available for 4"-6" pole only 4A(180) 180° Quad - Available for 4"-6" pole only	3 3" (76mm) 4 4" (102mm) 5 5" (127mm) 6 6" (152mm)	BK Black BLANK Bronze SV Silver WH White	 Single  180° Double  180° Triple  90° Quad  180° Quad

### Round External Mount Vertical Tenons (for use with Adjustable Arm & Horizontal/Vertical Tenon Mounts)







The round base of the PB Series steel brackets is designed to mount over a steel or aluminum 2-3/8"-5" (60-127mm) O.D. round pole or tenon. All are supplied with end caps to enclose the wiring chamber. Tenon base secures to pole with eight stainless steel allen head screws. Vertical tenons measure 2-3/8" (60mm) O.D. x 3.75" (95mm) tall and are made of steel tubing. Luminaires mounted to these tenons can be adjusted both vertically and horizontally. Not for use with PT tenons or THE EDGE® area round post top mounts.

PB	-				
Product	-	Mounting Configurations	Pole Size (O.D.)	Color Options	
PB	-	1R Single 2R 180° Twin 3R 180° Triple 4R 90° Quad/180° Quad	2.375 Fits 1.97-2.41" (50-61mm) pole tops - Available for 2R, 3R and 4R mounting configurations only 3.00 Fits 2.57-3.00" (65-76mm) pole tops 3.50 Fits 3.01-3.50" (76-89mm) pole tops 4.00 Fits 3.54-4.03" (90-102mm) pole tops 4.50 Fits 4.13-4.57" (105-116mm) pole tops 5.00 Fits 4.75-5.19" (121-132mm) pole tops  <i>For 90-degree Quad Only</i> 2.375(90) Fits 1.97-2.41" (50-61mm) pole tops 3.0(90) Fits 2.57-3.00" (65-76mm) pole tops 3.5(90) Fits 3.01-3.50" (76-89mm) pole tops 4.0(90) Fits 3.54-4.03" (90-102mm) pole tops 4.5(90) Fits 4.13-4.57" (105-116mm) pole tops 5.0(90) Fits 4.75-5.19" (121-132mm) pole tops	BK Black BLANK Bronze SV Silver WH White	 Single  180° Twin  180° Triple  180° Quad  NOTE: 90° Quad is not shown

## PT Series

### Round External Mount Horizontal Tenons (for use with Adjustable Arm Mount and RUL Luminaires). Not for use with the THE EDGE® High Output or OSQ™ High Output Area/Flood Luminaires

The round base of the PT Series aluminum brackets is designed to mount over a steel or aluminum 2-3/8" (60mm) to 3" (76mm) O.D. round pole or tenon. Tenon base secures to pole with eight stainless steel allen head screws. Luminaires mounted to these tenons can only be adjusted vertically. The PT Series brackets can be mounted on a square pole, but require the use of the Single Vertical Tenon PB-1A. Not for use with PB Series round tenons.

PT	-								
Product	-	Mounting Configurations	Color Options						
PT	-	<div>1Single</div> <div>2(90)90° Twin</div> <div>2(180)180° Twin</div> <div>3(90)90° Triple</div> <div>3(120)120° Triple</div> <div>4(90)90° Quad</div>	<div>BKBlack</div> <div>BLANKBronze</div> <div>SVSilver</div> <div>WHWhite</div>	Single	90° Twin	180° Twin	90° Triple	120° Triple	90° Quad

### Round External Mount Horizontal Tenons (for use with Horizontal Tenon Mount — LEDway®, RSW™, Traveyo®, and XSP Series Luminaires). Not for use with the THE EDGE® High Output or OSQ™ High Output Area/Flood Luminaires

The round base of the PT Series aluminum brackets is designed to mount over a steel or aluminum 2-3/8" (60mm) to 3" (76mm) O.D. round pole or tenon. Tenon base secures to pole with eight stainless steel allen head screws. The PT Series brackets can be mounted on a square pole, but require the use of the Single Vertical Tenon PB-1A. Not for use with PB Series round tenons.

PT	-							
Product	-	Mounting Configurations	Color Options					
PT	-	<div>1H Single</div> <div>2H(90) 90° Twin</div> <div>2H(180) 180° Twin</div> <div>3H(90) 90° Triple</div> <div>4H(90) 90° Quad</div>	<div>BK Black</div> <div>BLANK Bronze</div> <div>SV Silver</div> <div>WH White</div>	Single	90° Twin	180° Twin	90° Triple	90° Quad

## PD Series





### Square Internal Mount Horizontal Tenons (for use with Adjustable Arm Mount and RUL Luminaires). Not for use with the THE EDGE® High Output or OSQ™ High Output Area/Flood Luminaires

The square base of the PD Series cast aluminum brackets is designed to be inserted into square, non-tapered steel or aluminum 4" (102mm) poles with a maximum wall thickness of 0.188" (5mm). Square PD tenons are supplied with end caps to enclose the wiring chamber. Tenon base secures to pole with four 5/16" (8mm) hex head stainless steel black oxide bolts. Luminaires mounted to these tenons can only be adjusted vertically.

PD	-						
Product	-	Mounting Configurations	Color Options				
PD	-	<b>2A4 (90)</b> 90° Twin <b>2A4 (180)</b> 180° Twin <b>3A4 (90)</b> 90° Triple <b>4A4 (90)</b> 90° Quad	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	90° Twin	180° Twin	90° Triple	90° Quad

### Square Internal Mount Horizontal Tenons (for use with Horizontal Tenon Mount — LEDway®, RSW™, Traveyo®, and XSP Series Luminaires). Not for use with the THE EDGE® High Output or OSQ™ High Output Area/Flood Luminaires

The square base of the PD Series cast aluminum brackets is designed to be inserted into square, non-tapered steel or aluminum 4" (102mm) poles with a maximum wall thickness of 0.188" (5mm). Square PD tenons are supplied with end caps to enclose the wiring chamber. Tenon base secures to pole with four 5/16" (8mm) hex head stainless steel black oxide bolts. Luminaires mounted to these tenons can only be adjusted vertically.


PD	-							
Product	-	Mounting Configurations	Color Options					
PD	-	<div>1H4Single</div> <div>2H4(90)90° Twin</div> <div>2H4(180)180° Twin</div> <div>3H4(90)90° Triple</div> <div>4H4(90)90° Quad</div>	<div>BKBlack</div> <div>BLANKBronze</div> <div>SVSilver</div> <div>WHWhite</div>					
				Single	90° Twin	180° Twin	90° Triple	90° Quad
								Pole sold separately

Pole sold separately

## PW Series

### Mid-Pole Mounting Bracket (for use with Adjustable Arm & Horizontal/Vertical Tenon Mounts)


The PW Series steel bracket is designed to be mounted to the side of a square pole. Typically, the two brackets are mounted on either side to provide accent lighting. PW series brackets are supplied with end caps to enclose the wiring chamber. The bracket is secured to the pole with supplied 1/2" (13mm) hex head bolts. The 11" (279mm) long x 3" (76mm) square arm provides a 2-3/8" (60mm) O.D. tenon to mount a luminaire. Luminaires mounted to these tenons can be adjusted both vertically and horizontally.

<b>PW</b>	-				
<b>Product</b>	-	<b>Mounting Configurations</b>	<b>Pole Size (O.D.)</b>	<b>Color Options</b>	
<b>PW</b>	-	<b>1A3</b> Single <b>2A3</b> Twin	<b>(3)</b> 3" (76mm) <b>(4)</b> 4" (102mm) <b>(5)</b> 5" (127mm) <b>(6)</b> 6" (152mm)	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	

## RUL Series

### Pole Mounting Kit (for use with RUL Luminaires)


The RUL Series pole mounting kit is designed to be mounted to a wood pole. The kit is supplied with a 24" (610mm), 1.66" (42mm) O.D. curved raw aluminum arm. The arm secures to the wood pole with an upper and lower mounting bracket. The arm's top bracket secures to the pole with a 5/8-11 x 9.75" hex head bolt, nut and 11 ga. square washer plate. The arm's bottom bracket secures to the pole with two 3/8" (10mm) x 3" (76mm) long hex-head lag bolts. All hardware is zinc-plated steel and included in the mounting kit. Luminaire may be leveled by additional adjustment of the 5/8" (16mm) nut.

<b>RUL</b>	-	<b>ARM24</b>	
<b>Product</b>	-	<b>Mounting Configurations</b>	
<b>RUL</b>	-	<b>ARM24</b>	

## WM Series

### Surface Bracket (for use with Adjustable Arm & Horizontal/Vertical Tenon Mounts)


The WM-2 steel bracket is designed for mounting to ground, rooftop, wall or to the side of a wood pole. The bracket provides a 2-3/8" (60mm) O.D. tenon to mount a luminaire. The 0.25" (6mm) thick steel backplate provides wiring access. When ordered with (1/2), the bottom of the tenon has a 1/2" -14NPT threaded access hole for surface wiring. The use of 3/8" (9mm) diameter bolts to mount bracket to wall is recommended. Mounting holes are spaced 3-1/4" (83mm) apart. LEDway®, RSW™, Traveyo®, and XSP Series luminaires must be used with extended mount only.

<b>WM</b>	-				
<b>Product</b>	-	<b>Mounting</b>	<b>Wiring Access</b>	<b>Color Options</b>	
<b>WM</b>	-	<b>2</b> Horizontal <b>2L</b> Extended Horizontal	<b>BLANK</b> Wiring Access through Threaded Hole in Back Plate <b>(1/2)</b> 1/2"-14NPT Threaded Hole in Tenon for Surface Wiring	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	

2, 2L (shown)

### L-Shaped Surface Bracket (for use with Adjustable Arm & Horizontal/Vertical Tenon Mounts)

The WM-4 steel bracket is designed for mounting to a wall or to the side of a wood pole. The bracket provides a 2-3/8" (60mm) O.D. elbow tenon to mount a luminaire. The 0.25" (6mm) thick steel backplate provides wiring access. When ordered with (1/2), the bottom of the tenon has a 1/2" -14NPT threaded access hole for surface wiring. For mounting the bracket to the wall, use only 3/8" (9mm) diameter bolts. Mounting holes are spaced 3-1/4" (83mm) apart.

<b>WM</b>	-				
<b>Product</b>	-	<b>Mounting</b>	<b>Wiring Access</b>	<b>Color Options</b>	
<b>WM</b>	-	<b>4</b> L-shape <b>4L</b> Extended L-shape	<b>BLANK</b> Wiring Access through Threaded Hole in Back Plate <b>(1/2)</b> 1/2"-14NPT Threaded Hole in Tenon for Surface Wiring	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	

4, 4L (shown)

## WM Series



### Direct Arm Surface Bracket (for use with THE EDGE® Direct Arm and Direct Arm Long, OSQ™ and OSQ™ High Output Direct Arm Mounts)

The WM-DM steel bracket is designed for mounting luminaires with direct mount arms to a wall or to the side of a wood pole. The 0.25" (6mm) thick steel back plate provides wiring access. The use of 3/8" (9mm) diameter bolts to mount bracket to wall is recommended. Mounting holes are spaced 4.0" (102mm) apart.

WM	-	DM		 DM
Product	-	Mounting	Color Options	
WM	-	DM Direct Mount	<b>BK</b> Black <b>BZ</b> Bronze <b>SV</b> Silver <b>WH</b> White	

### Beauty Plates (for use with THE EDGE® and XSPW™ Security Luminaires)


The WM-PLT is an aluminum plate designed for covering existing surfaces for LED security luminaire upgrades. The 0.08" (2mm) thick plate provides wiring access. The use of 3/8" (9mm) diameter bolts to mount bracket to wall is recommended. Mounting holes are spaced 4.0" (102mm) apart.

WM	-			 PLT12	 PLT14
Product	-	Mounting	Color Options		
WM	-	<b>PLT12</b> 12" Plate <b>PLT14</b> 14" Plate	<b>BK</b> Black <b>BZ</b> Bronze <b>PB</b> Platinum Bronze <b>SV</b> Silver <b>WH</b> White		

## Direct Mount Bracket Series

### Direct Mount Bracket (for use with THE EDGE® High Output Area/Flood Luminaire HV Mount)

The EHO-UNV bracket is designed for mounting to a minimum 4" (102mm) round or square; aluminum or steel pole or can be surface-mounted directly to a vertical or horizontal surface. Bracket includes die cast aluminum fitter and steel mounting plate. Square mounting plate bolts are supplied for pole mounting. For surface mounting, use only Grade 5 or higher bolts.

EHO	-	UNV		
Product	-	Mounting	Color Options	
EHO	-	UNV	<b>BK</b> Black <b>BZ</b> Bronze <b>SV</b> Silver <b>WH</b> White	

## XA-TMDA8

### Direct Arm Pole Adaptor Bracket (for use with Horizontal Tenon Mount – LEDway®, RSW™, Traveyo®, and XSP Series Luminaires)

The die cast aluminum direct arm pole adaptor bracket mounts to square or round steel or aluminum poles ranging in size from 3" (76mm) to 6" (152mm). Mounting plate secures to pole with two 5/16" (8mm) hex head stainless steel black oxide bolts. Two 5/16" (8mm) hex head stainless steel black oxide bolts secure the adaptor bracket to the mounting plate. The horizontal tenon measures 2-3/8" (60mm) O.D. x 8.0" (203mm) long and is made of steel tubing.

XA	-	TMDA8		
Product	-	Mount	Color Options	
XA	-	TMDA8	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	

## PGM Series

### Ground Mount Post (for use with THE EDGE®, OSQ™, and Noctura® Series Area/Flood Luminaires with Adjustable Arm Mounts)

The PGM-1 steel post is designed for ground mounted floodlight luminaires with an adjustable mounting arm. Wiring or conduit feed through the base of the post.

PGM	-	1			 PGM-1
Product	-	Mounting		Color Options	
PGM	-	1	Single Adjustable Arm Mount	<b>BK</b> Black <b>BLANK</b> Bronze <b>SV</b> Silver <b>WH</b> White	

## MNH Series


### Conduit Slipfitter (for use with Noctura® Series Luminaires with 1/2" Knuckle Mount)

The cast aluminum hub provides a threaded entry for the 1/2" knuckle mount, and slips over a 2-3/8" (60 mm) O.D. pipe or tenon. A 3/8" allen head set screw is provided to secure the slipfitter.

MNH	-	2			 MNH-2
Product	-	Mounting		Color Options	
MNH	-	2		<b>BLANK</b> Bronze	


**PB Series**

**PB-1A\***




\* 3" (76 mm), 4" (102 mm), 5" (127 mm) or 6" (152 mm) depending on pole size

**PB-2A\***

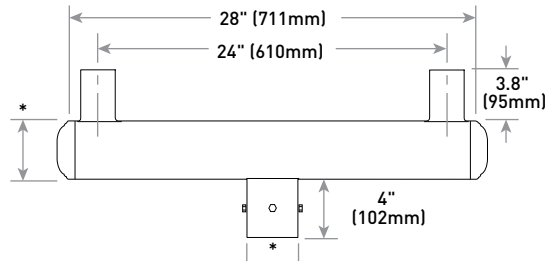


\* 3" (76 mm), 4" (102 mm), 5" (127 mm) or 6" (152 mm) depending on pole size

**PB-3A\***

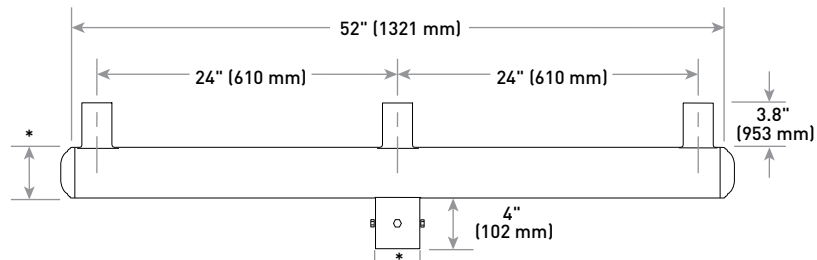


\* 3" (76mm), 4" (102mm), 5" (127mm) or 6" (152mm) depending on pole size

**PB-4A\*(180)**

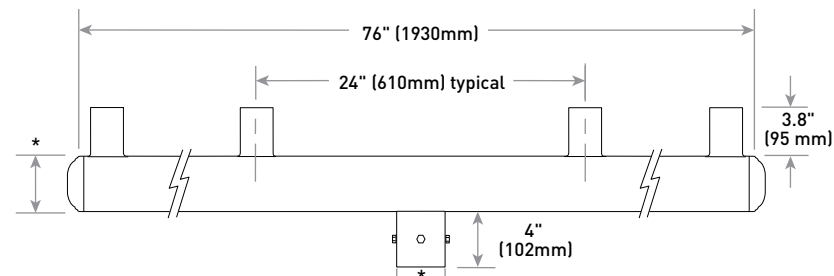

\* 4" (102mm), 5" (127mm) or 6" (152mm) depending on pole size


**PB-4A\*(90)**

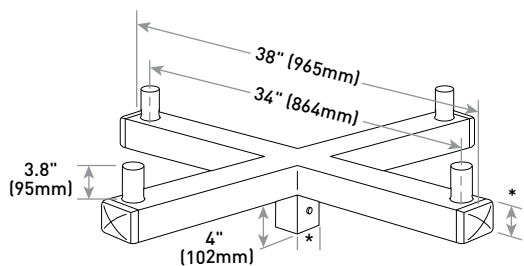

\* 4" (102mm), 5" (127mm), or 6" (152mm) depending on pole size


## PB Series

### PB-1R\*

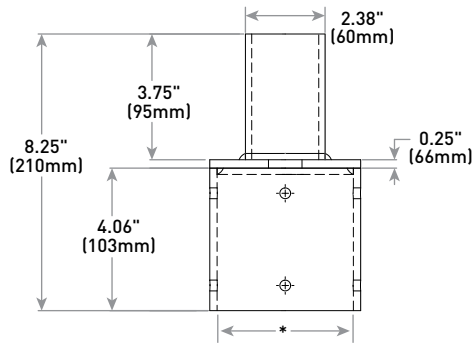


\* 3" (76mm), 3.5" (89mm), 4" (102mm), 4.5" (114mm), or 5" (127mm) depending on pole size

### PB-2R\*

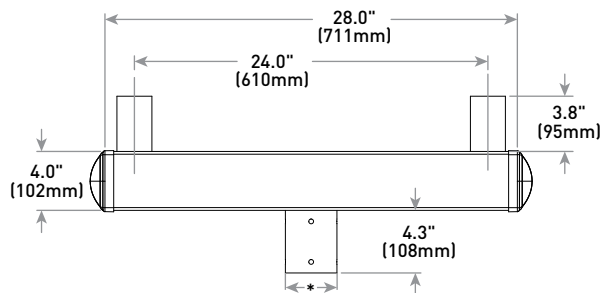


\* 2.375" (60mm), 3" (76mm), 3.5" (89mm), 4" (102mm), 4.5" (114mm), or 5" (127mm) depending on pole size

### PB-3R\*

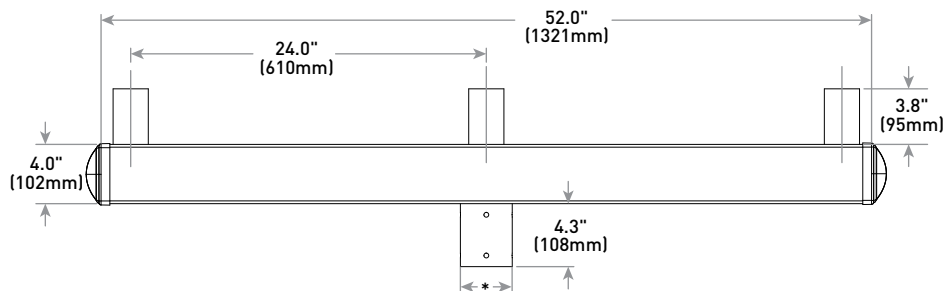

\* 2.375" (60mm), 3" (76mm), 3.5" (89mm), 4" (102mm), 4.5" (114mm), or 5" (127mm) depending on pole size

### PB-4R\*

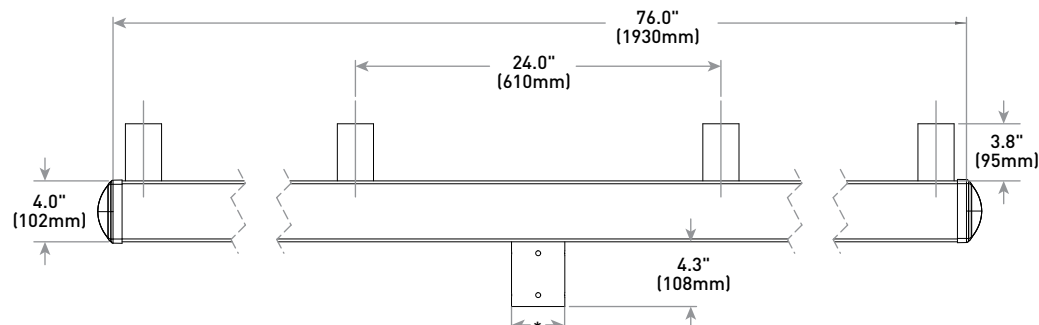


\* 2.375" (60mm), 3" (76mm), 3.5" (89mm), 4" (102mm), 4.5" (114mm), or 5" (127mm) depending on pole size

## Brackets and Tenons

### PB Series


#### PB-4R\*(90)

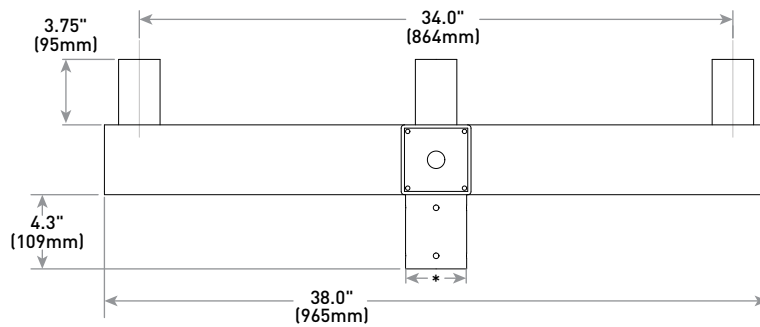


\* 2.375" (60mm), 3" (76mm), 3.5" (89mm), 4" (102mm), 4.5" (114mm), or 5" (127mm) depending on pole size

### PT Series


#### PT-1




#### PT-2(90)

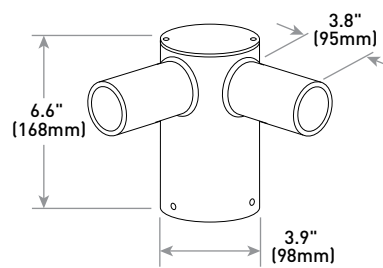


#### PT-2(180)

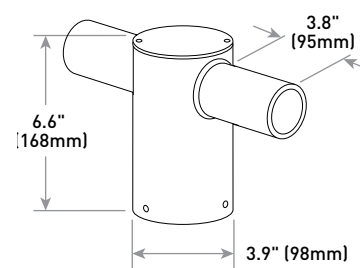


#### PT-3(90)

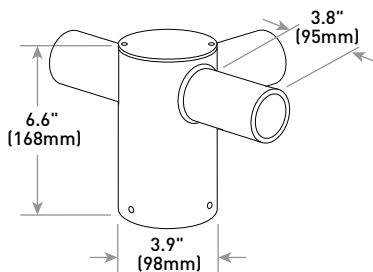


#### PT-3(120)

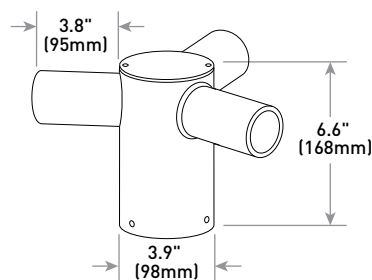


#### PT-4(90)

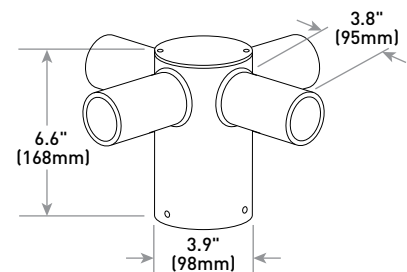


#### PT-1H



#### PT-2H(90)



#### PT-2H(180)

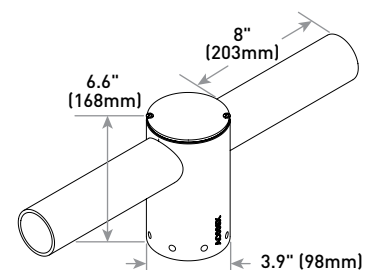





## Brackets and Tenons

### PT Series

PT-3H(90)




PT-4H(90)

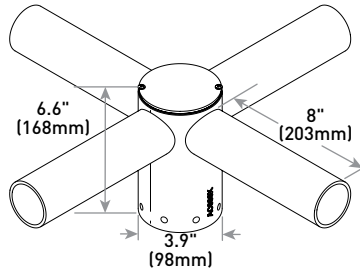


### PD Series


PD-2A4(90)

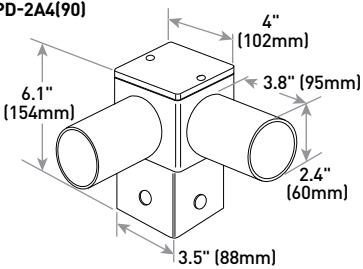


PD-2A4(180)

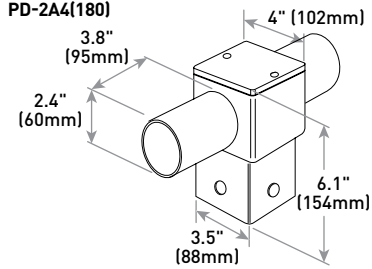


PD-3A4(90)

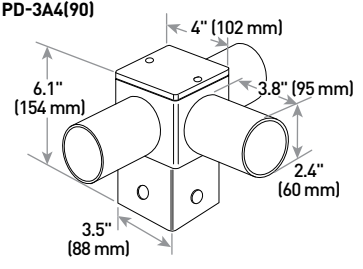


PD-4A4(90)

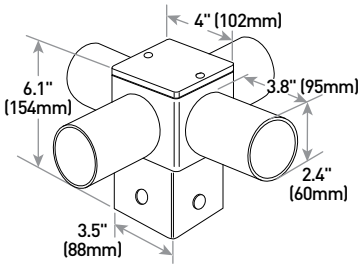


PD-1H4

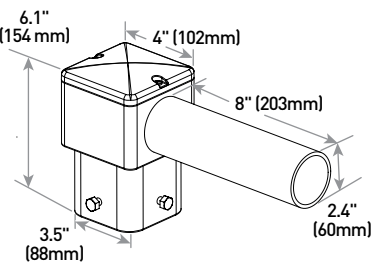


PD-2H4(90)

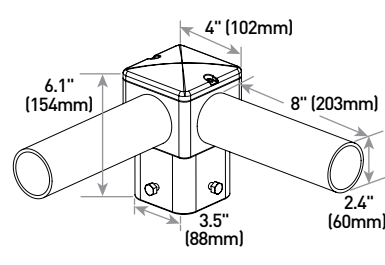


PD-2H4(180)

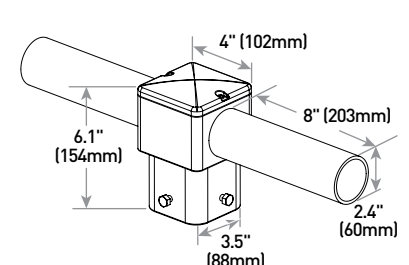

PD-3H4(90)

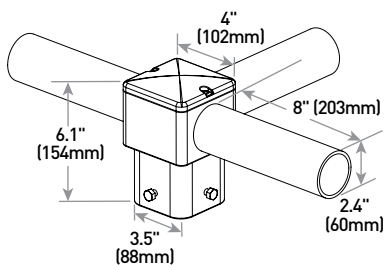


PD-4H4(90)

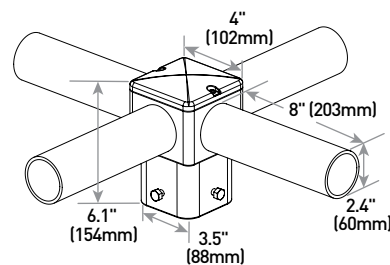

Brackets and Tenons


PW Series

PW-1A3, PW-2A3

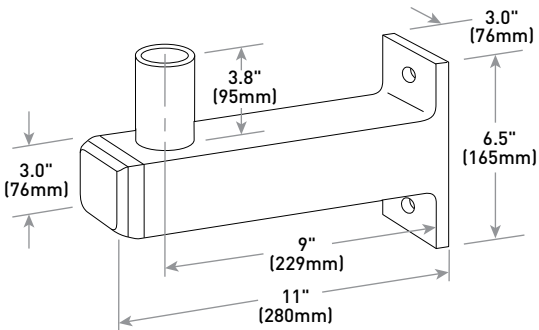


RUL Series

RUL-ARM24

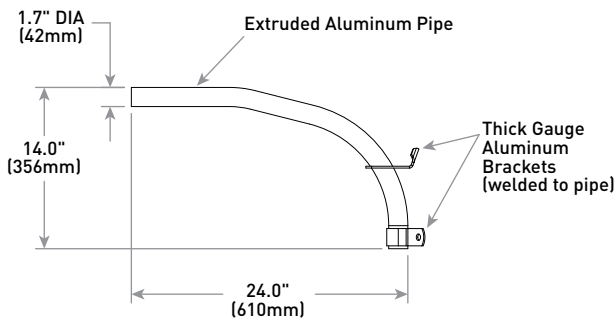


WM Series

WM-2L/WM-2L(1/2)

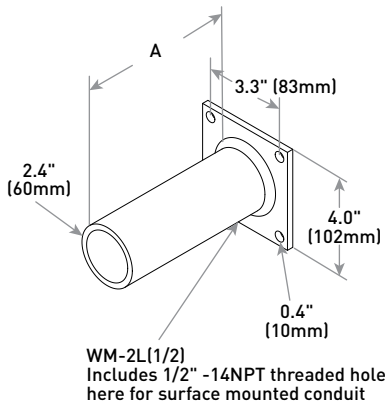


WM-4L/WM-4L(1/2)

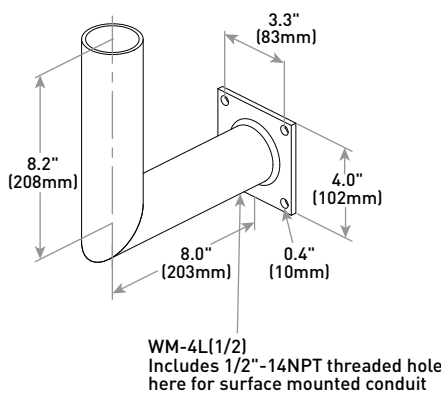


Product	"A" Dimension
WM-2L	6.5" (165mm)
WM-2L(1/2)	8.3" (210mm)



WM-PLT12

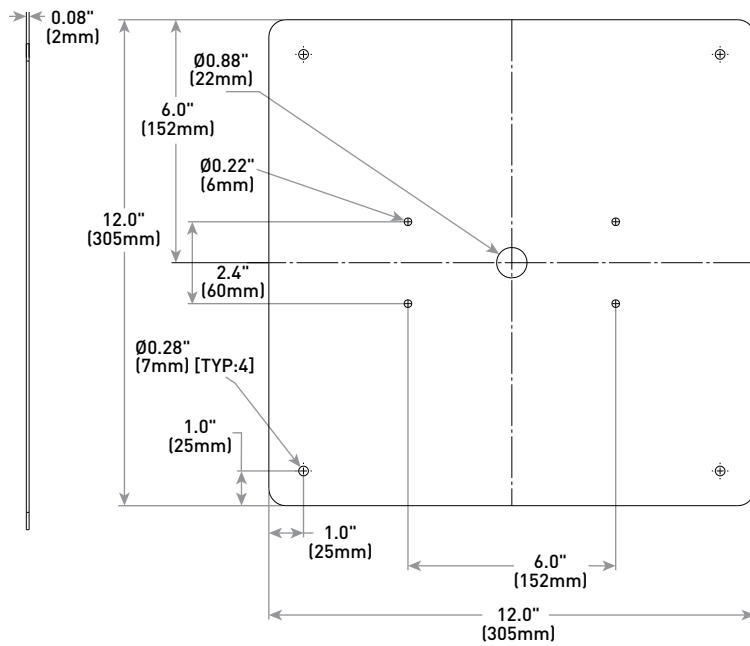


WM-PLT14

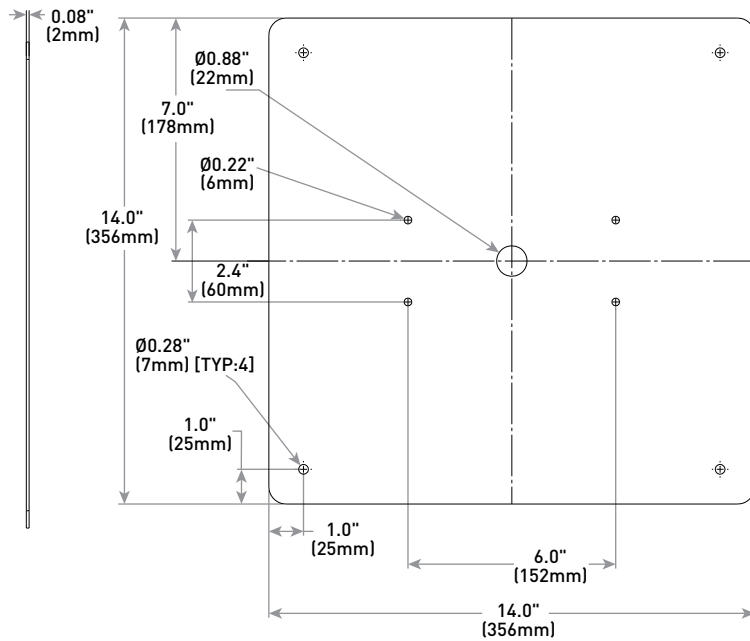


## Brackets and Tenons

### Direct Mount Bracket


#### EHO-UNV

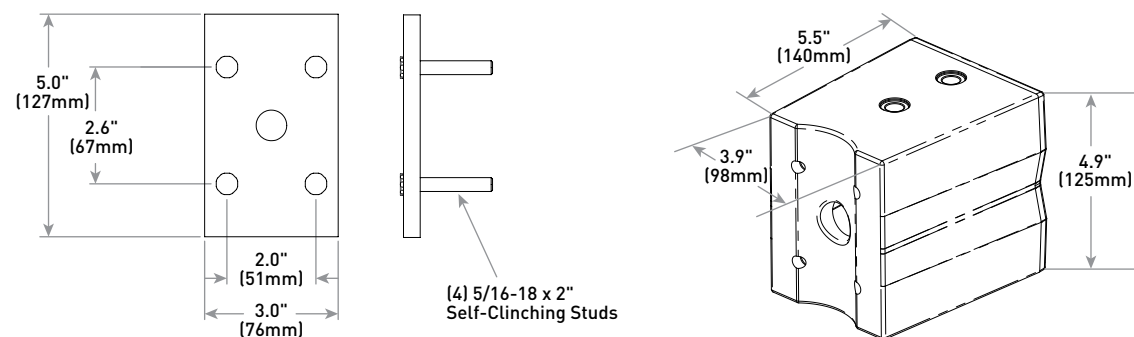


#### XA-TMDA8

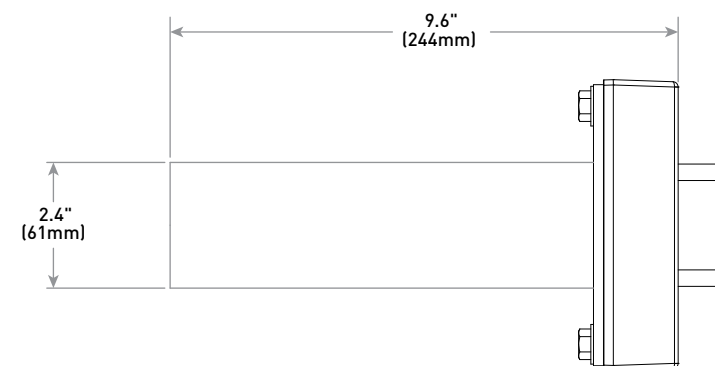

#### PGM-1

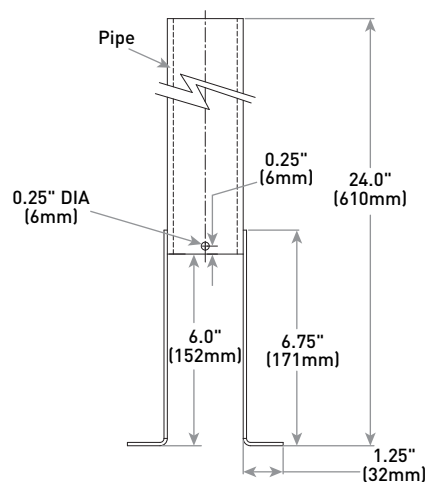

#### MNH-2

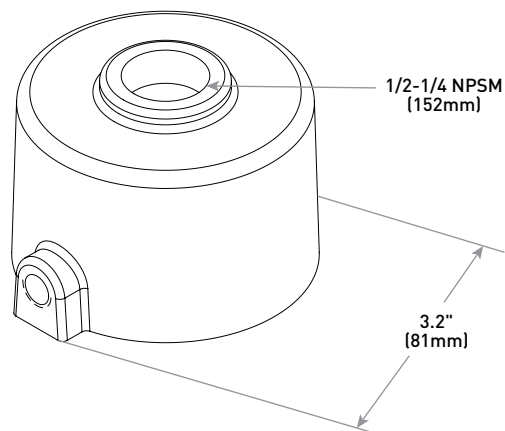


## Brackets and Tenons

### Tenon EPA

Part Number	EPA
PB-1A*	None
PB-2A*	0.82
PB-3A*	1.52
PB-4A*(180)	2.22
PB-4A*(90)	1.11
PB-2R2.375	0.92
PB-3R2.375	1.62
PB-4R2.375	2.32
PD Series Tenons	0.09
PT Series Tenons	0.10
PW-1A3**	0.47
PW-2A3**	0.94
RUL-ARM24	0.42
WM-2	0.08
WM-2L	0.13
WM-4	0.25
WM-4L	0.32
WM-DM	None
WM-PLT12	None
WM-PLT14	None
XA-TMDA8	0.19

\* Specify pole size: 3 (3"), 4 (4"), 5 (5") or 6 (6") for single, double or triple luminaire orientation or 4 (4"), 5 (5") or 6 (6") for quad luminaire orientation  
\*\* These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 (3"), 4 (4"), 5 (5") or 6 (6")

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm –  
[www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent [www.creelighting.com/patents](http://www.creelighting.com/patents). Cree® and the Cree logo are registered trademarks of Cree, Inc. LEDway®, THE EDGE®, Traveyo®, Noctura® and Colorfast DeltaGuard® are registered trademarks, and OSQ™, XSPW™ and RSW™ are trademarks of Cree Lighting, A company of IDEAL INDUSTRIES.

US: [creelighting.com](http://creelighting.com) (800) 236-6800  
Canada: [creelighting-canada.com](http://creelighting-canada.com) (800) 473-1234

**CREE**  **LIGHTING**

A COMPANY OF **IDEAL INDUSTRIES, INC.**