



DX14SN

COOLING CAPACITY: 18,000 - 60,000 BTU/H

ENERGY-EFFICIENT
SPLIT SYSTEM AIR CONDITIONER
UP TO 15 SEER AND 12.2 EER



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	5
Performance Data	33
AHRI Ratings	35
Dimensions	71
Wiring Diagrams	72
Accessories	74

■ Standard Features

- Energy-efficient compressor
- Single-speed PSC condenser fan motor
- Factory-installed filter drier
- Copper tube/aluminum fin coil
- Service valves with sweat connections and easy-access gauge ports
- AHRI Certified; ETL Listed

■ Cabinet Features

- Heavy-gauge galvanized-steel cabinet with louvered sound control top
- Steel louver coil guard
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in California or Quebec.

	D	X	14	S	N	036	3	AA	
	1	2	3,4	5	6	7,8,9	10	11,12	
Brand	D - Daikin								Engineering
									Major & Minor revisions * Not used for inventory control.
Type	X - AC R-410A V Inverter Z - HP R-410A								Voltage
									1 - 208/230 V Single-Phase 60 Hz
SEER	14 - 14 SEER 18 - 18 SEER 16 - 16 SEER 20 - 20 SEER								Nominal Tonnage
									018 - 1½ tons 031 - 2½ tons 043 - 3½ tons 019 - 1½ tons 036 - 3 tons 048 - 4 tons 024 - 2 tons 037 - 3 tons 060 - 5 tons 025 - 2 tons 042 - 3½ tons 061 - 5 tons (high capacity) 030 - 2½ tons
Compressor	S - Single Stage V - Variable Speed T - Two Stage								
									Feature Set
									A - Base D - Deluxe C - ComfortNet 4-Wire Ready N - Nominal

	DX14SN 0181C*	DX14SN 0191B*	DX14SN 0241C*	DX14SN 0251C*	DX14SN 0301B*
CAPACITIES					
Nominal Cooling (BTU/h)	18,000	18,000	24,000	24,000	30,000
SEER / EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 12
Decibels	72	71	74	71	72
COMPRESSOR					
RLA	6.0	9.0	7.7	13.5	12.8
LRA	37.5	47.5	38	58.3	64
CONDENSER FAN MOTOR					
Horsepower	1/8	1/8	1/8	1/8	1/6
FLA	0.7	0.7	0.7	0.7	0.95
REFRIGERATION SYSTEM					
Refrigerant Line Size ¹					
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Connection Size					
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	3/4"	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge (oz.)	75	68	72	75	80
Shipped with Orifice Size (in.)	0.051	0.053	0.057	0.057	0.065
ELECTRICAL DATA					
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	8.2	12	10.3	17.6	17.0
Max. Overcurrent Protection ³	15 amps	20 amps	15 amps	30 amps	25 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	126	131	126	136	162
SHIP WEIGHT (LBS)	141	146	141	153	180

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.

³ Must use time-delay fuses or HACR-type circuit breakers of the SNme size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 3/8" to 1 1/4" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

	DX14SN 0311B*	DX14SN 0361B*	DX14SN 0371B*	DX14SN 0421B*	DX14SN 0431B*	DX14SN 0481B*	DX14SN 0601B*
CAPACITIES							
Nominal Cooling (BTU/h)	30,000	36,000	36,000	42,000	42,000	48,000	60,000
SEER / EER	14 / 12.2	14 / 12	14 / 12.2	14 / 12.2	14 / 12	14 / 11.7	14 / 11.7
Decibels	72	73	73	73	73	74	75
COMPRESSOR							
RLA	12.8	14.1	14.1	16.7	16.7	19.9	25.0
LRA	67.8	77	72.2	79	79	109	134
CONDENSER FAN MOTOR							
Horsepower	1/6	1/6	1/6	1/6	1/6	1/4	1/4
FLA	0.95	0.95	0.95	0.95	0.95	1.3	1.3
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	7/8"	7/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	90	81	81	93	93	101	120
Shipped with Orifice Size	0.063	0.068	0.071	0.074	0.074	0.078	0.088
ELECTRICAL DATA							
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	17.0	18.6	18.6	21.8	21.8	26.2	32.6
Max. Overcurrent Protection ³	25 amps	30 amps	30 amps	35 amps	35 amps	45 amps	50 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
EQUIPMENT WEIGHT (LBS)	162	162	162	189	189	220	192
SHIP WEIGHT (LBS)	180	180	180	207	207	242	314

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes.

³ Must use time-delay fuses or HACR-type circuit breakers of the SNme size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 3/8" to 1 1/4" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

		OUTDOOR AMBIENT TEMPERATURE																															
		65					75					85					95					105					115						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	MBh	18.3	18.6	19.1	-	18.1	18.4	19.0	-	17.7	17.9	18.5	-	16.8	17.1	17.7	-	15.8	16.1	16.6	-	14.9	15.2	15.7	-	14.9	15.2	15.7	-				
	S/T	0.57	0.50	0.37	-	0.58	0.51	0.38	-	0.60	0.53	0.40	-	0.62	0.55	0.42	-	1.00	0.57	0.44	-	1.00	0.62	0.49	-	1.00	0.62	0.49	-				
	ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-				
	KW	1.09	1.09	1.09	-	1.22	1.22	1.21	-	1.36	1.36	1.35	-	1.51	1.51	1.50	-	1.68	1.68	1.67	-	1.87	1.87	1.87	-	1.87	1.87	1.87	-				
	Amps	4.0	4.0	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.9	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-				
	HI PR	243	244	246	-	282	283	284	-	322	323	325	-	365	366	368	-	412	413	415	-	462	463	464	-	462	463	464	-				
	LO PR	122	123	126	-	129	131	134	-	136	137	140	-	141	143	146	-	147	148	151	-	153	155	158	-	153	155	158	-				
600	MBh	18.6	18.8	19.4	-	18.4	18.6	19.2	-	17.9	18.2	18.7	-	17.1	17.3	17.9	-	16.1	16.3	16.9	-	15.2	15.4	16.0	-	15.2	15.4	16.0	-				
	S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.68	0.55	-	1.00	0.68	0.55	-				
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-	20	18	15	-				
	KW	1.10	1.10	1.10	-	1.22	1.22	1.22	-	1.36	1.36	1.36	-	1.51	1.51	1.51	-	1.68	1.68	1.68	-	1.88	1.88	1.88	-	1.88	1.88	1.88	-				
	Amps	4.0	4.0	4.0	-	4.6	4.6	4.6	-	5.2	5.2	5.2	-	5.9	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-				
	HI PR	245	246	248	-	284	285	286	-	324	325	327	-	367	368	370	-	414	415	417	-	464	465	466	-	464	465	466	-				
	LO PR	115	119	129	-	118	122	133	-	122	126	138	-	126	130	141	-	128	132	144	-	131	135	148	-	131	135	148	-				
675	MBh	18.8	19.1	19.6	-	18.7	18.9	19.5	-	18.2	18.5	19.0	-	17.4	17.6	18.2	-	16.4	16.6	17.2	-	15.5	15.7	16.3	-	15.5	15.7	16.3	-				
	S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-				
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-				
	KW	1.10	1.10	1.10	-	1.23	1.23	1.23	-	1.37	1.37	1.37	-	1.52	1.52	1.52	-	1.69	1.69	1.69	-	1.89	1.89	1.88	-	1.89	1.89	1.88	-				
	Amps	4.1	4.0	4.0	-	4.6	4.6	4.6	-	5.3	5.3	5.2	-	6.0	5.9	5.9	-	6.7	6.7	6.7	-	7.6	7.6	7.6	-	7.6	7.6	7.6	-				
	HI PR	247	248	250	-	286	287	288	-	326	327	329	-	369	370	372	-	416	417	419	-	466	467	468	-	466	467	468	-				
	LO PR	126	127	130	-	133	134	138	-	139	141	144	-	145	146	150	-	150	152	155	-	157	159	162	-	157	159	162	-				
75	MBh	18.3	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	17.9	18.5	19.3	16.9	17.1	17.7	18.5	15.9	16.1	16.7	17.5	14.9	15.2	15.7	16.6	15.9	16.1	16.7	17.5	14.9	15.2	15.7	16.6
	S/T	0.70	0.62	0.50	0.36	0.70	0.63	0.50	0.37	1.00	0.65	0.53	0.39	1.00	0.67	0.54	0.41	1.00	0.69	0.57	0.43	1.00	1.00	0.61	0.48	1.00	0.69	0.57	0.43	1.00	1.00	0.61	0.48
	ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16	24	22	19	15	25	23	20	16
	KW	1.09	1.09	1.09	1.10	1.22	1.22	1.21	1.22	1.36	1.36	1.35	1.36	1.51	1.51	1.50	1.51	1.68	1.67	1.67	1.68	1.87	1.87	1.87	1.88	1.68	1.67	1.67	1.68	1.87	1.87	1.87	1.88
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	7.6	6.7	6.7	6.7	7.6	7.6	7.6	7.6
600	HI PR	243	244	246	250	282	283	285	289	322	323	325	329	365	366	368	372	412	413	415	419	462	463	465	469	412	413	415	419	462	463	465	469
	LO PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	147	148	151	156	153	155	158	163	147	148	151	156	153	155	158	163
	MBh	18.6	18.8	19.4	20.2	18.4	18.7	19.2	20.0	17.9	18.2	18.7	19.6	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.4	16.0	16.8	16.1	16.4	16.9	17.7	15.2	15.4	16.0	16.8
	S/T	0.75	0.68	0.55	0.42	0.76	0.69	0.56	0.42	1.00	0.71	0.58	0.45	1.00	0.73	0.60	0.47	1.00	0.75	0.62	0.49	1.00	1.00	0.67	0.54	1.00	0.75	0.62	0.49	1.00	1.00	0.67	0.54
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	23	21	18	14	24	22	19	15
675	KW	1.10	1.10	1.10	1.10	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.37	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.69	1.88	1.88	1.88	1.89	1.68	1.68	1.68	1.69	1.88	1.88	1.88	1.89
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	7.6	6.7	6.7	6.7	7.6	7.6	7.6	7.6
	HI PR	246	247	248	253	284	285	287	291	324	325	327	331	367	368	370	374	414	415	417	421	464	465	467	471	414	415	417	421	464	465	467	471
	LO PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165	148	150	153	158	155	157	160	165
	MBh	18.9	19.1	19.7	20.5	18.7	18.9	19.5	20.3	18.2	18.5	19.0	19.9	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1
75	S/T	0.79	0.71	0.59	0.45	0.79	0.72	0.59	0.46	1.00	0.74	0.62	0.48	1.00	0.76	0.63	0.50	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57
	ΔT	22	20	17	13	22	20	17	13	23	21	17	14	22	20	17	13	22	20	17	13	23	21	18	14	22	20	17	13	23	21	18	14
	KW	1.10	1.10	1.10	1.11	1.23	1.23	1.23	1.24	1.37	1.37	1.37	1.37	1.52	1.52	1.52	1.53	1.69	1.69	1.68	1.69	1.89	1.88	1.88	1.89	1.69	1.69	1.68	1.69	1.89	1.88	1.88	1.89
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.7	5.3	5.3	5.2	5.3	6.0	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7
	HI PR	248	249	250	255	286	287	289	293	326	327	329	333	369	370	372	376	416	417	419	423	466	467	469	473	416	417	419	423	466	467	469	473
	LO PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167	157	159	162	167	157	159	162	167

		65										75										85										95										105										115									
		OUTDOOR AMBIENT TEMPERATURE																																																											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
80	MBh	18.4	18.7	19.2	20.1	18.3	18.5	19.1	19.9	17.8	18.0	18.6	19.4	17.0	17.2	17.8	18.6	15.9	16.2	16.8	17.6	15.0	15.3	15.8	16.7	15.0	15.3	15.8	16.7	15.0	15.3	15.8	16.7																												
	S/T	0.82	0.74	0.62	0.5	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.53	1.00	1.00	0.68	0.6	1.00	1.00	0.73	0.60	1.00	1.00	0.73	0.60	1.00	1.00	0.73	0.60																												
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	19	28	26	23	19	29	27	24	20	28	26	23	19	29	27	24	20																												
	KW	1.09	1.09	1.09	1.1	1.22	1.22	1.21	1.22	1.36	1.36	1.35	1.4	1.51	1.51	1.50	1.51	1.68	1.68	1.67	1.7	1.87	1.87	1.87	1.88	1.68	1.68	1.67	1.7	1.87	1.87	1.87	1.88																												
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.2	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6																												
	HI PR	244	245	247	251	282	283	285	289	322	324	325	329	366	367	369	373	412	414	415	419	462	463	465	469	462	463	465	469	462	463	465	469																												
	LO PR	122	124	127	132	130	131	134	140	136	138	141	146	142	143	146	151	147	149	152	157	154	155	158	164	154	155	158	164	154	155	158	164																												
600	MBh	18.7	18.9	19.5	20.3	18.5	18.8	19.3	20.1	18.0	18.3	18.8	19.7	17.2	17.5	18.0	18.8	16.2	16.4	17.0	17.8	15.3	15.5	16.1	16.9	15.3	15.5	16.1	16.9	15.3	15.5	16.1	16.9																												
	S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.68	0.54	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.58	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.79	0.65																												
	ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	27	25	22	18	28	26	23	19																												
	KW	1.10	1.10	1.10	1.1	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.4	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.7	1.88	1.88	1.88	1.89	1.68	1.68	1.68	1.7	1.88	1.88	1.88	1.89																												
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6																												
	HI PR	246	247	249	253	284	285	287	291	325	326	327	332	368	369	371	375	415	416	417	422	464	465	467	471	464	465	467	471	464	465	467	471																												
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165	156	157	160	165	156	157	160	165																												
675	MBh	18.9	19.2	19.8	20.6	18.8	19.0	19.6	20.4	18.3	18.6	19.1	19.9	17.5	17.7	18.3	19.1	16.5	16.7	17.3	18.1	15.6	15.8	16.4	17.2	15.6	15.8	16.4	17.2	15.6	15.8	16.4	17.2																												
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69	1.00	1.00	0.82	0.69	1.00	1.00	0.82	0.69																												
	ΔT	26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18	26	24	21	17	27	25	22	18																												
	KW	1.10	1.10	1.10	1.1	1.23	1.23	1.23	1.24	1.37	1.37	1.37	1.4	1.52	1.52	1.52	1.53	1.69	1.69	1.69	1.7	1.89	1.89	1.88	1.89	1.69	1.69	1.69	1.7	1.89	1.89	1.88	1.89																												
	Amps	4.1	4.1	4.0	4.1	4.6	4.6	4.6	4.7	5.3	5.3	5.3	5.3	6.0	6.0	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7																												
	HI PR	248	249	251	255	286	287	289	293	327	328	329	334	370	371	373	377	417	418	419	424	466	467	469	473	466	467	469	473	466	467	469	473																												
	LO PR	126	128	131	136	134	135	138	143	140	141	145	150	145	147	150	155	151	152	155	161	158	159	162	167	158	159	162	167	158	159	162	167																												
85	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.3	15.6	16.1	17.0	15.3	15.6	16.1	17.0	15.3	15.6	16.1	17.0																												
	S/T	1.00	0.84	0.71	0.58	1.00	0.85	0.72	0.58	1.00	1.00	0.74	0.61	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.82	0.69	1.00	1.00	0.82	0.69	1.00	1.00	0.82	0.69																												
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	28	24	33	30	26	23	33	31	28	24																												
	KW	1.09	1.09	1.09	1.10	1.22	1.22	1.22	1.23	1.36	1.36	1.36	1.37	1.51	1.51	1.51	1.52	1.68	1.68	1.68	1.69	1.88	1.88	1.87	1.88	1.68	1.68	1.68	1.69	1.88	1.88	1.87	1.88																												
	Amps	4.0	4.0	4.0	4.0	4.6	4.6	4.6	4.6	5.2	5.2	5.2	5.3	5.9	5.9	5.9	5.9	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.6																												
	HI PR	245	246	248	252	283	284	286	290	324	325	326	331	367	368	370	374	414	415	416	421	463	464	466	470	463	464	466	470	463	464	466	470																												
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	144	145	148	153	149	150	154	159	156	157	160	165	156	157	160	165	156	157	160	165																												
600	MBh	19.0	19.2	19.8	20.6	18.8	19.1	19.6	20.4	18.3	18.6	19.1	20.0	17.5	17.8	18.3	19.1	16.5	16.8	17.3	18.1	15.6	15.8	16.4	17.2	15.6	15.8	16.4	17.2	15.6	15.8	16.4	17.2																												
	S/T	1.00	0.90	0.77	0.63	1.00	0.90	0.77	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.82	0.75	1.00	1.00	0.84	0.70	1.00	1.00	0.82	0.75																												
	ΔT	31	29	26	22	31	29	26	22	31	29	26	22	31	29	26	22	31	29	25	22	32	30	26	23	32	30	26	23	32	30	26	23																												
	KW	1.10	1.10	1.10	1.11	1.23	1.23	1.22	1.23	1.37	1.36	1.36	1.37	1.52	1.52	1.51	1.52	1.69	1.68	1.68	1.69	1.88	1.88	1.88	1.89	1.68	1.68	1.68	1.69	1.88	1.88	1.88	1.89																												
	Amps	4.0	4.0	4.0	4.1	4.6	4.6	4.6	4.6	5.3	5.2	5.2	5.3	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.7	6.7	6.7	6.7	6.7	7.6	7.6	7.6	7.7																												
	HI PR	247	248	250	254	285	287	288	292	326	327	328	333	369	370	372	376	416	417	418	423	465	467	468	472	465	467	468	472	465	467	468	472																												
	LO PR	126	127	131	136	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	160	157	159	162	167	157	159	162	167	157	159	162	167																												
675	MBh	19.3	19.5	20.1	20.9	19.1	19.4	19.9	20.7	18.6	18.9	19.4	20.3	17.8	18.1	18.6	19.4	16.8	17.0	17.6	18.4	15.9	16.1	16.7	17.5	15.9	16.1	16.7	17.5	15.9	16.1	16.7	17.5																												
	S/T	1.00	0.93	0.80	0.66	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.82	0.78	1.00	1.00	0.82	0.73	1.00	1.00	0.82	0.78																												
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	22	31	29	26	22	31	29	26	22</																												

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																									
				65							75							85							95							105							115						
				ENTERING INDOOR WET BULB TEMPERATURE																																									
70	525	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-	12.9	13.4	14.7	-															
		S/T	0.69	0.57	0.40	-	0.71	0.60	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-															
		ΔT	19	16	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	15	12	-	18	15	12	-															
		KW	0.93	0.95	0.98	-	1.01	1.03	1.07	-	1.08	1.10	1.14	-	1.13	1.16	1.20	-	1.19	1.21	1.26	-	1.23	1.26	1.30	-	1.23	1.26	1.30	-															
		Amps	4.2	4.3	4.4	-	4.5	4.6	4.7	-	4.9	5.0	5.1	-	5.2	5.3	5.4	-	5.5	5.6	5.8	-	5.8	5.9	6.1	-	5.8	5.9	6.1	-															
600	HI PR	206	222	234	-	231	249	263	-	263	283	299	-	300	322	340	-	337	363	383	-	372	401	423	-	372	401	423	-																
	LO PR	105	111	122	-	111	118	128	-	115	122	133	-	121	128	140	-	127	135	147	-	131	139	152	-	131	139	152	-																
	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-	14.0	14.5	15.9	-																
	S/T	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.82	0.68	0.47	-	0.82	0.68	0.47	-																
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-																
675	KW	0.96	0.98	1.01	-	1.03	1.06	1.09	-	1.10	1.13	1.17	-	1.17	1.19	1.23	-	1.22	1.25	1.29	-	1.26	1.29	1.34	-	1.26	1.29	1.34	-																
	Amps	4.3	4.4	4.5	-	4.6	4.7	4.9	-	5.0	5.1	5.3	-	5.3	5.4	5.6	-	5.6	5.8	5.9	-	5.9	6.1	6.3	-	5.9	6.1	6.3	-																
	HI PR	212	229	241	-	238	257	271	-	271	292	308	-	309	332	351	-	347	374	395	-	384	413	436	-	384	413	436	-																
	LO PR	108	115	125	-	114	121	132	-	118	126	138	-	124	132	145	-	130	139	151	-	135	144	157	-	135	144	157	-																
	MBh	17.6	18.2	19.9	-	17.1	17.8	19.5	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.5	16.1	17.6	-	14.4	14.9	16.3	-	14.4	14.9	16.3	-																
75	525	S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.50	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-															
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-															
		KW	0.96	0.99	1.02	-	1.04	1.07	1.10	-	1.11	1.14	1.18	-	1.18	1.20	1.25	-	1.23	1.26	1.30	-	1.27	1.30	1.35	-	1.27	1.30	1.35	-															
		Amps	4.3	4.4	4.6	-	4.6	4.8	4.9	-	5.0	5.1	5.3	-	5.3	5.5	5.6	-	5.7	5.8	6.0	-	6.0	6.1	6.3	-	6.0	6.1	6.3	-															
		HI PR	215	231	244	-	241	259	274	-	274	295	311	-	312	336	354	-	351	378	399	-	388	417	441	-	388	417	441	-															
75	600	LO PR	109	116	127	-	115	122	134	-	120	127	139	-	126	134	146	-	132	140	153	-	136	145	158	-	136	145	158	-															
		MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7	13.2	13.5	14.7	15.7															
		S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.89	0.80	0.60	0.39	0.90	0.80	0.61	0.39	0.90	0.80	0.61	0.39															
		ΔT	22	20	17	11	22	21	17	12	22	21	17	12	22	21	17	12	22	20	17	12	21	19	16	11	21	19	16	11															
		KW	0.94	0.96	0.99	1.03	1.02	1.04	1.08	1.11	1.08	1.11	1.15	1.19	1.14	1.17	1.21	1.25	1.20	1.22	1.27	1.31	1.24	1.27	1.31	1.24	1.27	1.31	1.24	1.27	1.31														
75	675	Amps	4.2	4.3	4.4	4.6	4.5	4.6	4.8	4.9	4.9	5.0	5.2	5.3	5.2	5.3	5.5	5.7	5.5	5.7	5.8	6.0	5.8	6.0	6.2	6.4	5.8	6.0	6.2	6.4															
		HI PR	208	224	237	247	234	251	265	277	266	286	302	315	303	326	344	359	340	366	387	404	376	405	427	446	376	405	427	446															
		LO PR	106	112	123	131	112	119	130	138	116	124	135	144	122	130	142	151	128	136	148	158	132	141	154	164	132	141	154	164															
		MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1	14.3	14.7	15.9	17.1															
		S/T	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.86	0.77	0.58	0.38	0.89	0.80	0.60	0.39	0.92	0.83	0.62	0.40	0.93	0.83	0.63	0.41	0.93	0.83	0.63	0.41															
75	675	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11	20	19	15	11															
		KW	0.96	0.99	1.02	1.05	1.04	1.07	1.10	1.14	1.11	1.14	1.18	1.22	1.18	1.20	1.25	1.29	1.23	1.26	1.30	1.35	1.27	1.30	1.35	1.27	1.30	1.35	1.27	1.30	1.35														
		Amps	4.3	4.4	4.6	4.7	4.6	4.8	4.9	5.1	5.0	5.1	5.3	5.5	5.3	5.5	5.6	5.8	5.7	5.8	6.0	6.2	6.0	6.1	6.3	6.6	6.0	6.1	6.3	6.6															
		HI PR	215	231	244	254	241	259	274	285	274	295	311	325	312	336	355	370	351	378	399	416	388	417	441	460	388	417	441	460															
		LO PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169	136	145	158	169															
75	675	MBh	17.9	18.4	19.9	21.4	17.4	18.0	19.4	20.9	17.0	17.5	19.0	20.4	16.6	17.1	18.5	19.9	15.8	16.2	17.6	18.9	14.6	15.0	16.3	17.5	14.6	15.0	16.3	17.5															
		S/T	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.91	0.81	0.61	0.40	0.94	0.84	0.63	0.41	0.97	0.87	0.66	0.42	0.98	0.88	0.66	0.43	0.98	0.88	0.66	0.43															
		ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	20	18	15	10	20	18	15	10															
		KW	0.97	0.99	1.03	1.06	1.05	1.08	1.11	1.15	1.12	1.15	1.19	1.23	1.19	1.21	1.26	1.30	1.24	1.27	1.31	1.36	1.29	1.32	1.36	1.29	1.32	1.36	1.29	1.32	1.36	1.29													
		Amps	4.4	4.5	4.6	4.8	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.0	6.2	6.4	6.6	6.0	6.2	6.4	6.6															
75	675	HI PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	373	354	381	403	420	392	421	445	464	392	421	445	464															
		LO PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	147	157	133	142	155	165	138	146	160	170	138	146	160	170															
IDB: Entering Indoor Dry Bulb Temperature		Shaded area reflects ACCA (TVA) conditions																												kW = Total system power															
High and low pressures are measured at the liquid and suction service valves.		Amps = outdoor unit amps (comp.+fan)																																											

		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	525	MBh	16.4	16.7	17.9	19.1	16.0	16.3	17.4	18.6	15.6	15.9	17.0	18.2	15.2	15.6	16.6	17.8	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9	13.4	13.7	14.6	15.6	13.4	13.7	14.6	15.6			
		S/T	0.86	0.80	0.65	0.5	0.89	0.83	0.68	0.51	0.91	0.85	0.70	0.5	0.94	0.88	0.72	0.54	0.98	0.92	0.75	0.6	0.98	0.92	0.75	0.6	0.98	0.92	0.75	0.56	0.98	0.92	0.75	0.56			
		ΔT	25	24	20	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	16	25	24	21	16	23	22	19	15	23	22	19	15			
		KW	0.95	0.97	1.00	1.0	1.03	1.05	1.08	1.12	1.09	1.12	1.16	1.2	1.15	1.18	1.22	1.27	1.21	1.23	1.28	1.3	1.25	1.28	1.33	1.37	1.25	1.28	1.33	1.37	1.25	1.28	1.33	1.37			
		Amps	4.2	4.3	4.5	4.6	4.6	4.7	4.8	5.0	4.9	5.0	5.2	5.4	5.3	5.4	5.5	5.7	5.6	5.7	5.9	6.1	5.9	6.0	6.2	6.4	5.9	6.0	6.2	6.4	5.9	6.0	6.2	6.4			
		Hi PR	210	226	239	249	236	254	268	280	268	289	305	318	306	329	347	362	344	370	391	408	380	409	432	450	380	409	432	450	380	409	432	450			
		Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	134	142	155	165	134	142	155	165			
		MBh	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.5	16.8	18.0	19.2	15.7	16.0	17.1	18.3	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9	14.5	14.8	15.8	16.9			
600	S/T	0.89	0.83	0.68	0.5	0.92	0.86	0.70	0.53	0.95	0.89	0.72	0.5	0.98	0.91	0.74	0.56	1.00	0.95	0.77	0.6	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58	1.00	0.96	0.78	0.58				
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	25	24	21	16	24	23	20	16	22	22	19	15	22	22	19	15	22	22	19	15				
	KW	0.97	0.99	1.03	1.1	1.05	1.08	1.11	1.15	1.12	1.15	1.19	1.2	1.19	1.21	1.26	1.30	1.24	1.27	1.31	1.4	1.29	1.32	1.36	1.41	1.29	1.32	1.36	1.41	1.29	1.32	1.36	1.41				
	Amps	4.4	4.5	4.6	4.8	4.7	4.8	4.9	5.1	5.1	5.2	5.3	5.5	5.4	5.5	5.7	5.9	5.7	5.9	6.0	6.3	6.0	6.2	6.4	6.6	6.0	6.2	6.4	6.6	6.0	6.2	6.4	6.6				
	Hi PR	217	233	246	257	243	262	276	288	277	298	314	328	315	339	358	374	355	382	403	420	392	422	445	464	392	422	445	464	392	422	445	464				
	Lo PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	146	160	170	138	146	160	170	138	146	160	170				
	MBh	18.2	18.6	19.8	21.2	17.7	18.1	19.4	20.7	17.3	17.7	18.9	20.2	16.9	17.3	18.5	19.7	16.1	16.4	17.5	18.7	14.9	15.2	16.2	17.4	14.9	15.2	16.2	17.4	14.9	15.2	16.2	17.4				
	S/T	0.94	0.88	0.72	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61	1.00	1.00	0.82	0.61				
675	ΔT	23	22	19	15	23	22	20	16	24	23	20	16	23	23	20	16	22	22	19	16	20	21	18	15	20	21	18	15	20	21	18	15				
	KW	0.98	1.00	1.04	1.1	1.06	1.09	1.12	1.16	1.13	1.16	1.20	1.2	1.20	1.22	1.27	1.31	1.25	1.28	1.32	1.4	1.30	1.33	1.37	1.42	1.30	1.33	1.37	1.42	1.30	1.33	1.37	1.42				
	Amps	4.4	4.5	4.6	4.8	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.2	6.4	6.7	6.1	6.2	6.4	6.7	6.1	6.2	6.4	6.7				
	Hi PR	219	236	249	260	246	264	279	291	279	301	318	331	318	343	362	377	358	385	407	424	396	426	450	469	396	426	450	469	396	426	450	469				
	Lo PR	111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172	139	148	161	172	139	148	161	172				

525	MBh	16.6	17.0	17.8	19.0	16.3	16.6	17.4	18.5	15.9	16.2	16.9	18.1	15.5	15.8	16.5	17.6	14.7	15.0	15.7	16.8	13.6	13.9	14.5	15.5
	S/T	0.90	0.87	0.78	0.64	0.93	0.90	0.81	0.66	0.96	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.90	0.73
	ΔT	26	26	24	21	27	26	25	21	27	26	25	21	27	26	25	22	26	26	25	21	24	24	23	20
	KW	0.96	0.98	1.01	1.04	1.03	1.06	1.09	1.13	1.10	1.13	1.17	1.21	1.17	1.19	1.23	1.28	1.22	1.25	1.29	1.34	1.26	1.29	1.34	1.39
	Amps	4.3	4.4	4.5	4.7	4.6	4.7	4.9	5.0	5.0	5.1	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.8	5.9	6.1	5.9	6.1	6.3	6.5
	Hi PR	212	229	241	252	238	256	271	282	271	292	308	321	309	332	351	366	347	374	395	412	384	413	436	455
	LO PR	108	115	125	133	114	121	132	141	118	126	138	147	124	132	145	154	130	139	151	161	135	143	157	167
	600	MBh	18.0	18.4	19.3	20.5	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.8	17.1	17.9	19.1	15.9	16.2	17.0	18.2	14.8	15.0	15.8
S/T		0.93	0.90	0.81	0.66	0.97	0.93	0.84	0.68	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.76
ΔT		26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	24	25	24	21	23	23	23	19
KW		0.98	1.00	1.04	1.07	1.06	1.09	1.12	1.16	1.13	1.16	1.20	1.24	1.20	1.22	1.27	1.31	1.25	1.28	1.32	1.37	1.30	1.33	1.37	1.42
Amps		4.4	4.5	4.6	4.8	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.7	5.9	5.8	5.9	6.1	6.3	6.1	6.2	6.4	6.7
Hi PR		219	236	249	260	246	264	279	291	279	301	318	331	318	343	362	377	358	385	407	424	396	426	450	469
LO PR		111	118	129	138	117	125	136	145	122	130	142	151	128	136	149	159	134	143	156	166	139	148	161	172
675		MBh	18.5	18.8	19.7	21.1	18.1	18.4	19.3	20.6	17.6	18.0	18.8	20.1	17.2	17.5	18.4	19.6	16.3	16.7	17.4	18.6	15.1	15.4	16.2
	S/T	0.98	0.95	0.86	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	25	24	23	20	25	25	23	20	24	24	23	20	23	24	23	20	22	23	23	20	21	21	22	19
	KW	0.99	1.01	1.05	1.08	1.07	1.10	1.13	1.17	1.14	1.17	1.21	1.25	1.21	1.24	1.28	1.32	1.26	1.29	1.34	1.38	1.31	1.34	1.39	1.44
	Amps	4.4	4.5	4.7	4.8	4.8	4.9	5.0	5.2	5.2	5.3	5.4	5.6	5.5	5.6	5.8	6.0	5.8	6.0	6.1	6.4	6.2	6.3	6.5	6.7
	Hi PR	221	238	251	262	248	267	282	294	282	304	321	335	321	346	365	381	362	389	411	429	400	430	454	474
	LO PR	112	119	130	139	119	126	138	147	123	131	143	153	130	138	150	160	136	144	158	168	140	149	163	174

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
70	550	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.8	15.1	15.6	-	14.8	15.1	15.6	-	14.8	15.1	15.6	-			
		S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-	1.00	0.69	0.56	-	1.00	0.69	0.56	-			
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-			
		KW	1.05	1.05	1.05	-	1.17	1.17	1.16	-	1.30	1.30	1.29	-	1.44	1.44	1.43	-	1.59	1.59	1.59	-	1.78	1.78	1.77	-	1.78	1.78	1.77	-	1.78	1.78	1.77	-			
		Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.6	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-			
	Hi PR	240	241	242	-	277	278	280	-	316	318	319	-	359	360	362	-	404	405	407	-	453	454	456	-	453	454	456	-	453	454	456	-				
	LO PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-				
70	600	MBh	18.3	18.6	19.1	-	18.2	18.4	19.0	-	17.7	18.0	18.5	-	16.9	17.2	17.7	-	15.9	16.2	16.7	-	15.0	15.3	15.8	-	15.0	15.3	15.8	-	15.0	15.3	15.8	-			
		S/T	0.67	0.60	0.47	-	0.68	0.61	0.47	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-			
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-			
		KW	1.05	1.05	1.05	-	1.17	1.17	1.17	-	1.30	1.30	1.30	-	1.44	1.44	1.44	-	1.60	1.60	1.59	-	1.78	1.78	1.78	-	1.78	1.78	1.78	-	1.78	1.78	1.78	-			
		Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-	7.2	7.2	7.2	-			
	Hi PR	241	242	244	-	279	280	281	-	318	319	321	-	360	361	363	-	406	407	409	-	455	456	457	-	455	456	457	-	455	456	457	-				
	LO PR	126	128	131	-	133	135	138	-	140	142	145	-	146	147	150	-	151	152	156	-	158	159	162	-	158	159	162	-	158	159	162	-				
70	675	MBh	18.7	18.9	19.5	-	18.5	18.8	19.3	-	18.1	18.3	18.9	-	17.3	17.5	18.1	-	16.3	16.5	17.1	-	15.4	15.6	16.2	-	15.4	15.6	16.2	-	15.4	15.6	16.2	-			
		S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	0.72	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-			
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-			
		KW	1.06	1.06	1.06	-	1.18	1.17	1.17	-	1.30	1.30	1.30	-	1.45	1.44	1.44	-	1.60	1.60	1.60	-	1.79	1.79	1.78	-	1.79	1.79	1.78	-	1.79	1.79	1.78	-			
		Amps	3.9	3.9	3.9	-	4.5	4.5	4.5	-	5.1	5.1	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.3	7.3	7.2	-	7.3	7.3	7.2	-	7.3	7.3	7.2	-			
	Hi PR	243	244	246	-	281	282	283	-	320	321	323	-	362	363	365	-	408	409	411	-	457	458	459	-	457	458	459	-	457	458	459	-				
	LO PR	128	130	133	-	136	137	141	-	142	144	147	-	148	149	153	-	153	155	158	-	160	162	165	-	160	162	165	-	160	162	165	-				
75	550	MBh	18.2	18.4	18.9	19.8	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4			
		S/T	0.77	0.70	0.57	0.43	0.78	0.70	0.57	0.43	1.00	0.73	0.60	0.46	1.00	0.77	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55			
		ΔT	24	22	18	15	24	22	18	15	24	22	19	15	24	22	18	15	24	22	18	14	25	23	19	16	24	22	18	14	25	23	19	16			
		KW	1.05	1.05	1.05	1.06	1.17	1.16	1.16	1.17	1.18	1.30	1.29	1.29	1.30	1.44	1.43	1.43	1.44	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78		
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2		
	Hi PR	240	241	243	247	277	278	280	284	317	318	319	324	359	360	362	366	405	406	407	411	453	454	456	460	405	406	407	411	453	454	456	460				
	LO PR	125	126	129	134	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	154	156	158	161	166	149	150	154	159	156	158	161	166				
75	600	MBh	18.4	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	18.0	18.5	19.3	16.9	17.2	17.7	18.5	15.9	16.2	16.7	17.5	15.0	15.3	15.8	16.6	16.9	17.2	17.7	18.5	15.9	16.2	16.7	17.5			
		S/T	0.80	0.73	0.59	0.45	1.00	0.73	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.53	1.00	1.00	0.71	0.58	1.00	0.80	0.66	0.53	1.00	1.00	0.71	0.58			
		ΔT	23	21	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	17	13	24	22	19	15	23	21	17	13	24	22	19	15			
		KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.43	1.43	1.44	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79			
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3			
	Hi PR	241	242	244	248	279	280	282	286	318	319	321	325	360	361	363	367	406	407	409	413	455	456	457	462	406	407	409	413	455	456	457	462				
	LO PR	126	128	131	136	133	135	138	143	140	142	145	150	146	147	150	155	151	153	156	161	158	159	162	168	149	150	154	161	158	159	162	168				
75	675	MBh	18.7	19.0	19.5	20.3	18.5	18.8	19.3	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.4	15.6	16.2	17.0	16.3	16.5	17.1	17.9	15.4	15.6	16.2	17.0			
		S/T	0.82	0.74	0.61	0.47	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	1.00	0.68	0.54	1.00	1.00	0.73	0.59	1.00	0.79	0.66	0.52	1.00	1.00	0.73	0.59			
		ΔT	22	20	17	13	22	20	17	13	23	21	17	13	22	20	17	13	22	20	16	13	23	21	18	14	22	20	16	13	23	21	18	14			
		KW	1.06	1.06	1.06	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.43	1.43	1.44	1.60	1.60	1.60	1.61	1.79	1.78	1.78	1.79	1.60	1.60	1.60	1.61	1.79	1.78	1.78	1.79			
		Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3			
	Hi PR	244	24																																		

		65						75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	550	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5	14.9	15.2	15.7	16.5			
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67			
		ΔT	28	26	23	19	28	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20	29	27	24	20	29	27	24	20			
		KW	1.05	1.05	1.05	1.1	1.17	1.17	1.16	1.17	1.30	1.30	1.29	1.3	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.6	1.78	1.78	1.77	1.78	1.78	1.78	1.77	1.78	1.78	1.77	1.78				
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2			
80	600	MBh	18.4	18.7	19.2	20.0	18.3	18.5	19.1	19.9	17.8	18.1	18.6	19.4	17.0	17.3	17.8	18.6	16.0	16.3	16.8	17.6	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7	15.1	15.4	15.9	16.7			
		S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.6	1.00	1.00	0.76	0.63	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70	1.00	1.00	0.84	0.70	1.00	1.00	0.84	0.70			
		ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	28	27	23	19	28	27	23	19	28	27	23	19			
		KW	1.05	1.05	1.05	1.1	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.59	1.6	1.78	1.78	1.78	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78			
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	7.2	7.2	7.2	7.2	7.2	7.2	7.3				
80	675	MBh	18.8	19.1	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	19.0	19.8	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1	15.5	15.7	16.3	17.1			
		S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71			
		ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	27	25	22	18	27	25	22	18			
		KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.60	1.6	1.79	1.78	1.78	1.79	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78		
		Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	7.3	7.3	7.2	7.2	7.3	7.3	7.3	7.3			
85	550	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8	15.2	15.5	16.0	16.8	15.2	15.5	16.0	16.8			
		S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.80	0.77	1.00	1.00	0.80	0.77	1.00	1.00	0.80	0.77			
		ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	22	32	30	26	22	33	31	27	24	33	31	27	24	33	31	27	24			
		KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78				
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	7.2	7.2	7.2	7.2	7.2	7.2	7.3				
85	600	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.4	18.9	19.7	17.3	17.6	18.1	18.9	16.3	16.6	17.1	17.9	15.4	15.7	16.2	17.0	15.4	15.7	16.2	17.0	15.4	15.7	16.2	17.0			
		S/T	1.00	0.95	0.81	0.67	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.75	1.00	1.00	0.80	0.80	1.00	1.00	0.80	0.75	1.00	1.00	0.80	0.80			
		ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	26	22	32	30	27	23	32	30	27	23	32	30	27	23			
		KW	1.06	1.06	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.78	1.78	1.78	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78				
		Amps	3.9	3.9	3.9	3.9	4.5	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	7.2	7.2	7.2	7.2	7.2	7.2	7.3				
85	675	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4	15.8	16.0	16.6	17.4	15.8	16.0	16.6	17.4			
		S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.81	0.81	1.00	1.00	0.81	0.76	1.00	1.00	0.81	0.81			
		ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22	31	29	26	22	31	29	26	22			
		KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.30	1.31	1.45	1.45	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	1.79	1.79	1.78	1.79	1.79	1.78	1.79				
		Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3	7.3			
85	LO PR	MBh	127	128	131	136	134	136	139	144	141	142	145	150	146	148	151	156	152	153	156	161	158	160	163	168	158	160	163	168	158	160	163	168			
		S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71			
		ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18	27	25	22	18	27	25	22	18			
		KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.60	1.6	1.79	1.78	1.78	1.79	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78		
		Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	7.3	7.3	7.2	7.2	7.3	7.3	7.3	7.3			
85	LO PR	MBh	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	169	161	162	165	171	161	162	165	171			
		S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.80	0.77	1.00	1.00	0.80	0.77	1.00	1.00	0.80	0.77			
		ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	22	32	30	26	22	33	31	27	24	33	31	27	24	33	31	27	24			
		KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79	1.78	1.78	1.77	1.78	1.78	1.77	1.78				
		Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	7.2	7.2	7.2	7.2	7.2	7.2	7.3				
85	LO PR	MBh	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	169	161	162	165	171	161	162	165				

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65						75						85						95						105						115					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
700		MBh	24.5	24.9	25.6	-	24.3	24.7	25.4	-	23.7	24.0	24.7	-	22.6	22.9	23.7	-	21.3	21.6	22.3	-	20.1	20.4	21.1	-	20.1	20.4	21.1	-									
		S/T	0.63	0.56	0.43	-	0.63	0.56	0.43	-	0.66	0.59	0.46	-	0.68	0.60	0.48	-	1.00	0.62	0.50	-	1.00	0.67	0.55	-	1.00	0.67	0.55	-									
		ΔT	20	18	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	14	-	21	19	16	-	21	19	16	-									
		KW	1.41	1.40	1.40	-	1.57	1.57	1.57	-	1.75	1.75	1.75	-	1.95	1.95	1.95	-	2.17	2.17	2.17	-	2.43	2.43	2.43	-	2.43	2.43	2.43	-									
		Amps	5.3	5.3	5.2	-	6.0	6.0	6.0	-	6.9	6.8	6.8	-	7.8	7.8	7.7	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-									
800		Hi PR	253	254	256	-	293	294	296	-	334	335	337	-	379	380	382	-	427	428	430	-	478	480	481	-	478	480	481	-									
		LO PR	121	123	126	-	128	130	133	-	135	136	139	-	140	142	145	-	145	147	150	-	152	153	156	-	152	153	156	-									
		MBh	25.0	25.3	26.0	-	24.8	25.1	25.8	-	24.1	24.5	25.2	-	23.0	23.4	24.1	-	21.7	22.1	22.8	-	20.5	20.8	21.6	-	20.5	20.8	21.6	-									
		S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-									
		ΔT	19	17	14	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-									
900		KW	1.41	1.41	1.41	-	1.58	1.58	1.57	-	1.76	1.76	1.76	-	1.96	1.96	1.96	-	2.18	2.18	2.18	-	2.44	2.44	2.44	-	2.44	2.44	2.44	-									
		Amps	5.3	5.3	5.3	-	6.1	6.0	6.0	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-									
		Hi PR	255	257	258	-	295	296	298	-	337	338	339	-	381	382	384	-	429	430	432	-	481	482	484	-	481	482	484	-									
		LO PR	123	125	128	-	131	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-									
		MBh	25.5	25.9	26.6	-	25.3	25.6	26.4	-	24.7	25.0	25.7	-	23.6	23.9	24.6	-	22.3	22.6	23.3	-	21.0	21.4	22.1	-	21.0	21.4	22.1	-									
700		S/T	0.67	0.60	0.47	-	0.68	0.60	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-	1.00	0.72	0.59	-									
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-									
		KW	1.42	1.42	1.42	-	1.59	1.58	1.58	-	1.77	1.77	1.76	-	1.97	1.97	1.96	-	2.19	2.19	2.19	-	2.45	2.45	2.45	-	2.45	2.45	2.45	-									
		Amps	5.3	5.3	5.3	-	6.1	6.1	6.1	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-	10.0	10.0	10.0	-									
		Hi PR	258	259	261	-	298	299	300	-	339	340	342	-	384	385	387	-	432	433	435	-	483	484	486	-	483	484	486	-									
LO PR		LO PR	126	127	130	-	133	135	138	-	140	141	144	-	145	146	149	-	150	152	155	-	157	158	161	-	157	158	161	-									
75		MBh	24.5	24.9	25.6	26.7	24.3	24.7	25.4	26.5	23.7	24.0	24.8	25.9	22.6	23.0	23.7	24.8	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2	20.1	20.4	21.1	22.2									
		S/T	0.75	0.68	0.55	0.42	0.76	0.68	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.80	0.67	0.53	1.00	0.80	0.67	0.53									
		ΔT	25	23	19	15	25	23	19	15	25	23	19	15	25	23	19	15	24	22	19	15	26	24	20	16	26	24	20	16									
		KW	1.40	1.40	1.40	1.41	1.57	1.57	1.56	1.58	1.75	1.75	1.75	1.76	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.18	2.43	2.43	2.43	2.44	2.43	2.43	2.43	2.44									
		Amps	5.3	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.																										

Shaded area reflects ACCA (TVA) conditions

		65										75										85										95										105										115									
		Outdoor Ambient Temperature																																																											
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
80	MBh	24.0	24.4	25.1	26.2	23.8	24.2	24.9	26.0	23.2	23.6	24.3	25.3	22.2	22.5	23.2	24.3	20.9	21.2	21.9	23.0	19.7	20.0	20.7	21.8	19.7	20.0	20.7	21.8	19.7	20.0	20.7	21.8																												
	S/T	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.7	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7																												
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	28	26	23	19	30	28	24	20	30	28	24	20	30	28	24	20																												
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.9	1.9	1.9	1.9	2.2	2.2	2.1	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4																												
	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.9																												
	HI PR	255	256	258	262	294	296	297	302	336	337	339	343	381	382	384	388	429	430	432	437	481	482	484	488	481	482	484	488	481	482	484	488																												
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165	156	157	160	165	156	157	160	165																												
80	MBh	24.5	24.8	25.5	26.6	24.3	24.6	25.3	26.4	23.7	24.0	24.7	25.8	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.2	22.2	20.1	20.4	21.2	22.2	20.1	20.4	21.2	22.2																												
	S/T	1.0	0.8	0.7	0.6	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7																												
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	27	26	22	18	27	25	22	18	28	26	23	19	28	26	23	19	28	26	23	19																												
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4																												
	Amps	5.2	5.2	5.2	5.3	6.0	5.9	5.9	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.8	9.8	9.9	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.9																												
	HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	384	386	391	432	433	435	439	483	484	486	490	483	484	486	490	483	484	486	490																												
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	163	168	158	159	163	168	158	159	163	168																												
900	MBh	25.0	25.3	26.1	27.1	24.8	25.1	25.8	26.9	24.2	24.5	25.2	26.3	23.1	23.5	24.2	25.2	21.8	22.2	22.9	23.9	20.6	21.0	21.7	22.8	20.6	21.0	21.7	22.8	20.6	21.0	21.7	22.8																												
	S/T	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7																												
	ΔT	27	25	21	17	27	25	21	17	27	25	21	17	26	25	21	17	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18																												
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4																												
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9																												
	HI PR	260	261	262	267	299	300	302	307	341	342	344	348	386	387	389	393	434	435	437	441	486	487	489	493	486	487	489	493	486	487	489	493																												
	LO PR	129	131	134	139	136	138	141	146	143	144	148	153	148	150	153	158	154	155	158	164	161	162	165	170	161	162	165	170	161	162	165	170																												

700	MBh	24.4	24.8	25.5	26.6	24.2	24.6	25.3	26.4	23.6	24.0	24.7	25.7	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2
	S/T	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	1.0	0.8
	ΔT	33	31	27	23	32	31	27	23	33	31	27	23	32	31	27	23	32	30	27	23	33	31	28	24
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.8	6.8	6.7	6.8	7.7	7.6	7.6	7.7	8.7	8.7	8.6	8.7	9.8	9.8	9.8	9.9
800	HI PR	256	257	259	263	296	297	299	303	337	338	340	345	382	383	385	389	430	432	433	438	482	483	485	489
	LO PR	126	127	131	136	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	160	157	159	162	167
	MBh	24.9	25.2	25.9	27.0	24.7	25.0	25.7	26.8	24.1	24.4	25.1	26.2	23.0	23.3	24.0	25.1	21.7	22.0	22.7	23.8	20.5	20.8	21.5	22.6
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	1.0	0.8
	ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	25	22	32	30	27	23
900	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.8	9.9
	HI PR	258	259	261	266	298	299	301	305	340	341	343	347	384	386	387	392	433	434	436	440	484	486	487	492
	LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	154	158	163	160	161	164	170
	MBh	25.4	25.7	26.4	27.5	25.2	25.5	26.2	27.3	24.6	24.9	25.6	26.7	23.5	23.9	24.6	25.6	22.2	22.6	23.3	24.3	21.0	21.4	22.1	23.2
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	1.0	0.7	1.0	1.0	1.0	0.8
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	24	21	31	29	26	22
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.8	1.8	2.0	2.0	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.8	8.7	8.7	8.7	8.8	9.9	9.9	9.9	9.9
	HI PR	261	262	264	268	300	302	303	308	342	343	345	349	387	388	390	394	435	436	438	443	487	488	490	494
LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	165	162	164	167	172	

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power

Amps = outdoor unit amps (comp. + fan)

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	MBh	22.1	22.9	25.1	-	21.6	22.3	24.5	-	21.0	21.8	23.9	-	20.5	21.3	23.3	-	19.5	20.2	22.2	-	18.1	18.7	20.5	-	18.1	18.7	20.5	-		
	S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-	0.81	0.67	0.47	-		
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	18	16	12	-	18	16	12	-		
	KW	1.26	1.29	1.33	-	1.37	1.40	1.45	-	1.46	1.50	1.55	-	1.54	1.58	1.64	-	1.62	1.65	1.71	-	1.68	1.72	1.78	-	1.68	1.72	1.78	-		
	Amps	5.5	5.6	5.8	-	5.9	6.1	6.2	-	6.4	6.6	6.8	-	6.8	7.0	7.2	-	7.3	7.4	7.7	-	7.7	7.9	8.1	-	7.7	7.9	8.1	-		
	HI PR	217	233	246	-	243	262	276	-	277	298	314	-	315	339	358	-	354	381	403	-	391	421	445	-	391	421	445	-		
800	LO PR	106	113	123	-	112	119	130	-	117	124	135	-	122	130	142	-	128	136	149	-	133	141	154	-	133	141	154	-		
	MBh	22.4	23.2	25.4	-	21.9	22.7	24.8	-	21.4	22.1	24.3	-	20.8	21.6	23.7	-	19.8	20.5	22.5	-	18.3	19.0	20.8	-	18.3	19.0	20.8	-		
	S/T	0.73	0.61	0.42	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.48	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-		
	ΔT	19	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-		
	KW	1.27	1.30	1.34	-	1.37	1.41	1.46	-	1.47	1.50	1.56	-	1.55	1.59	1.65	-	1.63	1.66	1.72	-	1.69	1.73	1.79	-	1.69	1.73	1.79	-		
	Amps	5.5	5.7	5.8	-	6.0	6.1	6.3	-	6.4	6.6	6.8	-	6.9	7.0	7.3	-	7.3	7.5	7.7	-	7.7	7.9	8.2	-	7.7	7.9	8.2	-		
900	HI PR	218	235	248	-	245	263	278	-	278	300	316	-	317	341	360	-	357	384	405	-	394	424	448	-	394	424	448	-		
	LO PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-	134	142	155	-		
	MBh	22.8	23.7	25.9	-	22.3	23.1	25.3	-	21.8	22.6	24.7	-	21.3	22.0	24.1	-	20.2	20.9	22.9	-	18.7	19.4	21.2	-	18.7	19.4	21.2	-		
	S/T	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-		
	ΔT	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	16	14	11	-		
	KW	1.28	1.31	1.36	-	1.39	1.42	1.47	-	1.49	1.52	1.58	-	1.57	1.61	1.67	-	1.64	1.68	1.75	-	1.71	1.75	1.81	-	1.71	1.75	1.81	-		
75	Amps	5.6	5.7	5.9	-	6.0	6.2	6.4	-	6.5	6.7	6.9	-	7.0	7.1	7.3	-	7.4	7.6	7.8	-	7.8	8.0	8.3	-	7.8	8.0	8.3	-		
	HI PR	221	238	251	-	248	267	282	-	282	304	321	-	321	346	365	-	361	389	411	-	399	430	454	-	399	430	454	-		
	LO PR	108	115	126	-	114	122	133	-	119	126	138	-	125	133	145	-	131	139	152	-	135	144	157	-	135	144	157	-		
	MBh	22.4	23.1	25.0	26.8	21.9	22.6	24.4	26.2	21.4	22.0	23.9	25.6	20.9	21.5	23.3	25.0	19.8	20.4	22.1	23.7	18.4	18.9	20.5	22.0	18.4	18.9	20.5	22.0		
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.78	0.59	0.38	0.91	0.81	0.62	0.40	0.92	0.82	0.62	0.40	0.92	0.82	0.62	0.40		
	ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	23	21	17	12	21	20	16	11	21	20	16	11		
725	KW	1.27	1.30	1.35	1.39	1.38	1.41	1.46	1.51	1.47	1.51	1.56	1.62	1.56	1.60	1.65	1.71	1.63	1.67	1.73	1.79	1.69	1.73	1.80	1.86	1.69	1.73	1.80	1.86		
	Amps	5.5	5.7	5.8	6.1	6.0	6.1	6.3	6.5	6.5	6.6	6.8	7.1	6.9	7.1	7.3	7.6	7.3	7.5	7.7	8.0	7.7	7.9	8.2	8.5	7.7	7.9	8.2	8.5		
	HI PR	219	236	249	259	246	264	279	291	279	301	317	331	318	342	362	377	358	385	407	424	395	426	449	469	395	426	449	469		
	LO PR	107	114	125	133	113	120	132	140	118	125	137	146	124	132	144	153	130	138	150	160	134	143	156	166	134	143	156	166		
	MBh	22.8	23.5	25.4	27.3	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.3	20.1	20.7	22.4	24.1	18.7	19.2	20.8	22.3	18.7	19.2	20.8	22.3		
	S/T	0.83	0.75	0.57	0.36	0.87	0.77	0.59	0.38	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42		
800	ΔT	22	20	16	11	22	20	17	12	22	20	17	12	22	21	17	12	22	20	17	11	21	19	15	11	21	19	15	11		
	KW	1.28	1.31	1.35	1.40	1.39	1.42	1.47	1.52	1.48	1.52	1.57	1.63	1.57	1.61	1.66	1.72	1.64	1.68	1.74	1.80	1.70	1.74	1.81	1.87	1.70	1.74	1.81	1.87		
	Amps	5.6	5.7	5.9	6.1	6.0	6.1	6.3	6.6	6.5	6.7	6.9	7.1	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.2	8.5	7.8	8.0	8.2	8.5		
	HI PR	220	237	250	261	247	266	281	293	281	303	320	333	320	345	364	380	360	388	410	427	398	429	453	472	398	429	453	472		
	LO PR	108	115	125	134	114	121	132	141	119	126	138	147	125	132	145	154	130	139	152	161	135	144	157	167	135	144	157	167		
	MBh	23.2	23.9	25.9	27.8	22.7	23.4	25.3	27.1	22.2	22.8	24.7	26.5	21.6	22.3	24.1	25.8	20.5	21.1	22.9	24.6	19.0	19.6	21.2	22.7	19.0	19.6	21.2	22.7		
900	S/T	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.90	0.81	0.61	0.39	0.93	0.83	0.63	0.41	0.97	0.87	0.65	0.42	0.98	0.87	0.66	0.42	0.98	0.87	0.66	0.42		
	ΔT	20	19	15	11	20	19	15	11	20	19	15	11	21	19	16	11	20	19	15	11	19	17	14	10	19	17	14	10		
	KW	1.29	1.32	1.37	1.42	1.40	1.44	1.49	1.54	1.50	1.54	1.59	1.65	1.59	1.62	1.68	1.74	1.66	1.70	1.76	1.83	1.72	1.77	1.83	1.90	1.72	1.77	1.83	1.90		
	Amps	5.6	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.6	6.7	7.0	7.2	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.3	8.6	7.9	8.1	8.3	8.6		
	HI PR	223	240	254	265	251	270	285	297	285	307	324	338	325	349	369	385	365	393	415	433	403	434	458	478	403	434	458	478		
	LO PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	146	156	132	141	154	163	137	145	159	169	137	145	159	169		

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65				75				85				95				105				115			
				ENTERING INDOOR WET BULB TEMPERATURE																							
80	725	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
		S/T	22.8	23.3	24.9	26.7	22.3	22.8	24.4	26.0	21.8	22.3	23.8	25.4	21.3	21.7	23.2	24.8	20.2	20.6	22.0	23.6	18.7	19.1	20.4	21.8	
		ΔT	25	24	21	17	26	25	21	17	26	25	21	17	26	25	22	17	26	24	21	17	24	23	20	16	
		kW	1.28	1.31	1.36	1.4	1.39	1.42	1.47	1.53	1.49	1.52	1.58	1.6	1.57	1.61	1.67	1.73	1.65	1.69	1.75	1.8	1.71	1.75	1.81	1.88	
		Amps	5.6	5.7	5.9	6.1	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.0	7.1	7.4	7.6	7.4	7.6	7.8	8.1	7.8	8.0	8.3	8.6	
	800	HI PR	221	238	251	262	248	267	282	294	282	304	321	334	321	346	365	381	362	389	411	429	399	430	454	473	
		LO PR	108	115	126	134	114	122	133	142	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	
		MBh	23.2	23.7	25.3	27.1	22.6	23.1	24.7	26.4	22.1	22.6	24.1	25.8	21.6	22.0	23.5	25.2	20.5	20.9	22.4	23.9	19.0	19.4	20.7	22.2	
		S/T	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.77	0.57	1.00	0.98	0.80	0.6	1.00	0.99	0.80	0.60	
		ΔT	24	23	20	16	25	24	21	16	25	24	21	16	25	24	21	17	24	24	20	16	22	22	19	15	
900	kW	1.29	1.32	1.37	1.4	1.40	1.43	1.48	1.54	1.50	1.53	1.59	1.6	1.58	1.62	1.68	1.74	1.66	1.70	1.76	1.8	1.72	1.76	1.82	1.89		
	Amps	5.6	5.8	5.9	6.1	6.1	6.2	6.4	6.6	6.6	6.7	6.9	7.2	7.0	7.2	7.4	7.7	7.4	7.6	7.9	8.1	7.9	8.1	8.3	8.6		
	HI PR	223	240	253	264	250	269	284	296	284	306	323	337	324	348	368	384	364	392	414	432	402	433	457	477		
	LO PR	109	116	127	135	115	123	134	142	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169		
	MBh	23.6	24.2	25.8	27.6	23.1	23.6	25.2	27.0	22.5	23.0	24.6	26.3	22.0	22.5	24.0	25.7	20.9	21.4	22.8	24.4	19.4	19.8	21.1	22.6		
85	725	S/T	0.93	0.87	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.58	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61	
		ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	22	19	15	21	22	19	15	20	20	18	14	
		kW	1.30	1.33	1.38	1.4	1.42	1.45	1.50	1.55	1.51	1.55	1.61	1.7	1.60	1.64	1.70	1.76	1.68	1.72	1.78	1.8	1.74	1.78	1.85	1.91	
		Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.1	7.2	7.5	7.8	7.5	7.7	7.9	8.2	8.0	8.1	8.4	8.7	
		HI PR	226	243	256	267	253	272	288	300	288	310	327	341	328	353	373	389	369	397	419	437	407	438	463	483	
	800	LO PR	110	117	128	137	117	124	136	144	121	129	141	150	127	136	148	158	134	142	155	165	138	147	160	171	
		MBh	23.2	23.7	24.8	26.5	22.7	23.1	24.2	25.9	22.2	22.6	23.7	25.2	21.6	22.0	23.1	24.6	20.5	20.9	21.9	23.4	19.0	19.4	20.3	21.7	
		S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75	
		ΔT	27	27	25	22	27	27	25	22	27	27	26	22	27	27	26	22	26	27	25	22	24	25	24	20	
		kW	1.29	1.32	1.37	1.42	1.40	1.44	1.49	1.54	1.50	1.54	1.59	1.65	1.59	1.63	1.68	1.74	1.66	1.70	1.76	1.83	1.72	1.77	1.83	1.90	
900	Amps	5.6	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.6	6.7	7.0	7.2	7.0	7.2	7.4	7.7	7.5	7.6	7.9	8.2	7.9	8.1	8.3	8.6		
	HI PR	223	240	254	265	251	270	285	297	285	307	324	338	325	349	369	385	365	393	415	433	403	434	458	478		
	LO PR	109	116	127	135	116	123	134	143	120	128	139	149	126	134	147	156	132	141	154	164	137	145	159	169		
	MBh	23.6	24.0	25.2	26.9	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	21.9	22.4	23.4	25.0	20.8	21.3	22.3	23.7	19.3	19.7	20.6	22.0		
	S/T	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78		
900	ΔT	26	26	24	21	26	26	24	21	26	26	25	21	25	26	25	21	24	24	24	21	22	23	23	20		
	kW	1.30	1.33	1.38	1.43	1.41	1.45	1.50	1.55	1.51	1.55	1.60	1.66	1.60	1.64	1.69	1.76	1.67	1.71	1.77	1.84	1.73	1.78	1.84	1.91		
	Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.2	7.1	7.2	7.5	7.7	7.5	7.7	7.9	8.2	7.9	8.1	8.4	8.7		
	HI PR	225	242	256	267	252	272	287	299	287	309	326	340	327	352	371	387	368	396	418	436	406	437	462	482		
	LO PR	110	117	128	136	116	124	135	144	121	129	140	150	127	135	148	157	133	142	155	165	138	146	160	170		
900	MBh	24.1	24.5	25.7	27.4	23.5	24.0	25.1	26.8	22.9	23.4	24.5	26.1	22.4	22.8	23.9	25.5	21.3	21.7	22.7	24.2	19.7	20.1	21.0	22.4		
	S/T	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.79		
	ΔT	24	24	22	19	24	24	23	20	23	24	23	20	23	23	23	20	22	22	22	19	20	21	21	18		
	kW	1.32	1.35	1.39	1.44	1.43	1.46	1.51	1.57	1.53	1.56	1.62	1.68	1.62	1.65	1.71	1.78	1.69	1.73	1.79	1.86	1.75	1.80	1.86	1.93		
	Amps	5.7	5.9	6.1	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.3	7.1	7.3	7.5	7.8	7.6	7.8	8.0	8.3	8.0	8.2	8.5	8.8		
900	HI PR	228	245	259	270	256	275	290	303	291	313	330	345	331	356	376	392	372	401	423	441	412	443	468	488		
	LO PR	112	119	130	138	118	125	137	146	122	130	142	152	129	137	149	159	135	143	157	167	139	148	162	173		

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE										105										115									
		65					75					85					95					105					115				
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																													
70	MBh	24.5	24.9	25.6	-	24.3	24.7	25.4	-	23.7	24.0	24.7	-	22.6	22.9	23.7	-	21.3	21.6	22.3	-	20.1	20.4	21.1	-						
	S/T	0.63	0.56	0.43	-	0.63	0.56	0.43	-	0.66	0.59	0.46	-	0.68	0.60	0.48	-	1.00	0.62	0.50	-	1.00	0.67	0.55	-						
	ΔT	20	18	15	-	20	18	15	-	21	19	15	-	20	18	15	-	20	18	14	-	21	19	16	-						
	KW	1.41	1.40	1.40	-	1.57	1.57	1.57	-	1.75	1.75	1.75	-	1.95	1.95	1.95	-	2.17	2.17	2.17	-	2.43	2.43	2.43	-						
	Amps	5.3	5.3	5.2	-	6.0	6.0	6.0	-	6.9	6.8	6.8	-	7.8	7.8	7.7	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-						
	Hi PR	253	254	256	-	293	294	296	-	334	335	337	-	379	380	382	-	427	428	430	-	478	480	481	-						
	LO PR	121	123	126	-	128	130	133	-	135	136	139	-	140	142	145	-	145	147	150	-	152	153	156	-						
800	MBh	25.0	25.3	26.0	-	24.8	25.1	25.8	-	24.1	24.5	25.2	-	23.0	23.4	24.1	-	21.7	22.1	22.8	-	20.5	20.8	21.6	-						
	S/T	0.66	0.59	0.46	-	0.67	0.60	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-						
	ΔT	19	17	14	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-						
	KW	1.41	1.41	1.41	-	1.58	1.58	1.57	-	1.76	1.76	1.76	-	1.96	1.96	1.96	-	2.18	2.18	2.18	-	2.44	2.44	2.44	-						
	Amps	5.3	5.3	5.3	-	6.1	6.0	6.0	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-						
	Hi PR	255	257	258	-	295	296	298	-	337	338	339	-	381	382	384	-	429	430	432	-	481	482	484	-						
	LO PR	123	125	128	-	131	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-						
900	MBh	25.5	25.9	26.6	-	25.3	25.6	26.4	-	24.7	25.0	25.7	-	23.6	23.9	24.6	-	22.3	22.6	23.3	-	21.0	21.4	22.1	-						
	S/T	0.67	0.60	0.47	-	0.68	0.60	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-						
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-						
	KW	1.42	1.42	1.42	-	1.59	1.58	1.58	-	1.77	1.77	1.76	-	1.97	1.97	1.96	-	2.19	2.19	2.19	-	2.45	2.45	2.45	-						
	Amps	5.3	5.3	5.3	-	6.1	6.1	6.1	-	6.9	6.9	6.9	-	7.8	7.8	7.8	-	8.8	8.8	8.8	-	10.0	10.0	10.0	-						
	Hi PR	258	259	261	-	298	299	300	-	339	340	342	-	384	385	387	-	432	433	435	-	483	484	486	-						
	LO PR	126	127	130	-	133	135	138	-	140	141	144	-	145	146	149	-	150	152	155	-	157	158	161	-						
75	MBh	24.5	24.9	25.6	26.7	24.3	24.7	25.4	26.5	23.7	24.0	24.8	25.9	22.6	23.0	23.7	24.8	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2						
	S/T	0.75	0.68	0.55	0.42	0.76	0.68	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.80	0.67	0.53						
	ΔT	25	23	19	15	25	23	19	15	25	23	19	15	25	23	19	15	24	22	19	15	26	24	20	16						
	KW	1.40	1.40	1.40	1.41	1.57	1.57	1.56	1.58	1.75	1.75	1.75	1.76	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.18	2.43	2.43	2.43	2.44						
	Amps	5.3	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.8	7.8	7.7	7.8	8.8	8.8	8.8	8.8	10.0	10.0	9.9	10.0						
	Hi PR	253	254	256	261	293	294	296	300	334	335	337	342	379	380	382	386	427	428	430	434	479	480	481	486						
	LO PR	121	123	126	131	128	130	133	138	135	136	139	144	140	142	145	150	145	147	150	155	152	153	157	162						
800	MBh	25.0	25.3	26.1	27.2	24.8	25.1	25.8	26.9	24.1	24.5	25.2	26.3	23.1	23.4	24.1	25.2	21.7	22.1	22.8	23.9	20.5	20.9	21.6	22.7						
	S/T	0.78	0.71	0.58	0.45	0.79	0.72	0.59	0.46	1.00	0.74	0.61	0.48	1.00	0.76	0.63	0.50	1.00	0.78	0.65	0.52	1.00	1.00	0.70	0.57						
	ΔT	24	22	18	14	24	22	18	14	24	22	18	14	24	22	18	14	23	21	18	14	25	23	19	15						
	KW	1.41	1.41	1.41	1.42	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.44	2.44	2.44	2.45						
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0						
	Hi PR	256	257	259	263	295	296	298	303	337	338	340	344	381	383	384	389	430	431	432	437	481	482	484	488						
	LO PR	123	125	128	133	131	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164						
900	MBh	25.5	25.9	26.6	27.7	25.3	25.7	26.4	27.5	24.7	25.0	25.8	26.9	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.1	21.4	22.1	23.2						
	S/T	0.79	0.72	0.59	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.79	0.66	0.53	1.00	1.00	0.71	0.57						
	ΔT	23	21	17	13	23	21	17	13	23	21	17	13	23	21	17	13	22	20	17	13	24	22	18	14						
	KW	1.42	1.42	1.42	1.43	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.78	1.97	1.96	1.96	1.97	2.19	2.19	2.18	2.20	2.45	2.45	2.44	2.46						
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1						
	Hi PR	258	259	261	265	298	299	301	305	339	340	342	346	384	385	387	391	432	433	435	439	483	485	486	491						
	LO PR	126	127	130	136	133	135	138	143	140	141	144	149	145	146	149	155	150	152	155	160	157	158	161	166						

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE														105														115													
				65							75							85							95							105							115						
				ENTERING INDOOR WET BULB TEMPERATURE																																									
80	700	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71							
		S/T	24.7	25.0	25.7	26.8	24.5	24.8	25.5	26.6	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6	20.2	20.5	21.3	22.4	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0						
		ΔT	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	19	30	28	24	21	0	0	0	0	0	0	0	0	0	0	0	0	0						
		KW	1.41	1.40	1.40	1.4	1.57	1.57	1.57	1.58	1.75	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.44	0	0	0	0	0	0	0	0	0	0	0	0	0						
		Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.1	6.9	6.8	6.8	6.9	7.8	7.8	7.7	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	0	0	0	0	0	0	0	0	0	0	0	0	0						
	800	HI PR	254	255	257	261	293	294	296	301	335	336	338	342	380	381	382	387	428	429	431	435	479	480	482	486	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
		LO PR	122	123	126	131	129	130	133	139	135	137	140	145	141	142	145	150	146	147	150	156	153	154	157	162	0	0	0	0	0	0	0	0	0	0	0	0	0						
		MBh	25.1	25.5	26.2	27.3	24.9	25.2	26.0	27.1	24.3	24.6	25.3	26.4	23.2	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	21.0	21.7	22.8	0	0	0	0	0	0	0	0	0	0	0	0	0						
		S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69	0	0	0	0	0	0	0	0	0	0	0	0							
		ΔT	28	26	22	18	28	26	22	18	28	26	23	19	28	26	22	18	28	26	22	18	29	27	23	19	0	0	0	0	0	0	0	0	0	0	0	0							
900	KW	1.41	1.41	1.41	1.4	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45	0	0	0	0	0	0	0	0	0	0	0	0								
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.0	0	0	0	0	0	0	0	0	0	0	0	0	0							
	HI PR	256	257	259	263	296	297	299	303	337	338	340	344	382	383	385	389	430	431	433	437	481	483	484	489	0	0	0	0	0	0	0	0	0	0	0	0	0							
	LO PR	124	125	128	133	131	133	136	141	138	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	0	0	0	0	0	0	0	0	0	0	0	0	0							
	MBh	25.7	26.0	26.7	27.8	25.4	25.8	26.5	27.6	24.8	25.2	25.9	27.0	23.7	24.1	24.8	25.9	22.4	22.7	23.5	24.6	21.2	21.5	22.2	23.3	0	0	0	0	0	0	0	0	0	0	0	0	0							
85	700	S/T	1.00	0.84	0.71	0.6	1.00	0.84	0.72	0.58	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69	0	0	0	0	0	0	0	0	0	0	0	0							
		ΔT	27	25	21	17	27	25	21	17	27	25	22	18	27	25	21	17	27	25	21	17	28	26	22	18	0	0	0	0	0	0	0	0	0	0	0	0							
		KW	1.42	1.42	1.42	1.4	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.8	1.97	1.97	1.96	1.98	2.19	2.19	2.19	2.2	2.45	2.45	2.45	2.46	0	0	0	0	0	0	0	0	0	0	0	0							
		Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1	0	0	0	0	0	0	0	0	0	0	0	0	0						
		HI PR	259	260	261	266	298	299	301	305	340	341	343	347	384	385	387	392	433	434	435	440	484	485	487	491	0	0	0	0	0	0	0	0	0	0	0	0	0						
	800	LO PR	126	128	131	136	134	135	138	143	140	142	145	150	145	147	150	155	151	152	155	160	157	159	162	167	0	0	0	0	0	0	0	0	0	0	0	0	0						
		MBh	25.1	25.4	26.1	27.2	24.9	25.2	25.9	27.0	24.2	24.6	25.3	26.4	23.1	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	20.9	21.7	22.8	0	0	0	0	0	0	0	0	0	0	0	0	0						
		S/T	1.00	0.89	0.76	0.63	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	0.75	0.75	0	0	0	0	0	0	0	0	0	0	0	0							
		ΔT	33	31	27	24	33	31	27	23	33	31	28	24	33	31	27	23	33	31	27	23	34	32	28	24	0	0	0	0	0	0	0	0	0	0	0	0							
		KW	1.41	1.41	1.40	1.42	1.57	1.57	1.57	1.58	1.76	1.76	1.75	1.76	1.96	1.95	1.95	1.96	2.18	2.18	2.17	2.19	2.44	2.44	2.43	2.45	0	0	0	0	0	0	0	0	0	0	0	0							
900	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0	0	0	0	0	0	0	0	0	0	0	0	0								
	HI PR	255	256	258	262	295	296	297	302	336	337	339	343	381	382	384	388	429	430	432	436	480	481	483	488	0	0	0	0	0	0	0	0	0	0	0	0								
	LO PR	123	125	128	133	131	132	135	140	137	139	142	147	142	144	147	152	148	149	152	157	154	156	159	164	0	0	0	0	0	0	0	0	0	0	0	0								
	MBh	25.5	25.9	26.6	27.7	25.3	25.6	26.4	27.5	24.7	25.0	25.7	26.8	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.0	21.4	22.1	23.2	0	0	0	0	0	0	0	0	0	0	0	0	0							
	S/T	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.78	0.78	0	0	0	0	0	0	0	0	0	0	0	0								
85	700	ΔT	32	30	26	22	32	30	26	22	32	30	26	23	32	30	26	22	32	30	26	22	33	31	27	23	0	0	0	0	0	0	0	0	0	0	0								
		KW	1.42	1.42	1.41	1.42	1.58	1.58	1.58	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.19	2.18	2.18	2.19	2.45	2.44	2.44	2.45	0	0	0	0	0	0	0	0	0	0	0								
		Amps	5.3	5.3	5.3	5.3	6.1	6.1	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1	0	0	0	0	0	0	0	0	0	0	0	0							
		HI PR	257	258	260	265	297	298	300	304	338	339	341	346	383	384	386	390	431	432	434	438	483	484	485	490	0	0	0	0	0	0	0	0	0	0	0	0							
		LO PR	126	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	151	154	160	157	158	161	166	0	0	0	0	0	0	0	0	0	0	0	0							
900	MBh	26.1	26.4	27.1	28.2	25.9	26.2	26.9	28.0	25.2	25.6	26.3	27.4	24.1	24.5	25.2	26.3	22.8	23.1	23.9	25.0	21.6	21.9	22.7	23.8	0	0	0	0	0	0	0	0	0	0	0	0	0							
	S/T	1.00	0.93	0.81	0.67	1.00	1.00	0.81	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.85	0.72	1.00	1.00																										

		OUTDOOR AMBIENT TEMPERATURE																																									
		65							75							85							95							105							115						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
70	MBh	29.3	29.7	30.6	-	29.0	29.5	30.3	-	28.3	28.7	29.6	-	27.0	27.4	28.2	-	25.3	25.8	26.6	-	23.9	24.3	25.2	-	23.9	24.3	25.2	-	23.9	24.3	25.2	-										
	S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	1.00	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-										
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-	21	19	15	-										
	KW	1.76	1.75	1.75	-	1.95	1.95	1.95	-	2.17	2.17	2.17	-	2.41	2.41	2.41	-	2.68	2.68	2.67	-	2.99	2.99	2.99	-	2.99	2.99	2.99	-	2.99	2.99	2.99	-										
	Amps	6.4	6.4	6.4	-	7.3	7.3	7.3	-	8.3	8.3	8.3	-	9.4	9.4	9.4	-	10.6	10.6	10.6	-	12.0	12.0	12.0	-	12.0	12.0	12.0	-	12.0	12.0	12.0	-										
	Hi PR	250	251	252	-	289	290	292	-	330	331	333	-	375	376	377	-	422	424	425	-	474	475	476	-	474	475	476	-	474	475	476	-										
	Lo PR	124	125	128	-	131	133	136	-	138	139	142	-	143	145	148	-	149	150	154	-	156	157	160	-	156	157	160	-	156	157	160	-										
	MBh	29.7	30.1	31.0	-	29.4	29.8	30.7	-	28.7	29.1	29.9	-	27.3	27.8	28.6	-	25.7	26.1	27.0	-	24.3	24.7	25.6	-	24.3	24.7	25.6	-	24.3	24.7	25.6	-										
	S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	1.00	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-										
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	20	18	14	-										
70	KW	1.77	1.77	1.76	-	1.96	1.96	1.96	-	2.18	2.18	2.18	-	2.42	2.42	2.42	-	2.69	2.69	2.68	-	3.00	3.00	3.00	-	3.00	3.00	3.00	-	3.00	3.00	3.00	-										
	Amps	6.4	6.4	6.4	-	7.3	7.3	7.3	-	8.3	8.3	8.3	-	9.4	9.4	9.4	-	10.6	10.6	10.6	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-										
	Hi PR	252	253	254	-	291	292	294	-	332	333	335	-	377	378	379	-	425	426	427	-	476	477	478	-	476	477	478	-	476	477	478	-										
	Lo PR	125	127	130	-	133	135	138	-	140	141	144	-	145	147	150	-	151	152	155	-	157	159	162	-	157	159	162	-	157	159	162	-										
	MBh	30.1	30.6	31.4	-	29.9	30.3	31.2	-	29.1	29.5	30.4	-	27.8	28.2	29.1	-	26.2	26.6	27.5	-	24.7	25.1	26.0	-	24.7	25.1	26.0	-	24.7	25.1	26.0	-										
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-										
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-	19	17	13	-										
	KW	1.78	1.77	1.77	-	1.97	1.97	1.97	-	2.19	2.19	2.19	-	2.43	2.43	2.43	-	2.70	2.70	2.69	-	3.01	3.01	3.01	-	3.01	3.01	3.01	-	3.01	3.01	3.01	-										
	Amps	6.5	6.5	6.4	-	7.4	7.4	7.3	-	8.4	8.4	8.3	-	9.5	9.5	9.4	-	10.7	10.7	10.7	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-	12.1	12.1	12.1	-										
	Hi PR	254	255	257	-	293	294	296	-	334	335	337	-	379	380	382	-	427	428	429	-	478	479	481	-	478	479	481	-	478	479	481	-										
Lo PR	128	129	132	-	135	137	140	-	142	143	146	-	147	149	152	-	153	154	157	-	160	161	164	-	160	161	164	-	160	161	164	-											
75	MBh	29.3	29.7	30.6	31.9	29.1	29.5	30.3	31.7	28.3	28.7	29.6	30.9	27.0	27.4	28.3	29.6	25.4	25.8	26.7	28.0	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.9	23.9	24.3	25.2	26.9										
	S/T	0.72	0.64	0.51	0.37	0.72	0.65	0.52	0.38	1.00	0.67	0.54	0.40	1.00	0.69	0.56	0.42	1.00	0.71	0.58	0.44	1.00	1.00	0.63	0.49	1.00	1.00	0.63	0.49	1.00	1.00	0.63	0.49										
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16	25	23	19	16	25	23	19	16										
	KW	1.76	1.75	1.75	1.77	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.18	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.69	2.99	2.99	2.99	3.00	2.99	2.99	2.99	3.00	2.99	2.99	3.00	3.00										
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.2	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.3	9.4	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1	12.0	12.0	12.0	12.1	12.0	12.0	12.1	12.1										
	Hi PR	250	251	253	257	289	290	292	296	330	331	333	338	375	376	378	382	423	424	425	430	474	475	477	481	474	475	477	481	474	475	477	481										
	Lo PR	124	125	128	134	131	133	136	141	138	139	142	148	143	145	148	153	149	150	154	159	156	157	160	166	156	157	160	166	156	157	160	166										
	MBh	29.7	30.1	31.0	32.3	29.4	29.9	30.7	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.6	30.0	25.8	26.2	27.0	28.4	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9	24.3	24.7	25.6	26.9										
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55										
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	18	15	24	22	18	15										
75	KW	1.77	1.76	1.76	1.78	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.19	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.70	3.00	3.00	3.01	3.01	3.00	3.00	3.00	3.01	3.00	3.00	3.01	3.01										
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1	12.1	12.1	12.0	12.1	12.0	12.1	12.1	12.2										
	Hi PR	252	253	255	259	291	292	294	298	332	334	335	340	377	378	380	384	425	426	428	432	476	477	479	483	476	477	479	483	476	477	479	483										
	Lo PR	126	127	130	135	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	161	158	159	162	167	158	159	162	167	158	159	162	167										
	MBh	30.2	30.6	31.5	32.8	29.9	30.3	31.2	32.5	29.1	29.6	30.4	31.8	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.2	26.0	27.4	24.7	25.2	26.0	27.4	24.7	25.2	26.0	27.4										
	S/T	0.81	0.73	0.60	0.46	1.00	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58										
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	21	20	16	13																						

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																													
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	MbH	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.4	28.9	29.7	31.1	27.1	27.5	28.4	29.8	25.5	25.9	26.8	28.1	24.0	24.5	25.3	26.7						
	S/T	1.00	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61						
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20						
	KW	1.76	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.7	2.99	2.99	2.99	3.00						
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1						
	HI PR	250	251	253	257	290	291	292	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	477	481						
	LO PR	124	126	129	134	132	133	136	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166						
80	MbH	29.9	30.3	31.1	32.5	29.6	30.0	30.9	32.2	28.8	29.2	30.1	31.5	27.5	27.9	28.8	30.1	25.9	26.3	27.2	28.5	24.4	24.8	25.7	27.1						
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67						
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19						
	KW	1.77	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.42	2.42	2.42	2.43	2.69	2.69	2.68	2.7	3.00	3.00	3.00	3.01						
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1						
	HI PR	252	253	255	259	292	293	295	299	333	334	336	340	377	378	380	385	425	426	428	432	476	477	479	484						
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	160	163	168						
1125	MbH	30.3	30.7	31.6	32.9	30.1	30.5	31.3	32.7	29.3	29.7	30.6	31.9	28.0	28.4	29.3	30.6	26.4	26.8	27.7	29.0	24.9	25.3	26.2	27.5						
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71						
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18						
	KW	1.78	1.77	1.77	1.8	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.2	2.43	2.43	2.43	2.44	2.70	2.70	2.69	2.7	3.01	3.01	3.01	3.02						
	Amps	6.5	6.5	6.4	6.5	7.4	7.4	7.3	7.4	8.4	8.4	8.3	8.4	9.5	9.5	9.4	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2						
	HI PR	254	255	257	262	294	295	297	301	335	336	338	342	379	380	382	387	427	428	430	434	478	479	481	486						
	LO PR	128	130	133	138	136	137	140	146	142	144	147	152	148	149	152	158	153	155	158	163	160	162	165	170						

85	875	MBh	30.0	30.4	31.3	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.6	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.5	25.0	25.8	27.2
		S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	1.00	0.71
		ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
		KW	1.76	1.76	1.76	1.77	1.96	1.96	1.95	1.97	2.18	2.18	2.17	2.19	2.42	2.41	2.41	2.43	2.68	2.68	2.68	2.69	3.00	2.99	2.99	3.01
		Amps	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.7	12.0	12.0	12.0	12.1
	HI PR	251	252	254	259	291	292	294	298	332	333	335	339	376	377	379	384	424	425	427	431	475	476	478	483	
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	160	163	168	
	1000	MBh	30.0	31.0	32.0	33.0	30.0	30.0	31.0	33.0	29.0	30.0	31.0	32.0	28.0	28.0	29.0	31.0	26.0	27.0	28.0	29.0	25.0	25.0	26.0	28.0
		S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
		ΔT	30	29	25	22	30	29	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22
KW		1.77	1.77	1.77	1.78	1.97	1.97	1.96	1.98	2.19	2.19	2.18	2.20	2.43	2.42	2.42	2.44	2.69	2.69	2.69	2.70	3.01	3.00	3.00	3.02	
Amps		6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.7	10.7	10.6	10.7	12.1	12.1	12.1	12.1	
HI PR	253	255	256	261	293	294	296	300	334	335	337	341	379	380	381	386	426	427	429	434	477	479	480	485		
LO PR	128	129	133	138	135	137	140	145	142	144	147	152	148	149	152	158	153	155	158	163	160	161	165	170		
1125	MBh	31.0	31.0	32.0	33.0	31.0	31.0	32.0	33.0	30.0	30.0	31.0	32.0	28.0	29.0	30.0	31.0	27.0	27.0	28.0	29.0	25.0	26.0	27.0	28.0	
	S/T	1.00	0.96	0.82	0.68	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.76	1.00	1.00	1.00	0.81	
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	22	
	KW	1.78	1.78	1.77	1.79	1.98	1.97	1.97	1.99	2.20	2.20	2.19	2.21	2.44	2.43	2.43	2.45	2.70	2.70	2.70	2.71	3.01	3.01	3.01	3.02	
	Amps	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2	
HI PR	256	257	258	263	295	296	298	302	336	337	339	343	381	382	383	388	428	430	431	436	480	481	482	487		
LO PR	130	131	135	140	137	139	142	147	144	146	149	154	150	151	154	160	155	157	160	165	162	163	167	172		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE														115																				
		65							75							85							95							105						
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
70	MBh	29.1	29.5	30.4	-	28.8	29.2	30.1	-	28.1	28.5	29.4	-	26.8	27.2	28.0	-	25.2	25.6	26.5	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-	23.7	24.1	25.0	-			
	S/T	0.63	0.55	0.41	-	0.63	0.56	0.42	-	0.66	0.58	0.44	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-			
	ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-	21	19	16	-	21	19	16	-			
	KW	1.72	1.72	1.72	-	1.91	1.91	1.91	-	2.13	2.12	2.12	-	2.36	2.35	2.35	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-	2.92	2.92	2.91	-			
	Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.0	8.0	-	9.1	9.1	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-			
	Hi PR	244	245	247	-	282	283	285	-	323	324	325	-	366	367	369	-	413	414	416	-	463	464	466	-	463	464	466	-	463	464	466	-			
	Lo PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-	154	156	159	-			
	MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-	24.1	24.5	25.4	-			
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-			
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-			
70	KW	1.73	1.73	1.73	-	1.92	1.92	1.92	-	2.14	2.13	2.13	-	2.37	2.36	2.36	-	2.62	2.62	2.62	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-	2.93	2.93	2.92	-			
	Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-	11.7	11.7	11.7	-			
	Hi PR	246	247	249	-	284	286	287	-	325	326	328	-	368	369	371	-	415	416	418	-	465	466	468	-	465	466	468	-	465	466	468	-			
	Lo PR	124	126	129	-	132	133	136	-	138	140	143	-	144	145	149	-	149	151	154	-	156	158	161	-	156	158	161	-	156	158	161	-			
	MBh	29.9	30.3	31.2	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.6	28.0	28.9	-	26.0	26.4	27.3	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-	24.6	25.0	25.8	-			
	S/T	0.73	0.65	0.51	-	0.73	0.65	0.51	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-	1.00	0.78	0.63	-			
	ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	19	17	14	-	19	17	14	-			
	KW	1.74	1.74	1.73	-	1.93	1.93	1.92	-	2.14	2.14	2.14	-	2.37	2.37	2.37	-	2.63	2.63	2.63	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-	2.94	2.93	2.93	-			
	Amps	6.3	6.3	6.3	-	7.2	7.2	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.2	-	10.4	10.4	10.4	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-	11.8	11.8	11.7	-			
	Hi PR	248	249	251	-	286	288	289	-	327	328	330	-	370	371	373	-	417	418	420	-	467	468	470	-	467	468	470	-	467	468	470	-			
Lo PR	126	128	131	-	134	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-	158	160	163	-	158	160	163	-				
75	MBh	29.1	29.5	30.4	31.7	28.9	29.3	30.1	31.5	28.1	28.5	29.4	30.7	26.8	27.2	28.1	29.4	25.2	25.6	26.5	27.8	23.7	24.1	25.0	26.3	23.7	24.1	25.0	26.7	23.7	24.1	25.4	26.7			
	S/T	0.76	0.68	0.54	0.39	0.77	0.69	0.55	0.40	1.00	0.72	0.57	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.52	1.00	1.00	0.73	0.59	1.00	1.00	0.73	0.59			
	ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16	24	22	19	15	25	23	20	16			
	KW	1.72	1.72	1.71	1.73	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.13	2.36	2.35	2.35	2.36	2.61	2.61	2.61	2.62	2.92	2.92	2.91	2.93	2.92	2.92	2.92	2.92	2.92	2.92	2.91	2.93			
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.0	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7			
	Hi PR	244	245	247	251	283	284	285	290	323	324	326	330	366	367	369	373	413	414	416	420	463	464	466	470	463	464	466	470	463	464	466	470			
	Lo PR	123	124	127	132	130	132	135	140	137	138	141	146	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164			
	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7	24.1	24.5	25.4	26.7	24.1	24.5	25.4	26.7			
	S/T	0.82	0.75	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59	1.00	1.00	0.73	0.59	1.00	1.00	0.73	0.59			
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15	24	22	19	15			
75	KW	1.73	1.73	1.72	1.74	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.14	2.37	2.36	2.36	2.37	2.62	2.62	2.62	2.63	2.93	2.92	2.92	2.94	2.93	2.92	2.92	2.92	2.92	2.92	2.92	2.94			
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.8	11.7	11.7	11.7	11.7	11.7	11.7	11.8				
	Hi PR	246	247	249	253	285	286	287	292	325	326	328	332	368	369	371	375	415	416	418	422	465	466	468	472	465	466	468	472	465	466	468	472			
	Lo PR	124	126	129	134	132	133	137	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	156	158	161	166	156	158	161	166			
	MBh	30.0	30.4	31.2	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.5	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.6	25.0	25.9	27.2	24.6	25.0	25.9	27.2	24.6	25.0	25.9	27.2			
	S/T																																			

		65										75										85										95										105										115									
		OUTDOOR AMBIENT TEMPERATURE																																																											
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
80	MBh	29.3	29.7	30.5	31.9	29.0	29.4	30.3	31.6	28.2	28.7	29.5	30.9	26.9	27.3	28.2	29.5	25.3	25.8	26.6	27.9	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5	23.9	24.3	25.2	26.5																												
	S/T	1.00	0.81	0.67	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.70	0.6	1.00	0.87	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65	1.00	1.00	0.80	0.65																												
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	20	28	26	23	19	29	27	24	20	29	27	24	20	29	27	24	20																												
	KW	1.72	1.72	1.72	1.7	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.1	2.36	2.35	2.35	2.37	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93																												
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.1	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7																												
80	HI PR	245	246	247	252	283	284	286	290	323	324	326	330	367	368	370	374	414	415	416	421	464	465	466	471	414	415	416	421	464	465	466	471																												
	LO PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165	148	150	153	158	155	156	160	165																												
	MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9	24.3	24.7	25.5	26.9																												
	S/T	1.00	0.88	0.73	0.6	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72																												
	ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	27	25	22	18	28	26	23	19																												
1125	KW	1.73	1.73	1.72	1.7	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.1	2.37	2.36	2.36	2.38	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94																												
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.2	9.2	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8																												
	HI PR	247	248	249	254	285	286	288	292	325	326	328	332	369	370	372	376	416	417	418	423	466	467	468	473	416	417	418	423	466	467	468	473																												
	LO PR	125	126	130	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	150	151	155	160	157	158	161	167																												
	1125	MBh	30.1	30.5	31.4	32.7	29.8	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3	24.7	25.1	26.0	27.3																											
S/T		1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.67	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	1.00	1.00	0.90	0.75	1.00	1.00	0.90	0.75																												
ΔT		26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18	26	24	21	17	27	25	22	18																												
KW		1.74	1.74	1.73	1.8	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.2	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95																												
Amps		6.3	6.3	6.3	6.3	7.2	7.2	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8																												
1125	HI PR	249	250	251	256	287	288	290	294	327	328	330	334	371	372	374	378	418	419	420	425	468	469	470	475	418	419	420	425	468	469	470	475																												
	LO PR	127	128	132	137	134	136	139	144	141	142	146	151	146	148	151	156	152	153	157	162	159	160	163	169	152	153	157	162	159	160	163	169																												
	MBh	29.8	30.2	31.0	32.4	29.5	29.9	30.8	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.7	30.0	25.8	26.2	27.1	28.4	24.4	24.8	25.7	27.0	24.4	24.8	25.7	27.0	24.4	24.8	25.7	27.0																												
	S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	1.00	0.76	1.00	1.00	0.85	0.70	1.00	1.00	0.85	0.70																												
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	28	24	33	30	26	23	33	31	28	24																												
875	KW	1.72	1.72	1.72	1.73	1.91	1.91	1.91	1.92	2.13	2.13	2.12	2.14	2.36	2.36	2.36	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93																												
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.1	8.1	8.1	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7																												
	HI PR	246	247	248	253	284	285	287	291	325	326	327	332	368	369	371	375	415	416	417	422	465	466	467	472	415	416	417	422	465	466	467	472																												
	LO PR	125	127	130	135	132	134	137	142	139	141	144	149	145	146	149	154	150	151	155	160	157	158	161	167	150	151	155	160	157	158	161	167																												
	85	MBh	30.1	30.5	31.4	32.7	29.9	30.3	31.2	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.8	25.2	26.0	27.4	24.8	25.2	26.0	27.4	24.8	25.2	26.0	27.4																											
S/T		1.00	0.98	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.82	1.00	1.00	0.92	0.77	1.00	1.00	0.82	0.82																												
ΔT		31	29	26	22	31	29	26	22	31	29	26	22	31	29	26	22	31	29	25	22	32	30	26	23	32	30	26	23	32	30	26	23																												
KW		1.73	1.73	1.73	1.74	1.92	1.92	1.92	1.93	2.14	2.14	2.13	2.15	2.37	2.37	2.36	2.38	2.63	2.63	2.62	2.64	2.93	2.93	2.93	2.94	2.63	2.63	2.62	2.64	2.93	2.93	2.93	2.94																												
Amps		6.3	6.3	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.3	10.4	11.7	11.7	11.7	11.8	10.4	10.4	10.3	10.4	11.7	11.7	11.7	11.8																												
1125	HI PR	248	249	251	255	286	287	289	293	327	328	329	334	370	371	373	377	417	418	420	424	467	468	470	474	417	418	420	424	467</																															

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
		ENTERING INDOOR WET BULB TEMPERATURE																													
70	MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	28.4	28.8	29.9	-		
	S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	0.64	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.64	0.51	-		
	ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-		
	KW	2.09	2.09	2.09	-	2.32	2.32	2.32	-	2.58	2.58	2.58	-	2.87	2.86	2.86	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-	3.55	3.55	3.54	-		
	Amps	7.6	7.6	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-		
	Hi PR	254	255	257	-	294	295	297	-	336	337	339	-	381	382	384	-	430	431	433	-	482	483	485	-	482	483	485	-		
	LO PR	121	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	147	151	-	153	154	157	-	153	154	157	-		
70	MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	28.8	29.3	30.3	-		
	S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.70	0.56	-		
	ΔT	18	16	13	-	18	16	13	-	18	17	13	-	18	16	13	-	18	16	13	-	19	17	14	-	19	17	14	-		
	KW	2.10	2.10	2.10	-	2.34	2.33	2.33	-	2.60	2.59	2.59	-	2.88	2.88	2.87	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-	3.56	3.56	3.55	-		
	Amps	7.6	7.6	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-		
	Hi PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	386	-	432	433	435	-	484	485	487	-	484	485	487	-		
	LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	154	156	159	-		
1350	MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	29.4	29.9	30.9	-		
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-		
	ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-		
	KW	2.11	2.11	2.11	-	2.35	2.34	2.34	-	2.61	2.60	2.60	-	2.89	2.89	2.88	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-	3.57	3.57	3.56	-		
	Amps	7.7	7.7	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.2	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-		
	Hi PR	258	259	261	-	298	300	301	-	340	342	343	-	386	387	389	-	434	435	437	-	486	488	489	-	486	488	489	-		
	LO PR	125	127	130	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-		
75	MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5	28.4	28.9	29.9	31.5		
	S/T	0.72	0.64	0.51	0.37	0.72	0.65	0.52	0.38	1.00	0.67	0.54	0.40	1.00	0.69	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49	1.00	0.76	0.63	0.49		
	ΔT	23	21	18	15	23	21	18	15	23	22	18	15	23	21	18	15	23	21	18	14	24	22	19	15	24	22	19	15		
	KW	2.09	2.09	2.08	2.10	2.32	2.32	2.32	2.33	2.58	2.58	2.58	2.59	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56	3.55	3.54	3.54	3.56		
	Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	8.7	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.2	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.3	14.2	14.2	14.3	14.0		
	Hi PR	254	255	257	262	294	295	297	302	336	337	339	344	382	383	384	389	430	431	433	438	482	484	485	490	482	484	485	490		
	LO PR	121	123	126	131	129	130	133	138	135	137	140	145	141	142	145	150	146	147	151	156	153	154	157	162	153	154	157	162		
1200	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	28.8	29.3	30.4	32.0		
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	1.00	0.69	0.55		
	ΔT	22	20	17	14	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14	23	21	18	14		
	KW	2.10	2.10	2.10	2.11	2.33	2.33	2.33	2.35	2.59	2.59	2.59	2.61	2.88	2.87	2.87	2.89	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57	3.56	3.56	3.55	3.57		
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0		
	Hi PR	256	258	259	264	297	298	299	304	339	340	341	346	384	385	387	391	433	434	435	440	485	486	487	492	485	486	487	492		
	LO PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164		
1350	MBh	35.8	36.3	37.4	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.0	33.5	34.6	36.2	31.1	31.6	32.7	34.2	29.4	29.9	30.9	32.5	29.4	29.9	30.9	32.5		
	S/T	0.81	0.73	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58		
	ΔT	21	19	16	13	21	19	16	13	21	20	16	13	21	19	16	13	21	19	16	12	22	20	17	13	22	20	17	13		
	KW	2.11	2.11	2.11	2.12	2.34	2.34	2.34	2.36	2.60	2.60	2.60	2.62	2.89	2.88	2.88	2.90	3.20	3.20	3.19	3.21	3.57	3.57	3.56	3.58	3.57	3.57	3.56	3.58		
	Amps	7.7	7.7	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0		
	Hi PR	259	260	261	266	299	300	302	306	341	342	344																			

		65										75										85										95										105										115									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																												
80	MBh	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7	28.6	29.0	30.1	31.7																												
	S/T	0.84	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61	1.00	1.00	0.75	0.61																												
	ΔT	27	25	22	19	27	25	22	18	27	25	22	19	27	25	22	18	27	25	22	18	28	26	23	19	28	26	23	19	28	26	23	19																												
	KW	2.09	2.09	2.09	2.1	2.32	2.32	2.32	2.34	2.58	2.58	2.58	2.6	2.86	2.86	2.86	2.88	3.18	3.18	3.18	3.17	3.2	3.55	3.55	3.54	3.56	3.55	3.55	3.54	3.56	3.55	3.55	3.54	3.56																											
	Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.0	14.2	14.2	14.2	14.0	14.2	14.2	14.0	14.0																												
80	HI PR	255	256	258	262	295	296	298	302	337	338	340	344	382	383	385	389	431	432	434	438	483	484	486	490	483	484	486	490	483	484	486	490																												
	LO PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	155	158	163	153	155	158	163	153	155	158	163																												
	MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1	29.0	29.5	30.5	32.1																												
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67	1.00	1.00	0.81	0.67																												
	ΔT	26	24	21	17	26	24	21	17	26	24	21	18	26	24	21	17	26	24	21	17	27	25	22	18	27	25	22	18	27	25	22	18																												
80	KW	2.10	2.10	2.10	2.1	2.34	2.33	2.33	2.35	2.60	2.59	2.59	2.6	2.88	2.87	2.87	2.89	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.57	3.56	3.56	3.55	3.57	3.56	3.56	3.55	3.57																												
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0	14.3	14.3	14.0	14.0																												
	HI PR	257	258	260	264	297	298	300	304	339	340	342	346	384	385	387	392	433	434	436	440	485	486	488	492	485	486	488	492	485	486	488	492																												
	LO PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	144	153	148	150	153	158	155	156	160	165	155	156	160	165	155	156	160	165																												
	80	MBh	36.0	36.5	37.5	39.1	35.7	36.2	37.2	38.8	34.8	35.3	36.3	37.9	33.2	33.7	34.7	36.3	31.3	31.8	32.8	34.4	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7																											
S/T		1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71	1.00	1.00	0.85	0.71																												
ΔT		25	23	20	17	25	23	20	17	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17	26	24	21	17	26	24	21	17																												
KW		2.11	2.11	2.11	2.1	2.35	2.34	2.34	2.36	2.61	2.60	2.60	2.6	2.89	2.89	2.88	2.90	3.20	3.20	3.20	3.2	3.57	3.57	3.56	4.00	3.57	3.57	3.56	4.00	3.57	3.57	3.56	4.00																												
Amps		7.7	7.7	7.6	8.0	9.0	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.7	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0	14.3	14.3	14.0	14.0																												
80	HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	394	435	436	438	442	487	488	490	494	487	488	490	494	487	488	490	494																												
	LO PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	157	158	162	167	157	158	162	167																												
	85	MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.8	33.3	34.3	35.9	30.9	31.4	32.4	34.0	29.1	29.6	30.7	32.3	29.1	29.6	30.7	32.3	29.1	29.6	30.7	32.3																											
		S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.77	0.71	1.00	1.00	0.77	0.71	1.00	1.00	0.77	0.71																											
		ΔT	31	29	25	22	30	29	25	22	31	29	26	22	30	29	25	22	30	28	25	22	31	30	26	23	31	30	26	23	31	30	26	23																											
KW		2.10	2.09	2.09	2.11	2.33	2.33	2.32	2.34	2.59	2.59	2.58	2.60	2.87	2.87	2.86	2.88	3.18	3.18	3.18	3.20	3.55	3.55	3.55	3.56	3.55	3.55	3.55	3.56	3.55	3.55	3.56	3.56																												
Amps		7.6	7.6	7.6	8.0	8.7	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.2	14.2	14.0	14.3	14.2	14.2	14.0	14.3	14.2	14.0	14.0																												
85	HI PR	256	257	259	263	296	297	299	303	338	339	341	345	383	384	386	391	432	433	435	439	484	485	487	491	484	485	487	491	484	485	487	491																												
	LO PR	124	125	128	133	131	133	136	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165	155	157	160	165	155	157	160	165																												
	MBh	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7	29.6	30.1	31.1	32.7																												
	S/T	1.00	0.92	0.79	0.65	1.00	0.93	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.77	0.71	1.00	1.00	0.77	0.71	1.00	1.00	0.77	0.71																												
	ΔT	29	28	24	21	29	28	24	21	30	28	25	21	29	28	24	21	29	27	24	21	30	28	25	22	30	28	25	22	30	28	25	22																												
85	KW	2.11	2.11	2.10	2.12	2.34	2.34	2.33	2.35	2.60	2.60	2.59	2.61	2.88	2.88	2.88	2.89	3.20	3.19	3.19	3.21	3.56	3.56	3.56	3.58	3.56	3.56	3.56	3.58	3.56	3.56	3.58	3.58																												
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	14.3	14.3	14.3	14.0	14.3	14.3	14.0	14.0																												
	HI PR	258	259	261	265	298	299	301	306	340	341	343	348	385	387	388	393	434	435	4																																									

		OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1100	MBh	35.0	35.5	36.6	-	34.7	35.2	36.3	-	33.8	34.3	35.4	-	32.3	32.8	33.8	-	30.4	30.9	31.9	-	28.6	29.1	30.2	-	28.6	29.1	30.2	-							
		S/T	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.70	0.62	0.48	-	0.71	0.64	0.50	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-	1.00	0.71	0.58	-							
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	19	17	14	-	20	19	15	-	20	19	15	-							
		KW	2.03	2.03	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.81	2.81	2.81	-	3.13	3.13	3.13	-	3.51	3.50	3.50	-	3.51	3.50	3.50	-							
		Amps	7.4	7.4	7.4	-	8.5	8.5	8.5	-	9.7	9.7	9.7	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-							
		HI PR	255	256	258	-	295	296	298	-	337	338	340	-	382	383	385	-	430	431	433	-	482	483	485	-	482	483	485	-							
		LO PR	122	123	126	-	129	130	134	-	135	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-	153	154	157	-							
70	1200	MBh	35.4	35.9	37.0	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.7	33.2	34.2	-	30.8	31.3	32.3	-	29.0	29.5	30.6	-	29.0	29.5	30.6	-							
		S/T	0.69	0.62	0.48	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-							
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-	20	18	14	-							
		KW	2.04	2.03	2.03	-	2.27	2.27	2.27	-	2.54	2.53	2.53	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.51	3.51	3.51	-	3.51	3.51	3.51	-							
		Amps	7.5	7.5	7.5	-	8.6	8.6	8.5	-	9.8	9.8	9.7	-	11.1	11.1	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	14.2	14.2	14.2	-							
		HI PR	257	258	259	-	296	298	299	-	338	339	341	-	383	384	386	-	432	433	435	-	484	485	486	-	484	485	486	-							
		LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	147	149	152	-	154	156	159	-	154	156	159	-							
1350	1350	MBh	36.1	36.6	37.6	-	35.8	36.3	37.3	-	34.9	35.4	36.4	-	33.4	33.8	34.9	-	31.5	31.9	33.0	-	29.7	30.2	31.2	-	29.7	30.2	31.2	-							
		S/T	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	1.00	0.76	0.62	-							
		ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	19	17	13	-							
		KW	2.05	2.04	2.04	-	2.28	2.28	2.28	-	2.55	2.54	2.54	-	2.83	2.83	2.83	-	3.15	3.15	3.14	-	3.52	3.52	3.52	-	3.52	3.52	3.52	-							
		Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	14.3	14.3	14.3	-							
		HI PR	259	260	262	-	299	300	302	-	341	342	343	-	386	387	388	-	434	435	437	-	486	487	489	-	486	487	489	-							
		LO PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	151	154	-	156	158	161	-	156	158	161	-							

75	1100	MBh	35.1	35.6	36.6	38.2	34.8	35.2	36.3	37.9	33.9	34.3	35.4	37.0	32.3	32.8	33.8	35.4	30.4	30.9	31.9	33.5	28.7	29.2	30.2	31.8	
		S/T	0.79	0.72	0.58	0.44	0.80	0.72	0.59	0.45	1.00	0.75	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.84	0.71	0.56	
		ΔT	24	22	18	15	24	22	18	15	24	22	18	15	24	22	18	14	14	23	22	18	14	25	23	19	15
		KW	2.03	2.02	2.02	2.04	2.26	2.26	2.26	2.28	2.53	2.52	2.52	2.54	2.81	2.81	2.81	2.82	3.13	3.13	3.12	3.14	3.50	3.50	3.50	3.52	
		Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.2	14.3	
	HI PR	255	256	258	263	295	296	298	302	337	338	340	344	382	382	385	389	430	432	433	438	482	483	485	490		
	LO PR	122	123	126	131	129	130	134	139	135	137	140	145	141	141	142	145	150	146	148	151	156	153	154	157	162	
	1200	MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.2	34.2	34.7	35.8	37.3	32.7	33.2	34.2	35.8	30.8	31.3	32.3	33.9	29.1	29.5	30.6	32.2	
		S/T	0.82	0.74	0.61	0.47	0.83	0.75	0.61	0.47	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.82	0.68	0.54	1.00	1.00	0.73	0.59	
		ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	21	17	14	23	21	17	14	24	22	18	15	
KW		2.03	2.03	2.03	2.05	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.55	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.15	3.51	3.51	3.51	3.52		
Amps		7.5	7.5	7.4	7.5	8.6	8.5	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3		
1350	HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	385	386	391	432	433	435	439	484	485	487	491		
	LO PR	123	125	128	133	130	132	135	140	137	138	141	146	142	144	147	152	147	147	149	152	154	156	159	164		
	MBh	36.1	36.6	37.7	39.2	35.8	36.3	37.4	38.9	34.9	35.4	36.4	38.0	33.4	33.9	34.9	36.5	31.5	32.0	33.0	34.6	29.7	30.2	31.3	32.8		
	S/T	0.84	0.76	0.63	0.48	0.84	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	0.81	0.68	0.53	1.00	0.83	0.70	0.56	1.00	1.00	0.75	0.61		
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14		
1500	KW	2.04	2.04	2.04	2.06	2.28	2.28	2.27	2.29	2.54	2.54	2.54	2.56	2.83	2.83	2.82	2.84	3.15	3.15	3.14	3.16	3.52	3.52	3.52	3.53		
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.5	12.6	14.3	14.3	14.3	14.3		
	HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	393	434	435	437	442	486	487	489	493		
	LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166		

DB: Entering Indoor Dry Bulb Temperature	Shaded area reflects ACCA (TVA) conditions	kW = Total system power
High and low pressures are measured at the liquid and suction service valves.		Amps = outdoor unit amps (comp.+fan)

		65						75						85						95						105						115					
		OUTDOOR AMBIENT TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	MBh	35.2	35.7	36.8	38.3	34.9	35.4	36.5	38.0	34.0	34.5	35.6	37.1	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	31.9	28.8	29.3	30.4	31.9								
	S/T	0.92	0.84	0.71	0.6	1.00	0.85	0.71	0.57	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.61	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69	1.00	1.00	0.83	0.69								
	ΔT	28	26	23	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20	29	27	23	20								
	KW	2.03	2.03	2.02	2.0	2.26	2.26	2.26	2.28	2.53	2.53	2.52	2.5	2.81	2.81	2.81	2.83	3.13	3.13	3.13	3.1	3.51	3.50	3.50	3.52	3.51	3.50	3.50	3.52								
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3	14.2	14.2	14.2	14.3								
80	HI PR	256	257	259	263	296	297	298	303	337	339	340	345	382	384	385	390	431	432	434	438	483	484	486	490	483	484	486	490								
	LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	153	155	158	163								
	MBh	35.6	36.1	37.2	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.2	29.7	30.8	32.3	29.2	29.7	30.8	32.3								
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	1.00	1.00	0.86	0.72								
	ΔT	27	25	22	18	27	25	22	18	27	26	22	18	27	25	22	18	27	25	21	18	28	26	23	19	28	26	23	19								
80	KW	2.04	2.03	2.03	2.1	2.27	2.27	2.27	2.28	2.54	2.53	2.53	2.6	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.2	3.51	3.51	3.51	3.53	3.51	3.51	3.51	3.53								
	Amps	7.5	7.5	7.5	7.5	8.6	8.6	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3	14.2	14.2	14.2	14.3								
	HI PR	257	258	260	265	297	298	300	304	339	340	342	346	384	385	387	391	432	434	435	440	484	485	487	492	484	485	487	492								
	LO PR	124	125	128	133	131	132	135	141	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	155	156	159	164								
	MBh	36.3	36.8	37.8	39.4	36.0	36.5	37.5	39.1	35.1	35.6	36.6	38.2	33.6	34.0	35.1	36.7	31.7	32.1	33.2	34.8	29.9	30.4	31.4	33.0	29.9	30.4	31.4	33.0								
80	S/T	1.00	0.89	0.75	0.6	1.00	0.89	0.76	0.61	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.7	1.00	1.00	0.88	0.73	1.00	1.00	0.88	0.73								
	ΔT	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	20	17	27	25	22	18	27	25	22	18								
	KW	2.05	2.04	2.04	2.1	2.28	2.28	2.28	2.29	2.55	2.54	2.54	2.6	2.83	2.83	2.83	2.84	3.15	3.15	3.14	3.2	3.52	3.52	3.52	3.54	3.52	3.52	3.52	3.54								
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.6	14.3	14.3	14.3	14.3	14.3	14.3	14.3	14.3								
	HI PR	260	261	262	267	299	301	302	307	341	342	344	349	386	387	389	394	435	436	438	442	487	488	489	494	487	488	489	494								
80	LO PR	126	127	131	136	133	135	138	143	140	141	144	149	145	147	150	155	150	152	155	160	157	159	162	167	157	159	162	167								
	MBh	35.8	36.3	37.3	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.1	33.5	34.6	36.2	31.2	31.7	32.7	34.3	29.4	29.9	30.9	32.5	29.4	29.9	30.9	32.5								
	S/T	1.00	0.94	0.81	0.67	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.79	0.79	1.00	1.00	0.79	0.79								
	ΔT	32	30	26	23	32	30	26	23	32	30	26	23	32	30	26	22	31	30	26	22	33	31	27	23	33	31	27	23								
	KW	2.03	2.03	2.03	2.04	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.54	2.82	2.82	2.81	2.83	3.14	3.13	3.13	3.15	3.51	3.51	3.50	3.52	3.51	3.51	3.50	3.52								
85	Amps	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.6	9.8	9.7	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3	14.2	14.2	14.2	14.3								
	HI PR	257	258	260	264	297	298	300	304	339	340	341	346	384	385	386	391	432	433	435	439	484	485	487	491	484	485	487	491								
	LO PR	124	126	129	134	131	133	136	141	138	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	155	157	160	165								
	MBh	36.2	36.7	37.7	39.3	35.9	36.4	37.4	39.0	35.0	35.5	36.5	38.1	33.4	33.9	35.0	36.5	31.5	32.0	33.1	34.6	29.8	30.3	31.3	32.9	29.8	30.3	31.3	32.9								
	S/T	1.00	0.97	0.83	0.69	1.00	0.98	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.82	0.82	1.00	1.00	0.82	0.82								
85	ΔT	31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	31	29	25	22	32	30	26	23	32	30	26	23								
	KW	2.04	2.04	2.03	2.05	2.28	2.27	2.27	2.29	2.54	2.54	2.53	2.55	2.83	2.82	2.82	2.84	3.14	3.14	3.14	3.16	3.52	3.52	3.51	3.53	3.52	3.52	3.51	3.53								
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.8	9.8	9.8	9.8	11.1	11.1	11.1	11.2	12.6	12.5	12.5	12.6	14.3	14.3	14.2	14.3	14.3	14.3	14.2	14.3								
	HI PR	258	260	261	266	298	299	301	306	340	341	343	347	385	386	388	392	434	435	437	441	485	487	488	493	485	487	488	493								
	LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166	156	158	161	166								
85	MBh	36.9	37.4	38.4	40.0	36.6	37.1	38.1	39.7	35.7	36.2	37.2	38.8	34.1	34.6	35.7	37.2	32.2	32.7	33.8	35.3	30.5	31.0	32.0	33.6	30.5	31.0	32.0	33.6								
	S/T	1.00	0.99	0.85	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	0.83	0.83	1.00	1.00	0.83	0.83								
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	25	22	31	29	25	22								
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54	3.53	3.53	3.52	3.54								
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.4								
85	HI PR	261	262	264	268	301	302	304	30																												

		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70		MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-	
	1225	S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-	
		ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-	
		KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-	
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-	
	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-		
	LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-		
		MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-	
	1400	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-	
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-	
KW		2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-		
Amps		8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-		
HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	504	505	507	-			
LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	161	162	165	-			
	MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-		
1575	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-		
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-		
	KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-	4.03	4.03	4.02	-		
	Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-	16.1	16.1	16.1	-		
HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-	506	507	509	-			
LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-	163	164	167	-			
75		MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	37.1	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9	32.4	32.9	34.1	35.9	
	1225	S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	1.00	1.00	0.67	0.53	
		ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	22	19	15	24	22	18	15	25	23	19	16	24	22	18	15	
		KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	3.99	4.01	4.00	4.00	3.99	4.01	
		Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.4	14.0	14.0	14.0	14.0	16.0	16.0	15.9	16.0	16.0	16.0	15.9	16.0	
	HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	398	400	405	448	449	451	455	502	503	505	510	502	503	505	510		
	LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	164	169	159	160	164	169		
		MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4	
	1400	S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59	
		ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	18	15	
KW		2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	3.23	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03	4.01	4.01	4.01	4.03		
Amps		8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.1		
HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	400	402	407	450	451	453	458	504	505	507	512	504	505	507	512			
LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	158	164	161	162	165	171	161	162	165	171			
	MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	38.2	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1		
1575	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00</																					

		65					75					85					95					105					115														
		OUTDOOR AMBIENT TEMPERATURE																																							
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1	32.6	33.1	34.3	36.1												
	S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66	1.00	1.00	0.81	0.66												
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20	29	27	23	20												
	KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02	4.00	4.00	4.00	4.02												
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.3	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0	16.0												
	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510	502	504	505	510												
	LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169	159	161	164	169												
1400	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6	33.1	33.6	34.8	36.6												
	S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72	1.00	1.00	0.87	0.72												
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	21	18	26	25	21	18	28	26	22	19	28	26	22	19												
	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	3.23	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03	4.02	4.01	4.01	4.03												
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.1												
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	403	407	451	452	454	458	505	506	508	512	505	506	508	512												
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	153	159	154	156	159	164	161	163	166	171	161	163	166	171												
1575	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3	33.7	34.3	35.5	37.3												
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.75	1.00	1.00	0.75	0.75												
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18	27	25	21	18												
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00	4.03	4.03	4.02	4.00												
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2	16.1	16.1	16.1	16.2												
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514	507	508	510	514												
	LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173	163	165	168	173												
85	MBh	40.6	41.1	42.3	44.1	40.2	40.8	42.0	43.8	39.2	39.7	40.9	42.7	37.4	38.0	39.1	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8	33.2	33.8	35.0	36.8												
	S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.75	0.71	1.00	1.00	1.00	0.76	1.00	1.00	0.76	0.76												
	ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24	32	30	27	24												
	KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02	4.01	4.01	4.00	4.02												
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.1												
	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511	504	505	507	511												
	LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171	161	163	166	171												
1400	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3	33.8	34.3	35.5	37.3												
	S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	0.77	0.77	1.00	1.00	1.00	0.82	1.00	1.00	0.82	0.82												
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22	31	29	26	22												
	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04	4.02	4.02	4.01	4.04												
	Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1	16.1	16.1	16.0	16.1												
	HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514	506	507	509	514												
	LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173	163	165	168	173												
1575	MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9	34.4	34.9	36.1	37.9												
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.81	0.81	1.00	1.00	1.00	0.86	1.00	1.00	0.86	0.86												
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21	30	28	25	21												
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3																								

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects AHRI conditions

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

			OUTDOOR AMBIENT TEMPERATURE																													
			65					75					85					95					105					115				
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1225	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	32.3	32.9	34.1	-		
		S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	1.00	0.68	0.54	-		
		ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	21	19	15	-		
		KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	4.00	4.00	4.00	-		
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-		
	1400	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-		
		LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	159	160	163	-		
		MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	32.9	33.4	34.6	-		
		S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	1.00	0.74	0.60	-		
		ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	20	18	14	-		
1575	KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	4.02	4.01	4.01	-			
	Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	16.0	16.0	16.0	-			
	HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	504	505	507	-			
	LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	161	162	165	-			
	MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	33.5	34.0	35.2	-			
75	1225	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	1.00	1.00	0.64	-		
		ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	19	17	13	-		
		KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	3.99	-	4.00	4.00	3.99	-		
		Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	15.9	-	16.0	16.0	15.9	-		
		HI PR	265	266	268	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	502	503	505	-		
	1400	LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	148	151	156	152	153	157	162	159	160	164	169	32.4	32.9	34.1	35.9		
		MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	38.4	35.4	36.6	38.4	32.9	33.4	34.6	36.4	32.9	33.4	34.6	36.4		
		S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59	1.00	1.00	0.74	0.59		
		ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	21	17	14	22	21	17	14	24	22	18	15	24	22	18	15		
		KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	3.23	3.22	3.24	3.22	3.59	3.58	3.60	4.01	4.01	4.01	4.03	4.01	4.01	4.01	4.03		
1575	Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	9.6	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	16.0	16.0	16.0	16.1			
	HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	400	402	407	450	451	453	458	504	505	507	512	504	505	507	512			
	LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	150	153	158	154	155	158	164	161	162	165	161	162	165	171				
	MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	38.2	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	33.5	34.1	35.3	37.1			
	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	0.84	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62	1.00	1.00	0.77	0.62			
1575	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	21	20	16	13	23	21	17	14	23	21	17	14			
	KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	3.24	3.24	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04	4.03	4.02	4.02	4.04			
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.1	16.2	16.1	16.1	16.1	16.2			
	HI PR	269	270	272	277	311	312	314	318	354	356	357	362	402	403	405	409	452	453	455	460	506	508	509	514	506	508	509	514			
	LO PR	130	132	135	140	138	139	142	148	144	146	149	155	150	152	155	160	156	157	160	166	163	164	167	173	163	164	167	173			

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

			OUTDOOR AMBIENT TEMPERATURE																													
			65					75					85					95					105					115				
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	1400	MBh	46.4	47.1	48.5	-	46.0	46.7	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.8	-	40.2	40.8	42.2	-	37.9	38.5	39.9	-	37.9	38.5	39.9	-		
		S/T	0.61	0.54	0.41	-	0.62	0.55	0.41	-	0.65	0.57	0.44	-	0.66	0.59	0.46	-	1.00	0.61	0.48	-	1.00	0.66	0.53	-	1.00	0.66	0.53	-		
		ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	20	18	15	-		
		KW	2.77	2.77	2.76	-	3.09	3.08	3.08	-	3.44	3.44	3.43	-	3.83	3.82	3.82	-	4.26	4.25	4.25	-	4.76	4.76	4.75	-	4.76	4.76	4.75	-		
		Amps	10.1	10.1	10.0	-	11.5	11.5	11.5	-	13.2	13.2	13.1	-	14.9	14.9	14.9	-	16.9	16.9	16.9	-	19.2	19.2	19.2	-	19.2	19.2	19.2	-		
		Hi PR	257	259	260	-	298	299	301	-	341	342	343	-	386	387	389	-	436	437	438	-	488	489	491	-	488	489	491	-		
		Lo PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	148	150	153	-	155	157	160	-	155	157	160	-		
70	1550	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-	38.3	39.0	40.4	-		
		S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-	1.00	0.71	0.57	-		
		ΔT	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	19	17	14	-		
		KW	2.78	2.78	2.77	-	3.10	3.10	3.09	-	3.45	3.45	3.45	-	3.84	3.84	3.83	-	4.27	4.27	4.26	-	4.77	4.77	4.76	-	4.77	4.77	4.76	-		
		Amps	10.1	10.1	10.1	-	11.6	11.6	11.6	-	13.2	13.2	13.2	-	15.0	15.0	14.9	-	16.9	16.9	16.9	-	19.3	19.2	19.2	-	19.3	19.2	19.2	-		
		Hi PR	259	260	262	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	490	491	493	-	490	491	493	-		
		Lo PR	125	126	129	-	132	134	137	-	139	140	144	-	144	146	149	-	150	151	154	-	157	158	161	-	157	158	161	-		
1800		MBh	47.9	48.5	49.9	-	47.5	48.1	49.5	-	46.2	46.9	48.3	-	44.2	44.8	46.2	-	41.6	42.3	43.7	-	39.3	40.0	41.3	-	39.3	40.0	41.3	-		
		S/T	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.74	0.61	-		
		ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	18	16	13	-		
		KW	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.46	-	3.86	3.85	3.85	-	4.29	4.28	4.28	-	4.79	4.79	4.78	-	4.79	4.79	4.78	-		
		Amps	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.0	15.0	-	17.0	17.0	17.0	-	19.3	19.3	19.3	-	19.3	19.3	19.3	-		
		Hi PR	262	263	265	-	302	304	305	-	345	346	348	-	391	392	394	-	440	441	443	-	493	494	496	-	493	494	496	-		
		Lo PR	127	129	132	-	135	136	140	-	141	143	146	-	147	149	152	-	152	154	157	-	159	161	164	-	159	161	164	-		
75	1400	MBh	46.4	47.1	48.5	50.6	46.0	46.7	48.1	50.2	44.8	45.5	46.9	49.0	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.4	37.9	38.5	39.9	42.0	37.9	38.5	39.9	42.0		
		S/T	0.74	0.67	0.53	0.39	0.75	0.67	0.54	0.40	1.00	0.70	0.56	0.42	1.00	0.72	0.58	0.44	1.00	0.74	0.60	0.46	1.00	1.00	0.66	0.51	1.00	1.00	0.66	0.51		
		ΔT	23	21	18	15	23	21	18	14	23	22	18	15	23	21	18	14	23	21	18	14	24	22	19	15	24	22	19	15		
		KW	2.77	2.76	2.76	2.78	3.08	3.08	3.08	3.10	3.44	3.44	3.43	3.46	3.82	3.82	3.82	3.84	4.25	4.25	4.25	4.27	4.76	4.76	4.75	4.77	4.76	4.76	4.75	4.77		
		Amps	10.1	10.1	10.0	10.1	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.8	17.0	19.2	19.2	19.1	19.3	19.2	19.2	19.1	19.3		
		Hi PR	258	259	261	265	298	299	301	306	341	342	344	348	386	388	389	394	436	437	439	443	488	490	491	496	488	490	491	496		
		Lo PR	123	125	128	133	131	132	136	141	137	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	155	157	160	165		
75	1550	MBh	46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5	38.4	39.0	40.4	42.5		
		S/T	0.79	0.71	0.58	0.44	0.79	0.72	0.58	0.44	1.00	0.74	0.61	0.47	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	1.00	0.70	0.56	1.00	1.00	0.70	0.56		
		ΔT	22	21	17	14	22	20	17	14	23	21	17	14	22	20	17	14	22	20	17	13	23	21	18	15	23	21	18	15		
		KW	2.78	2.78	2.77	2.80	3.10	3.09	3.09	3.11	3.45	3.45	3.44	3.47	3.84	3.83	3.83	3.85	4.27	4.26	4.26	4.28	4.77	4.77	4.76	4.79	4.77	4.77	4.76	4.79		
		Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.7	13.2	13.2	13.2	13.3	15.0	15.0	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	19.2	19.2	19.2	19.3		
		Hi PR	259	260	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498	490	491	493	498		
		Lo PR	125	126	129	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	157	158	161	167		
1800		MBh	47.9	48.5	49.9	52.0	47.5	48.1	49.5	51.6	46.3	46.9	48.3	50.4	44.2	44.8	46.2	48.3	41.7	42.3	43.7	45.8	39.3	40.0	41.4	43.5	39.3	40.0	41.4	43.5		
		S																														

		OUTDOOR AMBIENT TEMPERATURE																									
		65				75				85				95				105				115					
		ENTERING INDOOR WET BULB TEMPERATURE																									
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	1400	MBh	46.7	47.3	48.7	50.8	46.3	46.9	48.3	50.4	45.1	45.7	47.1	49.2	43.0	43.6	45.0	47.1	40.4	41.1	42.5	44.6	38.1	38.8	40.2	42.3	
		S/T	1.00	0.79	0.66	0.5	1.00	0.80	0.66	0.52	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.64	
		ΔT	27	25	22	19	27	25	22	18	27	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	
		KW	2.77	2.77	2.76	2.8	3.09	3.08	3.08	3.10	3.44	3.44	3.43	3.5	3.83	3.82	3.82	3.84	4.26	4.25	4.25	4.3	4.76	4.76	4.75	4.78	
	Amps	10.1	10.1	10.0	10.2	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3		
	HI PR	258	259	261	266	299	300	302	306	341	342	344	349	387	388	390	394	436	437	439	444	489	490	492	496		
	LO PR	124	125	129	134	131	133	136	141	138	140	143	148	144	145	148	153	149	151	154	159	156	157	160	166		
	1550	MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8	
S/T		1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.68		
ΔT		26	25	21	18	26	24	21	18	27	25	21	18	26	24	21	18	26	24	21	17	27	25	22	18		
KW		2.78	2.78	2.77	2.8	3.10	3.10	3.09	3.12	3.45	3.45	3.45	3.5	3.84	3.84	3.83	3.86	4.27	4.27	4.26	4.3	4.77	4.77	4.76	4.79		
1800	Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	14.9	15.1	16.9	16.9	16.9	17.0	19.3	19.2	19.2	19.3		
	HI PR	260	261	263	267	300	302	303	308	343	344	346	350	389	390	392	396	438	439	441	445	491	492	493	498		
	LO PR	125	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167		
	MBh	48.1	48.8	50.2	52.3	47.7	48.4	49.8	51.9	46.5	47.2	48.5	50.7	44.4	45.1	46.5	48.6	41.9	42.5	43.9	46.0	39.6	40.2	41.6	43.7		
	S/T	1.00	0.87	0.74	0.6	1.00	0.88	0.75	0.60	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72		
	ΔT	25	23	20	17	25	23	20	16	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17		
	KW	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.13	3.47	3.47	3.46	3.5	3.86	3.85	3.85	3.87	4.29	4.28	4.28	4.3	4.79	4.79	4.78	4.81		
	Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4		
	HI PR	263	264	266	270	303	304	306	311	346	347	349	353	391	392	394	399	441	442	444	448	493	494	496	501		
	LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	155	158	163	160	161	165	170		
	85	1400	MBh	47.5	48.1	49.5	51.6	47.1	47.7	49.1	51.2	45.8	46.5	47.9	50.0	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.4	38.9	39.6	40.9	43.0
			S/T	1.00	0.89	0.76	0.62	1.00	0.90	0.76	0.62	1.00	1.00	0.83	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.74	
ΔT			31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	30	29	25	22	31	30	26	23	
KW			2.77	2.77	2.77	2.79	3.09	3.09	3.08	3.11	3.45	3.45	3.44	3.46	3.83	3.83	3.82	3.85	4.26	4.26	4.25	4.28	4.77	4.76	4.76	4.78	
	1550	Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.6	13.2	13.2	13.2	13.3	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3	
		HI PR	259	261	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498	
		LO PR	126	127	130	136	133	135	138	143	140	141	145	150	145	147	150	155	151	152	155	161	158	159	162	168	
		MBh	47.9	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.3	47.0	48.4	50.5	44.2	44.9	46.3	48.4	41.7	42.4	43.7	45.9	39.4	40.0	41.4	43.5	
	1800	S/T	1.00	0.93	0.80	0.66	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.78		
		ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	22	
		KW	2.79	2.78	2.78	2.80	3.10	3.10	3.10	3.12	3.46	3.46	3.45	3.48	3.84	3.84	3.84	3.86	4.27	4.27	4.27	4.29	4.78	4.78	4.77	4.79	
		Amps	10.2	10.2	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	15.0	15.1	17.0	17.0	16.9	17.0	19.3	19.3	19.2	19.4	
		HI PR	261	262	264	268	302	303	305	309	344	345	347	351	390	391	393	397	439	440	442	447	492	493	495	499	
		LO PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169	
		MBh	48.9	49.6	51.0	53.1	48.5	49.2	50.5	52.6	47.3	47.9	49.3	51.4	45.2	45.9	47.2	49.4	42.7	43.3	44.7	46.8	40.3	41.0	42.4	44.5	
		S/T	1.00	0.97	0.84	0.70	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.75	1.00	1.00	0.87	0.77	1.00	1.00	0.78		
		ΔT	29	27	24	20	29	27	23	20	29	27	24	20	29	27	23	20	28	27	23	20	30	28	24	21	
		KW	2.80	2.80	2.80	2.82	3.12	3.12	3.11	3.14	3.48	3.48	3.47	3.49	3.86	3.86	3.85	3.88	4.29	4.29	4.28	4.31	4.80	4.79	4.79	4.81	
		Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.3	13.3	13.3	13.4													

			OUTDOOR AMBIENT TEMPERATURE												115																							
			65						75						85						95						105						115					
IDB	AIRFLOW		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
			ENTERING INDOOR WET BULB TEMPERATURE																																			
70	1550	MBh	58.8	59.6	61.3	-	58.2	59.1	60.8	-	56.7	57.5	59.3	-	54.1	54.9	56.7	-	50.9	51.7	53.5	-	48.0	48.8	50.6	-	48.0	48.8	50.6	-								
		S/T	0.62	0.55	0.42	-	0.62	0.55	0.43	-	0.65	0.58	0.45	-	0.66	0.59	0.47	-	0.69	0.61	0.49	-	1.00	0.66	0.54	-	1.00	0.66	0.54	-								
		ΔT	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	22	20	16	-	22	20	16	-								
		KW	3.43	3.42	3.42	-	3.85	3.85	3.84	-	4.33	4.33	4.32	-	4.84	4.84	4.83	-	5.42	5.42	5.41	-	6.09	6.09	6.08	-	6.09	6.09	6.08	-								
		Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.3	-	19.7	19.6	19.6	-	22.3	22.3	22.2	-	25.4	25.4	25.3	-	25.4	25.4	25.3	-								
		Hi PR	270	271	273	-	312	313	315	-	356	358	359	-	404	405	407	-	455	457	459	-	510	511	513	-	510	511	513	-								
		Lo PR	117	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	151	-	146	148	151	-								
		MBh	59.7	60.5	62.3	-	59.2	60.0	61.7	-	57.7	58.5	60.2	-	55.1	55.9	57.6	-	51.9	52.7	54.4	-	49.0	49.8	51.5	-	49.0	49.8	51.5	-								
		S/T	0.65	0.58	0.45	-	0.66	0.58	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	0.72	0.65	0.52	-	1.00	0.69	0.57	-	1.00	0.69	0.57	-								
		ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-	21	19	15	-								
2000	KW	3.45	3.44	3.43	-	3.87	3.87	3.86	-	4.35	4.34	4.34	-	4.86	4.86	4.85	-	5.44	5.43	5.43	-	6.11	6.11	6.10	-	6.11	6.11	6.10	-									
	Amps	13.3	13.3	13.2	-	15.2	15.2	15.2	-	17.4	17.4	17.3	-	19.8	19.7	19.7	-	22.4	22.4	22.3	-	25.5	25.5	25.4	-	25.5	25.5	25.4	-									
	Hi PR	272	273	275	-	314	316	318	-	359	360	362	-	406	408	409	-	458	459	461	-	513	514	516	-	513	514	516	-									
	Lo PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	150	153	-	148	150	153	-									
	MBh	61.2	62.0	63.7	-	60.6	61.5	63.2	-	59.1	60.0	61.7	-	56.5	57.3	59.1	-	53.3	54.2	55.9	-	50.4	51.3	53.0	-	50.4	51.3	53.0	-									
	S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.70	0.58	-	1.00	0.70	0.58	-									
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	20	18	14	-	20	18	14	-									
	KW	3.47	3.46	3.46	-	3.89	3.89	3.88	-	4.37	4.37	4.36	-	4.88	4.88	4.87	-	5.46	5.46	5.45	-	6.13	6.13	6.12	-	6.13	6.13	6.12	-									
	Amps	13.4	13.3	13.3	-	15.3	15.3	15.3	-	17.5	17.5	17.4	-	19.8	19.8	19.8	-	22.5	22.5	22.4	-	25.6	25.6	25.5	-	25.6	25.6	25.5	-									
	Hi PR	275	276	278	-	317	319	320	-	362	363	365	-	409	410	412	-	461	462	464	-	516	517	519	-	516	517	519	-									
Lo PR	121	123	126	-	128	130	133	-	134	136	139	-	140	141	144	-	145	146	149	-	151	152	155	-	151	152	155	-										
75	1550	MBh	58.8	59.6	61.3	64.0	58.3	59.1	60.8	63.5	56.8	57.6	59.3	62.0	54.1	55.0	56.7	59.3	51.0	51.8	53.5	56.2	48.1	48.9	50.6	53.3	48.1	48.9	50.6	53.3								
		S/T	0.74	0.67	0.54	0.41	0.74	0.67	0.55	0.41	0.77	0.70	0.57	0.44	1.00	0.71	0.59	0.46	1.00	0.73	0.61	0.48	1.00	0.78	0.66	0.52	1.00	0.78	0.66	0.52								
		ΔT	25	23	20	16	25	23	19	16	26	24	20	16	25	23	19	16	25	23	19	15	26	24	20	17	26	24	20	17								
		KW	3.42	3.42	3.41	3.45	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.35	4.84	4.84	4.83	4.86	5.42	5.41	5.41	5.44	6.09	6.09	6.08	6.11	6.09	6.09	6.08	6.11								
		Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	25.3	25.5								
		Hi PR	270	271	273	278	312	314	315	320	357	358	360	364	404	405	407	412	456	457	459	463	511	512	514	518	511	512	514	518								
		Lo PR	117	118	121	126	124	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	151	155	146	148	151	155								
		MBh	59.7	60.6	62.3	64.9	59.2	60.0	61.8	64.4	57.7	58.5	60.3	62.9	55.1	55.9	57.6																					

		OUTDOOR AMBIENT TEMPERATURE																																						
		65						75						85						95						105						115								
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71							
80	MbH	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.4	55.3	57.0	59.6	51.3	52.1	53.8	56.5	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6	48.4	49.2	50.9	53.6							
	S/T	0.85	0.78	0.66	0.5	1.00	0.79	0.66	0.53	1.00	0.81	0.69	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.72	0.6	1.00	1.00	0.77	0.64	1.00	1.00	0.77	0.64	1.00	1.00	0.77	0.64							
	ΔT	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	31	29	25	21	31	29	25	21	31	29	25	21							
	KW	3.43	3.42	3.42	3.5	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.4	4.84	4.84	4.83	4.87	5.42	5.42	5.42	5.41	5.4	6.09	6.09	6.08	6.12	5.4	6.09	6.09	6.08	6.12	5.4	6.09	6.09	6.08	6.12				
	Amps	13.2	13.2	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.3	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5	25.4	25.4	22.2	22.4	25.4	25.4	25.3	25.5						
	Hi PR	271	272	274	278	313	314	316	321	357	358	360	365	405	406	408	413	456	457	459	464	511	512	514	519	511	512	514	519	511	512	514	519	511	512	514	519			
	Lo PR	117	118	121	126	124	125	128	133	130	132	135	139	135	137	140	145	140	142	145	150	147	148	151	156	147	148	151	156	147	148	151	156	147	148	151	156			
	MbH	60.0	60.9	62.6	65.2	59.5	60.3	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	57.9	60.6	52.2	53.0	54.8	57.4	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5	49.3	50.1	51.9	54.5			
1750	S/T	0.89	0.81	0.69	0.6	1.00	0.82	0.70	0.56	1.00	0.84	0.72	0.6	1.00	0.86	0.74	0.60	1.00	0.88	0.76	0.6	1.00	1.00	0.80	0.67	1.00	1.00	0.80	0.67	1.00	1.00	0.80	0.67	1.00	1.00	0.80	0.67			
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	26	23	19	30	28	24	20	29	26	23	19	30	28	24	20	29	26	23	19			
	KW	3.44	3.44	3.43	3.5	3.87	3.87	3.86	3.89	4.35	4.34	4.34	4.4	4.86	4.86	4.85	4.88	5.44	5.43	5.43	5.5	6.11	6.11	6.10	6.13	5.5	6.11	6.11	6.10	6.13	5.5	6.11	6.11	6.10	6.13	5.5	6.11	6.11	6.10	6.13
	Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6	25.5	25.5	22.4	22.3	22.5	25.5	25.4	25.6	25.5	25.4	25.6	25.5	25.4	25.6	
	Hi PR	273	274	276	281	315	316	318	323	359	361	362	367	407	408	410	415	458	460	462	466	513	514	516	521	513	514	516	521	513	514	516	521	513	514	516	521			
	Lo PR	119	120	123	128	126	127	130	135	132	134	136	141	137	139	142	146	142	144	147	152	149	150	153	158	149	150	153	158	149	150	153	158	149	150	153	158			
	MbH	61.5	62.3	64.1	66.7	61.0	61.8	63.5	66.2	59.5	60.3	62.0	64.7	56.9	57.7	59.4	62.1	53.7	54.5	56.2	58.9																			

DX14SN0181C* / CA*F3636*6** W/.052" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	19,300	13,124	6,176	1,220
80	19,050	13,142	5,908	1,290
85	18,800	13,160	5,640	1,360
90	18,400	13,060	5,340	1,435
95	18,000	12,960	5,040	1,510
100	17,500	12,770	4,730	1,595
105	17,000	12,580	4,420	1,680
110	16,550	12,650	3,901	1,780
115	16,100	12,719	3,381	1,880
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,400	12,700	4,700	1,510

DX14SN0191B* / CA*F3636*6** W/.053" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,900	13,041	5,859	1,160
80	18,650	13,145	5,506	1,225
85	18,400	13,248	5,152	1,290
90	18,000	13,136	4,864	1,360
95	17,600	13,024	4,576	1,430
100	17,100	12,820	4,280	1,530
105	16,600	12,616	3,984	1,590
110	16,150	12,667	3,484	1,680
115	15,700	12,717	2,983	1,770
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	17,000	12,750	4,250	1,430

DX14SN0241C* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	24,877	16,961	7,916	1,554
80	24,568	17,040	7,528	1,644
85	24,260	17,120	7,140	1,735
90	23,730	16,961	6,769	1,833
95	23,200	16,802	6,397	1,931
100	22,552	16,564	5,988	2,040
105	21,904	16,326	5,578	2,149
110	21,312	16,393	4,919	2,278
115	20,721	16,461	4,260	2,406
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	22,400	16,802	5,598	1,931

DX14SN0251C* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	25,500	17,085	8,415	1,570
80	25,200	17,258	7,943	1,660
85	24,900	17,430	7,470	1,750
90	24,350	17,283	7,067	1,850
95	23,800	17,136	6,664	1,950
100	23,150	16,893	6,257	2,060
105	22,500	16,650	5,850	2,170
110	21,900	16,739	5,162	2,300
115	21,300	16,827	4,473	2,430
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	23,000	16,790	6,210	1,950

DX14SN0301B* / CA*F3642*6** W/.065" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,900	21,630	9,270	1,960
80	30,500	21,651	8,849	2,070
85	30,100	21,672	8,428	2,180
90	29,450	21,492	7,958	2,300
95	28,800	21,312	7,488	2,420
100	28,000	20,992	7,008	2,550
105	27,200	20,672	6,528	2,680
110	26,450	20,745	5,706	2,840
115	25,700	20,817	4,883	3,000
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,800	20,850	6,950	2,420

DX14SN0311B* / CA*F3137*6** W/.063" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,700	22,718	7,982	1,920
80	30,300	22,871	7,430	2,025
85	29,900	23,023	6,877	2,130
90	29,250	22,809	6,442	2,245
95	28,600	22,594	6,006	2,360
100	27,800	22,232	5,568	2,490
105	27,000	21,870	5,130	2,620
110	26,250	21,900	4,350	2,770
115	25,500	21,930	3,570	2,920
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,600	20,080	5,520	2,360

DX14SN0361B* / CA*F3642*6** W/.068" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1200 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,700	25,690	11,010	2,330
80	36,250	25,733	10,517	2,460
85	35,800	25,776	10,024	2,590
90	35,000	25,542	9,458	2,730
95	34,200	25,308	8,892	2,870
100	33,250	24,928	8,322	3,030
105	32,300	24,548	7,752	3,190
110	31,400	24,627	6,774	3,370
115	30,500	24,705	5,795	3,550
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	33,000	24,750	8,250	2,870

DX14SN0371B* / CA*F3137*6** W/.071" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1100 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,500	25,915	10,585	2,260
80	36,050	26,130	9,921	2,400
85	35,600	26,344	9,256	2,540
90	34,800	26,092	8,708	2,675
95	34,000	25,840	8,160	2,810
100	33,050	25,439	7,611	2,970
105	32,100	25,038	7,062	3,130
110	31,250	25,135	6,115	3,315
115	30,400	25,232	5,168	3,500
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	32,800	25,256	7,544	2,810

DX14SN0421B* / CA*F4961*6** W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

DX14SN0431B* / CA*F4961*6D* W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
95	39,000	30,810	8,190	3,220
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	37,600	30,080	7,520	3,220

DX14SN0481B* / CA*F4860*6** W/.078" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	48,300	31,878	16,422	3,080
80	47,700	32,189	15,511	3,255
85	47,100	32,500	14,600	3,430
90	46,050	32,225	13,825	3,625
95	45,000	31,950	13,050	3,820
100	43,750	31,488	12,263	4,035
105	42,500	31,025	11,475	4,250
110	41,350	31,191	10,160	4,500
115	40,200	31,356	8,844	4,750
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	43,400	31,248	12,152	3,820

DX14SN0601B* / CA*F4961*6** W/.088" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	61,100	40,326	20,774	3,840
80	60,350	40,725	19,625	4,080
85	59,600	41,124	18,476	4,320
90	58,300	40,512	17,788	4,575
95	57,000	39,900	17,100	4,830
100	55,400	39,318	16,082	5,120
105	53,800	38,736	15,064	5,410
110	52,350	38,965	13,386	5,745
115	50,900	39,193	11,707	6,080
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	55,000	39,050	15,950	4,840

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0181C*	ACNF25XX16A*		17,800	13,300	14.0	11.7	610	9039621
	ARUF25B14A*		17,800	12,800	14.0	11.5	570	7989036
	ARUF25B14A*		17,800	13,300	14.0	11.5	610	9039622
	ASPT24B14A*+HSK		18,000	13,400	14.5	12.0	595	9039623
	ASPT25B14A*		17,800	12,800	14.5	12.0	580	8245760
	ASPT25B14A*+HSK		17,800	13,300	14.5	12.0	580	9039624
	ASPT29B14A*		18,000	13,000	15.0	12.5	560	8245761
	ASPT29B14A*+HSK		18,000	13,400	15.0	12.5	565	9039625
	ASPT30C14A*		18,400	13,300	14.5	12.0	580	7539577
	ASPT30C14A*+HSK		18,400	13,700	14.5	12.0	630	9039626
	ASPT33C14B*+HSK		18,400	13,700	14.5	12.0	615	201834884
	AVPTC24B14A*+HSK		18,000	13,400	14.5	12.0	600	9039627
	AVPTC30C14A*+HSK		18,400	13,700	14.5	12.0	630	9039628
	AVPTC33C14A*+HSK		18,600	13,850	14.5	12.0	645	10269189
	AWUF19XX16A*		17,000	12,200	14.0	11.5	600	8248693
	AWUF19XX16A*		17,000	12,700	14.0	11.5	580	9039629
	AWUF31XX16A*		17,400	12,500	14.5	11.5	600	7539580
	AWUF31XX16A*		17,400	13,000	14.5	11.5	630	9039630
	AWUF32XX16A*		17,400	12,500	14.5	11.5	600	7539581
	AWUF32XX16A*		17,400	13,000	14.5	11.5	630	9039631
	CA*F3137*6A*+EEP+TXV+HSK		18,000	13,400	14.5	12.0	600	9039632
	CA*F3137*6A*+TXV+HSK	D*96VE0303ANA*	17,800	13,300	15.0	12.0	650	10516663
	CA*F3137*6A*+TXV+HSK	D*96VE0403ANA*	18,000	13,400	15.0	12.5	610	10516667
	CA*F3137*6A*+TXV+HSK	D*96VE0603ANA*	17,800	13,300	15.0	12.2	580	10516662
	CA*F3137*6A*+TXV+HSK	D*96VE0403BNA*	18,000	13,400	15.0	12.5	625	10338665
	CA*F3137*6A*+TXV+HSK	D*96VE0302BNA*	17,800	13,300	15.0	12.2	605	9039633
	CA*F3137*6A*+TXV+HSK	D*96VE0402BNA*	17,800	13,300	15.0	12.2	610	9039634
	CA*F3137*6A*+TXV+HSK	D*96VC0403BNA*	18,000	13,400	15.0	12.2	620	9039635
	CA*F3137*6A*+TXV+HSK	D*96VE0603BNA*	17,800	13,300	15.0	12.2	550	9039636
	CA*F3137*6A*+TXV+HSK	D*96VC0603BNA*	18,000	13,400	15.0	12.2	620	9039637
	CA*F3137*6A*+TXV+HSK	D*96VE0803BNA*	17,800	13,300	15.0	12.2	575	9039638
	CA*F3137*6A*+TXV+HSK	D*96VC0803BNA*	18,000	13,400	15.0	12.2	610	9039639
	CA*F3137*6A*+TXV+HSK	D*97MC0603BNA*	18,000	13,400	15.0	12.2	620	9039640
	CA*F3137*6A*+TXV+HSK	D*80HE0603B*A*	18,000	13,400	15.0	12.2	590	9039641
	CA*F3137*6A*+TXV+HSK	D*80VC0604B*A*	18,000	13,400	15.0	12.2	620	9039642
	CA*F3636*6D*	D*96VE0303ANA*	17,800	13,300	14.5	12.0	650	10516664
	CA*F3636*6D*	D*96VE0403ANA*	17,800	13,300	14.5	11.5	610	10516668
	CA*F3636*6D*	D*96VE0603ANA*	17,800	13,300	14.5	11.5	580	10516660
	CA*F3636*6D*	D*96VE0403BNA*	17,800	13,300	14.5	12.2	625	10338666
	CA*F3636*6D*	D*80VC0603B*A*	18,000	13,800	14.5	11.5	600	9948521
	CA*F3636*6D*	D*80VC0803B*A*	18,000	13,800	14.5	11.5	600	9948526
	CA*F3636*6D*	D*80VC0604B*A*	18,000	13,400	14.5	11.5	620	9039643
	CA*F3636*6D*	D*97MC0804CNA*	18,000	13,400	14.5	11.5	635	9039644
	CA*F3636*6D*	D*80HE0603B*A*	18,000	13,400	14.5	11.5	590	9039645
	CA*F3636*6D*	D*97MC0603BNA*	18,000	13,400	14.5	11.5	620	9039646
	CA*F3636*6D*	D*96VE0803BNA*	17,800	13,300	14.5	11.5	575	9039647
	CA*F3636*6D*	D*96VC0803BNA*	18,000	13,400	14.5	11.5	610	9039648

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0181C* (cont.)	CA*F3636*6D*	D*96VE0603BNA*	17,800	13,300	14.5	11.5	550	9039649
	CA*F3636*6D*	D*96VC0603BNA*	18,000	13,400	14.5	11.5	620	9039650
	CA*F3636*6D*	D*96VE0402BNA*	17,800	13,300	14.5	11.5	610	9039651
	CA*F3636*6D*	D*96VC0403BNA*	18,000	13,400	14.5	11.5	620	9039652
	CA*F3636*6D*	D*96VE0302BNA*	17,800	13,300	14.5	11.5	605	9039653
	CA*F3636*6D*+EEP		17,800	13,300	14.0	11.5	600	9039654
	CA*F3636*6D*+EEP+TXV		17,800	12,800	14.0	11.5	600	7539582
	CA*F3636*6D*+MBVC1200**-1A*+TXV		17,800	12,800	14.5	11.5	600	7539583
	CA*F3636*6D*+MBVC1200**-1A*+TXV+HSK		17,800	13,300	14.5	11.5	590	9039655
	CA*F3636*6D*+TXV	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7542449
	CA*F3636*6D*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7542452
	CA*F3636*6D*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7542455
	CA*F3636*6D*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7542458
	CA*F3636*6D*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7542461
	CA*F3636*6D*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7542464
	CA*F3636*6D*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7542467
	CA*F3636*6D*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7542470
	CA*F3636*6D*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7542473
	CA*F3636*6D*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7542476
	CA*F3636*6D*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7542479
	CA*F3636*6D*+TXV+HSK	D*80VC0603B*A*	18,000	13,800	15.0	12.0	600	9948522
	CA*F3636*6D*+TXV+HSK	D*80VC0803B*A*	18,000	13,800	15.0	12.0	600	9948527
	CA*F3743*6D*+EEP+TXV		18,000	13,000	14.5	11.5	600	7539584
	CA*F3743*6D*+TXV+HSK	D*97MC0804CNA*	18,000	13,400	15.0	12.2	635	9039656
	CAPT3743*4A*	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7542450
	CAPT3743*4A*	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7542453
	CAPT3743*4A*	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7542456
	CAPT3743*4A*	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7542459
	CAPT3743*4A*	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7542462
	CAPT3743*4A*	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7542465
	CAPT3743*4A*	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7542468
	CAPT3743*4A*	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7542471
	CAPT3743*4A*	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7542474
	CAPT3743*4A*	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7542477
	CAPT3743*4A*	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7542480
	CAPT3743*4A*+EEP		17,800	12,800	14.0	11.5	550	7539585
	CAPT3743*4A*+EEP+HSK		17,800	13,300	14.0	11.5	600	9039657
	CAPT3743*4A*+HSK	D*96VE0403BNA*	18,000	13,400	15.0	12.5	625	10338667
	CAPT3743*4A*+HSK	D*80VC0603B*A*	18,000	13,800	14.5	11.5	600	9948523
	CAPT3743*4A*+HSK	D*80VC0803B*A*	18,000	13,800	14.5	11.5	600	9948528
	CAPT3743*4A*+HSK	D*96VE0302BNA*	17,800	13,300	14.5	11.5	605	9039658
	CAPT3743*4A*+HSK	D*96VE0402BNA*	17,800	13,300	14.5	11.5	610	9039659
	CAPT3743*4A*+HSK	D*96VC0403BNA*	18,000	13,400	14.5	11.5	620	9039660
	CAPT3743*4A*+HSK	D*96VC0603BNA*	18,000	13,400	14.5	11.5	620	9039661
	CAPT3743*4A*+HSK	D*96VE0603BNA*	17,800	13,300	14.5	11.5	550	9039662
	CAPT3743*4A*+HSK	D*80VC0604B*A*	18,000	13,400	14.5	11.5	620	9039663
	CAPT3743*4A*+HSK	D*97MC0804CNA*	18,000	13,400	14.5	11.5	635	9039664
	CAPT3743*4A*+HSK	D*96VE0803BNA*	17,800	13,300	14.5	11.5	575	9039665
	CAPT3743*4A*+HSK	D*80HE0603B*A*	18,000	13,400	14.5	11.5	590	9039666

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0181C* (cont.)	CAPT3743*4A*+HSK	D*97MC0603BNA*	18,000	13,400	14.5	11.5	620	9039667
	CAPT3743*4A*+HSK	D*96VC0803BNA*	18,000	13,400	14.5	11.5	610	9039668
	CAPT3743*4A*+MBVC1200**-1A*		17,400	12,500	14.5	12.0	535	7539586
	CAPT3743*4A*+MBVC1200**-1A*+HSK		17,400	13,000	14.5	12.0	590	9039669
	CHPF2430B6C*+EEP+TXV		17,800	12,800	14.0	11.5	600	7539587
	CHPF2430B6C*+EEP+TXV+HSK		17,800	13,300	14.0	11.5	600	9039670
	CHPF2430B6C*+MBVC1200**-1A*+TXV		17,800	12,800	14.5	11.5	600	7539588
	CHPF2430B6C*+MBVC1200**-1A*+TXV+HSK		17,800	13,300	14.5	11.5	590	9039671
	CHPF2430B6C*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7539592
	CHPF2430B6C*+TXV+HSK	D*80VC0604B*A*	18,000	13,400	14.5	11.5	620	9039672
	CHPF3636B6C*+EEP+TXV		18,000	13,000	14.5	11.5	600	7539589
	CHPF3636B6C*+TXV	D*80HE0603B*A*	18,000	13,000	14.5	11.5	670	7542451
	CHPF3636B6C*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7542457
	CHPF3636B6C*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7542460
	CHPF3636B6C*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7542463
	CHPF3636B6C*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7542466
	CHPF3636B6C*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7542469
	CHPF3636B6C*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7542472
	CHPF3636B6C*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7542475
	CHPF3636B6C*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7542478
	CHPF3636B6C*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7542481
	CHPF3636B6C*+TXV+HSK	D*96VE0303ANA*	17,800	13,300	14.5	12.0	650	10516665
	CHPF3636B6C*+TXV+HSK	D*96VE0403ANA*	17,800	13,300	14.5	11.5	610	10516669
	CHPF3636B6C*+TXV+HSK	D*96VE0603ANA*	17,800	13,300	14.5	11.5	580	10516661
	CHPF3636B6C*+TXV+HSK	D*96VE0403BNA*	17,800	13,300	14.5	12.2	600	10338668
	CHPF3636B6C*+TXV+HSK	D*80VC0603B*A*	18,000	13,800	14.5	11.5	600	9948524
	CHPF3636B6C*+TXV+HSK	D*80VC0803B*A*	18,000	13,800	14.5	11.5	600	9948529
	CHPF3636B6C*+TXV+HSK	D*97MC0804CNA*	18,000	13,400	14.5	11.5	635	9039673
	CHPF3636B6C*+TXV+HSK	D*96VC0803BNA*	18,000	13,400	14.5	11.5	610	9039674
	CHPF3636B6C*+TXV+HSK	D*97MC0603BNA*	18,000	13,400	14.5	11.5	620	9039675
	CHPF3636B6C*+TXV+HSK	D*80HE0603B*A*	18,000	13,400	14.5	11.5	590	9039676
	CHPF3636B6C*+TXV+HSK	D*96VE0803BNA*	17,800	13,300	14.5	11.5	575	9039677
	CHPF3636B6C*+TXV+HSK	D*96VE0402BNA*	17,800	13,300	14.5	11.5	610	9039678
	CHPF3636B6C*+TXV+HSK	D*96VE0302BNA*	17,800	13,300	14.5	11.5	605	9039679
	CHPF3636B6C*+TXV+HSK	D*96VE0603BNA*	17,800	13,300	14.5	11.5	550	9039680
	CHPF3636B6C*+TXV+HSK	D*96VC0603BNA*	18,000	13,400	14.5	11.5	620	9039681
	CHPF3636B6C*+TXV+HSK	D*96VC0403BNA*	18,000	13,400	14.5	11.5	620	9039682
	CSCF1824N6D*+TXV+HSK	D*96VE0303ANA*	16,800	12,500	14.0	11.5	630	10516666
	CSCF1824N6D*+TXV+HSK	D*96VE0403ANA*	17,000	12,700	14.0	11.5	610	10516670
	CSCF3036N6D*+EEP+TXV		17,800	12,800	14.0	11.5	600	7539590
	CSCF3036N6D*+EEP+TXV+HSK		17,800	13,300	14.0	11.5	600	9039683
	CSCF3036N6D*+TXV	D*96VC0403BNA*	18,000	13,000	14.5	11.5	615	7539593
	CSCF3036N6D*+TXV	D*96VC0603BNA*	18,000	13,000	14.5	11.5	625	7539594
	CSCF3036N6D*+TXV	D*96VC0803BNA*	18,000	13,000	14.5	11.5	620	7539595
	CSCF3036N6D*+TXV	D*97MC0603BNA*	18,000	13,000	14.5	11.5	625	7539596
	CSCF3036N6D*+TXV	D*97MC0804CNA*	18,000	13,000	14.5	11.5	620	7539597
	CSCF3036N6D*+TXV	D*96VE0302BNA*	17,800	12,800	14.5	11.5	575	7539598
	CSCF3036N6D*+TXV	D*96VE0402BNA*	17,800	12,800	14.5	11.5	575	7539599
	CSCF3036N6D*+TXV	D*96VE0603BNA*	17,800	12,800	14.5	11.5	500	7539600

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0181C* (cont.)	CSCF3036N6D*+TXV	D*96VE0803BNA*	17,800	12,800	14.5	11.5	540	7539601
	CSCF3036N6D*+TXV	D*80VC0604B*A*	18,000	13,000	14.5	11.5	620	7542454
	CSCF3036N6D*+TXV+HSK	D*96VE0403BNA*	17,800	13,300	14.5	12.2	625	10338669
	CSCF3036N6D*+TXV+HSK	D*80VC0603B*A*	18,000	13,800	14.5	12.0	600	9948525
	CSCF3036N6D*+TXV+HSK	D*80VC0803B*A*	18,000	13,800	14.5	12.0	600	9948530
	CSCF3036N6D*+TXV+HSK	D*96VE0302BNA*	17,800	13,300	14.5	11.5	605	9039684
	CSCF3036N6D*+TXV+HSK	D*96VE0402BNA*	17,800	13,300	14.5	11.5	610	9039685
	CSCF3036N6D*+TXV+HSK	D*96VC0403BNA*	18,000	13,400	14.5	11.5	620	9039686
	CSCF3036N6D*+TXV+HSK	D*96VC0603BNA*	18,000	13,400	14.5	11.5	620	9039687
	CSCF3036N6D*+TXV+HSK	D*96VE0603BNA*	17,800	13,300	14.5	11.5	550	9039688
	CSCF3036N6D*+TXV+HSK	D*96VE0803BNA*	17,800	13,300	14.5	11.5	575	9039689
	CSCF3036N6D*+TXV+HSK	D*97MC0603BNA*	18,000	13,400	14.5	11.5	620	9039690
	CSCF3036N6D*+TXV+HSK	D*96VC0803BNA*	18,000	13,400	14.5	11.5	610	9039691
	CSCF3036N6D*+TXV+HSK	D*97MC0804CNA*	18,000	13,400	14.5	11.5	635	9039692
	CSCF3642N6D*+EEP+TXV		18,000	13,000	14.5	11.5	600	7539591
	CSCF3642N6D*+EEP+TXV+HSK		18,000	13,400	14.5	11.5	600	9039693
	DV24PTCB14A*		18,000	13,000	14.5	12.0	600	7539578
	DV25PTCB14A*		18,000	13,400	14.5	12.0	640	8996452
	DV25PTCB14A*+HSK		18,000	13,400	14.5	12.0	640	9114185
	DV29PTCB14A*		18,400	13,700	15.0	12.5	585	8996453
	DV29PTCB14A*+HSK		18,400	13,700	15.0	12.5	585	9114186
	DV30PTCC14A*		18,400	13,300	14.5	12.0	615	7539579
	DV33PTCC14A*+HSK		18,600	13,850	14.5	12.0	645	10221134
	CAPFA1818*6A*+EEP		18,000	13,400	12.0	14.0	600	201953623
	CAPFA1818*6A*+EEP+TXV+HSK		18,000	13,400	12.0	14.0	600	201953624
	CAPFA1818*6A*+MBVC1200**-1A*+TXV+HSK		18,000	13,400	12.5	15.5	600	201953625
	CAPFA1818*6A*	D*80HE0603B*A*	18,000	13,400	12.5	15.0	600	201953626
	CAPFA1818*6A*	D*80VC0603B*A*	18,000	13,400	12.5	15.0	600	201953627
	CAPFA1818*6A*+TXV+HSK	D*80VC0603B*A*	18,000	13,400	12.5	15.5	600	201953628
	CAPFA1818*6A*	D*80VC0604B*A*	18,000	13,400	12.5	15.0	620	201953629
	CAPFA1818*6A*	D*80VC0803B*A*	18,000	13,400	12.5	15.0	610	201953630
	CAPFA1818*6A*+TXV+HSK	D*80VC0803B*A*	18,000	13,400	12.5	15.5	610	201953631
	CAPFA1818*6A*	D*96VE0302BNA*	18,000	13,400	12.5	15.0	560	201953632
	CAPFA1818*6A*	D*96VE0303ANA*	18,000	13,400	12.5	15.0	650	201953633
	CAPFA1818*6A*	D*96VE0402BNA*	18,000	13,400	12.5	15.0	570	201953634
	CAPFA1818*6A*	D*96VE0403ANA*	18,000	13,400	12.5	15.0	650	201953635
	CAPFA1818*6A*	D*96VE0403BNA*	18,000	13,400	12.5	15.0	620	201953636
	CAPFA1818*6A*	D*96VE0603ANA*	18,000	13,400	12.5	15.0	580	201953637
	CAPFA1818*6A*	D*96VE0603BNA*	17,800	13,300	12.2	15.0	500	201953638
	CAPFA1818*6A*	D*96VE0803BNA*	17,800	13,300	12.2	15.0	520	201953639
	CAPFA1818*6A*	D*96VC0403BNA*	18,000	13,400	12.5	15.0	615	201953640
	CAPFA1818*6A*+TXV+HSK	D*96VC0403BNA*	18,000	13,400	12.5	15.0	615	201953641
	CAPFA1818*6A*	D*96VC0603BNA*	18,000	13,400	12.5	15.0	620	201953642
	CAPFA1818*6A*+TXV+HSK	D*96VC0603BNA*	18,000	13,400	12.5	15.0	620	201953643
	CAPFA1818*6A*	D*96VC0803BNA*	18,000	13,400	12.5	15.0	620	201953644
	CAPFA1818*6A*+TXV+HSK	D*96VC0803BNA*	18,000	13,400	12.5	15.0	620	201953645
	CAPFA1818*6A*	D*97MC0603BNA*	18,000	13,400	12.5	15.0	650	201953646
DX14SN 0191B*	ACNF25XX16A*		17,400	12,800	14.0	12.2	610	8740698
	ARUF25B14A*		17,800	13,100	14.0	12.2	570	7989037

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0191B* (cont.)	ASPT25B14A*		17,800	13,100	14.5	12.2	580	8245762
	ASPT29B14A*		18,000	13,300	15.0	12.5	560	8245763
	ASPT30C14A*		18,000	13,300	15.0	12.5	600	7539603
	ASPT33C14B*		18,000	13,300	15.0	12.5	615	201834885
	AVPTC33C14A*		18,200	13,400	15.0	12.5	645	10269194
	AWUF19XX16A*		17,000	12,600	14.0	12.2	600	8248699
	AWUF31XX16A*		17,200	12,700	15.0	12.5	550	7539606
	AWUF32XX16A*		17,200	12,700	15.0	12.5	550	7539607
	CA*F3636*6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7539608
	CA*F3636*6D*+MBVC1200*-1A*+TXV		18,000	13,300	15.0	12.5	600	7539609
	CA*F3636*6D*+TXV	D*96VE0303ANA*	17,400	12,200	15.0	12.5	650	10516674
	CA*F3636*6D*+TXV	D*96VE0403ANA*	17,400	12,200	15.0	12.5	610	10516677
	CA*F3636*6D*+TXV	D*96VE0603ANA*	17,800	12,500	15.0	12.5	580	10516671
	CA*F3636*6D*+TXV	D*96VE0403BNA*	17,400	12,200	15.0	12.5	625	10338670
	CA*F3636*6D*+TXV	D*80VC0603B*A*	17,800	13,500	15.0	12.5	550	9948531
	CA*F3636*6D*+TXV	D*80VC0803B*A*	17,800	13,500	15.0	12.5	600	9948535
	CA*F3636*6D*+TXV	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7539616
	CA*F3636*6D*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7539619
	CA*F3636*6D*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7539623
	CA*F3636*6D*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7539627
	CA*F3636*6D*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7539631
	CA*F3636*6D*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7539635
	CA*F3636*6D*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7539639
	CA*F3636*6D*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7539643
	CA*F3636*6D*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7539647
	CA*F3636*6D*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7539651
	CA*F3636*6D*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7539655
	CA*F3743*6D*+EEP+TXV		18,000	13,300	14.5	12.2	550	7539610
	CAPT3743*4A*	D*96VE0403BNA*	17,600	12,400	15.0	12.5	625	10338671
	CAPT3743*4A*	D*80VC0603B*A*	17,800	13,500	15.0	12.5	550	9948532
	CAPT3743*4A*	D*80VC0803B*A*	17,800	13,500	15.0	12.5	600	9948536
	CAPT3743*4A*	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7539617
	CAPT3743*4A*	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7539620
	CAPT3743*4A*	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7539624
	CAPT3743*4A*	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7539628
	CAPT3743*4A*	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7539632
	CAPT3743*4A*	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7539636
	CAPT3743*4A*	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7539640
	CAPT3743*4A*	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7539644
	CAPT3743*4A*	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7539648
	CAPT3743*4A*	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7539652
	CAPT3743*4A*	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7539656
	CAPT3743*4A*+EEP		17,600	13,000	14.0	12.2	550	7539611
	CAPT3743*4A*+MBVC1200*-1A*		17,800	13,100	15.0	12.5	600	7539612
	CHPF3636B6C*+EEP+TXV		17,600	13,000	14.5	12.2	550	7539613
	CHPF3636B6C*+MBVC1200*-1A*+TXV		18,200	13,400	15.0	12.5	600	7539614
	CHPF3636B6C*+TXV	D*96VE0303ANA*	17,800	12,500	15.0	12.5	650	10516675
	CHPF3636B6C*+TXV	D*96VE0403ANA*	17,400	12,200	15.0	12.5	610	10516678
	CHPF3636B6C*+TXV	D*96VE0603ANA*	17,800	12,500	15.0	12.5	580	10516672

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0191B* (cont.)	CHPF3636B6C*+TXV	D*96VE0403BNA*	17,400	12,200	15.0	12.5	600	10338672
	CHPF3636B6C*+TXV	D*80VC0603B*A*	17,800	13,500	15.0	12.5	550	9948533
	CHPF3636B6C*+TXV	D*80VC0803B*A*	17,800	13,500	15.0	12.5	600	9948537
	CHPF3636B6C*+TXV	D*80HE0603B*A*	17,800	13,100	15.0	12.5	600	7539618
	CHPF3636B6C*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7539621
	CHPF3636B6C*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7539625
	CHPF3636B6C*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7539629
	CHPF3636B6C*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7539633
	CHPF3636B6C*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7539637
	CHPF3636B6C*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7539641
	CHPF3636B6C*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7539645
	CHPF3636B6C*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7539649
	CHPF3636B6C*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7539653
	CHPF3636B6C*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7539657
	CSCF1824N6D*+TXV	D*96VE0303ANA*	16,800	11,800	14.0	12.2	630	10516676
	CSCF1824N6D*+TXV	D*96VE0403ANA*	16,800	11,800	14.5	12.2	610	10516679
	CSCF3036N6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7539615
	CSCF3036N6D*+TXV	D*80VC0603B*A*	17,800	13,500	15.0	12.5	550	9948534
	CSCF3036N6D*+TXV	D*80VC0803B*A*	17,800	13,500	15.0	12.5	600	9948538
	CSCF3036N6D*+TXV	D*80VC0604B*A*	17,800	13,100	15.0	12.5	620	7539622
	CSCF3036N6D*+TXV	D*96VC0403BNA*	17,800	13,100	15.0	12.5	615	7539626
	CSCF3036N6D*+TXV	D*96VC0603BNA*	17,800	13,100	15.0	12.5	625	7539630
	CSCF3036N6D*+TXV	D*96VC0803BNA*	17,800	13,100	15.0	12.5	620	7539634
	CSCF3036N6D*+TXV	D*97MC0603BNA*	17,800	13,100	15.0	12.5	625	7539638
	CSCF3036N6D*+TXV	D*97MC0804CNA*	17,800	13,100	15.0	12.5	620	7539642
	CSCF3642N6D*+TXV	D*96VE0403BNA*	18,000	12,700	15.0	12.5	625	10338673
	CSCF3642N6D*+TXV	D*96VE0302BNA*	17,800	13,100	15.0	12.5	575	7539646
	CSCF3642N6D*+TXV	D*96VE0402BNA*	17,800	13,100	15.0	12.5	575	7539650
	CSCF3642N6D*+TXV	D*96VE0603BNA*	17,800	13,100	15.0	12.5	500	7539654
	CSCF3642N6D*+TXV	D*96VE0803BNA*	17,800	13,100	15.0	12.5	540	7539658
	DV24PTCB14A*		17,800	13,100	14.5	12.2	600	7539604
	DV25PTCB14A*		17,800	13,100	14.5	12.2	640	8996454
	DV29PTCB14A*		18,000	13,300	15.0	12.5	585	8996455
	DV30PTCC14A*		18,200	13,400	15.0	12.5	615	7539605
	DV33PTCC14A*		18,200	13,400	15.0	12.5	645	10221135
	CAPFA1818*6A*+EEP		18,000	12,700	12.2	14.5	650	201954298
	CAPFA1818*6A*+EEP+TXV		18,000	12,700	12.2	14.5	650	201954299
	CAPFA1818*6A*+MBVC1200**-1A*		18,000	12,700	12.5	15.5	600	201954300
	CAPFA1818*6A*+MBVC1200**-1A*+TXV		18,000	12,700	12.5	15.5	600	201954301
	CAPFA1818*6A*	D*96VE0302BNA*	18,000	12,700	12.5	15.5	560	201954302
	CAPFA1818*6A*+TXV	D*96VE0302BNA*	18,000	12,700	12.5	15.5	560	201954303
	CAPFA1818*6A*	D*96VE0303ANA*	18,000	12,700	12.5	15.5	650	201954304
	CAPFA1818*6A*+TXV	D*96VE0303ANA*	18,000	12,700	12.5	15.5	650	201954305
	CAPFA1818*6A*	D*96VE0403ANA*	18,000	12,700	12.5	15.5	650	201954306
	CAPFA1818*6A*+TXV	D*96VE0403ANA*	18,000	12,700	12.5	15.5	650	201954307
	CAPFA1818*6A*	D*96VE0403BNA*	18,000	12,700	12.5	15.5	620	201954308
	CAPFA1818*6A*+TXV	D*96VE0403BNA*	18,000	12,700	12.5	15.5	620	201954309
	CAPFA1818*6A*	D*96VE0402BNA*	18,000	12,700	12.5	15.5	570	201954310
	CAPFA1818*6A*+TXV	D*96VE0402BNA*	18,000	12,700	12.5	15.5	570	201954311

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0191B* (cont.)	CAPFA1818*6A*	D*96VE0603BNA*	17,800	12,500	12.5	15.5	500	201954312
	CAPFA1818*6A*+TXV	D*96VE0603BNA*	18,000	12,700	12.5	15.5	500	201954313
	CAPFA1818*6A*	D*96VE0603ANA*	18,000	12,700	12.5	15.5	580	201954314
	CAPFA1818*6A*+TXV	D*96VE0603ANA*	18,000	12,700	12.5	15.5	580	201954315
	CAPFA1818*6A*	D*96VE0803BNA*	18,000	12,700	12.5	15.5	520	201954316
	CAPFA1818*6A*+TXV	D*96VE0803BNA*	18,000	12,700	12.5	15.5	520	201954317
	CAPFA1818*6A*	D*80HE0603B*A*	18,000	12,700	12.5	15.5	600	201954318
	CAPFA1818*6A*+TXV	D*80HE0603B*A*	18,000	12,700	12.5	15.5	600	201954319
	CAPFA1818*6A*	D*80VC0603B*A*	18,000	12,700	12.5	15.5	550	201954320
	CAPFA1818*6A*+TXV	D*80VC0603B*A*	18,000	12,700	12.5	15.5	550	201954321
	CAPFA1818*6A*	D*80VC0604B*A*	18,000	12,700	12.5	15.5	620	201954322
	CAPFA1818*6A*+TXV	D*80VC0604B*A*	18,000	12,700	12.5	15.5	620	201954323
	CAPFA1818*6A*	D*80VC0803B*A*	18,000	12,700	12.5	15.5	600	201954324
	CAPFA1818*6A*+TXV	D*80VC0803B*A*	18,000	12,700	12.5	15.5	600	201954325
	CAPFA1818*6A*	D*96VC0403BNA*	18,000	12,700	12.5	15.5	615	201954326
	CAPFA1818*6A*+TXV	D*96VC0403BNA*	18,000	12,700	12.5	15.5	615	201954327
	CAPFA1818*6A*	D*96VC0603BNA*	18,000	12,700	12.5	15.5	620	201954328
	CAPFA1818*6A*+TXV	D*96VC0603BNA*	18,000	12,700	12.5	15.5	620	201954329
	CAPFA1818*6A*	D*96VC0803BNA*	18,000	12,700	12.5	15.5	620	201954330
	CAPFA1818*6A*+TXV	D*96VC0803BNA*	18,000	12,700	12.5	15.5	620	201954331
	CAPFA1818*6A*	D*97MC0603BNA*	18,000	12,700	12.5	15.5	625	201954332
	CAPFA1818*6A*+TXV	D*97MC0603BNA*	18,000	12,700	12.5	15.5	625	201954333
DX14SN 0241C*	ACNF25XX16A*		22,800	16,700	14.0	11.7	710	9039925
	ARUF24B14C*+TXV+HSK		23,000	16,900	14.0	11.5	800	9114189
	ARUF29B14A*		23,600	17,300	14.0	11.5	720	9039926
	ARUF30B14A*+TXV+HSK		23,400	17,200	14.0	11.5	800	9114190
	ARUF31B14A*		23,600	17,300	14.0	11.5	760	9039927
	ASPT24B14A*+HSK		23,000	16,900	14.0	11.5	740	9039928
	ASPT25B14A*+HSK		23,000	16,900	14.5	12.0	725	9039929
	ASPT29B14A*+HSK		23,600	17,300	15.0	12.5	745	9039930
	ASPT30C14A*+HSK		23,600	17,300	14.5	12.0	745	9039931
	ASPT33C14B*+HSK		23,600	17,300	14.5	12.0	820	201834886
	AVPTC24B14A*+HSK		23,000	16,900	14.0	11.5	600	9039932
	AVPTC30C14A*+HSK		23,600	17,300	14.5	12.0	680	9039933
	AVPTC33C14A*+HSK		23,600	17,300	14.5	12.0	785	10269199
	AWUF25XX16A*		22,000	16,200	14.0	11.5	750	9039934
	AWUF31XX16A*		23,000	16,900	14.5	11.5	725	9039935
	AWUF32XX16A*		23,000	16,900	14.5	11.5	725	9039936
	CA*F3137*6A*	D*96VE0303ANA*	23,400	16,600	14.5	12.0	800	10516682
	CA*F3137*6A*	D*96VE0403ANA*	23,400	16,600	14.5	11.5	800	10516689
	CA*F3137*6A*	D*96VE0603ANA*	23,400	16,600	14.5	11.5	775	10516673
	CA*F3137*6A*	D*96VE0403BNA*	23,800	16,900	14.5	12.2	800	10338674
	CA*F3137*6A*	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948539
	CA*F3137*6A*	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948548
	CA*F3137*6A*	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9039937
	CA*F3137*6A*	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9039938
	CA*F3137*6A*	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9039939
	CA*F3137*6A*	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9039940
	CA*F3137*6A*	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9039941

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0241C* (cont.)	CA*F3137*6A*	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9039942
	CA*F3137*6A*	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9039943
	CA*F3137*6A*	D*80VC0805C*A*	23,600	17,300	14.5	11.5	740	9039944
	CA*F3137*6A*	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9039945
	CA*F3137*6A*	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9039946
	CA*F3137*6A*	D*80HE0603B*A*	23,600	17,300	14.5	11.5	735	9039947
	CA*F3137*6A*	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9039948
	CA*F3137*6A*+EEP		23,600	17,300	14.0	11.5	725	9039949
	CA*F3137*6A*+EEP+TXV+HSK		23,600	17,300	14.5	12.0	725	9039950
	CA*F3137*6A*+TXV+HSK	D*96VE0303ANA*	23,400	16,600	15.0	12.0	800	10516683
	CA*F3137*6A*+TXV+HSK	D*96VE0403ANA*	23,400	16,600	15.0	12.0	800	10516690
	CA*F3137*6A*+TXV+HSK	D*96VE0603ANA*	23,400	16,600	15.0	12.2	775	10516680
	CA*F3137*6A*+TXV+HSK	D*96VE0403BNA*	23,800	16,900	15.0	12.5	800	10338675
	CA*F3137*6A*+TXV+HSK	D*80VC0603B*A*	23,600	17,800	15.0	12.2	750	9948540
	CA*F3137*6A*+TXV+HSK	D*80VC0803B*A*	23,600	17,800	15.0	12.2	750	9948549
	CA*F3137*6A*+TXV+HSK	D*96VE0302BNA*	23,400	17,200	15.0	12.2	745	9039951
	CA*F3137*6A*+TXV+HSK	D*96VC0403BNA*	23,600	17,300	15.0	12.2	750	9039952
	CA*F3137*6A*+TXV+HSK	D*96VE0402BNA*	23,400	17,200	14.5	12.0	710	9039953
	CA*F3137*6A*+TXV+HSK	D*96VC0803BNA*	23,600	17,300	15.0	12.2	740	9039954
	CA*F3137*6A*+TXV+HSK	D*96VE0803BNA*	23,400	17,200	15.0	12.2	735	9039955
	CA*F3137*6A*+TXV+HSK	D*96VC0603BNA*	23,600	17,300	15.0	12.2	745	9039956
	CA*F3137*6A*+TXV+HSK	D*96VE0603BNA*	23,400	17,200	15.0	12.2	725	9039957
	CA*F3137*6A*+TXV+HSK	D*80VC0604B*A*	23,600	17,300	15.0	12.2	745	9039961
	CA*F3137*6A*+TXV+HSK	D*80HE0603B*A*	23,600	17,300	15.0	12.2	735	9039962
	CA*F3137*6A*+TXV+HSK	D*97MC0803BNA*	23,600	17,300	15.0	12.2	740	9039963
	CA*F3137*6A*+TXV+HSK	D*97MC0603BNA*	23,600	17,300	15.0	12.2	745	9039964
	CA*F3137*6A*+TXV+HSK	D*80VC0805C*A*	23,600	17,300	15.0	12.2	740	9039965
	CA*F3636*6D*	D*96VE0303ANA*	23,400	16,600	14.5	12.0	800	10516684
	CA*F3636*6D*	D*96VE0403ANA*	23,200	16,400	14.5	11.5	800	10516691
	CA*F3636*6D*	D*96VE0603ANA*	23,400	16,600	14.5	11.5	775	10516681
	CA*F3636*6D*	D*96VE0403BNA*	23,200	16,400	14.5	12.2	800	10338676
	CA*F3636*6D*	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948541
	CA*F3636*6D*	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948550
	CA*F3636*6D*	D*80VC0804C*A*	23,600	17,800	14.5	11.5	800	9948557
	CA*F3636*6D*	D*80VC0805D*A*	23,600	17,800	14.5	11.5	800	9948561
	CA*F3636*6D*	D*80VC0805C*A*	23,600	17,300	14.5	11.5	740	9039966
	CA*F3636*6D*	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9039967
	CA*F3636*6D*	D*80HE0603B*A*	23,600	17,300	14.5	11.5	735	9039968
	CA*F3636*6D*	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9039969
	CA*F3636*6D*	D*97MC0804CNA*	23,600	17,300	14.5	11.5	795	9039970
	CA*F3636*6D*	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9039971
	CA*F3636*6D*	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9039972
	CA*F3636*6D*	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9039973
	CA*F3636*6D*	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9039974
	CA*F3636*6D*	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9039975
	CA*F3636*6D*	D*96VC0804CNA*	23,600	17,300	14.5	11.5	760	9039976
	CA*F3636*6D*	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9039977
	CA*F3636*6D*	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9039978
	CA*F3636*6D*	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9039979

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0241C* (cont.)	CA*F3636*6D*+EEP		23,200	17,000	14.0	11.5	725	9039980
	CA*F3636*6D*+EEP+TXV+HSK		23,200	17,000	14.0	11.5	725	9039981
	CA*F3636*6D*+MBVC1200*-1A*		23,600	17,300	14.5	12.0	735	9039982
	CA*F3636*6D*+TXV+HSK	D*96VE0303ANA*	23,400	16,600	14.5	12.0	800	10516685
	CA*F3636*6D*+TXV+HSK	D*96VE0403ANA*	23,200	16,400	15.0	12.0	800	10516692
	CA*F3636*6D*+TXV+HSK	D*96VE0603ANA*	23,400	16,600	14.5	11.5	750	10516696
	CA*F3636*6D*+TXV+HSK	D*96VE0403BNA*	23,200	16,400	15.0	12.2	800	10338677
	CA*F3636*6D*+TXV+HSK	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948542
	CA*F3636*6D*+TXV+HSK	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948551
	CA*F3636*6D*+TXV+HSK	D*80VC0804C*A*	23,600	17,800	14.5	11.5	800	9948558
	CA*F3636*6D*+TXV+HSK	D*80VC0805D*A*	23,600	17,800	14.5	11.5	750	9948562
	CA*F3636*6D*+TXV+HSK	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9039983
	CA*F3636*6D*+TXV+HSK	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9039984
	CA*F3636*6D*+TXV+HSK	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9039985
	CA*F3636*6D*+TXV+HSK	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9039986
	CA*F3636*6D*+TXV+HSK	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9039987
	CA*F3636*6D*+TXV+HSK	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9039988
	CA*F3636*6D*+TXV+HSK	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9039989
	CA*F3636*6D*+TXV+HSK	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9039990
	CA*F3636*6D*+TXV+HSK	D*80HE0603B*A*	23,600	17,300	14.5	11.5	735	9039991
	CA*F3636*6D*+TXV+HSK	D*97MC0804CNA*	23,600	17,300	14.5	11.5	795	9039992
	CA*F3636*6D*+TXV+HSK	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9039993
	CA*F3636*6D*+TXV+HSK	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9039994
	CA*F3636*6D*+TXV+HSK	D*96VC0804CNA*	23,600	17,300	14.5	11.5	760	9039995
	CA*F3636*6D*+TXV+HSK	D*80VC0805C*A*	23,600	17,300	14.5	11.5	740	9039996
	CA*F3642*6D*+EEP		23,600	17,300	14.0	11.5	725	9039997
	CA*F3743*6D*	D*96VC0804CNA*	23,600	17,300	14.5	11.5	760	9039998
	CA*F3743*6D*	D*97MC0804CNA*	23,600	17,300	14.5	11.5	795	9039999
	CA*F3743*6D*+TXV+HSK	D*97MC0804CNA*	23,600	17,300	14.5	12.0	795	9040000
	CA*F3743*6D*+TXV+HSK	D*96VC0804CNA*	23,600	17,300	14.5	12.0	760	9040001
	CAPT3743*4A*+EEP+HSK		23,000	16,900	14.0	11.5	725	9040002
	CAPT3743*4A*+HSK	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948543
	CAPT3743*4A*+HSK	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948552
	CAPT3743*4A*+MBVC1200*-1A*+HSK		23,600	17,300	14.5	12.0	735	9040003
	CHPF3636B6C*	D*96VE0303ANA*	23,400	16,600	14.5	12.0	750	10516686
	CHPF3636B6C*	D*96VE0403ANA*	23,200	16,400	14.5	11.5	750	10516693
	CHPF3636B6C*	D*96VE0603ANA*	23,400	16,600	14.5	11.5	700	10516697
	CHPF3636B6C*	D*96VE0403BNA*	23,200	16,400	14.5	12.2	725	10338678
	CHPF3636B6C*	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948544
	CHPF3636B6C*	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948553
	CHPF3636B6C*	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9040004
	CHPF3636B6C*	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9040005
	CHPF3636B6C*	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9040006
	CHPF3636B6C*	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9040007
	CHPF3636B6C*	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9040008
	CHPF3636B6C*	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9040009
	CHPF3636B6C*	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9040010
	CHPF3636B6C*	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9040011
	CHPF3636B6C*	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9040012

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0241C* (cont.)	CHPF3636B6C*	D*80HE0603B*A*	23,600	17,300	14.5	11.5	735	9040013
	CHPF3636B6C*	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9040014
	CHPF3636B6C*+EEP		23,600	17,300	14.0	11.5	725	9040015
	CHPF3636B6C*+EEP+TXV+HSK		23,600	17,300	14.5	11.5	725	9040016
	CHPF3636B6C*+MBVC1200*-1A*		23,600	17,300	14.5	12.0	735	9040017
	CHPF3636B6C*+TXV+HSK	D*96VE0303ANA*	23,400	16,600	14.5	12.0	750	10516687
	CHPF3636B6C*+TXV+HSK	D*96VE0403ANA*	23,200	16,400	15.0	12.0	750	10516694
	CHPF3636B6C*+TXV+HSK	D*96VE0603ANA*	23,400	16,600	14.5	11.5	700	10516698
	CHPF3636B6C*+TXV+HSK	D*96VE0403BNA*	23,200	16,400	15.0	12.5	725	10338679
	CHPF3636B6C*+TXV+HSK	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948545
	CHPF3636B6C*+TXV+HSK	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948554
	CHPF3636B6C*+TXV+HSK	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9040018
	CHPF3636B6C*+TXV+HSK	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9040019
	CHPF3636B6C*+TXV+HSK	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9040020
	CHPF3636B6C*+TXV+HSK	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9040021
	CHPF3636B6C*+TXV+HSK	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9040022
	CHPF3636B6C*+TXV+HSK	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9040023
	CHPF3636B6C*+TXV+HSK	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9040024
	CHPF3636B6C*+TXV+HSK	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9040025
	CHPF3636B6C*+TXV+HSK	D*80HE0603B*A*	23,600	17,300	14.5	11.5	735	9040026
	CHPF3636B6C*+TXV+HSK	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9040027
	CHPF3636B6C*+TXV+HSK	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9040028
	CHPF3642C6C*+EEP		23,600	17,300	14.0	11.5	725	9040029
	CHPF3642C6C*+EEP+TXV+HSK		23,600	17,300	14.5	11.5	725	9040030
	CSCF1824N6D*+TXV+HSK	D*96VE0303ANA*	22,000	15,600	14.0	11.5	800	10516688
	CSCF1824N6D*+TXV+HSK	D*96VE0403ANA*	22,000	15,600	14.0	11.5	800	10516695
	CSCF1824N6D*+TXV+HSK	D*96VE0603ANA*	22,400	15,900	14.5	11.5	750	10516699
	CSCF3036N6D*	D*96VE0403BNA*	23,600	16,700	14.5	12.2	800	10338680
	CSCF3036N6D*	D*80VC0603B*A*	23,000	17,400	14.5	11.5	750	9948546
	CSCF3036N6D*	D*80VC0803B*A*	23,000	17,400	14.5	11.5	750	9948555
	CSCF3036N6D*	D*80VC0804C*A*	23,600	17,800	14.5	11.5	800	9948559
	CSCF3036N6D*	D*80VC0805D*A*	23,600	17,800	14.5	11.5	750	9948563
	CSCF3036N6D*	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9040031
	CSCF3036N6D*	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9040032
	CSCF3036N6D*	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9040033
	CSCF3036N6D*	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9040034
	CSCF3036N6D*	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9040035
	CSCF3036N6D*	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9040036
	CSCF3036N6D*	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9040037
	CSCF3036N6D*	D*96VC0804CNA*	23,600	17,300	14.5	11.5	760	9040038
	CSCF3036N6D*	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9040039
	CSCF3036N6D*	D*97MC0804CNA*	23,600	17,300	14.5	11.5	795	9040040
	CSCF3036N6D*	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9040041
	CSCF3036N6D*	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9040042
	CSCF3036N6D*	D*80VC0805C*A*	23,600	17,300	14.5	11.5	740	9040043
	CSCF3036N6D*+EEP		23,600	17,300	14.0	11.5	725	9040044
	CSCF3036N6D*+EEP+TXV+HSK		23,600	17,300	14.0	11.5	725	9040045
	CSCF3036N6D*+TXV+HSK	D*96VE0403BNA*	23,600	16,700	15.0	12.5	800	10338681
	CSCF3036N6D*+TXV+HSK	D*80VC0603B*A*	23,600	17,800	14.5	11.5	750	9948547

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0241C* (cont.)	CSCF3036N6D*+TXV+HSK	D*80VC0803B*A*	23,600	17,800	14.5	11.5	750	9948556
	CSCF3036N6D*+TXV+HSK	D*80VC0804C*A*	23,600	17,800	14.5	11.5	800	9948560
	CSCF3036N6D*+TXV+HSK	D*80VC0805D*A*	23,600	17,800	14.5	11.5	750	9948564
	CSCF3036N6D*+TXV+HSK	D*96VE0302BNA*	23,400	17,200	14.5	11.5	745	9040046
	CSCF3036N6D*+TXV+HSK	D*96VC0403BNA*	23,600	17,300	14.5	11.5	750	9040047
	CSCF3036N6D*+TXV+HSK	D*96VE0402BNA*	23,400	17,200	14.5	11.5	710	9040048
	CSCF3036N6D*+TXV+HSK	D*96VC0603BNA*	23,600	17,300	14.5	11.5	745	9040049
	CSCF3036N6D*+TXV+HSK	D*96VE0603BNA*	23,400	17,200	14.5	11.5	725	9040050
	CSCF3036N6D*+TXV+HSK	D*96VE0803BNA*	23,400	17,200	14.5	11.5	735	9040051
	CSCF3036N6D*+TXV+HSK	D*96VC0804CNA*	23,600	17,300	14.5	11.5	760	9040052
	CSCF3036N6D*+TXV+HSK	D*96VC0803BNA*	23,600	17,300	14.5	11.5	740	9040053
	CSCF3036N6D*+TXV+HSK	D*80VC0805C*A*	23,600	17,300	14.5	11.5	740	9040054
	CSCF3036N6D*+TXV+HSK	D*80VC0604B*A*	23,600	17,300	14.5	11.5	745	9040055
	CSCF3036N6D*+TXV+HSK	D*97MC0804CNA*	23,600	17,300	14.5	11.5	795	9040056
	CSCF3036N6D*+TXV+HSK	D*97MC0603BNA*	23,600	17,300	14.5	11.5	745	9040057
	CSCF3036N6D*+TXV+HSK	D*97MC0803BNA*	23,600	17,300	14.5	11.5	740	9040058
	CSCF3642N6D*+EEP		23,600	17,300	14.0	11.5	725	9040059
	CSCF3642N6D*+EEP+TXV+HSK		23,600	17,300	14.0	11.5	725	9040060
	DV25PTCB14A*		23,000	16,900	14.5	12.0	850	8996456
	DV25PTCB14A*+HSK		23,000	16,900	14.5	12.0	850	9114187
	DV29PTCB14A*		23,600	17,300	15.0	12.5	795	8996457
	DV29PTCB14A*+HSK		23,600	17,300	15.0	12.5	795	9114188
	DV33PTCC14A*+HSK		23,600	17,300	14.5	12.0	785	10221136
DX14SN 0251C*	ACNF25XX16A*		22,800	16,400	14.0	12.2	710	8740704
	ARUF29B14A*		23,600	16,900	14.0	12.2	860	8715498
	ARUF31B14A*		23,600	16,900	14.0	12.2	870	8715499
	ASPT25B14A*		23,600	16,900	14.5	12.2	800	8715501
	ASPT29B14A*		24,000	17,200	15.0	12.5	790	8715502
	ASPT30C14A*		23,600	16,900	15.0	12.5	845	8715503
	ASPT33C14B*		24,000	17,200	15.0	12.5	820	201834887
	AVPTC33C14A*		24,000	17,200	15.0	12.5	785	10269204
	AWUF25XX16A*		22,000	15,800	14.0	12.2	750	8715506
	AWUF31XX16A*		23,000	16,500	14.5	12.2	800	8715507
	AWUF32XX16A*		23,000	16,500	14.5	12.2	800	8715508
	CA*F3636*6D*	D*96VE0303ANA*	23,400	16,800	14.5	12.2	800	10516704
	CA*F3636*6D*	D*96VE0403ANA*	23,400	16,800	14.5	12.2	800	10516709
	CA*F3636*6D*	D*96VE0603ANA*	23,400	16,800	14.5	12.2	750	10516700
	CA*F3636*6D*	D*96VE0403BNA*	23,600	16,900	14.5	12.2	800	10338682
	CA*F3636*6D*	D*80VC0603B*A*	23,600	17,400	15.0	12.5	750	9948565
	CA*F3636*6D*	D*80VC0803B*A*	23,600	17,400	15.0	12.5	750	9948570
	CA*F3636*6D*	D*80VC0804C*A*	23,600	17,400	15.0	12.5	800	9948575
	CA*F3636*6D*	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948580
	CA*F3636*6D*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	8715509
	CA*F3636*6D*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715510
	CA*F3636*6D*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715511
	CA*F3636*6D*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	775	8715512
	CA*F3636*6D*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715513
	CA*F3636*6D*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715514
	CA*F3636*6D*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715515

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0251C* (cont.)	CA*F3636*6D*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715516
	CA*F3636*6D*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715517
	CA*F3636*6D*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	820	8715518
	CA*F3636*6D*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715519
	CA*F3636*6D*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715520
	CA*F3636*6D*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715521
	CA*F3636*6D*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715522
	CA*F3636*6D*+EEP		23,600	16,900	14.0	12.2	725	8715523
	CA*F3636*6D*+EEP+TXV		23,600	16,900	14.0	12.2	725	8715524
	CA*F3636*6D*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	8715525
	CA*F3636*6D*+TXV	D*96VE0303ANA*	23,400	16,800	15.0	12.5	800	10516705
	CA*F3636*6D*+TXV	D*96VE0403ANA*	23,400	16,800	15.0	12.5	800	10516710
	CA*F3636*6D*+TXV	D*96VE0603ANA*	23,400	16,800	15.0	12.5	750	10516701
	CA*F3636*6D*+TXV	D*96VE0403BNA*	23,600	16,900	15.0	12.5	800	10338683
	CA*F3636*6D*+TXV	D*80VC0603B*A*	23,600	17,400	15.0	12.5	750	9948566
	CA*F3636*6D*+TXV	D*80VC0803B*A*	23,600	17,400	15.0	12.5	750	9948571
	CA*F3636*6D*+TXV	D*80VC0804C*A*	23,600	17,400	15.0	12.5	800	9948576
	CA*F3636*6D*+TXV	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948581
	CA*F3636*6D*+TXV	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	8715526
	CA*F3636*6D*+TXV	D*96VE0302BNA*	23,400	16,800	15.0	12.5	750	8715527
	CA*F3636*6D*+TXV	D*96VE0402BNA*	23,400	16,800	15.0	12.5	775	8715528
	CA*F3636*6D*+TXV	D*96VE0603BNA*	23,400	16,800	15.0	12.5	775	8715529
	CA*F3636*6D*+TXV	D*96VE0803BNA*	23,400	16,800	15.0	12.5	750	8715530
	CA*F3636*6D*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715531
	CA*F3636*6D*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715532
	CA*F3636*6D*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715533
	CA*F3636*6D*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715534
	CA*F3636*6D*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	8715535
	CA*F3636*6D*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715536
	CA*F3636*6D*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715537
	CA*F3636*6D*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715538
	CA*F3636*6D*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715539
	CA*F3743*6D*+EEP		23,800	17,100	14.0	12.2	725	8715540
	CA*F3743*6D*+EEP+TXV		23,800	17,100	14.5	12.2	725	8715541
	CAPT3743*4A*	D*96VE0403BNA*	24,200	17,400	15.0	12.5	800	10338684
	CAPT3743*4A*	D*80VC0603B*A*	23,600	17,400	15.0	12.5	750	9948567
	CAPT3743*4A*	D*80VC0803B*A*	23,600	17,400	15.0	12.5	750	9948572
	CAPT3743*4A*	D*80VC0804C*A*	23,600	17,400	15.0	12.5	800	9948577
	CAPT3743*4A*	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948582
	CAPT3743*4A*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	8715542
	CAPT3743*4A*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715543
	CAPT3743*4A*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715544
	CAPT3743*4A*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	8715545
	CAPT3743*4A*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715546
	CAPT3743*4A*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715547
	CAPT3743*4A*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715548
	CAPT3743*4A*	D*96VC0403BNA*	23,400	16,800	15.0	12.5	805	8715549
	CAPT3743*4A*	D*96VC0603BNA*	23,400	16,800	15.0	12.5	820	8715550
	CAPT3743*4A*	D*96VC0803BNA*	23,400	16,800	15.0	12.5	800	8715551

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0251C* (cont.)	CAPT3743*4A*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715552
	CAPT3743*4A*	D*97MC0603BNA*	23,400	16,800	15.0	12.5	820	8715553
	CAPT3743*4A*	D*97MC0803BNA*	23,400	16,800	15.0	12.5	800	8715554
	CAPT3743*4A*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715555
	CAPT3743*4A*+EEP		23,600	16,900	14.0	12.2	725	8715556
	CAPT3743*4A*+MBVC1200*-1A*		23,600	16,900	14.5	12.2	775	8715557
	CHPF3636B6C*	D*96VE0303ANA*	23,400	16,800	14.5	12.2	750	10516706
	CHPF3636B6C*	D*96VE0403ANA*	23,400	16,800	14.5	12.2	750	10516711
	CHPF3636B6C*	D*96VE0603ANA*	23,400	16,800	14.5	12.2	700	10516702
	CHPF3636B6C*	D*96VE0403BNA*	23,800	17,100	14.5	12.2	725	10338685
	CHPF3636B6C*	D*80VC0603B*A*	23,600	17,400	15.0	12.5	750	9948568
	CHPF3636B6C*	D*80VC0803B*A*	23,600	17,400	15.0	12.5	750	9948573
	CHPF3636B6C*	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	8715558
	CHPF3636B6C*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715559
	CHPF3636B6C*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715560
	CHPF3636B6C*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	8715561
	CHPF3636B6C*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715562
	CHPF3636B6C*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715563
	CHPF3636B6C*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715564
	CHPF3636B6C*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715565
	CHPF3636B6C*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	8715566
	CHPF3636B6C*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715567
	CHPF3636B6C*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715568
	CHPF3636B6C*+EEP		23,600	16,900	14.0	12.2	725	8715569
	CHPF3636B6C*+EEP+TXV		23,600	16,900	14.5	12.2	725	8715570
	CHPF3636B6C*+MBVC1200*-1A*		23,600	16,900	15.0	12.5	775	8715571
	CHPF3636B6C*+TXV	D*96VE0303ANA*	23,400	16,800	14.5	12.2	750	10516707
	CHPF3636B6C*+TXV	D*96VE0403ANA*	23,400	16,800	14.5	12.2	750	10516712
	CHPF3636B6C*+TXV	D*96VE0603ANA*	23,400	16,800	14.5	12.2	700	10516703
	CHPF3636B6C*+TXV	D*96VE0403BNA*	23,800	17,100	14.5	12.2	725	10338686
	CHPF3636B6C*+TXV	D*80VC0603B*A*	23,600	17,400	15.0	12.5	750	9948569
	CHPF3636B6C*+TXV	D*80VC0803B*A*	23,600	17,400	15.0	12.5	750	9948574
	CHPF3636B6C*+TXV	D*80HE0603B*A*	23,600	16,900	15.0	12.5	725	8715572
	CHPF3636B6C*+TXV	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715573
	CHPF3636B6C*+TXV	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715574
	CHPF3636B6C*+TXV	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	8715575
	CHPF3636B6C*+TXV	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715576
	CHPF3636B6C*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715577
	CHPF3636B6C*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715578
	CHPF3636B6C*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715579
	CHPF3636B6C*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	8715580
	CHPF3636B6C*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715581
	CHPF3636B6C*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715582
	CHPF3642C6C*	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948583
	CHPF3642C6C*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715583
	CHPF3642C6C*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715584
	CHPF3642C6C*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715585
	CHPF3642C6C*+TXV	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948584
	CHPF3642C6C*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715586

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0251C* (cont.)	CHPF3642C6C*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715587
	CHPF3642C6C*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715588
	CSCF3036N6D*	D*80VC0804C*A*	23,600	17,400	15.0	12.5	800	9948578
	CSCF3036N6D*	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948585
	CSCF3036N6D*	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715589
	CSCF3036N6D*	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715590
	CSCF3036N6D*	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715591
	CSCF3036N6D*	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715592
	CSCF3036N6D*	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	8715593
	CSCF3036N6D*	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715594
	CSCF3036N6D*	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715595
	CSCF3036N6D*	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715596
	CSCF3036N6D*	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715597
	CSCF3036N6D*+EEP		23,200	16,700	14.0	12.2	800	8715598
	CSCF3036N6D*+EEP+TXV		23,200	16,700	14.0	12.2	800	8715599
	CSCF3036N6D*+TXV	D*96VE0303ANA*	23,000	16,500	14.0	12.2	800	10516708
	CSCF3036N6D*+TXV	D*96VE0403ANA*	23,000	16,500	14.0	12.2	800	10516713
	CSCF3036N6D*+TXV	D*80VC0804C*A*	23,600	17,400	15.0	12.5	800	9948579
	CSCF3036N6D*+TXV	D*80VC0805D*A*	23,600	17,400	15.0	12.5	800	9948586
	CSCF3036N6D*+TXV	D*80VC0604B*A*	23,600	16,900	15.0	12.5	750	8715600
	CSCF3036N6D*+TXV	D*80VC0805C*A*	23,600	16,900	15.0	12.5	725	8715601
	CSCF3036N6D*+TXV	D*96VC0403BNA*	23,600	16,900	15.0	12.5	805	8715602
	CSCF3036N6D*+TXV	D*96VC0603BNA*	23,600	16,900	15.0	12.5	820	8715603
	CSCF3036N6D*+TXV	D*96VC0803BNA*	23,600	16,900	15.0	12.5	800	8715604
	CSCF3036N6D*+TXV	D*96VC0804CNA*	23,600	16,900	15.0	12.5	810	8715605
	CSCF3036N6D*+TXV	D*97MC0603BNA*	23,600	16,900	15.0	12.5	820	8715606
	CSCF3036N6D*+TXV	D*97MC0803BNA*	23,600	16,900	15.0	12.5	800	8715607
	CSCF3036N6D*+TXV	D*97MC0804CNA*	23,600	16,900	15.0	12.5	810	8715608
	CSCF3642N6D*	D*96VE0403BNA*	24,000	17,200	14.5	12.2	800	10338687
	CSCF3642N6D*	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715609
	CSCF3642N6D*	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715610
	CSCF3642N6D*	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	8715611
	CSCF3642N6D*	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715612
	CSCF3642N6D*+TXV	D*96VE0403BNA*	24,000	17,200	15.0	12.5	800	10338688
	CSCF3642N6D*+TXV	D*96VE0302BNA*	23,400	16,800	14.5	12.2	750	8715613
	CSCF3642N6D*+TXV	D*96VE0402BNA*	23,400	16,800	14.5	12.2	775	8715614
	CSCF3642N6D*+TXV	D*96VE0603BNA*	23,400	16,800	14.5	12.2	725	8715615
	CSCF3642N6D*+TXV	D*96VE0803BNA*	23,400	16,800	14.5	12.2	750	8715616
	DV24PTCB14A*		23,000	16,500	14.0	12.2	795	8715504
	DV25PTCB14A*		23,200	16,700	14.5	12.2	850	8996458
	DV29PTCB14A*		23,800	17,100	15.0	12.5	795	8996459
	DV30PTCC14A*		23,600	16,900	15.0	12.5	780	8715505
	DV33PTCC14A*		24,000	17,200	15.0	12.5	785	10221137
DX14SN 0301B*	ARUF31B14A*		28,200	21,000	14.0	11.5	870	7989042
	ASPT35B14A*		28,000	20,748	14.0	12.0	950	10341596
	ASPT36C14A*		29,000	21,400	14.5	12.0	1,010	7539892
	ASPT37B14A*		29,000	21,400	14.5	12.0	945	8245768
	ASPT37C14A*		29,000	21,400	15.0	12.5	1,045	8245769
	ASPT39C14B*		29,000	21,400	14.5	12.0	955	201841188

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0301B* (cont.)	AVPTC35B14A*		28,000	20,748	14.0	12.0	950	10341600
	AVPTC39C14A*		29,000	21,400	14.5	12.0	1,050	10269208
	AWUF31XX16A*		28,000	20,800	14.0	11.5	950	7539894
	AWUF31XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7539895
	AWUF32XX16A*		28,000	20,800	14.0	11.5	950	7539896
	AWUF32XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7539897
	AWUF37XX16B*		28,400	21,000	14.0	11.5	1,000	7539898
	AWUF37XX16B*+TXV		28,600	21,200	14.5	11.5	1,000	7539899
	AWUT31XX16A*		28400	21000	14.5	11.5	975	10567624
	AWUT32XX16A*		28400	21000	14.5	11.5	975	10567673
	AWUT37XX16A*		28600	21200	14.5	11.5	975	10567721
	CA*F3137*6A*+EEP		28,800	21,400	14.0	11.5	1,000	8191659
	CA*F3137*6A*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	8191660
	CA*F3137*6A*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	950	8191661
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	950	8191662
	CA*F3137*6A*+TXV	D*96VE0603ANA*	28,200	20,800	14.5	11.5	950	10516714
	CA*F3137*6A*+TXV	D*96VE0403BNA*	29,200	21,600	15.0	12.5	1,000	10338689
	CA*F3137*6A*+TXV	D*80VC0603B*A*	28,800	22,000	14.5	11.5	900	9948587
	CA*F3137*6A*+TXV	D*80VC0803B*A*	28,800	22,000	14.5	11.5	950	9948593
	CA*F3137*6A*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,000	8191663
	CA*F3137*6A*+TXV	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	8191664
	CA*F3137*6A*+TXV	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	8191665
	CA*F3137*6A*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,000	8191666
	CA*F3137*6A*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	950	8191667
	CA*F3137*6A*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,000	8191668
	CA*F3137*6A*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	8191669
	CA*F3137*6A*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	8191670
	CA*F3137*6A*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	8191671
	CA*F3137*6A*+TXV	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	8191672
	CA*F3137*6A*+TXV+HSK	D*96VE0303ANA*	28,800	22,200	14.5	12.0	975	10516718
	CA*F3137*6A*+TXV+HSK	D*96VE0403ANA*	28,800	22,200	14.5	11.5	975	10516719
	CA*F3137*6A*+TXV+HSK	D*96VE0603ANA*	28,800	22,200	14.5	11.5	950	10516715
	CA*F3642*6D*	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7539978
	CA*F3642*6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7539998
	CA*F3642*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7539900
	CA*F3642*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7539901
	CA*F3642*6D*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	980	7539902
	CA*F3642*6D*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	980	7539903
	CA*F3642*6D*+MBVC1600**-1A*		28,800	21,400	14.5	11.5	1,000	7539904
	CA*F3642*6D*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7539905
	CA*F3642*6D*+TXV	D*96VE0403BNA*	28,800	21,400	14.5	12.2	1,000	10338690
	CA*F3642*6D*+TXV	D*80VC0603B*A*	28,800	22,000	14.5	11.5	900	9948588
	CA*F3642*6D*+TXV	D*80VC0803B*A*	28,800	22,000	14.5	11.5	950	9948594
	CA*F3642*6D*+TXV	D*80VC0804C*A*	28,400	21,600	14.5	11.5	1,050	9948599
	CA*F3642*6D*+TXV	D*80VC0805D*A*	28,400	21,600	14.5	11.5	1,000	9948604
	CA*F3642*6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7539923
	CA*F3642*6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7539928
	CA*F3642*6D*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7539933
	CA*F3642*6D*+TXV	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	7539938

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0301B* (cont.)	CA*F3642*6D*+TXV	D*80VC0805C*A*	28,400	21,000	14.5	11.5	990	7539943
	CA*F3642*6D*+TXV	D*80VC1005C*A*	28,400	21,000	14.5	11.5	1,000	7539950
	CA*F3642*6D*+TXV	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	7539957
	CA*F3642*6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7539964
	CA*F3642*6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7539971
	CA*F3642*6D*+TXV	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7539979
	CA*F3642*6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539990
	CA*F3642*6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7539999
	CA*F3642*6D*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7540011
	CA*F3642*6D*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7540018
	CA*F3642*6D*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7540025
	CA*F3642*6D*+TXV	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	7540031
	CA*F3642*6D*+TXV	D*96VE1004CNA*	28,600	21,200	14.5	11.5	1,025	7540038
	CA*F3743*6D*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539981
	CA*F3743*6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540000
	CA*F3743*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7539906
	CA*F3743*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7539907
	CA*F3743*6D*+TXV	D*96VE0403BNA*	29,000	21,400	15.0	12.5	1,000	10338691
	CA*F3743*6D*+TXV	D*80VC0603B*A*	28,800	22,000	14.5	12.0	900	9948589
	CA*F3743*6D*+TXV	D*80VC0803B*A*	28,800	22,000	14.5	12.0	950	9948595
	CA*F3743*6D*+TXV	D*80VC0804C*A*	28,600	21,800	14.5	11.5	1050	9948600
	CA*F3743*6D*+TXV	D*80VC0805D*A*	28,600	21,800	14.5	11.5	1000	9948605
	CA*F3743*6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	12.0	1,050	7539924
	CA*F3743*6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	12.0	1,060	7539929
	CA*F3743*6D*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7539934
	CA*F3743*6D*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7539939
	CA*F3743*6D*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7539944
	CA*F3743*6D*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7539952
	CA*F3743*6D*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7539959
	CA*F3743*6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7539965
	CA*F3743*6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7539972
	CA*F3743*6D*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539982
	CA*F3743*6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539992
	CA*F3743*6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540002
	CA*F3743*6D*+TXV	D*96VE0302BNA*	28,400	21,000	14.5	11.5	940	7540012
	CA*F3743*6D*+TXV	D*96VE0402BNA*	28,400	21,000	14.5	11.5	925	7540019
	CA*F3743*6D*+TXV	D*96VE0603BNA*	28,400	21,000	14.5	11.5	965	7540026
	CA*F3743*6D*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7540033
	CA*F3743*6D*+TXV	D*96VE1004CNA*	28,800	21,400	14.5	11.5	1,025	7540040
	CAPT3743*4A*	D*96VE0403BNA*	29,000	21,400	15.0	12.5	1,000	10338692
	CAPT3743*4A*	D*80VC0603B*A*	28,800	22,000	14.5	11.5	900	9948590
	CAPT3743*4A*	D*80VC0803B*A*	28,800	22,000	14.5	11.5	950	9948596
	CAPT3743*4A*	D*80VC0804C*A*	28,400	21,600	14.5	11.5	1050	9948601
	CAPT3743*4A*	D*80VC0805D*A*	28,400	21,600	14.5	11.5	1000	9948606
	CAPT3743*4A*	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7539925
	CAPT3743*4A*	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7539930
	CAPT3743*4A*	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7539935
	CAPT3743*4A*	D*80VC0604B*A*	28,400	21,000	14.5	11.5	1,000	7539940
	CAPT3743*4A*	D*80VC0805C*A*	28,400	21,000	14.5	11.5	990	7539945

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0301B* (cont.)	CAPT3743*4A*	D*80VC1005C*A*	28,400	21,000	14.5	11.5	1,000	7539953
	CAPT3743*4A*	D*96VC0403BNA*	28,600	21,200	14.5	11.5	1,000	7539960
	CAPT3743*4A*	D*96VC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539967
	CAPT3743*4A*	D*96VC0803BNA*	28,400	21,000	14.5	11.5	975	7539974
	CAPT3743*4A*	D*96VC0804CNA*	28,600	21,200	14.5	11.5	1,000	7539983
	CAPT3743*4A*	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539994
	CAPT3743*4A*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540003
	CAPT3743*4A*	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7540013
	CAPT3743*4A*	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7540020
	CAPT3743*4A*	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7540027
	CAPT3743*4A*	D*96VE0803BNA*	28,200	21,000	14.5	11.5	950	7540034
	CAPT3743*4A*	D*96VE1004CNA*	28,600	21,200	14.5	11.5	1,025	7540042
	CAPT3743*4A*+EEP		28,800	21,400	14.5	11.5	1,000	7539908
	CAPT3743*4A*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	980	7539909
	CAPT3743*4A*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7539910
	CHPF3636B6C*+TXV	D*80VC0603B*A*	28,600	21,800	14.5	11.5	900	9948591
	CHPF3636B6C*+TXV	D*80VC0803B*A*	28,600	21,800	14.5	11.5	950	9948597
	CHPF3636B6C*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7539961
	CHPF3636B6C*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7539969
	CHPF3636B6C*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7539976
	CHPF3636B6C*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539995
	CHPF3642C6C*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539985
	CHPF3642C6C*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540005
	CHPF3642C6C*+EEP		28,800	21,400	14.0	11.5	1,000	7539911
	CHPF3642C6C*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7539912
	CHPF3642C6C*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	1,000	7539913
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7539914
	CHPF3642C6C*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7539915
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7539916
	CHPF3642C6C*+TXV	D*96VE0403BNA*	28,600	21,200	14.5	12.2	975	10338693
	CHPF3642C6C*+TXV	D*80VC0804C*A*	28,600	21,800	14.5	11.5	1,000	9948602
	CHPF3642C6C*+TXV	D*80VC0805D*A*	28,600	21,800	14.5	11.5	1,000	9948607
	CHPF3642C6C*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7539926
	CHPF3642C6C*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,000	7539931
	CHPF3642C6C*+TXV	D*80HE1005C*A*	28,800	21,400	14.5	11.5	1,080	7539936
	CHPF3642C6C*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7539941
	CHPF3642C6C*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7539946
	CHPF3642C6C*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7539954
	CHPF3642C6C*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539987
	CHPF3642C6C*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540006
	CHPF3642C6C*+TXV	D*96VE0302BNA*	28,400	21,000	14.5	11.5	940	7540014
	CHPF3642C6C*+TXV	D*96VE0402BNA*	28,400	21,000	14.5	11.5	925	7540021
	CHPF3642C6C*+TXV	D*96VE0603BNA*	28,400	21,000	14.5	11.5	965	7540028
	CHPF3642C6C*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7540035
	CHPF3642C6C*+TXV	D*96VE1004CNA*	28,800	21,400	14.5	11.5	1,025	7540043
	CHPF3743C6B*+EEP		28,800	21,400	14.0	11.5	1,000	7539917
	CHPF3743C6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7539918
	CHPF3743D6B*+EEP		28,800	21,400	14.0	11.5	1,000	7539919
	CHPF3743D6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7539920

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0301B* (cont.)	CSCF3642N6D*	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539988
	CSCF3642N6D*	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540007
	CSCF3642N6D*+EEP		28,600	21,200	14.0	11.5	1,000	7539921
	CSCF3642N6D*+EEP+TXV		28,600	21,200	14.0	11.5	1,000	7539922
	CSCF3642N6D*+TXV	D*96VE0403BNA*	28,600	21,200	14.5	12.2	1,000	10338694
	CSCF3642N6D*+TXV	D*80VC0603B*A*	28,800	22,000	14.5	11.5	900	9948592
	CSCF3642N6D*+TXV	D*80VC0803B*A*	28,800	22,000	14.5	11.5	950	9948598
	CSCF3642N6D*+TXV	D*80VC0804C*A*	28,600	21,800	14.5	11.5	1,050	9948603
	CSCF3642N6D*+TXV	D*80VC0805D*A*	28,600	21,800	14.5	11.5	1,000	9948608
	CSCF3642N6D*+TXV	D*80HE0603B*A*	28,800	21,400	14.5	11.5	1,050	7539927
	CSCF3642N6D*+TXV	D*80HE0805C*A*	28,800	21,400	14.5	11.5	1,060	7539932
	CSCF3642N6D*+TXV	D*80HE1005C*A*	28,600	21,200	14.5	11.5	1,070	7539937
	CSCF3642N6D*+TXV	D*80VC0604B*A*	28,600	21,200	14.5	11.5	1,000	7539942
	CSCF3642N6D*+TXV	D*80VC0805C*A*	28,600	21,200	14.5	11.5	990	7539948
	CSCF3642N6D*+TXV	D*80VC1005C*A*	28,600	21,200	14.5	11.5	1,000	7539955
	CSCF3642N6D*+TXV	D*96VC0403BNA*	28,800	21,400	14.5	11.5	1,000	7539962
	CSCF3642N6D*+TXV	D*96VC0603BNA*	28,800	21,400	14.5	11.5	1,040	7539970
	CSCF3642N6D*+TXV	D*96VC0803BNA*	28,600	21,200	14.5	11.5	975	7539977
	CSCF3642N6D*+TXV	D*96VC0804CNA*	28,800	21,400	14.5	11.5	1,000	7539989
	CSCF3642N6D*+TXV	D*97MC0603BNA*	28,600	21,200	14.5	11.5	1,040	7539996
	CSCF3642N6D*+TXV	D*97MC0804CNA*	28,600	21,200	14.5	11.5	1,000	7540009
	CSCF3642N6D*+TXV	D*96VE0302BNA*	28,200	21,000	14.5	11.5	940	7540016
	CSCF3642N6D*+TXV	D*96VE0402BNA*	28,200	21,000	14.5	11.5	925	7540023
	CSCF3642N6D*+TXV	D*96VE0603BNA*	28,200	21,000	14.5	11.5	965	7540030
	CSCF3642N6D*+TXV	D*96VE0803BNA*	28,400	21,000	14.5	11.5	950	7540037
	CSCF3642N6D*+TXV	D*96VE1004CNA*	28,400	21,000	14.5	11.5	1,025	7540044
	DV35PTCB14A*		28,000	20,748	14.0	12.0	950	10341601
	DV36PTCC14A*		29,000	21,400	14.5	12.0	1,085	7539893
	DV37PTCB14A*		29,000	21,400	14.5	12.0	925	8996460
	DV37PTCC14A*		29,200	21,600	15.0	12.5	930	8996461
	DV39PTCC14A*		29,000	21,400	14.5	12.0	1,050	10221138
DX14SA 0311B*	ARUF31B14A*		28,200	22,200	14.0	12.2	870	7989043
	ARUF37C14A*		28,400	22,400	14.0	12.2	1,050	7989044
	ASPT35B14A*		27,400	21,564	14.0	12.2	950	10341536
	ASPT36C14A*		28,000	22,000	15.0	12.5	1,010	7540045
	ASPT37B14A*		29,000	22,800	14.5	12.2	945	8245770
	ASPT37C14A*		29,000	22,800	15.0	12.5	1,045	8245771
	ASPT39C14B*		28,000	22,000	15.0	12.5	1,000	201841189
	AVPTC35B14A*		27,400	21,564	14.0	12.2	950	10341541
	AVPTC39C14A*		28,000	22,000	15.0	12.5	965	10269212
	AWUF31XX16A*		28,000	22,000	14.0	12.2	1,000	7540048
	AWUF31XX16A*+TXV		28,000	22,000	14.5	12.2	1,000	7540050
	AWUF32XX16A*		28,000	22,000	14.0	12.2	950	7540051
	AWUF32XX16A*+TXV		28,000	22,000	14.5	12.2	950	7540052
	AWUF37XX16B*		28,000	22,000	14.0	12.2	950	7540053
	AWUF37XX16B*+TXV		28,000	22,000	14.5	12.2	950	7540055
	AWUT31XX16A*		28000	22000	14.5	12.2	975	10567625
	AWUT32XX16A*		28000	22000	14.5	12.2	975	10567674
	AWUT37XX16A*		28000	22000	14.5	12.2	975	10567722

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0311B* (cont.)	CA*F3137*6A*	D*96VE0303ANA*	28,200	22,200	14.5	12.5	975	10516720
	CA*F3137*6A*	D*96VE0403ANA*	28,200	22,200	15.0	12.5	975	10516721
	CA*F3137*6A*	D*96VE0603ANA*	28,200	22,200	14.5	12.5	950	10516716
	CA*F3137*6A*	D*96VE0403BNA*	28,000	22,000	15.0	12.5	1,000	10338695
	CA*F3137*6A*	D*80VC0603B*A*	28,400	23,000	14.5	12.2	1000	9948609
	CA*F3137*6A*	D*80VC0803B*A*	28,400	23,000	14.5	12.2	1050	9948614
	CA*F3137*6A*	D*80HE0603B*A*	28,400	22,400	14.5	12.2	1,050	7540074
	CA*F3137*6A*	D*80VC0604B*A*	28,400	22,400	15.0	12.5	1,000	7540095
	CA*F3137*6A*	D*96VC0403BNA*	28,600	22,600	15.0	12.5	1,000	7540116
	CA*F3137*6A*	D*96VC0603BNA*	28,600	22,600	15.0	12.5	1,040	7540124
	CA*F3137*6A*	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7540134
	CA*F3137*6A*	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7540159
	CA*F3137*6A*	D*96VE0302BNA*	28,200	22,200	15.0	12.5	940	7540188
	CA*F3137*6A*	D*96VE0402BNA*	28,200	22,200	15.0	12.5	925	7540199
	CA*F3137*6A*	D*96VE0603BNA*	28,200	22,200	15.0	12.5	965	7540209
	CA*F3137*6A*	D*96VE0803BNA*	28,200	22,200	15.0	12.5	950	7540220
	CA*F3137*6A*+EEP		28,600	22,600	14.0	12.2	1,000	7540056
	CA*F3137*6A*+EEP+TXV		28,600	22,600	14.0	12.2	1,000	7540058
	CA*F3743*6D*	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7540147
	CA*F3743*6D*	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7540173
	CA*F3743*6D*+TXV	D*96VE0403BNA*	28,000	22,000	15.0	12.5	1,000	10338696
	CA*F3743*6D*+TXV	D*80VC0603B*A*	28,400	23,000	15.0	12.5	1,000	9948610
	CA*F3743*6D*+TXV	D*80VC0803B*A*	28,400	23,000	15.0	12.5	1,050	9948615
	CA*F3743*6D*+TXV	D*80VC0804C*A*	28,600	23,200	15.0	12.5	1,050	9948619
	CA*F3743*6D*+TXV	D*80VC0805D*A*	28,600	23,200	15.0	12.5	1,000	9948623
	CA*F3743*6D*+TXV	D*80HE0603B*A*	28,400	22,400	15.0	12.5	1,050	7540075
	CA*F3743*6D*+TXV	D*80HE0805C*A*	28,600	22,600	15.0	12.5	1,000	7540082
	CA*F3743*6D*+TXV	D*80HE1005C*A*	28,400	22,400	15.0	12.5	1,000	7540089
	CA*F3743*6D*+TXV	D*80VC0604B*A*	28,600	22,600	15.0	12.5	1,000	7540096
	CA*F3743*6D*+TXV	D*80VC0805C*A*	28,600	22,600	15.0	12.5	990	7540103
	CA*F3743*6D*+TXV	D*80VC1005C*A*	28,600	22,600	15.0	12.5	1,000	7540110
	CA*F3743*6D*+TXV	D*96VC0403BNA*	28,800	22,600	15.0	12.5	1,000	7540117
	CA*F3743*6D*+TXV	D*96VC0603BNA*	28,600	22,600	15.0	12.5	1,040	7540126
	CA*F3743*6D*+TXV	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7540136
	CA*F3743*6D*+TXV	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7540149
	CA*F3743*6D*+TXV	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7540161
	CA*F3743*6D*+TXV	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7540175
	CA*F3743*6D*+TXV	D*96VE0302BNA*	28,400	22,400	15.0	12.5	940	7540190
	CA*F3743*6D*+TXV	D*96VE0402BNA*	28,400	22,400	15.0	12.5	925	7540201
	CA*F3743*6D*+TXV	D*96VE0603BNA*	28,400	22,400	15.0	12.5	965	7540212
	CA*F3743*6D*+TXV	D*96VE0803BNA*	28,400	22,400	15.0	12.5	950	7540222
	CA*F3743*6D*+TXV	D*96VE1004CNA*	28,800	22,600	15.0	12.5	1,025	7540232
	CAPT3743*4A*	D*96VE0403BNA*	28,000	22,000	14.5	12.2	1,000	10338697
	CAPT3743*4A*	D*80VC0603B*A*	28,400	23,000	14.5	12.2	1,000	9948611
	CAPT3743*4A*	D*80VC0803B*A*	28,400	23,000	14.5	12.2	1,050	9948616
	CAPT3743*4A*	D*80VC0804C*A*	28,400	23,000	14.5	12.2	1,050	9948620
	CAPT3743*4A*	D*80HE0603B*A*	28,400	22,400	14.5	12.2	1,050	7540076
	CAPT3743*4A*	D*80HE0805C*A*	28,400	22,400	14.5	12.2	1,000	7540083
	CAPT3743*4A*	D*80VC0604B*A*	28,400	22,400	14.5	12.2	1,000	7540098

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0311B* (cont.)	CAPT3743*4A*	D*80VC1005C*A*	28,400	22,400	14.5	12.2	1,000	7540112
	CAPT3743*4A*	D*96VC0403BNA*	28,400	22,400	14.5	12.2	1,000	7540119
	CAPT3743*4A*	D*96VC0603BNA*	28,400	22,400	14.5	12.2	1,040	7540128
	CAPT3743*4A*	D*96VC0803BNA*	27,800	21,800	15.0	12.5	975	7540138
	CAPT3743*4A*	D*96VC0804CNA*	28,400	22,400	14.5	12.2	1,000	7540150
	CAPT3743*4A*	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7540163
	CAPT3743*4A*	D*97MC0804CNA*	28,400	22,400	14.5	12.2	1,000	7540177
	CAPT3743*4A*	D*96VE0302BNA*	28,200	22,200	14.5	12.2	940	7540192
	CAPT3743*4A*	D*96VE0402BNA*	28,200	22,200	14.5	12.2	925	7540203
	CAPT3743*4A*	D*96VE0803BNA*	28,200	22,200	14.5	12.2	950	7540224
	CAPT3743*4A*	D*96VE1004CNA*	28,600	22,600	14.5	12.2	1,025	7540234
	CAPT3743*4A*+EEP		28,000	22,000	14.5	12.2	1,000	7540059
	CAPT3743*4A*+MBVC1200**-1A*		28,600	22,600	15.0	12.5	1,000	7540060
	CAPT3743*4A*+MBVC1600**-1A*		28,600	22,600	15.0	12.5	1,000	7540061
	CHPF3636B6C*+TXV	D*80VC0603B*A*	28,400	23,000	14.5	12.2	1,000	9948612
	CHPF3636B6C*+TXV	D*80VC0803B*A*	28,400	23,000	14.5	12.2	950	9948617
	CHPF3636B6C*+TXV	D*96VC0403BNA*	28,000	22,000	14.5	12.5	1,000	7540121
	CHPF3636B6C*+TXV	D*96VC0603BNA*	28,000	22,000	14.5	12.2	1,040	7540130
	CHPF3636B6C*+TXV	D*96VC0803BNA*	28,000	22,000	14.5	12.2	975	7540140
	CHPF3636B6C*+TXV	D*97MC0603BNA*	28,000	22,000	14.5	12.2	1,040	7540165
	CHPF3642C6C*+EEP		28,600	22,600	14.0	12.2	1,000	7540063
	CHPF3642C6C*+EEP+TXV		28,000	22,000	14.5	12.2	1,000	7540064
	CHPF3642C6C*+MBVC1200**-1A*		28,000	22,000	14.5	12.2	1,000	7540065
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,000	22,000	14.5	12.2	1,000	7540067
	CHPF3642C6C*+MBVC1600**-1A*		28,000	22,000	14.5	12.2	1,000	7540068
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,400	22,400	15.0	12.5	1,000	7540069
	CHPF3642C6C*+TXV	D*96VE0403BNA*	28,000	22,000	14.5	12.2	975	10338698
	CHPF3642C6C*+TXV	D*80VC0804C*A*	28,000	22,600	14.5	12.2	1000	9948621
	CHPF3642C6C*+TXV	D*80HE0603B*A*	28,000	22,000	14.5	12.2	1,050	7540078
	CHPF3642C6C*+TXV	D*80VC0604B*A*	28,000	22,000	14.5	12.2	1,000	7540100
	CHPF3642C6C*+TXV	D*96VE0302BNA*	28,400	22,400	14.5	12.2	940	7540195
	CHPF3642C6C*+TXV	D*96VE0402BNA*	28,400	22,400	15.0	12.5	925	7540205
	CHPF3642C6C*+TXV	D*96VE0603BNA*	28,400	22,400	14.5	12.2	965	7540216
	CHPF3642C6C*+TXV	D*96VE0803BNA*	28,400	22,400	14.5	12.2	950	7540226
	CHPF3642D6C*	D*96VC0804CNA*	28,600	22,600	14.5	12.2	1,000	7540151
	CHPF3642D6C*	D*97MC0804CNA*	28,600	22,600	14.5	12.2	1,000	7540180
	CHPF3642D6C*+TXV	D*80VC0805D*A*	28,400	23,000	15.0	12.5	1000	9948624
	CHPF3642D6C*+TXV	D*80HE0805C*A*	28,000	22,000	15.0	12.5	1,000	7540085
	CHPF3642D6C*+TXV	D*80HE1005C*A*	28,600	22,600	15.0	12.5	1,000	7540092
	CHPF3642D6C*+TXV	D*80VC0805C*A*	28,600	22,600	15.0	12.5	990	7540107
	CHPF3642D6C*+TXV	D*80VC1005C*A*	28,600	22,600	14.5	12.2	1,000	7540114
	CHPF3642D6C*+TXV	D*96VC0804CNA*	28,600	22,600	14.5	12.2	1,000	7540153
	CHPF3642D6C*+TXV	D*97MC0804CNA*	28,600	22,600	14.5	12.2	1,000	7540182
	CHPF3642D6C*+TXV	D*96VE1004CNA*	28,800	22,600	15.0	12.5	1,025	7540236
	CSCF3642N6D*	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7540155
	CSCF3642N6D*	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7540184
	CSCF3642N6D*+EEP		28,400	22,400	14.0	12.2	1,000	7540071
	CSCF3642N6D*+EEP+TXV		28,400	22,400	14.5	12.2	1,000	7540073
	CSCF3642N6D*+TXV	D*96VE0403ANA*	28,200	22,200	15.0	12.5	975	10516722

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SA 0311B* (cont.)	CSCF3642N6D*+TXV	D*96VE0403BNA*	28,000	22,000	15.0	12.5	1,000	10338699
	CSCF3642N6D*+TXV	D*80VC0603B*A*	28,600	23,200	15.0	12.5	1,000	9948613
	CSCF3642N6D*+TXV	D*80VC0803B*A*	28,600	23,200	15.0	12.5	1,050	9948618
	CSCF3642N6D*+TXV	D*80VC0804C*A*	28,600	23,200	15.0	12.5	1,050	9948622
	CSCF3642N6D*+TXV	D*80VC0805D*A*	28,400	23,000	15.0	12.5	1,000	9948625
	CSCF3642N6D*+TXV	D*80HE0603B*A*	28,600	22,600	15.0	12.5	1,050	7540080
	CSCF3642N6D*+TXV	D*80HE0805C*A*	28,400	22,400	15.0	12.5	1,000	7540087
	CSCF3642N6D*+TXV	D*80HE1005C*A*	28,400	22,400	15.0	12.5	1,000	7540093
	CSCF3642N6D*+TXV	D*80VC0604B*A*	28,600	22,600	15.0	12.5	1,000	7540101
	CSCF3642N6D*+TXV	D*80VC0805C*A*	28,400	22,400	15.0	12.5	990	7540108
	CSCF3642N6D*+TXV	D*80VC1005C*A*	28,600	22,600	15.0	12.5	1,000	7540115
	CSCF3642N6D*+TXV	D*96VC0403BNA*	28,600	22,600	15.0	12.5	1,000	7540123
	CSCF3642N6D*+TXV	D*96VC0603BNA*	28,400	22,400	15.0	12.5	1,040	7540132
	CSCF3642N6D*+TXV	D*96VC0803BNA*	28,400	22,400	15.0	12.5	975	7540142
	CSCF3642N6D*+TXV	D*96VC0804CNA*	28,800	22,600	15.0	12.5	1,000	7540157
	CSCF3642N6D*+TXV	D*97MC0603BNA*	28,400	22,400	15.0	12.5	1,040	7540167
	CSCF3642N6D*+TXV	D*97MC0804CNA*	28,600	22,600	15.0	12.5	1,000	7540186
	CSCF3642N6D*+TXV	D*96VE0302BNA*	28,400	22,400	14.5	12.2	940	7540197
	CSCF3642N6D*+TXV	D*96VE0402BNA*	28,400	22,400	14.5	12.2	925	7540207
	CSCF3642N6D*+TXV	D*96VE0603BNA*	28,400	22,400	14.5	12.2	965	7540218
	CSCF3642N6D*+TXV	D*96VE0803BNA*	28,400	22,400	14.5	12.2	950	7540228
	CSCF3642N6D*+TXV	D*96VE1004CNA*	28,400	22,400	14.5	12.2	1,025	7540238
	DV35PTCB14A*		27,400	21,564	14.0	12.2	950	10341542
	DV36PTCC14A*		28,000	22,000	15.0	12.5	1,000	7540046
	DV37PTCB14A*		28,000	22,000	14.5	12.2	925	8996462
	DV37PTCC14A*		28,200	22,200	15.0	12.5	930	8996463
	DV39PTCC14A*		28,000	22,000	15.0	12.5	965	10221139
DX14SN 0361B*	ARUF37C14A*		33,600	25,000	14.0	11.5	1,050	7989045
	ARUF37D14A*		33,600	25,000	14.0	11.5	1,240	8171757
	ASPT36C14A*		34,200	25,400	14.5	11.5	1,210	7540240
	ASPT37C14A*		34,200	25,400	14.5	12.0	1,120	8245772
	ASPT39C14B*		34,200	25,400	14.0	11.5	1,220	201841190
	ASPT47C14B*		34,200	25,400	14.5	12.0	1,120	201834888
	ASPT47D14A*		34,600	25,600	15.0	12.5	1,205	8245774
	AVPTC39C14A*		34,200	25,400	14.5	11.5	1,220	10269216
	AWUF37XX16B*+TXV		33,000	24,400	14.5	11.5	1,050	7540247
	AWUT37XX16A*		33000	24500	14.5	11.5	975	10567723
	CA*F3137*6A*+EEP		34,000	25,200	14.0	11.5	1,200	8191673
	CA*F3137*6A*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	8191674
	CA*F3137*6A*+TXV	D*96VE0603ANA*	34,000	25,200	14.0	11.5	1,125	10516717
	CA*F3137*6A*+TXV	D*96VE0403BNA*	34,200	25,400	14.0	11.5	1,050	10338700
	CA*F3137*6A*+TXV	D*80VC0603B*A*	33,400	25,400	14.5	12.0	1200	9948626
	CA*F3137*6A*+TXV	D*80VC0803B*A*	33,400	25,400	14.5	12.0	1150	9948631
	CA*F3137*6A*+TXV	D*80HE0603B*A*	33,400	24,800	14.0	11.5	1,100	8191675
	CA*F3137*6A*+TXV	D*80VC0604B*A*	33,600	25,000	14.0	11.5	1,240	8191676
	CA*F3137*6A*+TXV	D*96VC0403BNA*	34,200	25,400	14.0	11.5	1,200	8191677
	CA*F3137*6A*+TXV	D*96VC0603BNA*	34,400	25,400	14.0	11.5	1,200	8191678
	CA*F3137*6A*+TXV	D*96VC0803BNA*	34,400	25,400	14.0	11.5	1,150	8191679
	CA*F3137*6A*+TXV	D*97MC0603BNA*	34,400	25,400	14.0	11.5	1,200	8191680

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0361B* (cont.)	CA*F3137*6A*+TXV	D*97MC0803BNA*	34,400	25,400	14.0	11.5	1,150	8191681
	CA*F3137*6A*+TXV	D*96VE0603BNA*	34,200	25,400	14.0	11.5	1,100	8191682
	CA*F3137*6A*+TXV	D*96VE0803BNA*	34,200	25,400	14.0	11.5	1,100	8191683
	CA*F3642*6D*+EEP		34,000	25,200	14.0	11.5	1,200	7540249
	CA*F3642*6D*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	7540251
	CA*F3642*6D*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,200	7540253
	CA*F3642*6D*+MBVC2000**-1A*		34,000	25,200	14.5	12.0	1,200	7540255
	CA*F3743*6D*	D*80VC0805D*A*	33,600	25,600	14.5	11.5	1,200	9948640
	CA*F3743*6D*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7540298
	CA*F3743*6D*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7540304
	CA*F3743*6D*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7540313
	CA*F3743*6D*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7540319
	CA*F3743*6D*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7540336
	CA*F3743*6D*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7540342
	CA*F3743*6D*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7540347
	CA*F3743*6D*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7540360
	CA*F3743*6D*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7540367
	CA*F3743*6D*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7540373
	CA*F3743*6D*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7540386
	CA*F3743*6D*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7540396
	CA*F3743*6D*+EEP		34,600	25,600	14.0	11.5	1,200	7540256
	CA*F3743*6D*+EEP+TXV		34,600	25,600	14.5	11.5	1,200	7540258
	CA*F3743*6D*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7540260
	CA*F3743*6D*+MBVC2000**-1A*		35,000	26,000	14.5	11.5	1,200	7540262
	CA*F3743*6D*+TXV	D*80VC0603B*A*	33,400	25,400	14.5	11.5	1,200	9948627
	CA*F3743*6D*+TXV	D*80VC0803B*A*	33,400	25,400	14.5	11.5	1,150	9948632
	CA*F3743*6D*+TXV	D*80VC0804C*A*	33,600	25,600	14.5	11.5	1,250	9948636
	CA*F3743*6D*+TXV	D*80VC0805D*A*	33,600	25,600	14.5	12.0	1,200	9948641
	CA*F3743*6D*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7540292
	CA*F3743*6D*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7540300
	CA*F3743*6D*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7540306
	CA*F3743*6D*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7540310
	CA*F3743*6D*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7540315
	CA*F3743*6D*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	12.0	1,200	7540321
	CA*F3743*6D*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7540326
	CA*F3743*6D*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7540329
	CA*F3743*6D*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7540333
	CA*F3743*6D*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7540338
	CA*F3743*6D*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	12.0	1,175	7540344
	CA*F3743*6D*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7540349
	CA*F3743*6D*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7540354
	CA*F3743*6D*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7540357
	CA*F3743*6D*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7540362
	CA*F3743*6D*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7540368
	CA*F3743*6D*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7540375
	CA*F3743*6D*+TXV	D*96VE0603BNA*	34,200	25,400	14.5	11.5	1,150	7540379
	CA*F3743*6D*+TXV	D*96VE0803BNA*	34,200	25,400	14.5	11.5	1,150	7540383
	CA*F3743*6D*+TXV	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7540388
	CA*F3743*6D*+TXV	D*96VE1205DNA*	34,000	25,200	14.5	12.0	1,075	7540398

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0361B* (cont.)	CA*F4860*6D*+EEP		34,800	25,800	14.0	11.5	1,200	7540269
	CA*F4860*6D*+EEP+TXV		34,800	25,800	14.0	11.5	1,200	7540271
	CAPT3743*4A*	D*80VC0603B*A*	33,600	25,600	14.5	11.5	1,200	9948628
	CAPT3743*4A*	D*80VC0803B*A*	33,600	25,600	14.5	11.5	1,150	9948633
	CAPT3743*4A*	D*80VC0804C*A*	33,600	25,600	14.5	11.5	1,250	9948637
	CAPT3743*4A*	D*80VC0805D*A*	33,600	25,600	14.5	11.5	1,200	9948642
	CAPT3743*4A*	D*96VE0603BNA*	34,200	25,400	14.0	11.5	1,150	7540381
	CAPT3743*4A*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7540390
	CAPT3743*4A*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7540400
	CAPT3743*4A*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7542818
	CAPT3743*4A*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7542829
	CAPT3743*4A*	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7542839
	CAPT3743*4A*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7542846
	CAPT3743*4A*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7542857
	CAPT3743*4A*	D*96VC0403BNA*	34,000	25,200	14.5	11.5	1,200	7542868
	CAPT3743*4A*	D*96VC0603BNA*	34,200	25,400	14.5	11.5	1,250	7542874
	CAPT3743*4A*	D*96VC0803BNA*	34,200	25,400	14.5	11.5	1,250	7542881
	CAPT3743*4A*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542888
	CAPT3743*4A*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542899
	CAPT3743*4A*	D*96VC1205DNA*	34,400	25,400	14.5	11.5	1,200	7542910
	CAPT3743*4A*	D*97MC0603BNA*	34,200	25,400	14.5	11.5	1,250	7542920
	CAPT3743*4A*	D*97MC0803BNA*	34,200	25,400	14.5	11.5	1,250	7542927
	CAPT3743*4A*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542934
	CAPT3743*4A*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542945
	CAPT3743*4A*	D*97MC1205DNA*	34,400	25,400	14.5	11.5	1,200	7542955
	CAPT3743*4A*	D*96VE0803BNA*	34,200	25,400	14.0	11.5	1,150	7542969
	CAPT3743*4A*+EEP		34,600	25,600	14.5	11.5	1,200	7540264
	CAPT3743*4A*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,205	7540266
	CAPT3743*4A*+MBVC2000**-1A*		34,000	25,200	14.5	11.5	1,205	7540268
	CHPF3636B6C*+TXV	D*96VE0403BNA*	34,200	25,400	14.0	11.5	1,050	10338701
	CHPF3642C6C*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7542820
	CHPF3642C6C*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7542831
	CHPF3642C6C*+EEP		33,600	25,600	14.0	11.5	1,075	7540273
	CHPF3642C6C*+EEP+TXV		33,600	25,600	14.0	11.5	1,075	7540275
	CHPF3642C6C*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7540277
	CHPF3642C6C*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7540294
	CHPF3642C6C*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7542822
	CHPF3642C6C*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	12.0	1,230	7542833
	CHPF3642C6C*+TXV	D*96VE0603BNA*	34,200	25,400	14.5	11.5	1,150	7542966
	CHPF3642C6C*+TXV	D*96VE0803BNA*	34,200	25,400	14.5	11.5	1,150	7542971
	CHPF3743C6B*	D*80VC0805D*A*	33,600	25,600	14.5	11.5	1,100	9948643
	CHPF3743C6B*	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7540392
	CHPF3743C6B*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7542848
	CHPF3743C6B*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7542859
	CHPF3743C6B*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542890
	CHPF3743C6B*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542901
	CHPF3743C6B*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542936
	CHPF3743C6B*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542946
	CHPF3743C6B*+EEP		33,000	25,200	14.0	11.5	1,075	7540279

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0361B* (cont.)	CHPF3743C6B*+EEP+TXV		33,000	25,200	14.5	11.5	1,075	7540280
	CHPF3743C6B*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7540282
	CHPF3743C6B*+TXV	D*80VC0603B*A*	33,600	25,600	14.5	12.0	1,100	9948629
	CHPF3743C6B*+TXV	D*80VC0803B*A*	33,600	25,600	14.5	12.0	1,150	9948634
	CHPF3743C6B*+TXV	D*80VC0804C*A*	33,600	25,600	14.5	11.5	1,100	9948638
	CHPF3743C6B*+TXV	D*80VC0805D*A*	33,600	25,600	14.5	12.0	1,100	9948644
	CHPF3743C6B*+TXV	D*96VE1004CNA*	34,600	25,600	14.5	11.5	1,250	7540394
	CHPF3743C6B*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7542841
	CHPF3743C6B*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7542850
	CHPF3743C6B*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	12.0	1,200	7542861
	CHPF3743C6B*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7542870
	CHPF3743C6B*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7542876
	CHPF3743C6B*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7542883
	CHPF3743C6B*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7542892
	CHPF3743C6B*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	12.0	1,175	7542903
	CHPF3743C6B*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7542922
	CHPF3743C6B*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7542928
	CHPF3743C6B*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542937
	CHPF3743C6B*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542948
	CHPF3743D6B*	D*96VE1205DNA*	34,000	25,200	14.5	11.5	1,075	7540402
	CHPF3743D6B*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7542912
	CHPF3743D6B*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7542957
	CHPF3743D6B*+EEP		34,600	25,600	14.5	11.5	1,150	7540284
	CHPF3743D6B*+EEP+TXV		34,600	25,600	14.5	12.0	1,150	7540286
	CHPF3743D6B*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542914
	CHPF3743D6B*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542959
	CHPF3743D6B*+TXV	D*96VE1205DNA*	34,000	25,200	14.5	12.0	1,075	7542979
	CSCF4860N6D*	D*80VC0805D*A*	33,600	25,600	14.5	11.5	1,200	9948645
	CSCF4860N6D*	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7542824
	CSCF4860N6D*	D*80HE1005C*A*	34,000	25,200	14.5	11.5	1,230	7542835
	CSCF4860N6D*	D*80VC0805C*A*	33,600	25,000	14.5	11.5	1,200	7542852
	CSCF4860N6D*	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7542863
	CSCF4860N6D*	D*96VC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542894
	CSCF4860N6D*	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542905
	CSCF4860N6D*	D*96VC1205DNA*	34,600	25,600	14.5	11.5	1,200	7542916
	CSCF4860N6D*	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542939
	CSCF4860N6D*	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542950
	CSCF4860N6D*	D*97MC1205DNA*	34,600	25,600	14.5	11.5	1,200	7542961
	CSCF4860N6D*+EEP		34,600	25,600	14.0	11.5	1,200	7540288
	CSCF4860N6D*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7540290
	CSCF4860N6D*+TXV	D*80VC0603B*A*	33,400	25,400	14.5	11.5	1,200	9948630
	CSCF4860N6D*+TXV	D*80VC0803B*A*	33,400	25,400	14.5	11.5	1,150	9948635
	CSCF4860N6D*+TXV	D*80VC0804C*A*	33,600	25,600	14.5	11.5	1,250	9948639
	CSCF4860N6D*+TXV	D*80VC0805D*A*	33,600	25,600	14.5	12.0	1,200	9948646
	CSCF4860N6D*+TXV	D*80HE0603B*A*	33,400	24,800	14.5	11.5	1,250	7540296
	CSCF4860N6D*+TXV	D*80HE0805C*A*	33,600	25,000	14.5	11.5	1,210	7542826
	CSCF4860N6D*+TXV	D*80HE1005C*A*	34,000	25,200	14.5	12.0	1,230	7542837
	CSCF4860N6D*+TXV	D*80VC0604B*A*	33,600	25,000	14.5	11.5	1,220	7542843
	CSCF4860N6D*+TXV	D*80VC0805C*A*	33,600	25,000	14.5	12.0	1,200	7542854

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0361B* (cont.)	CSCF4860N6D*+TXV	D*80VC1005C*A*	33,400	24,800	14.5	11.5	1,200	7542865
	CSCF4860N6D*+TXV	D*96VC0403BNA*	34,200	25,400	14.5	11.5	1,200	7542872
	CSCF4860N6D*+TXV	D*96VC0603BNA*	34,400	25,400	14.5	11.5	1,250	7542878
	CSCF4860N6D*+TXV	D*96VC0803BNA*	34,400	25,400	14.5	11.5	1,250	7542885
	CSCF4860N6D*+TXV	D*96VC0804CNA*	34,600	25,600	14.5	12.0	1,190	7542896
	CSCF4860N6D*+TXV	D*96VC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542907
	CSCF4860N6D*+TXV	D*96VC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542918
	CSCF4860N6D*+TXV	D*97MC0603BNA*	34,400	25,400	14.5	11.5	1,250	7542924
	CSCF4860N6D*+TXV	D*97MC0803BNA*	34,400	25,400	14.5	11.5	1,250	7542930
	CSCF4860N6D*+TXV	D*97MC0804CNA*	34,600	25,600	14.5	11.5	1,190	7542941
	CSCF4860N6D*+TXV	D*97MC1005CNA*	34,600	25,600	14.5	11.5	1,175	7542952
	CSCF4860N6D*+TXV	D*97MC1205DNA*	34,600	25,600	14.5	12.0	1,200	7542963
	DV36PTCC14A*		34,200	25,400	14.5	11.5	1,100	7540244
	DV37PTCC14A*		34,200	25,400	14.5	12.0	1,130	8996464
	DV37PTCD14A*		34,600	25,600	14.5	12.2	1,145	8996465
	DV39PTCC14A*		34,200	25,400	14.5	11.5	1,220	10221140
	DV42PTCD14A*		34,800	25,800	14.5	12.0	1,120	7540245
	DV49PTCD14A*		35,000	26,000	15.0	12.5	1,075	8996466
DX14SN 0371B*	ARUF37C14A*+TXV		33,400	25,200	14.0	12.2	1,050	7989059
	ARUF37D14A*		34,200	25,800	14.0	12.2	1,240	8171758
	ARUF49C14A*		34,000	25,800	14.0	12.2	1,220	7989046
	ASPT35B14A*		32,400	24,527	14.0	12.2	1,050	10341537
	ASPT36C14A*		34,200	25,800	14.5	12.5	1,210	7540404
	ASPT37C14A*		34,200	25,800	14.5	12.2	1,120	8245775
	ASPT39C14B*		34,200	25,800	14.5	12.2	1,220	201841191
	ASPT47C14B*		34,200	25,800	14.5	12.2	1,120	201834889
	ASPT47D14A*		34,600	26,200	15.0	12.5	1,205	8245777
	AVPTC39C14A*		34,200	25,800	14.5	12.2	1,250	10269222
	AWUF37XX16B*+TXV		33,000	25,000	14.5	12.2	355	7540411
	AWUT37XX16A*		33000	25000	14.5	12.2	975	10567724
	CA*F3137*6A*	D*80VC0603B*A*	33,400	26,000	14.5	12.2	1,100	9948647
	CA*F3137*6A*	D*80VC0803B*A*	33,400	26,000	14.5	12.2	1,150	9948652
	CA*F3137*6A*	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7540454
	CA*F3137*6A*	D*80VC0604B*A*	33,600	25,400	15.0	12.5	1,220	7540491
	CA*F3137*6A*	D*96VC0403BNA*	34,000	25,800	15.0	12.5	1,200	7540535
	CA*F3137*6A*	D*96VC0603BNA*	34,000	25,800	15.0	12.5	1,250	7540545
	CA*F3137*6A*	D*96VC0803BNA*	34,000	25,800	15.0	12.5	1,250	7540555
	CA*F3137*6A*	D*97MC0603BNA*	34,000	25,800	15.0	12.5	1,250	7540616
	CA*F3137*6A*	D*97MC0803BNA*	34,000	25,800	15.0	12.5	1,250	7540626
	CA*F3137*6A*+EEP		34,000	25,800	14.0	12.2	1,100	7540413
	CA*F3137*6A*+EEP+TXV		34,000	25,800	14.0	12.2	1,100	7540415
	CA*F3743*6D*	D*80VC0805D*A*	33,600	26,200	14.5	12.2	1200	9948661
	CA*F3743*6D*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7540462
	CA*F3743*6D*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7540478
	CA*F3743*6D*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7540505
	CA*F3743*6D*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7540522
	CA*F3743*6D*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540568
	CA*F3743*6D*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540586
	CA*F3743*6D*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540602

See Notes on Page 70.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0371B* (cont.)	CA*F3743*6D*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540640
	CA*F3743*6D*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540658
	CA*F3743*6D*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540676
	CA*F3743*6D*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7540694
	CA*F3743*6D*	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7540711
	CA*F3743*6D*+EEP		34,000	25,800	14.0	12.2	1,200	7540416
	CA*F3743*6D*+EEP+TXV		34,000	25,800	14.5	12.2	1,200	7540418
	CA*F3743*6D*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7540420
	CA*F3743*6D*+MBVC1600**-1A*+TXV		34,600	26,200	14.5	12.2	1,200	7540422
	CA*F3743*6D*+MBVC2000**-1A*		34,600	26,200	15.0	12.5	1,200	7540424
	CA*F3743*6D*+MBVC2000**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7540425
	CA*F3743*6D*+TXV	D*80VC0603B*A*	33,400	26,000	14.5	12.2	1,100	9948648
	CA*F3743*6D*+TXV	D*80VC0803B*A*	33,400	26,000	14.5	12.2	1,150	9948653
	CA*F3743*6D*+TXV	D*80VC0804C*A*	33,600	26,200	14.5	12.2	1,250	9948657
	CA*F3743*6D*+TXV	D*80VC0805D*A*	33,600	26,200	15.0	12.5	1,200	9948662
	CA*F3743*6D*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7540456
	CA*F3743*6D*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7540464
	CA*F3743*6D*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7540480
	CA*F3743*6D*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7540493
	CA*F3743*6D*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	7540507
	CA*F3743*6D*+TXV	D*80VC1005C*A*	33,400	25,200	15.0	12.5	1,200	7540524
	CA*F3743*6D*+TXV	D*96VC0403BNA*	34,000	25,800	14.5	12.2	1,200	7540537
	CA*F3743*6D*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7540547
	CA*F3743*6D*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540557
	CA*F3743*6D*+TXV	D*96VC0804CNA*	34,600	26,200	15.0	12.5	1,190	7540570
	CA*F3743*6D*+TXV	D*96VC1005CNA*	34,600	26,200	15.0	12.5	1,175	7540587
	CA*F3743*6D*+TXV	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540604
	CA*F3743*6D*+TXV	D*97MC0603BNA*	34,200	25,800	14.5	12.2	1,250	7540618
	CA*F3743*6D*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540628
	CA*F3743*6D*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7540642
	CA*F3743*6D*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7540660
	CA*F3743*6D*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540678
	CA*F3743*6D*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7540695
	CA*F3743*6D*+TXV	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7540713
	CAPT3743*4A*	D*80VC0603B*A*	33,600	26,200	15.0	12.2	1,100	9948649
	CAPT3743*4A*	D*80VC0803B*A*	33,600	26,200	15.0	12.2	1,150	9948654
	CAPT3743*4A*	D*80VC0804C*A*	33,600	26,200	14.5	12.2	1,250	9948658
	CAPT3743*4A*	D*80VC0805D*A*	33,600	26,200	15.0	12.2	1,200	9948663
	CAPT3743*4A*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7540466
	CAPT3743*4A*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7540482
	CAPT3743*4A*	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7540495
	CAPT3743*4A*	D*80VC0805C*A*	33,600	25,400	15.0	12.2	1,200	7540508
	CAPT3743*4A*	D*80VC1005C*A*	33,400	25,200	15.0	12.2	1,200	7540526
	CAPT3743*4A*	D*96VC0403BNA*	34,000	25,800	14.5	12.2	1,200	7540539
	CAPT3743*4A*</							

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0371B* (cont.)	CAPT3743*4A*	D*97MC0603BNA*	34,200	25,800	14.5	12.2	1,250	7540620
	CAPT3743*4A*	D*97MC0803BNA*	34,200	25,800	14.5	12.2	1,250	7540630
	CAPT3743*4A*	D*97MC0804CNA*	34,600	26,200	15.0	12.2	1,190	7540644
	CAPT3743*4A*	D*97MC1005CNA*	34,600	26,200	15.0	12.2	1,175	7540662
	CAPT3743*4A*	D*97MC1205DNA*	34,400	26,000	15.0	12.5	1,200	7540680
	CAPT3743*4A*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7540697
	CAPT3743*4A*	D*96VE1205DNA*	34,400	26,000	15.0	12.5	1,075	7540715
	CAPT3743*4A*+EEP		34,000	25,800	14.5	12.2	1,200	7540427
	CAPT3743*4A*+MBVC1600**-1A*		34,200	25,800	14.5	12.2	1,200	7540429
	CAPT3743*4A*+MBVC2000**-1A*		34,200	25,800	14.5	12.2	1,200	7540433
	CHPF3642C6C*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7540468
	CHPF3642C6C*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7540483
	CHPF3642C6C*+EEP		33,000	25,800	14.0	12.2	1,075	7540436
	CHPF3642C6C*+EEP+TXV		33,000	25,800	14.0	12.2	1,075	7540438
	CHPF3642C6C*+MBVC1600**-1A*		34,000	25,800	14.5	12.2	1,200	7540440
	CHPF3642C6C*+MBVC1600**-1A*+TXV		34,000	25,800	15.0	12.5	1,200	7540442
	CHPF3642C6C*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7540458
	CHPF3642C6C*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7540470
	CHPF3642C6C*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7540485
	CHPF3743C6B*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7540443
	CHPF3743C6B*+MBVC1600**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7540445
	CHPF3743C6B*+TXV	D*80VC0603B*A*	33,600	26,200	15.0	12.5	1,100	9948650
	CHPF3743C6B*+TXV	D*80VC0803B*A*	33,600	26,200	15.0	12.5	1,050	9948655
	CHPF3743C6B*+TXV	D*80VC0804C*A*	33,600	26,200	14.5	12.2	1,100	9948659
	CHPF3743C6B*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7540497
	CHPF3743C6B*+TXV	D*96VC0403BNA*	34,200	25,800	14.5	12.2	1,200	7540541
	CHPF3743C6B*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7540551
	CHPF3743C6B*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540561
	CHPF3743C6B*+TXV	D*97MC0603BNA*	34,400	26,000	14.5	12.2	1,250	7540622
	CHPF3743C6B*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540632
	CHPF3743D6B*	D*80VC0805D*A*	33,600	26,200	14.5	12.2	1,200	9948664
	CHPF3743D6B*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7540510
	CHPF3743D6B*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7540528
	CHPF3743D6B*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540574
	CHPF3743D6B*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540591
	CHPF3743D6B*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540608
	CHPF3743D6B*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540646
	CHPF3743D6B*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540664
	CHPF3743D6B*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540682
	CHPF3743D6B*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7540699
	CHPF3743D6B*	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7540717
	CHPF3743D6B*+EEP		34,600	26,200	14.5	12.2	1,150	7540447
	CHPF3743D6B*+EEP+TXV		34,600	26,200	15.0	12.5	1,150	7540449
	CHPF3743D6B*+TXV	D*80VC0805D*A*	33,600	26,200	15.0	12.5	1,200	9948665
	CHPF3743D6B*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	754

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0371B* (cont.)	CHPF3743D6B*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7540648
	CHPF3743D6B*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7540666
	CHPF3743D6B*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540684
	CHPF3743D6B*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7540701
	CHPF3743D6B*+TXV	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7540719
	CSCF4860N6D*	D*80VC0805D*A*	33,600	26,200	14.5	12.2	1,200	9948666
	CSCF4860N6D*	D*80HE0805C*A*	33,600	25,400	14.5	12.2	1,210	7540472
	CSCF4860N6D*	D*80HE1005C*A*	34,000	25,800	14.5	12.2	1,200	7540487
	CSCF4860N6D*	D*80VC0805C*A*	33,600	25,400	14.5	12.2	1,200	7540514
	CSCF4860N6D*	D*80VC1005C*A*	33,400	25,200	14.5	12.2	1,200	7540532
	CSCF4860N6D*	D*96VC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540578
	CSCF4860N6D*	D*96VC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540595
	CSCF4860N6D*	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540612
	CSCF4860N6D*	D*97MC0804CNA*	34,600	26,200	14.5	12.2	1,190	7540650
	CSCF4860N6D*	D*97MC1005CNA*	34,600	26,200	14.5	12.2	1,175	7540668
	CSCF4860N6D*	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540686
	CSCF4860N6D*	D*96VE1004CNA*	34,600	26,200	14.5	12.2	1,250	7540703
	CSCF4860N6D*	D*96VE1205DNA*	34,200	25,800	15.0	12.5	1,075	7540721
	CSCF4860N6D*+EEP		34,600	26,200	14.0	12.2	1,200	7540451
	CSCF4860N6D*+EEP+TXV		34,600	26,200	14.5	12.2	1,200	7540453
	CSCF4860N6D*+TXV	D*80VC0603B*A*	33,400	26,000	14.5	12.2	1,100	9948651
	CSCF4860N6D*+TXV	D*80VC0803B*A*	33,400	26,000	14.5	12.2	1,150	9948656
	CSCF4860N6D*+TXV	D*80VC0804C*A*	33,600	26,200	14.5	12.2	1,250	9948660
	CSCF4860N6D*+TXV	D*80VC0805D*A*	33,600	26,200	15.0	12.5	1,200	9948667
	CSCF4860N6D*+TXV	D*80HE0603B*A*	33,400	25,200	14.5	12.2	1,225	7540460
	CSCF4860N6D*+TXV	D*80HE0805C*A*	33,600	25,400	15.0	12.5	1,210	7540474
	CSCF4860N6D*+TXV	D*80HE1005C*A*	34,000	25,800	15.0	12.5	1,200	7540489
	CSCF4860N6D*+TXV	D*80VC0604B*A*	33,600	25,400	14.5	12.2	1,220	7540499
	CSCF4860N6D*+TXV	D*80VC0805C*A*	33,600	25,400	15.0	12.5	1,200	7540516
	CSCF4860N6D*+TXV	D*80VC1005C*A*	33,400	25,200	15.0	12.5	1,200	7540533
	CSCF4860N6D*+TXV	D*96VC0403BNA*	34,200	25,800	14.5	12.2	1,200	7540543
	CSCF4860N6D*+TXV	D*96VC0603BNA*	34,400	26,000	14.5	12.2	1,250	7540553
	CSCF4860N6D*+TXV	D*96VC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540563
	CSCF4860N6D*+TXV	D*96VC0804CNA*	34,600	26,200	15.0	12.5	1,190	7540580
	CSCF4860N6D*+TXV	D*96VC1005CNA*	34,600	26,200	15.0	12.5	1,175	7540597
	CSCF4860N6D*+TXV	D*96VC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540614
	CSCF4860N6D*+TXV	D*97MC0603BNA*	34,400	26,000	14.5	12.2	1,250	7540624
	CSCF4860N6D*+TXV	D*97MC0803BNA*	34,400	26,000	14.5	12.2	1,250	7540634
	CSCF4860N6D*+TXV	D*97MC0804CNA*	34,600	26,200	15.0	12.5	1,190	7540652
	CSCF4860N6D*+TXV	D*97MC1005CNA*	34,600	26,200	15.0	12.5	1,175	7540670
	CSCF4860N6D*+TXV	D*97MC1205DNA*	34,600	26,200	15.0	12.5	1,200	7540688
	CSCF4860N6D*+TXV	D*96VE1004CNA*	34,600	26,200	15.0	12.5	1,250	7540705

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0421B*	ARUF43D14A*		37,400	29,600	14.0	11.5	1,270	8171759
	ARUF43D14A*+TXV		37,600	29,800	14.0	11.5	1,270	8171760
	ARUF47D14A*		37,600	29,800	14.0	11.5	1,375	7989047
	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245778
	ASPT49C14A*		36,200	28,600	14.0	12.0	1,355	10345382
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245779
	ASPT59C14A*		38,000	30,000	14.0	12.0	1,260	8245780
	AVPTC49C14A*		36,200	28,600	14.0	12.0	1,300	10269226
	CA*F4860*6D*	D*80VC0805D*A*	38,000	31,000	14.0	11.5	1,350	9948668
	CA*F4860*6D*	D*80HE0805C*A*	38,000	30,000	14.0	11.5	1,425	7540765
	CA*F4860*6D*	D*80HE1005C*A*	38,000	30,000	14.0	11.5	1,425	7540783
	CA*F4860*6D*	D*80HE0805D*A*	38,000	30,000	14.0	11.5	1,425	7540801
	CA*F4860*6D*	D*80VC0805C*A*	38,000	30,000	14.0	11.5	1,400	7540817
	CA*F4860*6D*	D*80VC1005C*A*	38,000	30,000	14.0	11.5	1,370	7540835
	CA*F4860*6D*	D*96VC0804CNA*	38,000	30,000	14.0	11.5	1,385	7540853
	CA*F4860*6D*	D*96VC1005CNA*	38,000	30,000	14.0	11.5	1,300	7540871
	CA*F4860*6D*	D*96VC1205DNA*	38,000	30,000	14.0	11.5	1,425	7540889
	CA*F4860*6D*	D*97MC0804CNA*	38,000	30,000	14.0	11.5	1,425	7540907
	CA*F4860*6D*	D*97MC1005CNA*	38,000	30,000	14.0	11.5	1,300	7540925
	CA*F4860*6D*	D*97MC1205DNA*	38,000	30,000	14.0	11.5	1,300	7540943
	CA*F4860*6D*	D*96VE1004CNA*	38,000	30,000	14.0	11.5	1,275	7540961
	CA*F4860*6D*	D*96VE1205DNA*	38,000	30,000	14.0	11.5	1,400	7540977
	CA*F4860*6D*+EEP		38,000	30,000	14.0	11.5	1,400	7540731
	CA*F4860*6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,400	7540733
	CA*F4860*6D*+MBVC1600*-1A*		38,000	30,000	14.5	11.5	1,300	7540735
	CA*F4860*6D*+MBVC2000*-1A*		38,000	30,000	14.5	11.5	1,300	7540737
	CA*F4860*6D*+TXV	D*80VC0805D*A*	38,000	31,000	14.5	11.5	1,350	9948669
	CA*F4860*6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7540767
	CA*F4860*6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7540785
	CA*F4860*6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7540803
	CA*F4860*6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7540819
	CA*F4860*6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1,370	7540837
	CA*F4860*6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	11.5	1,385	7540855
	CA*F4860*6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	11.5	1,300	7540873
	CA*F4860*6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	11.5	1,425	7540891
	CA*F4860*6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	11.5	1,425	7540909
	CA*F4860*6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	11.5	1,300	7540927
	CA*F4860*6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7540945
	CA*F4860*6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	11.5	1,275	7540963
	CA*F4860*6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	11.5	1,400	7540979
	CA*F4961*6D*	D*80VC0805D*A*	39,000	31,800	14.5	12.2	1,350	9948670
	CA*F4961*6D*	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	7540769
	CA*F4961*6D*	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	7540788
	CA*F4961*6D*	D*80HE0805D*A*	39,000	30,800	14.5			

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0421B* (cont.)	CA*F4961*6D*	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	7540911
	CA*F4961*6D*	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	7540929
	CA*F4961*6D*	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	7540947
	CA*F4961*6D*	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	7540965
	CA*F4961*6D*	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	7540981
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	7540739
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	7540741
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7540743
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7540745
	CA*F4961*6D*+TXV	D*80VC0805D*A*	39,000	31,800	14.5	12.2	1,350	9948671
	CA*F4961*6D*+TXV	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	7540771
	CA*F4961*6D*+TXV	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	7540790
	CA*F4961*6D*+TXV	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	7540807
	CA*F4961*6D*+TXV	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	7540823
	CA*F4961*6D*+TXV	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	7540841
	CA*F4961*6D*+TXV	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	7540859
	CA*F4961*6D*+TXV	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	7540877
	CA*F4961*6D*+TXV	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	7540895
	CA*F4961*6D*+TXV	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	7540913
	CA*F4961*6D*+TXV	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	7540931
	CA*F4961*6D*+TXV	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	7540949
	CA*F4961*6D*+TXV	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	7540967
	CA*F4961*6D*+TXV	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	7540983
	CAPT4961*4A*	D*80VC0805D*A*	39,000	31,800	14.5	11.5	1350	9948672
	CAPT4961*4A*	D*80HE0805C*A*	39,000	30,800	14.5	11.5	1,425	7540773
	CAPT4961*4A*	D*80HE1005C*A*	39,000	30,800	14.5	11.5	1,425	7540792
	CAPT4961*4A*	D*80VC0805C*A*	39,000	30,800	14.5	11.5	1,425	7540825
	CAPT4961*4A*	D*80VC1005C*A*	39,000	30,800	14.5	11.5	1,370	7540843
	CAPT4961*4A*	D*96VC0804CNA*	39,000	30,800	14.5	11.5	1,385	7540861
	CAPT4961*4A*	D*96VC1005CNA*	39,000	30,800	14.5	11.5	1,300	7540879
	CAPT4961*4A*	D*96VC1205DNA*	39,000	30,800	14.5	11.5	1,450	7540897
	CAPT4961*4A*	D*97MC0804CNA*	39,000	30,800	14.5	11.5	1,430	7540915
	CAPT4961*4A*	D*97MC1005CNA*	39,000	30,800	14.5	11.5	1,300	7540933
	CAPT4961*4A*	D*97MC1205DNA*	39,000	30,800	14.5	11.5	1,300	7540951
	CAPT4961*4A*+EEP		39,000	30,800	14.0	11.5	1,275	7540747
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7540749
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7540751
	CHPF4860D6D*	D*80VC0805D*A*	38,000	31,000	14.5	12.2	1350	9948673
	CHPF4860D6D*	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	7540775
	CHPF4860D6D*	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	7540794
	CHPF4860D6D*	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	7540810
	CHPF4860D6D*	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	7540827
	CHPF4860D6D*	D*80VC1005C*A*	38,000	30,000				

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0421B* (cont.)	CHPF4860D6D*	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	7540953
	CHPF4860D6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7540969
	CHPF4860D6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7540985
	CHPF4860D6D*+EEP		38,000	30,000	14.0	12.0	1,425	7540753
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	7540755
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	7540757
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	7540759
	CHPF4860D6D*+TXV	D*80VC0805D*A*	38,000	31,000	14.5	12.2	1,350	9948674
	CHPF4860D6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	12.2	1,425	7540777
	CHPF4860D6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	7540796
	CHPF4860D6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	12.2	1,425	7540811
	CHPF4860D6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	7540829
	CHPF4860D6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	7540847
	CHPF4860D6D*+TXV	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	7540865
	CHPF4860D6D*+TXV	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	7540883
	CHPF4860D6D*+TXV	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	7540901
	CHPF4860D6D*+TXV	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	7540919
	CHPF4860D6D*+TXV	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	7540937
	CHPF4860D6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	7540955
	CHPF4860D6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7540971
	CHPF4860D6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7540987
	CSCF4860N6D*	D*80VC0805D*A*	38,000	31,000	14.5	11.5	1350	9948675
	CSCF4860N6D*	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7540779
	CSCF4860N6D*	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7540798
	CSCF4860N6D*	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7540813
	CSCF4860N6D*	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7540831
	CSCF4860N6D*	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1,370	7540849
	CSCF4860N6D*	D*96VC0804CNA*	38,000	30,000	14.5	11.5	1,385	7540867
	CSCF4860N6D*	D*96VC1005CNA*	38,000	30,000	14.5	11.5	1,300	7540885
	CSCF4860N6D*	D*96VC1205DNA*	38,000	30,000	14.5	11.5	1,425	7540903
	CSCF4860N6D*	D*97MC0804CNA*	38,000	30,000	14.5	11.5	1,425	7540921
	CSCF4860N6D*	D*97MC1005CNA*	38,000	30,000	14.5	11.5	1,300	7540939
	CSCF4860N6D*	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7540957
	CSCF4860N6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7540973
	CSCF4860N6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7540989
	CSCF4860N6D*+EEP		38,000	30,000	14.0	11.5	1,425	7540761
	CSCF4860N6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,425	7540763
	CSCF4860N6D*+TXV	D*80VC0805D*A*	38,000	31,000	14.5	11.5	1350	9948676
	CSCF4860N6D*+TXV	D*80HE0805C*A*	38,000	30,000	14.5	11.5	1,425	7540781
	CSCF4860N6D*+TXV	D*80HE1005C*A*	38,000	30,000	14.5	11.5	1,425	7540799
	CSCF4860N6D*+TXV	D*80HE0805D*A*	38,000	30,000	14.5	11.5	1,425	7540815
	CSCF4860N6D*+TXV	D*80VC0805C*A*	38,000	30,000	14.5	11.5	1,400	7540833
	CSCF4860N6D*+TXV	D*80VC1005C*A*	38,000	30,000	14.5	11.5	1	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0421B* (cont.)	CSCF4860N6D*+TXV	D*97MC1205DNA*	38,000	30,000	14.5	11.5	1,300	7540959
	CSCF4860N6D*+TXV	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	7540975
	CSCF4860N6D*+TXV	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	7540991
	DV48PTCD14A*		38,000	30,000	15.0	12.5	1,310	7540729
	DV49PTCC14A*		36,200	28,600	14.0	12.0	1,300	10221142
	DV49PTCD14A*		38,500	30,400	15.0	12.5	1,320	8996471
	DV59PTCC14A*		38,000	30,000	14.0	12.0	1,290	8996470
DX14SN 0431B*	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245782
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245783
	ASPT59C14A*		38,000	30,000	14.0	12.2	1,260	8245781
	AVPTC49C14A*		36,200	28,600	14.0	12.2	1,300	10269230
	CA*F4961*6D*	D*80VC0805D*A*	39,000	31,800	14.5	12.2	1,350	9948677
	CA*F4961*6D*	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	8083098
	CA*F4961*6D*	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	8083106
	CA*F4961*6D*	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	8083115
	CA*F4961*6D*	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	8083123
	CA*F4961*6D*	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	8083130
	CA*F4961*6D*	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	8083138
	CA*F4961*6D*	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083147
	CA*F4961*6D*	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	8083156
	CA*F4961*6D*	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	8083164
	CA*F4961*6D*	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083172
	CA*F4961*6D*	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	8083181
	CA*F4961*6D*	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	8083189
	CA*F4961*6D*	D*96VE1205DNA*	39,000	30,800	14.5	12.2	1,400	8083201
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	8083084
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	8083085
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8083087
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8083088
	CA*F4961*6D*+TXV	D*80VC0805D*A*	39,000	31,800	14.5	12.2	1,350	9948678
	CA*F4961*6D*+TXV	D*80HE0805C*A*	39,000	30,800	14.5	12.2	1,425	8083100
	CA*F4961*6D*+TXV	D*80HE0805D*A*	39,000	30,800	14.5	12.2	1,425	8083108
	CA*F4961*6D*+TXV	D*80HE1005C*A*	39,000	30,800	14.5	12.2	1,425	8083117
	CA*F4961*6D*+TXV	D*80VC0805C*A*	39,000	30,800	14.5	12.2	1,400	8083125
	CA*F4961*6D*+TXV	D*80VC1005C*A*	39,000	30,800	14.5	12.2	1,370	8083132
	CA*F4961*6D*+TXV	D*96VC0804CNA*	39,000	30,800	14.5	12.2	1,385	8083141
	CA*F4961*6D*+TXV	D*96VC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083149
	CA*F4961*6D*+TXV	D*96VC1205DNA*	39,000	30,800	14.5	12.2	1,450	8083158
	CA*F4961*6D*+TXV	D*97MC0804CNA*	39,000	30,800	14.5	12.2	1,430	8083166
	CA*F4961*6D*+TXV	D*97MC1005CNA*	39,000	30,800	14.5	12.2	1,300	8083174
	CA*F4961*6D*+TXV	D*97MC1205DNA*	39,000	30,800	14.5	12.2	1,300	8083183
	CA*F4961*6D*+TXV	D*96VE1004CNA*	39,000	30,800	14.5	12.2	1,275	8083191
	CA*F4961*6D*+TXV	D*96VE1205DNA*	39,000	30,800	14.5			


OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0431B* (cont.)	CHPF4860D6D*	D*80HE1005C*A*	38,000	30,000	14.5	12.2	1,425	8083119
	CHPF4860D6D*	D*80VC0805C*A*	38,000	30,000	14.5	12.2	1,400	8083127
	CHPF4860D6D*	D*80VC1005C*A*	38,000	30,000	14.5	12.2	1,370	8083134
	CHPF4860D6D*	D*96VC0804CNA*	38,000	30,000	14.5	12.2	1,385	8083143
	CHPF4860D6D*	D*96VC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083152
	CHPF4860D6D*	D*96VC1205DNA*	38,000	30,000	14.5	12.2	1,425	8083160
	CHPF4860D6D*	D*97MC0804CNA*	38,000	30,000	14.5	12.2	1,425	8083168
	CHPF4860D6D*	D*97MC1005CNA*	38,000	30,000	14.5	12.2	1,300	8083176
	CHPF4860D6D*	D*97MC1205DNA*	38,000	30,000	14.5	12.2	1,300	8083185
	CHPF4860D6D*	D*96VE1004CNA*	38,000	30,000	14.5	12.2	1,275	8083193
	CHPF4860D6D*	D*96VE1205DNA*	38,000	30,000	14.5	12.2	1,400	8083205

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0481B* (cont.)	CA*F4860*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7541004
	CA*F4860*6D*+TXV	D*80VC0805D*A*	45,500	35,000	14.5	11.7	1500	9948681
	CA*F4860*6D*+TXV	D*80HE0805C*A*	45,000	31,800	14.5	11.7	1,480	7541024
	CA*F4860*6D*+TXV	D*80HE1005C*A*	45,500	32,200	14.5	11.7	1,570	7541031
	CA*F4860*6D*+TXV	D*80VC0805C*A*	45,500	32,200	14.5	11.7	1,510	7541037
	CA*F4860*6D*+TXV	D*80VC1005C*A*	45,500	32,200	14.5	11.7	1,530	7541044
	CA*F4860*6D*+TXV	D*96VC0804CNA*	45,000	31,800	14.5	12.0	1,385	7541052
	CA*F4860*6D*+TXV	D*96VC1005CNA*	45,500	32,200	14.5	12.0	1,450	7541065
	CA*F4860*6D*+TXV	D*96VC1205DNA*	45,500	32,200	14.5	12.0	1,450	7541077
	CA*F4860*6D*+TXV	D*97MC0804CNA*	45,000	31,800	14.5	12.0	1,385	7541090
	CA*F4860*6D*+TXV	D*97MC1005CNA*						

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0481B* (cont.)	CHPF4860D6D*+TXV	D*97MC0804CNA*	45,000	31,800	14.5	12.0	1,385	7541095
	CHPF4860D6D*+TXV	D*97MC1005CNA*	45,500	32,200	14.5	12.0	1,450	7541107
	CHPF4860D6D*+TXV	D*97MC1205DNA*	45,500	32,200	14.5	12.0	1,450	7541120
	CHPF4860D6D*+TXV	D*96VE1004CNA*	45,000	31,800	14.5	11.7	1,525	7541128
	CHPF4860D6D*+TXV	D*96VE1205DNA*	45,000	31,800	14.5	12.0	1,525	7541133
	CSCF4860N6D*	D*96VC0804CNA*	45,000	31,800	14.5	11.7	1,385	7541059
	CSCF4860N6D*	D*96VC1005CNA*	45,500	32,200	14.5	11.7	1,450	7541071
	CSCF4860N6D*	D*96VC1205DNA*	45,500	32,200	14.5	11.7	1,450	7541084
	CSCF4860N6D*	D*97MC0804CNA*	45,000	31,800	14.5	11.7	1,385	7541097
	CSCF4860N6D*	D*97MC1005CNA*	45,500	32,200	14.5	11.7	1,450	7541109
	CSCF4860N6D*	D*97MC1205DNA*	45,500	32,200	14.5			

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX14SN 0601B* (cont.)	CAPT4961*4A*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7541219
	CAPT4961*4A*	D*96VE1205DNA*	56,500	40,000	14.0	11.7	1,525	7541229
	CAPT4961*4A*	D*80HE0805C*A*	57,000	40,000	14.0	11.7	1,525	7543264
	CAPT4961*4A*	D*80HE0805D*A*	57,000	40,000	14.0	12.0	1,500	7543267
	CAPT4961*4A*	D*80HE1005C*A*	57,000	40,000	14.0	11.7	1,600	7543271
	CAPT4961*4A*	D*80VC0805C*A*	57,000	40,000	14.0	11.7	1,560	7543275
	CAPT4961*4A*	D*80VC1005C*A*	57,000	40,000	14.0	11.7	1,525	7543279
	CAPT4961*4A*+EEP		57,000	40,000	14.0	11.7	1,545	7541142
	CHPF4860D6D*	D*96VC1205DNA*	56,500	40,000	14.0	11.7	1,575	7541200
	CHPF4860D6D*	D*97MC1205DNA*	56,500	40,000	14.0	11.7	1,575	7541220
	CHPF4860D6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7541144

8		7	6	5	4	3	2
E		D		C		B	
		</					

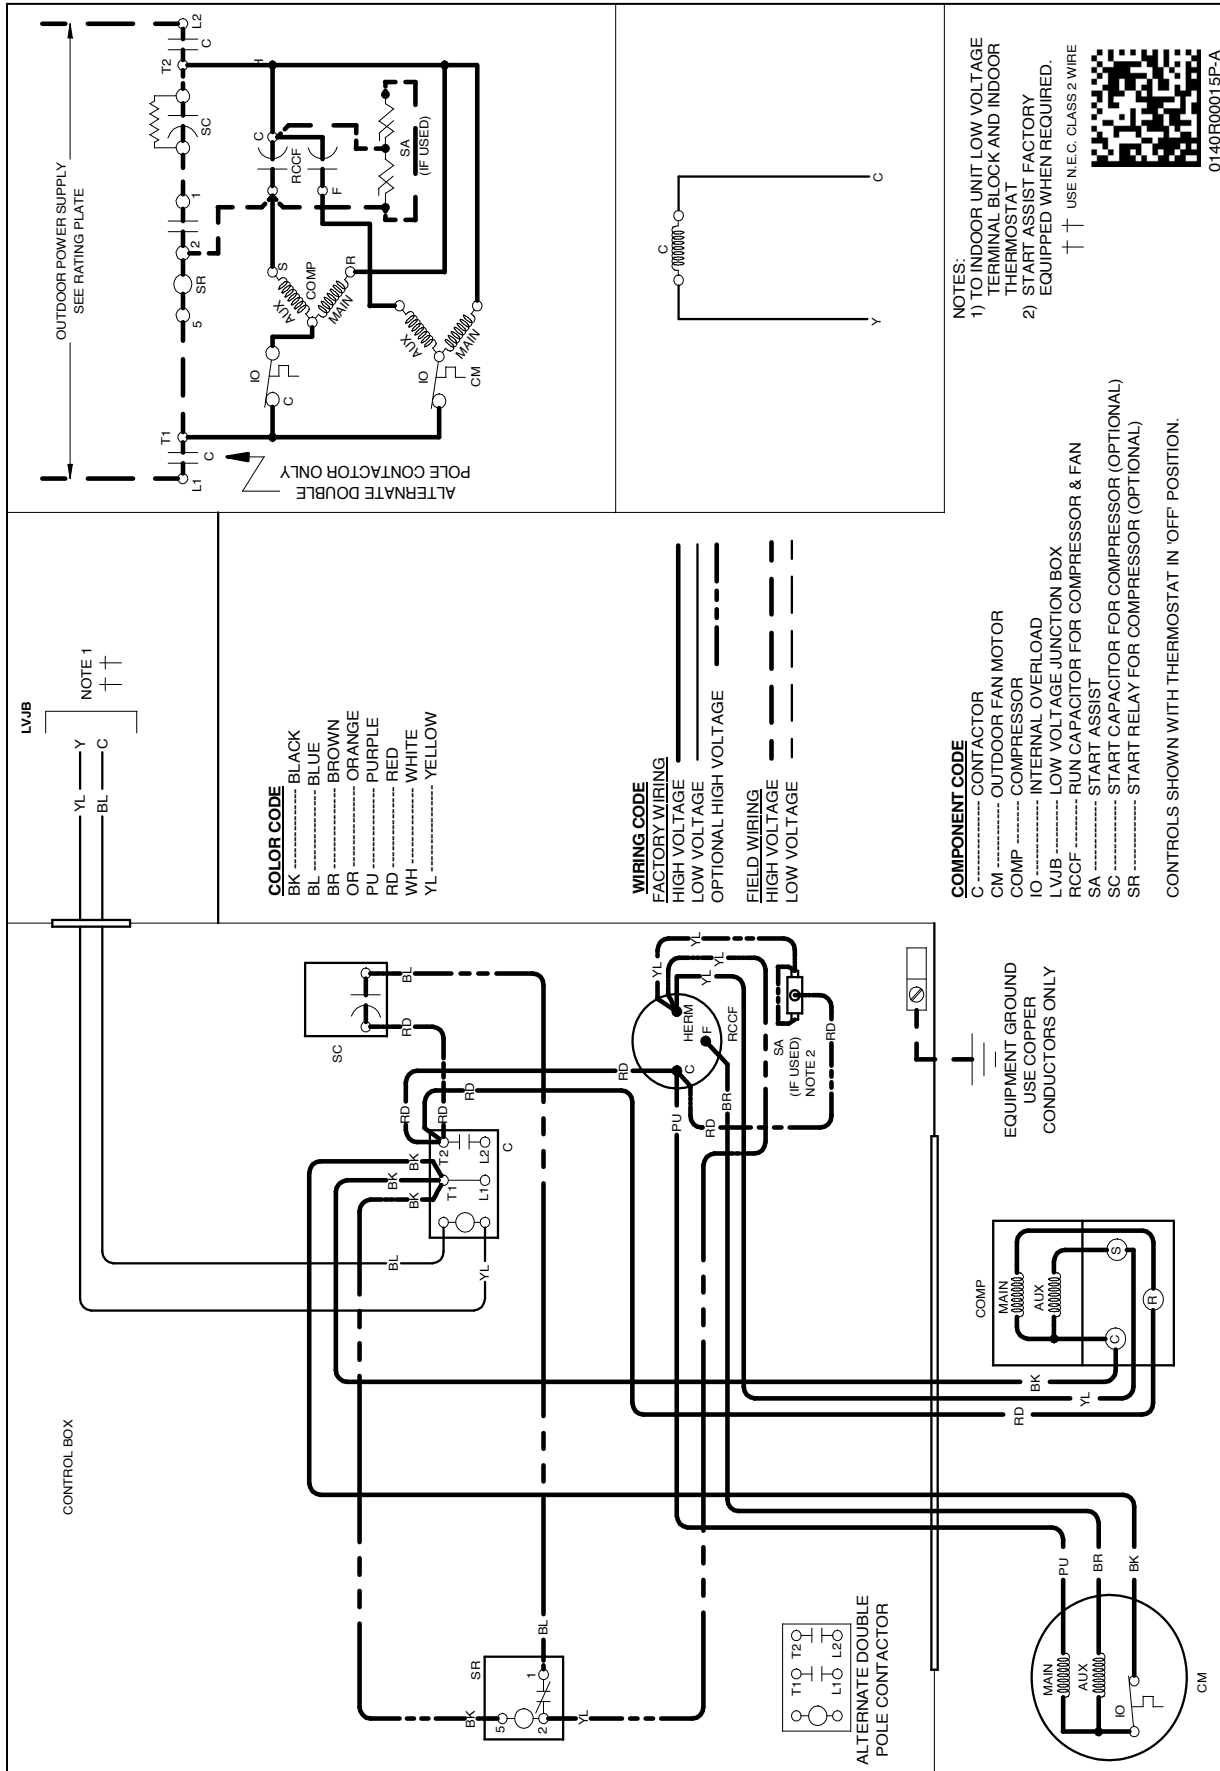

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



0140R00015P-A

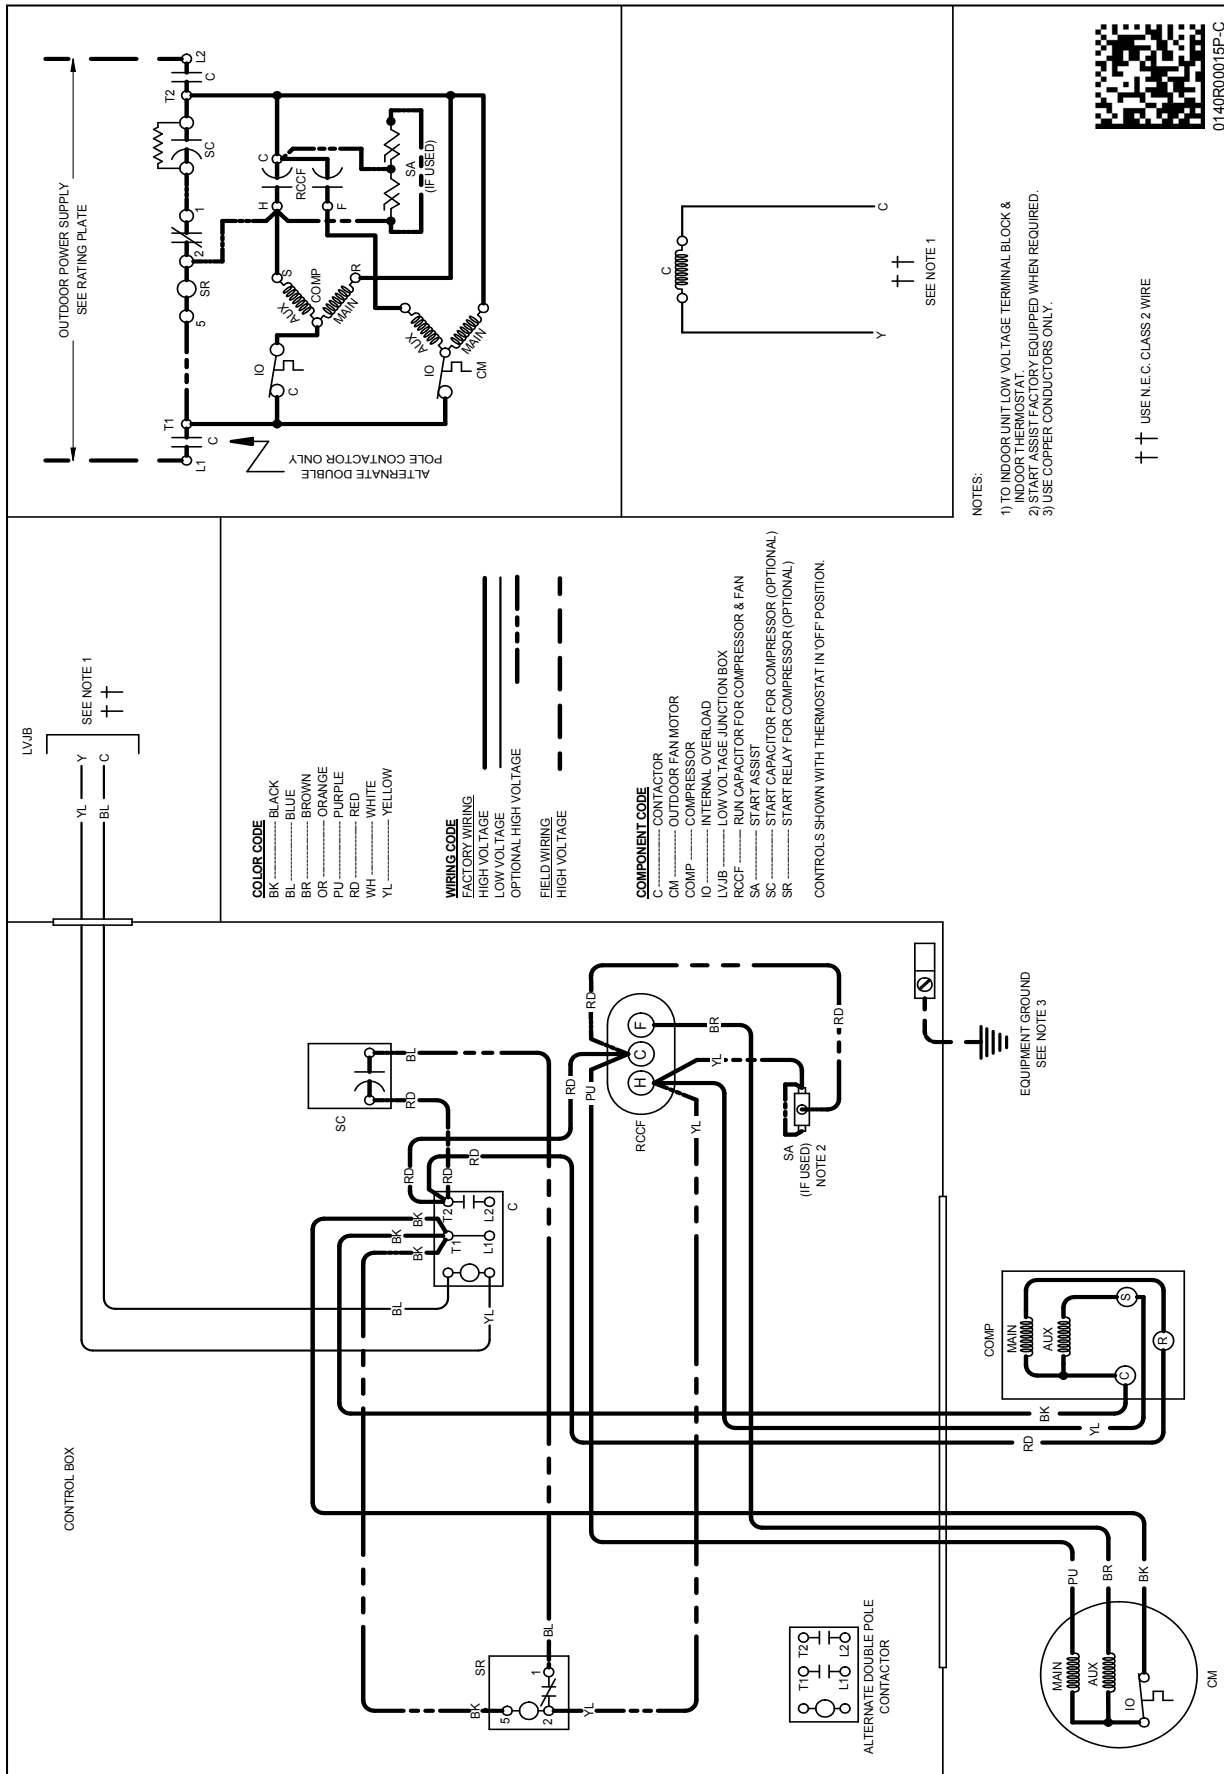

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

MODEL #	DESCRIPTION	DX14SN 018C*/019B*	DX14SN 0241C*/0251C*	DX14SN 030B*/031B*	DX14SN 0361B*/0371B*	DX14SN 0421B*/0431B*	DX14SN 0481B*	DX14SN 0601B*
ABK-20	Anchor Bracket Kit ^			X	X	X	X	X
ABK-21	Anchor Bracket Kit ^	X	X					
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit					X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X
LSK02A ²	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
0130R00000S	Low-Pressure Switch Kit	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X						
TX2N4A ²	TXV Kit	X	X					
TX3N4 ²	TXV Kit			X	X			
TX5N4 ²	TXV Kit					X	X	X

^ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.

[illegible]

[illegible]