
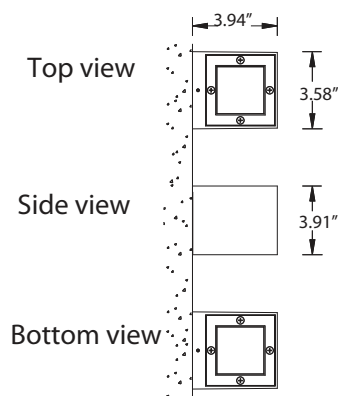
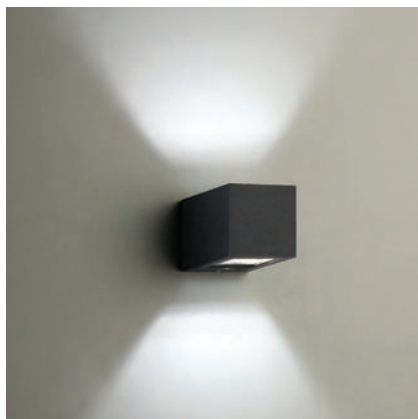


IP65 : Suitable for Wet Locations

IK08 : Impact Resistant (Vandal Resistant)

**UGI-31581****Gino 1 Frosted diffuser LED**

Wall mounted luminaires with upward and downward light distributions. Ideally suited to illuminate the wall and surfaces in front of wall and for light accents on vertical surfaces using halogen main voltage or compact fluorescent lamps.


Low copper content corrosion resistant die-cast aluminum frame and body. Stainless steel screws. Durable silicone rubber gasket and impact resistant toughened glass diffuser. The luminaire is treated with a chemical chromated protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity 95% reflective aluminum reflector. As an option the glass lens can be lightly frosted to hide lamp image. The Gino can also be supplied in a LED version. Fixture mounts over a 3" octagonal junction box

Physical Data

Length: 3.94"

Height: 3.91"

Weight: 2.2 lbs

Lamp☐ 2x4w - 2x131lm - White - LED **LED Color (Please Specify)**☐ **W27 - 2700K**☐ W30 - 3000K☐ W40 - 4000K**Voltage (Please Specify)**☐ **120V**☐ 277V☐ Other _____**Options (Please Specify)**☐ **F - Frosted Lens**☐ C - Clear Lens**Color (Please Specify)**☐ **01-Black - RAL 9011**☐ 03-White - RAL 9003☐ 05-Matt Silver - RAL 9006☐ 06-Bronze - RAL 6014☐ 02- Dark Grey - RAL 7043☐ 04 - Metallic Silver - RAL 9006☐ 07- Custom - RAL _____

Ordering Example : UGI - 31581 - White-2x4w - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.
 Due to the continual improvements in LED technology data and components may change without notice.