

### STORMWATER REPORT

# Detail Center Town Center Drive & Independence Avenue Lee's Summit, Missouri 64064

Prepared For:

City of Lee's Summit 220 SE Green St Lee's Summit, MO 64063

Prepared by:

#### DAVIDSON ARCHITECTURE & ENGINEERING, LLC

Skyler Martin, P.E. 4301 Indian Creek Parkway Overland Park, Kansas 66207 913.451.9390 (phone) 913.451.9391 (fax) www.davidsonae.com

Prepared: 02.20.2020 Revised: 03.23.2020 Revised: 06.19.2020 Revised: 11.05.2020 Project No. 19076







# **Table of Contents**

General Information	1
Methodology	
Existing Condition Analysis	
Proposed Condition Analysis	
Summary	

### **Appendices**

Appendix A – Supporting Data

- Hydrological Soil Group
- FEMA FIRM
- Sheet C3.1 Existing Drain Area Map
- Sheet C3.2 Proposed Drain Area Map
- Sheet C3.3 Storm Plan & Profile

Appendix B – Existing Conditions Hydraflow Hydrographs Output Data

Appendix C – Proposed Conditions Hydraflow Hydrographs Output Data





#### **GENERAL INFORMATION**

The proposed commercial development for Lee's Summit Town Center, LLC is located northwest of the intersection of Town Center Drive and Independence Avenue. The total area for the development is this property is approximately 5.57 acres.

The current site soil condition for this property is classified as "Greenton-Urban, 5 to 9 percent Slopes", with a Map Unit Symbol of '2qky4'. The hydrological soil group for this site is Class D. The site lies entirely within 'Zone X', areas determined to be outside the 0.2% annual chance floodplain as depicted on the FEMA Flood Insurance Rate Map (FIRM) no. 29095C0430G, Revision Date: January 20, 2017.



Figure 1 – Location Map (no scale)



#### METHODOLOGY

KCAPWA IDF curves were used to determine the rainfall intensity for 2, 10, and 100-year storm events. Hydraflow Hydrographs Extension for AutoCAD 2020 was used to determine runoff flow amounts for existing and proposed site conditions. Hydraflow computes the rational method runoff hydrographs by convoluting a rainfall hyetograph through a unit hydrograph. Convolution is known as linear superpositioning where each ordinate of the rainfall hyetograph is multiplied by each ordinate of the unit hydrograph, thus creating a series of hydrographs. These hydrographs are then summed to form the final runoff hydrograph.

#### **EXISTING CONDITIONS**

The existing project site location is 5.57 acres, with the entirety of the property being impervious area. Runoff from this site flows from the northwest of the property to east. For analysis the majority of the undeveloped area, encompassed by NE Town Center Boulevard was taken into consideration for runoff volume contribution. The resulting area is approximately 29.35 acres of impervious area. The area for the two existing ponds was added to the overall impervious area contributing to runoff. The total runoff, including the areas for the existing ponds will be takin into account for the detention ponds design.

An existing storm inlet at the east end of the property along NE Independence Avenue allows runoff to be conveyed east toward an existing dedicated drainage area. Refer to Sheet C3.1 "Existing Drainage Map" in Appendix A for the existing drainage patterns for the property.

**Table 1** below shows the peak discharges for the 2, 10, and 100-year rainfall events. Refer to Appendix B for Complete Hydraflows Report and results for the existing site conditions.

Table 1 – Existing Site Runoff Hydraflow Results									
Storm Event	Pre-developed Peak Flow								
	(cfs)								
2-Yr	35.95								
10-Yr	50.20								
100-Yr	75.61								



#### PROPOSED CONDITIONS

The existing property will undergo development for a proposed commercial area for Lee's Summit Town Center LLC. The proposed development will increase the impervious area from 0.00 acres to 2.85 acres, with the remaining 29.35 acres as open grass area. Refer to sheet C3.2 "Proposed Drainage Map" in Appendix A for the proposed drainage patterns for the property. The runoff will be collected and conveyed to a detention pond where the existing storm inlet, at the eastern edge of the property, will further convey the runoff towards the existing dedicated drainage area.

**Table 2** shows the increase in peak discharge rates for the 2, 10, and 100-year storms rainfall events, due to the increase in impervious area.

Table 2 – Proposed Site Runoff Hydraflow Results without Detention								
Storm Event	Pre-developed Peak Flow							
	(cfs)							
2-Yr	38.13							
10-Yr	53.24							
100-Yr	80.20							

In order to mitigate the increase in discharge rates from the site due to the increase in impervious area created by the proposed development, two separate storm networks are proposed to direct runoff to the existing drainage area via the existing storm inlet at the east edge of the property.

**Table 3** shows the resulting discharge rates for the 2, 10, and 100-year rainfall events with the proposed storm networks and detention pond.

Table 3 – Pi	Table 3 – Proposed Site Runoff Hydraflow Results with Detention									
Storm Event	Post-developed Peak Flow (cfs)									
2-Yr	1.68									
10-Yr	8.92									
100-Yr	24.15									

Hydraflow Hydrographs Extension for AutoCAD civil 3D was used to model the post developed site with the proposed storm system. A complete hydrograph can be found in Appendix C.



The above mentioned methodology was used to design the proposed detention pond to effectively capture and discharge the total runoff from the contributing drainage area, per the requirements set by APWA Section 5601.5.A.4.a. The discharge rates are controlled by a proposed storm structure to maintain release rates less than the rates indicated within APWA Section 5608.4.C.1. Elevations for different rainfall events were used to set outlet pipe inverts and storm structure openings to effectively discharge the collected runoff while meeting water quality requirements.

For water quality design consideration, a perforated riser is proposed to reach the water quality rainfall event elevation. Perforations within the riser allow for a controlled discharge from the detention pond through the proposed storm network, meeting the minimum forty-hour draw down.

Any overflow from the existing pond to the west will be collected and routed via a proposed earthen drainage swale to the north of the proposed development, and then to the detention pond. Outlet pipes convey storm water to existing infrastructure leading to an existing detention area to the east.

A spillway for the proposed detention pond was designed using the 100-yr water surface elevation of 985.87'. Manipulating the design within the Hydraflows program to simulate clogged conditions and zero available storage the spillway crest elevation was set 0.5' above the 100-yr water surface elevation at 986.37'. One foot of freeboard is available above the 100-yr water surface elevation to the top of the berm at 987'. The emergency spillway will allow the overflow to drain towards NE Independence Ave, and into the existing storm infrastructure.

#### **SUMMARY**

The proposed commercial development for Lee's Summit Town Center, LLC is located northwest of the intersection of Town Center Drive and Independence Avenue increases the amount of impervious area within the property. To account for the increase in runoff, storm networks and a detention basin have been designed to maintain the discharge rates below existing conditions flow rates.

Off-site contributions to runoff have been taken into account for the detention pond design. Outlet pipes and structures control peak discharge rates to less than that of existing conditions, while also meeting water quality requirements for the water quality rainfall event.

Table 4 below provides the discharge rates for the existing and post developed conditions for the 2, 10, and 100-year rainfall events for this site.

Table 4 – Total Runoff Volume Comparison										
Storm Event	Pre-development	Post-development	Difference							
(yr)	Discharge (cfs)	Discharge (cfs)	(cfs)							
2	35.95	1.68	34.27							
10	50.20	8.92	41.28							
100	75.61	24.15	51.46							





# Appendix A

# **Supporting Data**







#### MAP LEGEND

#### Area of Interest (AOI)

Area of Interest (AOI)

#### Soils

Soil Map Unit Polygons



#### Soil Map Unit Points **Special Point Features**

Blowout



Borrow Pit



Clay Spot



Closed Depression



Gravel Pit



**Gravelly Spot** 



Landfill




Lava Flow Marsh or swamp



Mine or Quarry



Miscellaneous Water



Rock Outcrop



Saline Spot



Sandy Spot



Severely Eroded Spot



Sinkhole



Slide or Slip



Sodic Spot



Spoil Area Stony Spot



Very Stony Spot



Wet Spot Other



Special Line Features

#### Water Features



Streams and Canals

#### Transportation



Rails



Interstate Highways



**US Routes** 



Major Roads



Local Roads

#### Background



Aerial Photography

#### MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24.000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri Survey Area Data: Version 20, Sep 16, 2019

Soil map units are labeled (as space allows) for map scales 1:50.000 or larger.

Date(s) aerial images were photographed: Sep 6, 2019—Nov 16. 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

# **Map Unit Legend**

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
10024	Greenton-Urban land complex, 5 to 9 percent slopes	4.0	98.8%
10128	Sharpsburg-Urban land complex, 2 to 5 percent slopes	0.0	1.2%
Totals for Area of Interest		4.0	100.0%

### NOTES TO USERS

This map is for use in administering the National Flood Insurance Program. It does not necessarily identify all areas subject to flooding, particularly from local drainage sources of small size. The **community map repository** should be consulted for possible updated or additional flood hazard information.

To obtain more detailed information in areas where **Base Flood Elevations** (BFEs) and/or **floodways** have been determined, users are encouraged to consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables contained within the Flood Insurance Study (FIS) Report that accompanies this FIRM. Users should be aware that BFEs shown on the FIRM represent rounded whole-foot elevations. These BFEs are intended for flood insurance rating purposes only and should not be used as the sole source of flood elevation information. Accordingly, flood elevation data presented in the FIS Report should be utilized in conjunction with the FIRM for purposes of construction and/or floodplain management.

Boundaries of the **floodways** were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the Flood Insurance Study Report for this jurisdiction.

Certain areas not in Special Flood Hazard Areas may be protected by **flood control structures**. Refer to Section 2.4 "Flood Protection Measures" of the Flood Insurance Study Report for information on flood control structures for this jurisdiction.

The **projection** used in the preparation of this map was Missouri State Plane West Zone (FIPS zone 2403). The horizontal datum was NAD 83, GRS 1980 spheroid. Differences in datum, spheroid, projection or UTM zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of this FIRM.

Flood elevations on this map are referenced to the North American Vertical Datum of 1988. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at http://www.ngs.noaa.gov or contact the National Geodetic Survey at the following

NGS Information Services NOAA, N/NGS12 National Geodetic Survey SSMC-3, #9202 1315 East-West Highway Silver Spring, Maryland 20910-3282 (301) 713-3242

centerline or appear outside the SFHA.

shown on previous maps.

To obtain current elevation, description, and/or location information for bench marks shown on this map, please contact the Information Services Branch of the National Geodetic Survey at (301) 713-3242, or visit its website at <a href="http://www.ngs.noaa.gov">http://www.ngs.noaa.gov</a>.

Base map information shown on this FIRM was derived from the U.S.D.A Farm Service National Agriculture ImageryProgram (NAIP) dated 2014. Produced at scale of 1:24,000.


The **profile baselines** depicted on this map represent the hydraulic modeling baselines that match the flood profiles in the FIS report. As a result of improved topographic data, the **profile baseline**, in some cases, may deviate significantly from the channel

Based on updated topographic information, this map reflects more detailed and up-to-date stream channel configurations and floodplain delineations than those shown on the previous FIRM for this jurisdiction. As a result, the Flood Profiles and Floodway Data tables for multiple streams in the Flood Insurance Study Report (which contains authoritative hydraulic data) may reflect stream channel distances that differ from what is shown on the map. Also, the road to floodplain relationships for unrevised streams may differ from what is

Corporate limits shown on this map are based on the best data available at the time f publication.Because changes due to annexations or de-annexations may have occurred after this map was published, map users should contact appropriate community officials to verify current corporate limit locations.

Please refer to the separately printed Map Index for an overview map of the county showing the layout of map panels; community map repository addresses; and a Listing of Communities table containing National Flood Insurance Program dates for each community as well as a listing of the panels on which each community

For information on available products associated with this FIRM visit the Map Service Center (MSC) website at <a href="http://msc.fema.gov">http://msc.fema.gov</a>. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the MSC website.

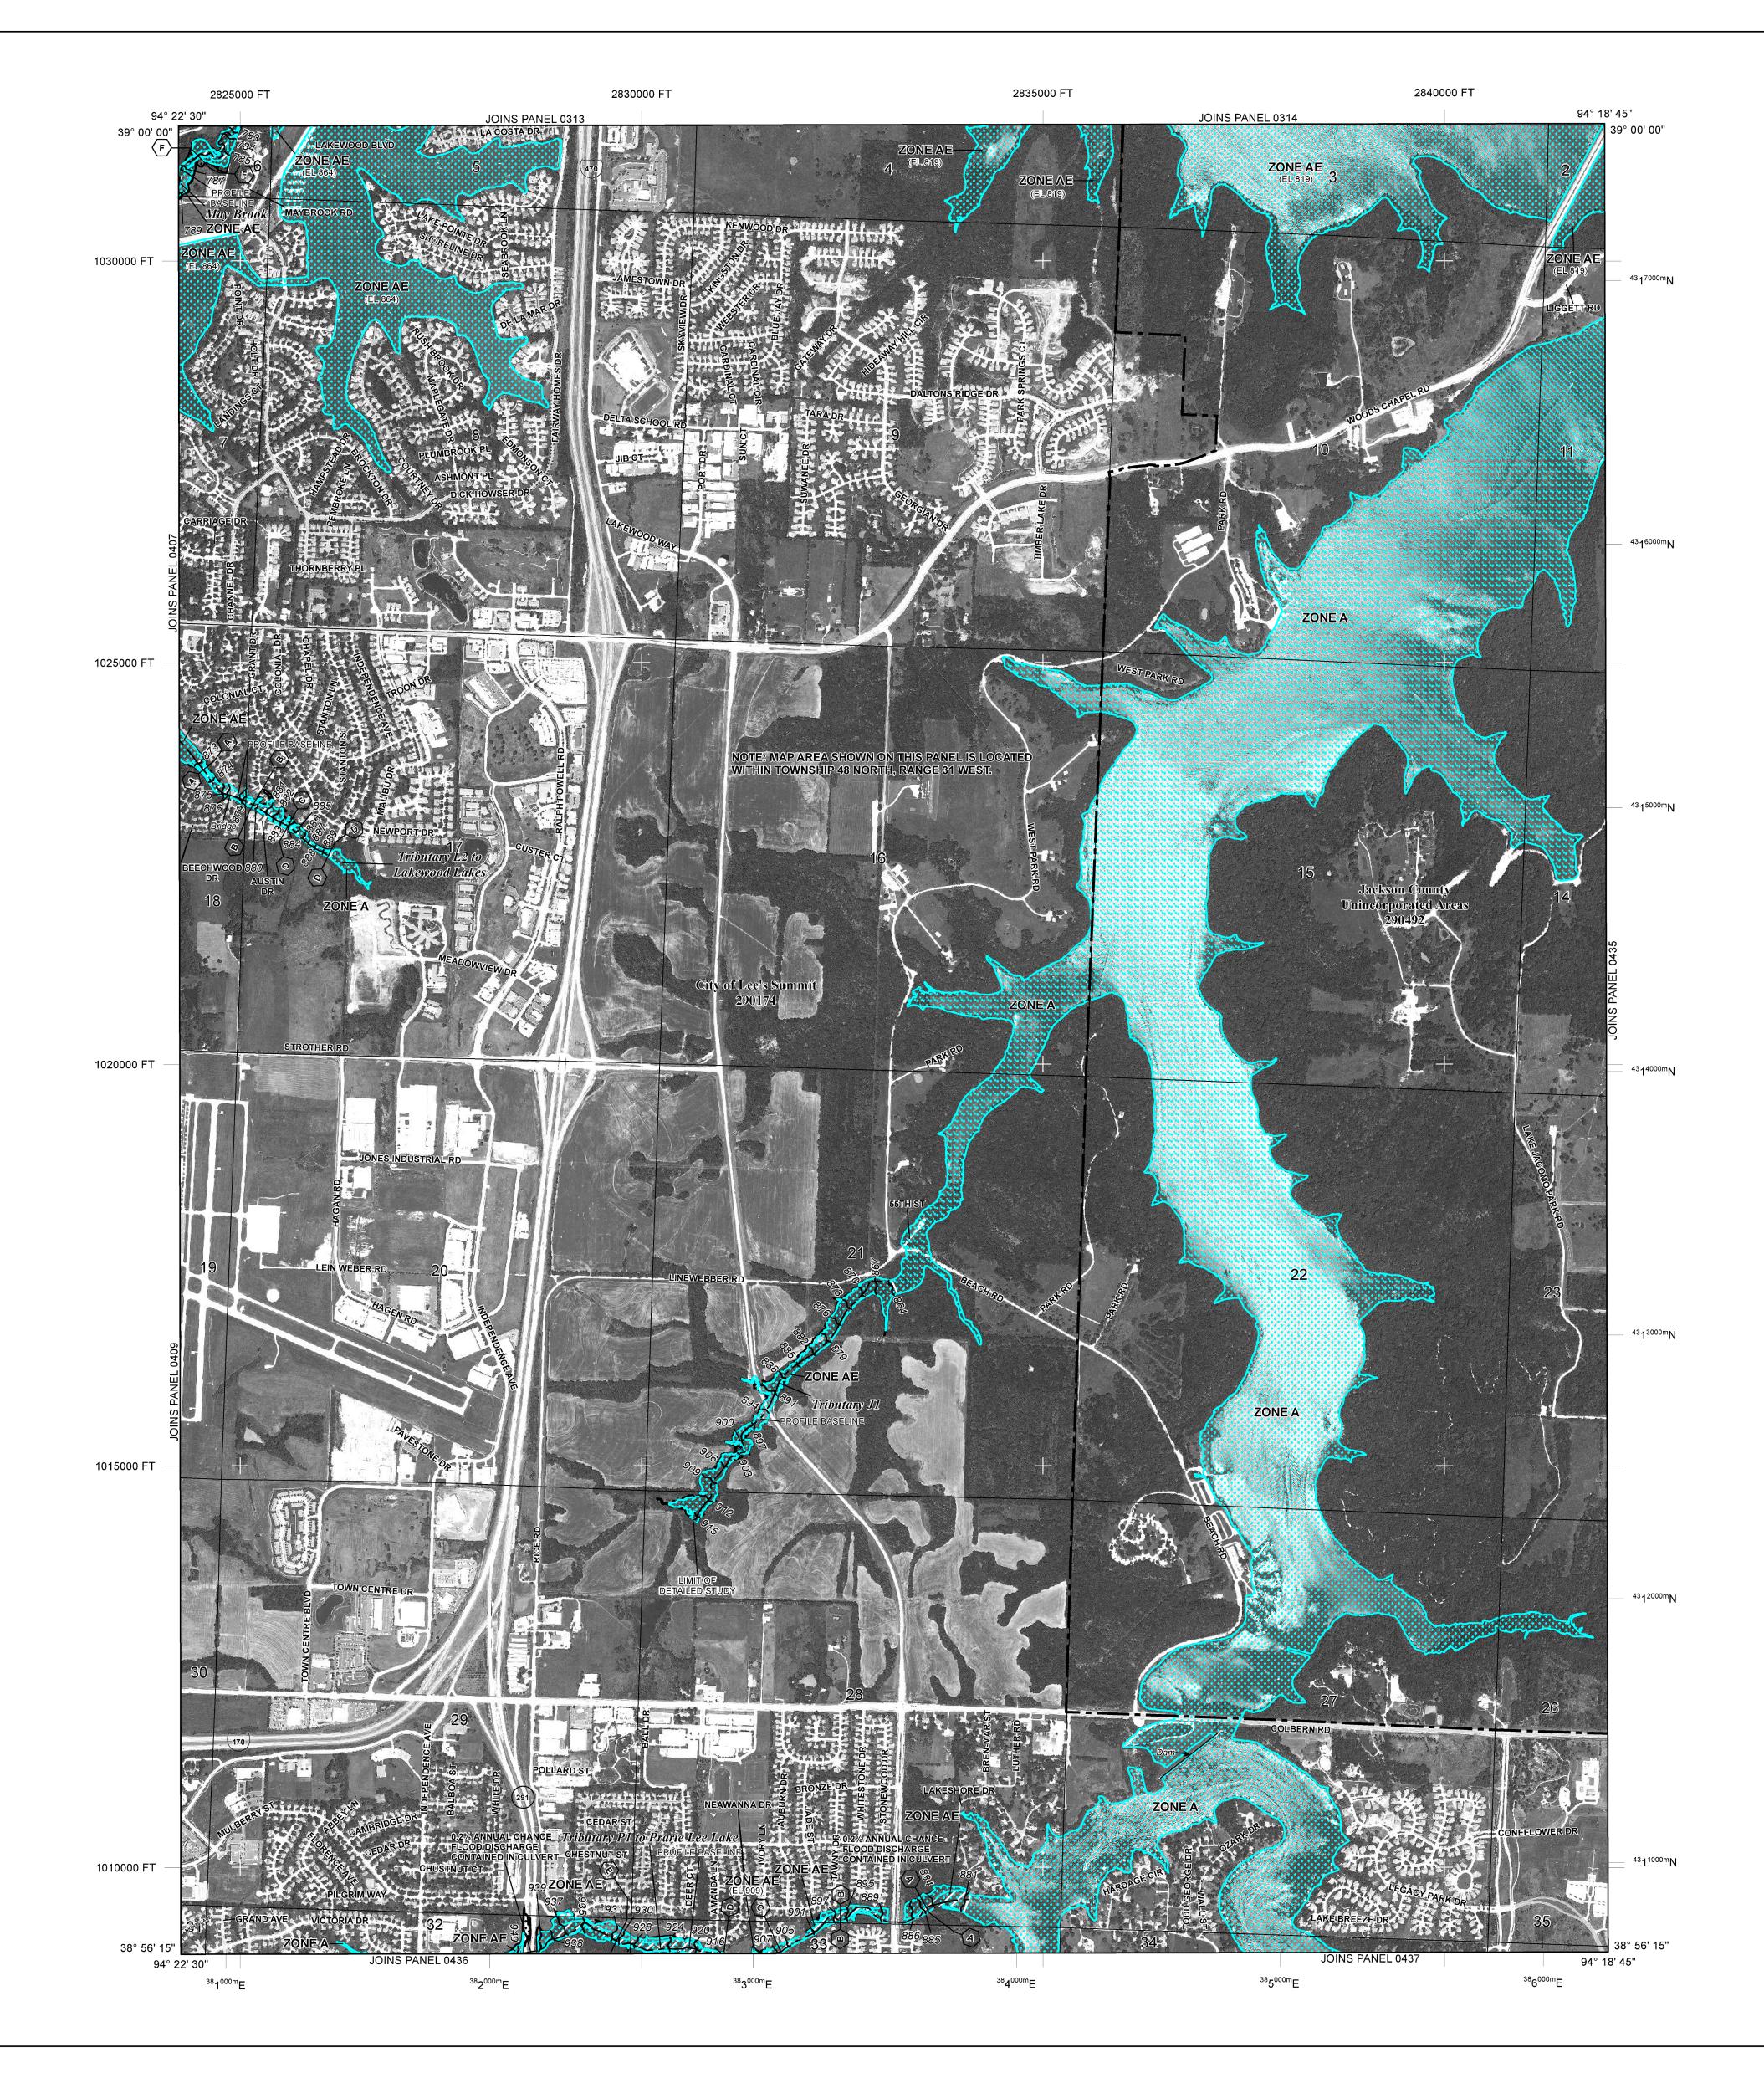

### LEGEND

SPECIAL FLOOD HAZARD AREAS (SFHAs) SUBJECT TO INUNDATION BY THE 1% ANNUAL CHANCE FLOOD The 1% annual chance flood (100-year flood), also known as the base flood, is the flood that has a 1% chance of being equaled or exceeded in any given year. The Special Flood Hazard Area is the area subject to flooding by the 1% annual chance flood. Areas of Special Flood Hazard include Zones A, AE, AH, AO, AR, A99, V, and VE. The Base Flood Elevation is the water-surface elevation of the 1% annual chance flood.

No Base Flood Elevations determined.

Base Flood Elevations determined. Flood depths of 1 to 3 feet (usually areas of ponding); Base Flood Elevations

Flood depths of 1 to 3 feet (usually sheet flow on sloping terrain); average

depths determined. For areas of alluvial fan flooding, velocities also determined. Special Flood Hazard Areas formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone

AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood. Area to be protected from 1% annual chance flood by a Federal flood

protection system under construction; no Base Flood Elevations determined. Coastal flood zone with velocity hazard (wave action); no Base Flood Elevations Coastal flood zone with velocity hazard (wave action); Base Flood Elevations

FLOODWAY AREAS IN ZONE AE

The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in

OTHER FLOOD AREAS

OTHER AREAS

Areas of 0.2% annual chance flood; areas of 1% annual chance flood with average depths of less than 1 foot or with drainage areas less than 1 square mile; and areas protected by levees from 1% annual chance flood.

Areas determined to be outside the 0.2% annual chance floodplain. Areas in which flood hazards are undetermined, but possible.

COASTAL BARRIER RESOURCES SYSTEM (CBRS) AREAS

OTHERWISE PROTECTED AREAS (OPAs)

CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas. 1% Annual Chance Floodplain Boundary

> 0.2% Annual Chance Floodplain Boundary Floodway boundary

Zone D boundary

CBRS and OPA boundary Boundary dividing Special Flood Hazard Area Zones and boundary dividing Special Flood Hazard Areas of different Base Flood Elevations, flood depths, or flood velocities.

Base Flood Elevation line and value; elevation in feet\* ~~~ 513~~~ Base Flood Elevation value where uniform within zone; elevation in

23 - - - - - - - - - - - - - - 23 \_ - - - - - - -

\*Referenced to the North American Vertical Datum of 1988

•••••

(EL 987)

Geographic coordinates referenced to the North American Datum of 45° 02' 08", 93° 02' 12"

1983 (NAD 83) Western Hemisphere

(FIPS Zone 2403), Transverse Mercator projection Bench mark (see explanation in Notes to Users section of this FIRM

> MAP REPOSITORIES Refer to Map Repositories list on Map Index

EFFECTIVE DATE OF COUNTYWIDE FLOOD INSURANCE RATE MAP September 29, 2006

EFFECTIVE DATE(S) OF REVISION(S) TO THIS PANEL January 20, 2017 - to change Special Flood Hazard Areas.

For community map revision history prior to countywide mapping, refer to the Community

Map History table located in the Flood Insurance Study report for this jurisdiction. To determine if flood insurance is available in this community, contact your insurance agent

or call the National Flood Insurance Program at 1-800-638-6620.

# **PANEL 0430G**

# FLOOD INSURANCE RATE MAP

JACKSON COUNTY, **MISSOURI** AND INCORPORATED AREAS

PANEL 430 OF 625

(SEE MAP INDEX FOR FIRM PANEL LAYOUT)

CONTAINS: **COMMUNITY** JACKSON COUNTY 290492 LEE'S SUMMIT,

Notice to User: The Map Number shown below should be used when placing map orders; the Community Number shown above should be used on insurance applications for the subject

Federal Emergency Management Agency



community.

MAP NUMBER 29095C0430G MAP REVISED JANUARY 20, 2017

0430

0430

# Appendix B

# **Existing Conditions Hydraflow Hydrograph Output Data**





# **Hydraflow Table of Contents**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Monday, 03 / 23 / 2020

Watershed Model Schematic	1
Hydrograph Return Period Recap	2
1 - Year Summary ReportHydrograph ReportsHydrograph No. 1, Rational, Existing Conditions	4
2 - Year Summary Report Hydrograph Reports Hydrograph No. 1, Rational, Existing Conditions	6
10 - Year Summary ReportHydrograph ReportsHydrograph No. 1, Rational, Existing Conditions	8
100 - Year Summary ReportHydrograph ReportsHydrograph No. 1, Rational, Existing Conditions	10
IDF Report	11

1

#### **Legend**

Hyd.OriginDescription1RationalExisting Conditions

Project: 19076.ExistingConditions.02.11.2020.gpw

Monday, 03 / 23 / 2020

# Hydrograph Return Period Recap

lyd.	Hydrograph	Inflow				Hydrograph					
lo.	type (origin)	hyd(s)	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	Description
1	Rational		28.28	35.95			50.20		64.86	75.61	Existing Conditions

Proj. file: 19076.ExistingConditions.02.11.2020.gpw

Monday, 03 / 23 / 2020

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1								strge used (cuft)	Existing Conditions  Existing Conditions
	076.ExistingC					Period: 1 Ye			3 / 23 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Monday, 03 / 23 / 2020

### Hyd. No. 1

**Existing Conditions** 

= 28.28 cfsHydrograph type = Rational Peak discharge Storm frequency = 1 yrsTime to peak = 15 min Time interval = 1 min Hyd. volume = 25,453 cuft Drainage area Runoff coeff. = 29.350 ac = 0.33Tc by User = 15.00 min Intensity = 2.920 in/hr

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

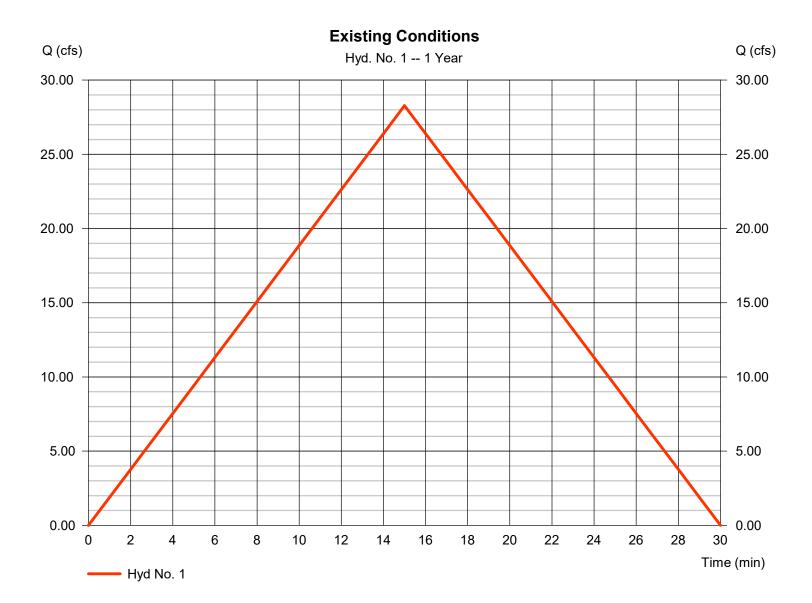

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1								(cuft)	Existing Conditions

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Monday, 03 / 23 / 2020

### Hyd. No. 1

**Existing Conditions** 

Hydrograph type = Rational Peak discharge = 35.95 cfsStorm frequency = 2 yrsTime to peak = 15 min Time interval = 1 min Hyd. volume = 32,356 cuft Drainage area Runoff coeff. = 0.33= 29.350 ac Tc by User = 15.00 min Intensity = 3.712 in/hr

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.		Peak flow (cfs)	Time interval (min)	Time to Peak (min)		Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	50.20	1	15	45,176				Existing Conditions
190	176.ExistingCo	onditions.	02.11.20	)20.gpw	Return P	eriod: 10 Y	ear ear	Monday, 03	2 / 23 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Monday, 03 / 23 / 2020

### Hyd. No. 1

**Existing Conditions** 

Hydrograph type = Rational Peak discharge = 50.20 cfsStorm frequency = 10 yrsTime to peak = 15 min Time interval = 1 min Hyd. volume = 45,176 cuft Drainage area Runoff coeff. = 29.350 ac = 0.33Tc by User = 15.00 min Intensity = 5.183 in/hr

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	75.61	1	15	68,053				Existing Conditions
190	19076.ExistingConditions.02.11.2020.gpw					Period: 100	Year	Monday, 03	3 / 23 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Monday, 03 / 23 / 2020

### Hyd. No. 1

**Existing Conditions** 

Hydrograph type = Rational Peak discharge = 75.61 cfsStorm frequency = 100 yrsTime to peak = 15 min Time interval = 1 min Hyd. volume = 68,053 cuftDrainage area Runoff coeff. = 29.350 ac = 0.33Tc by User = 15.00 min Intensity = 7.807 in/hr

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



# **Hydraflow Rainfall Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Monday, 03 / 23 / 2020

Return Period	Intensity-Duration-Frequency Equation Coefficients (FHA)										
(Yrs)	В	D	E	(N/A)							
1	2.9200	0.1000	0.0000								
2	110.7137	16.5000	0.9842								
3	0.0000	0.0000	0.0000								
5	168.3971	19.5000	1.0189								
10	183.3473	19.2000	1.0096								
25	103.5313	15.9000	0.8218								
50	235.4014	19.9000	1.0020								
100	83.7894	6.1000	0.7783								

File name: KCAPWA.IDF

#### Intensity = B / (Tc + D)^E

Return	Intensity Values (in/hr)												
Period (Yrs)	5 min	10	15	20	25	30	35	40	45	50	55	60	
1	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	
2	5.41	4.40	3.71	3.21	2.83	2.53	2.29	2.09	1.92	1.78	1.66	1.55	
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	6.47	5.35	4.56	3.98	3.52	3.16	2.86	2.62	2.41	2.24	2.08	1.95	
10	7.35	6.08	5.18	4.52	4.00	3.59	3.26	2.98	2.74	2.54	2.37	2.22	
25	8.51	7.14	6.17	5.46	4.90	4.46	4.10	3.79	3.54	3.31	3.12	2.95	
50	9.39	7.82	6.70	5.86	5.20	4.68	4.25	3.90	3.60	3.34	3.12	2.92	
100	12.87	9.64	7.81	6.62	5.77	5.14	4.65	4.25	3.92	3.65	3.41	3.21	

Tc = time in minutes. Values may exceed 60.

Precip. file name: P:\DAE Civil\Hydraflow Storm Sewer\SCS Custom Water Quality.pcp

		F	Rainfall F	Precipita	Rainfall Precipitation Table (in)											
Storm Distribution	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr								
SCS 24-hour	1.37	3.50	0.00	4.50	5.30	6.10	6.90	7.50								
SCS 6-Hr	0.00	1.80	0.00	0.00	2.60	2.90	0.00	4.00								
Huff-1st	0.00	1.55	0.00	2.75	4.00	5.38	6.50	8.00								
Huff-2nd	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00								
Huff-3rd	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00								
Huff-4th	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00								
Huff-Indy	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00								
Custom	0.00	1.75	0.00	2.80	3.90	5.25	6.00	7.10								

# Appendix C

# **Proposed Conditions Hydraflow Output Data**





# **Hydraflow Table of Contents**


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

watersned Model Schematic	
Hydrograph Return Period Recap	2
1 - Year	
Summary Report	3
Hydrograph Reports	
Hydrograph No. 1, Rational, Area 2-1	
Hydrograph No. 2, Rational, Area 2-2	
Hydrograph No. 3, Rational, Area 2-3	
Hydrograph No. 4, Rational, Area 2-4	
Hydrograph No. 5, Rational, Area 2-5	
Hydrograph No. 6, Rational, Area 2-6	
Hydrograph No. 7, Rational, Area 2-7	
Hydrograph No. 8, Rational, Area 2-8	
Hydrograph No. 9, Rational, Area 2-9	
Hydrograph No. 10, Rational, Area 2-10	
Hydrograph No. 11, Rational, Area 2-11	
Hydrograph No. 12, Combine, Combined 1	
Hydrograph No. 13, Combine, Combined 2	
Hydrograph No. 14, Combine, Combined 3	
Hydrograph No. 15, Combine, TOTAL TO DETENTION	
Hydrograph No. 16, Reservoir, TOTAL DETENTION	
Pond Report - Detention	
Hydrograph No. 17, Combine, TOTAL RUNOFF	
Trydrograph No. 17, Combine, TOTAL NONOTT	22
2 - Year	
Summary Report	
Hydrograph Reports	
Hydrograph No. 1, Rational, Area 2-1	
Hydrograph No. 2, Rational, Area 2-2	
Hydrograph No. 3, Rational, Area 2-3	
Hydrograph No. 4, Rational, Area 2-4	
Hydrograph No. 5, Rational, Area 2-5	
Hydrograph No. 6, Rational, Area 2-6	
Hydrograph No. 7, Rational, Area 2-7	
Hydrograph No. 8, Rational, Area 2-8	
Hydrograph No. 9, Rational, Area 2-9	
Hydrograph No. 10, Rational, Area 2-10	33
Hydrograph No. 11, Rational, Area 2-11	34
Hydrograph No. 12, Combine, Combined 1	
Hydrograph No. 13, Combine, Combined 2	36
Hydrograph No. 14, Combine, Combined 3	
Hydrograph No. 15, Combine, TOTAL TO DETENTION	
Hydrograph No. 16, Reservoir, TOTAL DETENTION	
Hydrograph No. 17, Combine, TOTAL RUNOFF	40

Summary Report	41
Hydrograph Reports	
Hydrograph No. 1, Rational, Area 2-1	
Hydrograph No. 2, Rational, Area 2-2	
Hydrograph No. 3, Rational, Area 2-3	44
Hydrograph No. 4, Rational, Area 2-4	45
Hydrograph No. 5, Rational, Area 2-5	46
Hydrograph No. 6, Rational, Area 2-6	
Hydrograph No. 7, Rational, Area 2-7	
Hydrograph No. 8, Rational, Area 2-8	49
Hydrograph No. 9, Rational, Area 2-9	50
Hydrograph No. 10, Rational, Area 2-10	51
Hydrograph No. 11, Rational, Area 2-11	. 52
Hydrograph No. 12, Combine, Combined 1	53
Hydrograph No. 13, Combine, Combined 2	54
Hydrograph No. 14, Combine, Combined 3	55
Hydrograph No. 15, Combine, TOTAL TO DETENTION	
Hydrograph No. 16, Reservoir, TOTAL DETENTION	57
Hydrograph No. 17, Combine, TOTAL RUNOFF	58
100 - Year	
Summary Report	
Summary ReportHydrograph Reports	60
Summary ReportHydrograph ReportsHydrograph No. 1, Rational, Area 2-1	<b>60</b>
Summary Report	60 60 61
Summary Report	60 60 61 62
Summary Report	60 61 62 63
Summary Report	60 60 61 62 63 64
Summary Report	60 60 61 62 63 64 65
Summary Reports	60 60 61 62 63 64 65 66
Summary Reports	60 61 62 63 64 65 66 67
Summary Reports	60 61 62 63 64 65 66 67 68
Summary Reports	60 61 62 63 64 65 66 67 68
Summary Reports  Hydrograph Reports  Hydrograph No. 1, Rational, Area 2-1.  Hydrograph No. 2, Rational, Area 2-2.  Hydrograph No. 3, Rational, Area 2-3.  Hydrograph No. 4, Rational, Area 2-4.  Hydrograph No. 5, Rational, Area 2-5.  Hydrograph No. 6, Rational, Area 2-6.  Hydrograph No. 7, Rational, Area 2-7.  Hydrograph No. 8, Rational, Area 2-8.  Hydrograph No. 9, Rational, Area 2-9.  Hydrograph No. 10, Rational, Area 2-10.  Hydrograph No. 11, Rational, Area 2-11.	60 61 62 63 64 65 66 67 68
Summary Reports  Hydrograph Reports  Hydrograph No. 1, Rational, Area 2-1.  Hydrograph No. 2, Rational, Area 2-2.  Hydrograph No. 3, Rational, Area 2-3.  Hydrograph No. 4, Rational, Area 2-4.  Hydrograph No. 5, Rational, Area 2-5.  Hydrograph No. 6, Rational, Area 2-6.  Hydrograph No. 7, Rational, Area 2-7.  Hydrograph No. 8, Rational, Area 2-8.  Hydrograph No. 9, Rational, Area 2-9.  Hydrograph No. 10, Rational, Area 2-10.  Hydrograph No. 11, Rational, Area 2-11.  Hydrograph No. 12, Combine, Combined 1.	60 61 62 63 64 65 66 67 68 69 70
Summary Reports	60 61 62 63 64 65 66 67 68 69 71 72
Summary Reports	60 60 61 62 63 64 65 66 67 68 69 71 72 73
Summary Reports Hydrograph Reports Hydrograph No. 1, Rational, Area 2-1 Hydrograph No. 2, Rational, Area 2-2 Hydrograph No. 3, Rational, Area 2-3 Hydrograph No. 4, Rational, Area 2-4 Hydrograph No. 5, Rational, Area 2-5 Hydrograph No. 6, Rational, Area 2-6 Hydrograph No. 7, Rational, Area 2-7 Hydrograph No. 8, Rational, Area 2-8 Hydrograph No. 9, Rational, Area 2-9 Hydrograph No. 10, Rational, Area 2-10 Hydrograph No. 11, Rational, Area 2-11 Hydrograph No. 12, Combine, Combined 1 Hydrograph No. 13, Combine, Combined 2 Hydrograph No. 14, Combine, Combined 3 Hydrograph No. 15, Combine, TOTAL TO DETENTION	60 60 61 62 63 64 65 66 67 68 69 70 71 72 73
Summary Reports	60 60 61 62 63 64 65 66 67 68 69 71 72 73 74 75
Summary Reports Hydrograph Reports Hydrograph No. 1, Rational, Area 2-1 Hydrograph No. 2, Rational, Area 2-2 Hydrograph No. 3, Rational, Area 2-3 Hydrograph No. 4, Rational, Area 2-4 Hydrograph No. 5, Rational, Area 2-5 Hydrograph No. 6, Rational, Area 2-6 Hydrograph No. 7, Rational, Area 2-7 Hydrograph No. 8, Rational, Area 2-8 Hydrograph No. 9, Rational, Area 2-9 Hydrograph No. 10, Rational, Area 2-10 Hydrograph No. 11, Rational, Area 2-11 Hydrograph No. 12, Combine, Combined 1 Hydrograph No. 13, Combine, Combined 2 Hydrograph No. 14, Combine, Combined 3 Hydrograph No. 15, Combine, TOTAL TO DETENTION	60 60 61 62 63 64 65 66 67 68 69 71 72 73 74 75

### **Watershed Model Schematic**

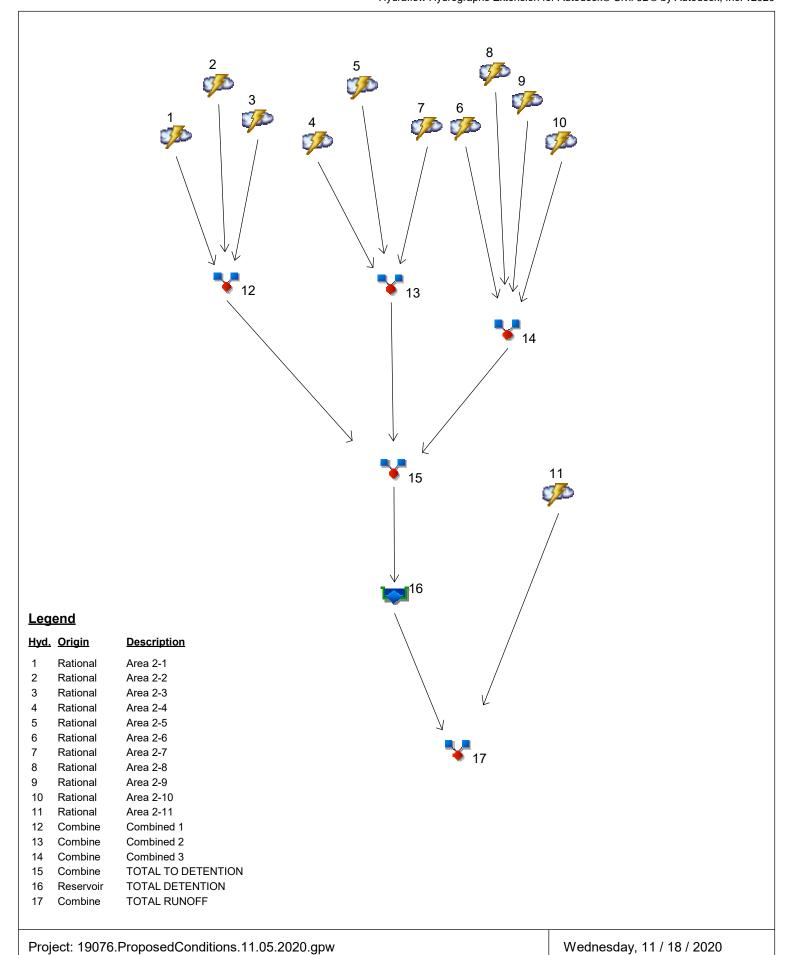

# Hydrograph Return Period Recap Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

- 1	Hydrograph	Inflow	Peak Outflow (cfs)							Hydrograph	
0.	o. type hyd(s) (origin)	hyd(s)	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	Description
ı	Rational		8.217	10.45			14.58			21.97	Area 2-1
!	Rational		3.933	5.000			6.981			10.52	Area 2-2
3	Rational		10.09	12.83			17.91			26.98	Area 2-3
4	Rational		1.993	3.689			5.015			8.784	Area 2-4
,	Rational		0.368	0.681			0.926			1.622	Area 2-5
	Rational		2.197	4.067			5.529			9.684	Area 2-6
.	Rational		1.285	2.378			3.233			5.663	Area 2-7
	Rational		0.728	1.348			1.833			3.210	Area 2-8
	Rational		0.631	1.168			1.587			2.780	Area 2-9
5	Rational		0.918	1.700			2.311			4.048	Area 2-10
1	Rational		0.450	0.832			1.132			1.982	Area 2-11
2	Combine	1, 2, 3,	22.24	28.27			39.48			59.47	Combined 1
3	Combine	4, 5, 7,	3.646	6.749			9.175			16.07	Combined 2
4	Combine	6, 8, 9,	4.474	8.283			11.26			19.72	Combined 3
5	Combine	10, 12, 13, 14	22.24	28.27			39.48			59.47	TOTAL TO DETENTION
6	Reservoir	15	0.000	0.000			0.000			0.093	TOTAL DETENTION
7	Combine	11, 16	0.450	0.832			1.132			1.982	TOTAL RUNOFF

Proj. file: 19076.ProposedConditions.11.05.2020.gpw

Wednesday, 11 / 18 / 2020

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	8.217	1	15	7,395				Area 2-1
2	Rational	3.933	1	15	3,540				Area 2-2
3	Rational	10.09	1	15	9,082				Area 2-3
4	Rational	1.993	1	5	598				Area 2-4
5	Rational	0.368	1	5	110				Area 2-5
6	Rational	2.197	1	5	659				Area 2-6
7	Rational	1.285	1	5	385				Area 2-7
8	Rational	0.728	1	5	218				Area 2-8
9	Rational	0.631	1	5	189				Area 2-9
10	Rational	0.918	1	5	276				Area 2-10
11	Rational	0.450	1	5	135				Area 2-11
12	Combine	22.24	1	15	20,017	1, 2, 3,			Combined 1
13	Combine	3.646	1	5	1,094	4, 5, 7,			Combined 2
14	Combine	4.474	1	5	1,342	6, 8, 9, 10,			Combined 3
15	Combine	22.24	1	15	22,453	12, 13, 14			TOTAL TO DETENTION
16	Reservoir	0.000	1	n/a	0	15	982.69	22,453	TOTAL DETENTION
17	Combine	0.450	1	5	135	11, 16			TOTAL RUNOFF
190	76.Proposed	Condition	s.11.05.2	2020.gpw	Return F	Period: 1 Ye	ear	Wednesda	y, 11 / 18 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020


### Hyd. No. 1

Area 2-1

Hydrograph type = 8.217 cfs= Rational Peak discharge Storm frequency = 1 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 7,395 cuftDrainage area Runoff coeff. = 9.380 ac= 0.3

Intensity = 2.920 in/hr Tc by User = 15.00 min

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

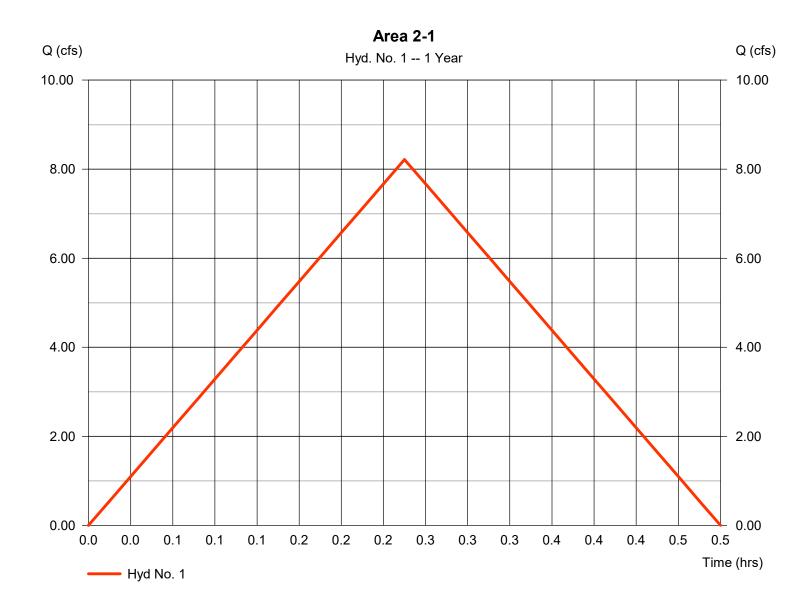

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 2

Area 2-2

Hydrograph type = Rational Peak discharge = 3.933 cfsStorm frequency = 1 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 3,540 cuftDrainage area Runoff coeff. = 4.490 ac= 0.3

Intensity = 2.920 in/hr Tc by User = 15.00 min

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

= 2.920 in/hr

Wednesday, 11 / 18 / 2020

### Hyd. No. 3

Area 2-3

Hydrograph type = Rational Peak discharge = 10.09 cfsStorm frequency = 1 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 9,082 cuft

Drainage area Runoff coeff. = 11.520 ac= 0.3

Tc by User = 15.00 min Intensity IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1




Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 4

Area 2-4

Hydrograph type = Rational Peak discharge = 1.993 cfsStorm frequency Time to peak = 1 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 598 cuft Drainage area Runoff coeff. = 1.050 ac= 0.65Tc by User  $= 5.00 \, \text{min}$ Intensity = 2.920 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

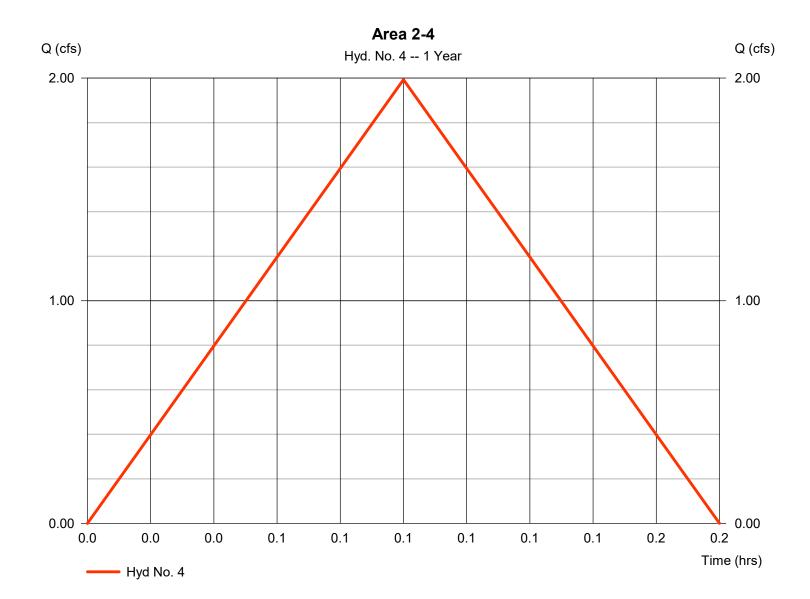


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 5

Area 2-5

= Rational Hydrograph type Peak discharge = 0.368 cfsStorm frequency Time to peak = 1 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 110 cuft Drainage area Runoff coeff. = 0.200 ac= 0.63Tc by User  $= 5.00 \, \text{min}$ Intensity = 2.920 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

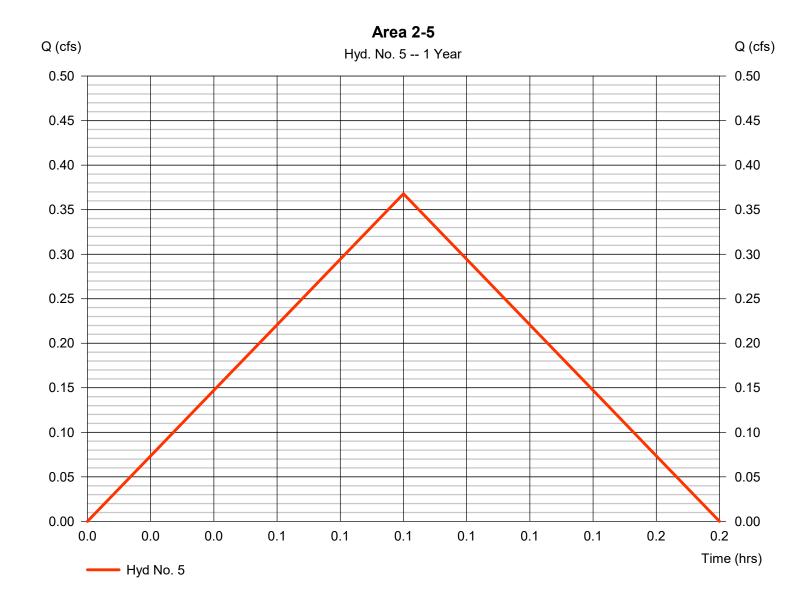


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 6

Area 2-6

Hydrograph type = 2.197 cfs= Rational Peak discharge Storm frequency = 1 yrsTime to peak = 0.08 hrs= 659 cuft Time interval = 1 min Hyd. volume Drainage area Runoff coeff. = 0.990 ac= 0.76Tc by User  $= 5.00 \, \text{min}$ Intensity = 2.920 in/hrAsc/Rec limb fact IDF Curve = KCAPWA.IDF = 1/1

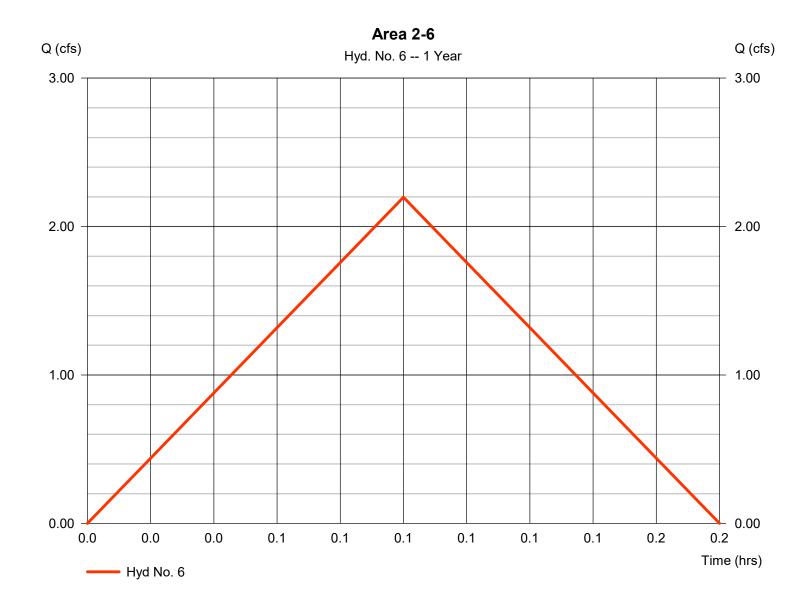

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 7

Area 2-7

Hydrograph type = 1.285 cfs= Rational Peak discharge Storm frequency = 1 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 385 cuft Drainage area Runoff coeff. = 0.500 ac= 0.88Tc by User  $= 5.00 \, \text{min}$ Intensity = 2.920 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1




Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 8

Area 2-8

= Rational Hydrograph type Peak discharge = 0.728 cfsStorm frequency Time to peak = 1 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 218 cuft Drainage area Runoff coeff. = 0.290 ac= 0.86Tc by User Intensity = 2.920 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

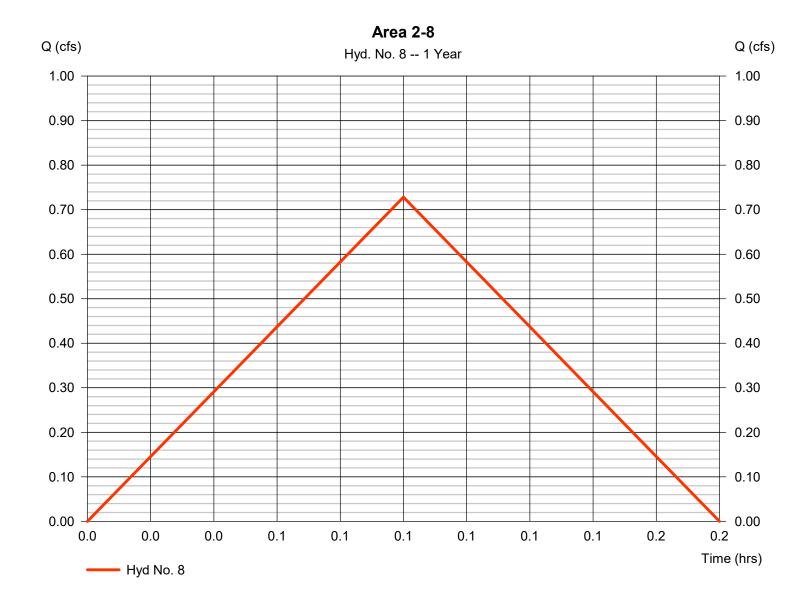


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 9

Area 2-9

= Rational Hydrograph type Peak discharge = 0.631 cfsStorm frequency Time to peak = 1 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 189 cuft Drainage area Runoff coeff. = 0.240 ac= 0.9Tc by User  $= 5.00 \, \text{min}$ Intensity = 2.920 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

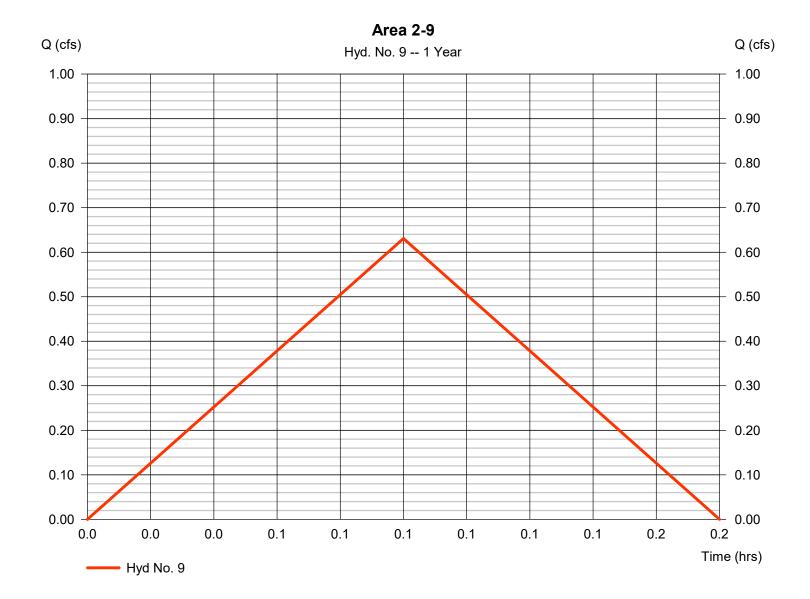


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 10

Area 2-10

= Rational Hydrograph type Peak discharge = 0.918 cfsStorm frequency = 1 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 276 cuft Drainage area Runoff coeff. = 0.370 ac= 0.85Tc by User Intensity = 2.920 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

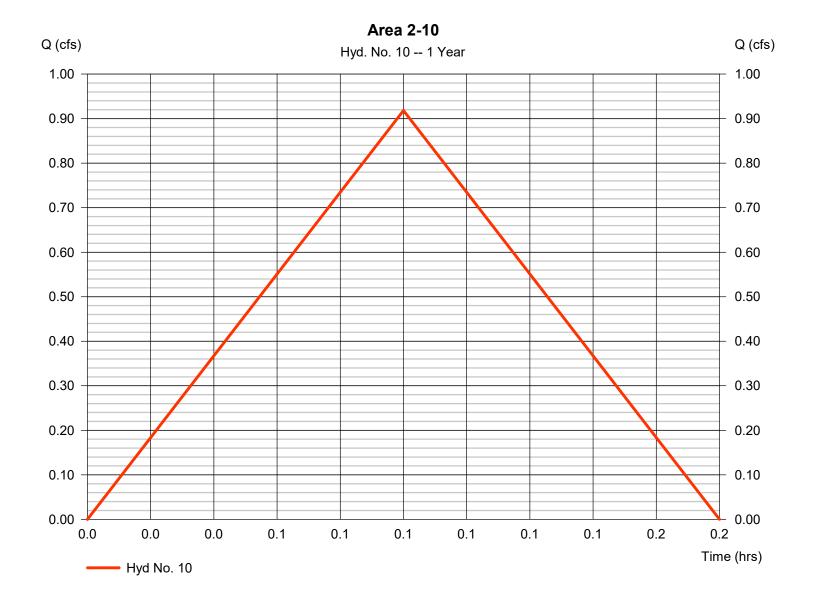


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 11

Area 2-11

= Rational Hydrograph type Peak discharge = 0.450 cfsStorm frequency = 1 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 135 cuft Drainage area Runoff coeff. = 0.350 ac= 0.44Tc by User Intensity = 2.920 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

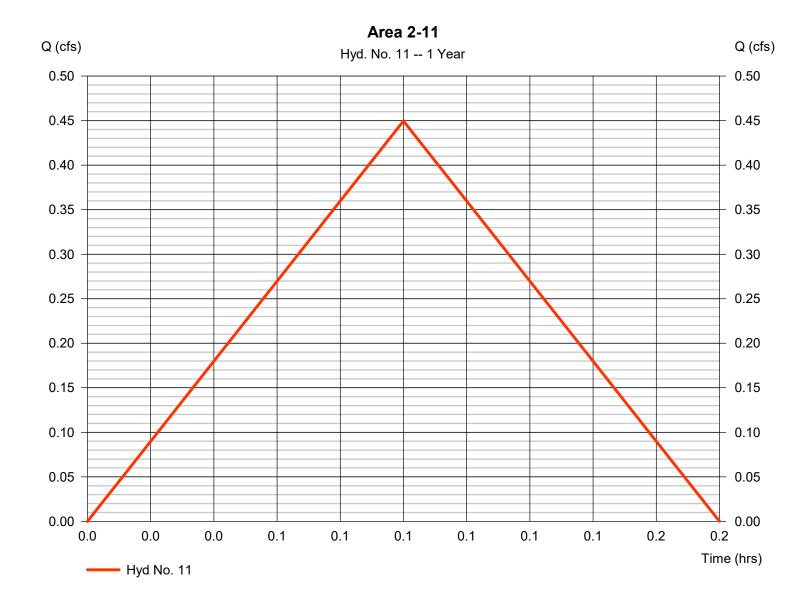

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 12

Combined 1

Hydrograph type = Combine
Storm frequency = 1 yrs
Time interval = 1 min
Inflow hyds. = 1, 2, 3

Peak discharge = 22.24 cfs
Time to peak = 0.25 hrs
Hyd. volume = 20,017 cuft
Contrib. drain. area = 25.390 ac

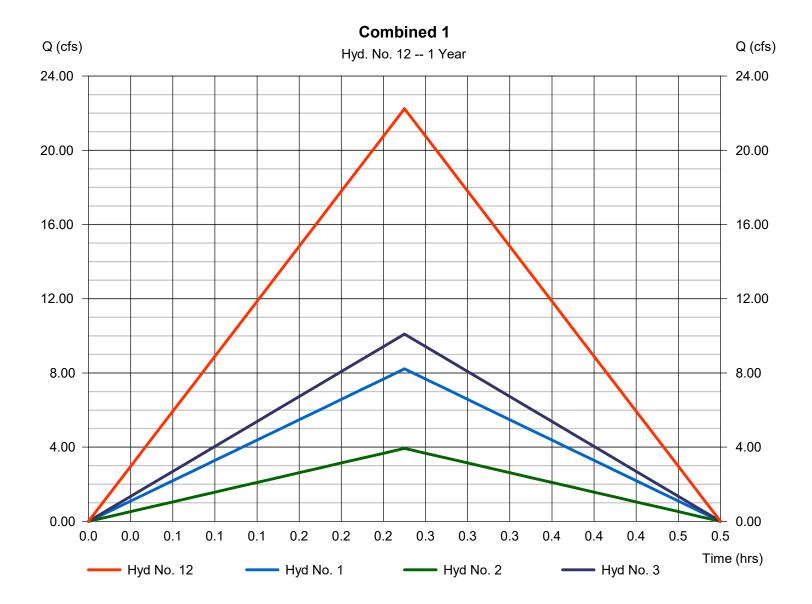

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

### Hyd. No. 13

Combined 2

Hydrograph type = Combine
Storm frequency = 1 yrs
Time interval = 1 min
Inflow hyds. = 4, 5, 7

Peak discharge = 3.646 cfs
Time to peak = 0.08 hrs
Hyd. volume = 1,094 cuft
Contrib. drain. area = 1.750 ac

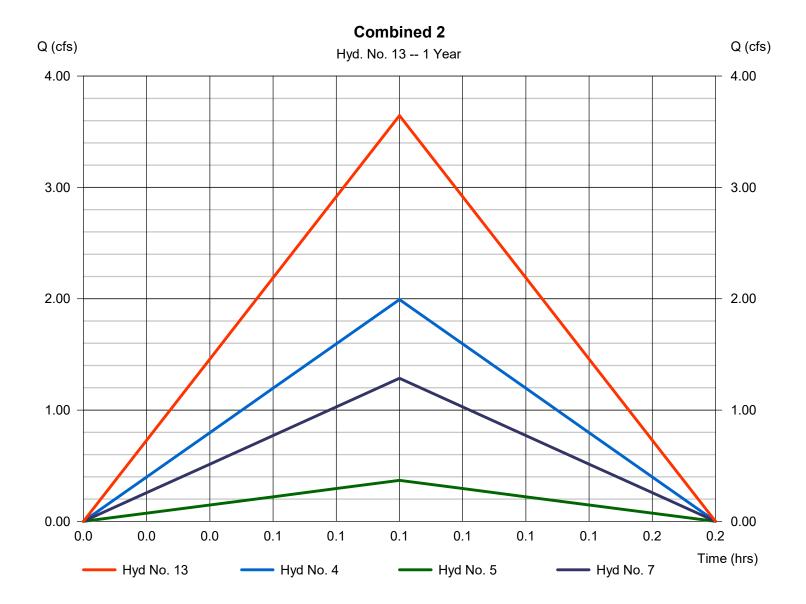

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 14

Combined 3

Hydrograph type = Combine
Storm frequency = 1 yrs
Time interval = 1 min
Inflow hyds. = 6, 8, 9, 10

Peak discharge = 4.474 cfs
Time to peak = 0.08 hrs
Hyd. volume = 1,342 cuft
Contrib. drain. area = 1.890 ac

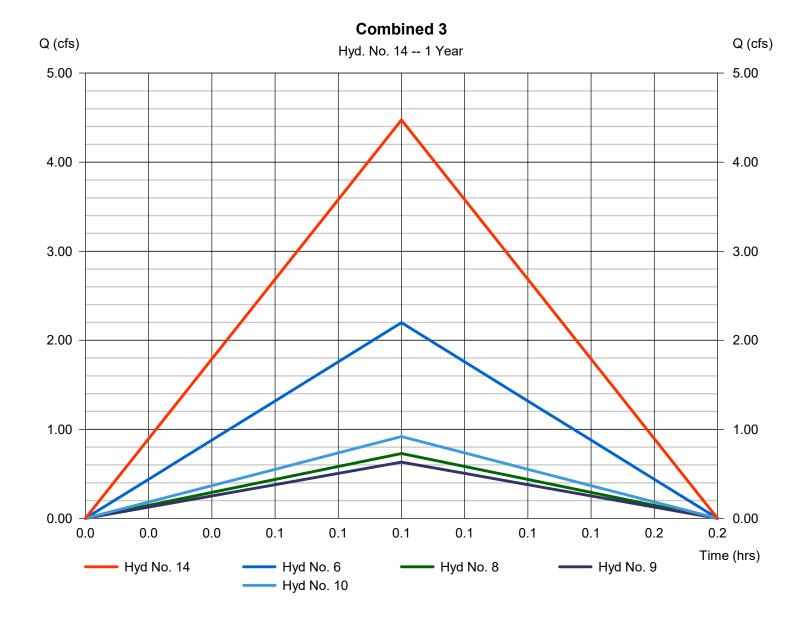


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 15

#### **TOTAL TO DETENTION**

= 22.24 cfsHydrograph type = Combine Peak discharge Storm frequency Time to peak = 1 yrs $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 22,453 cuft Inflow hyds. = 12, 13, 14 Contrib. drain. area = 0.000 ac

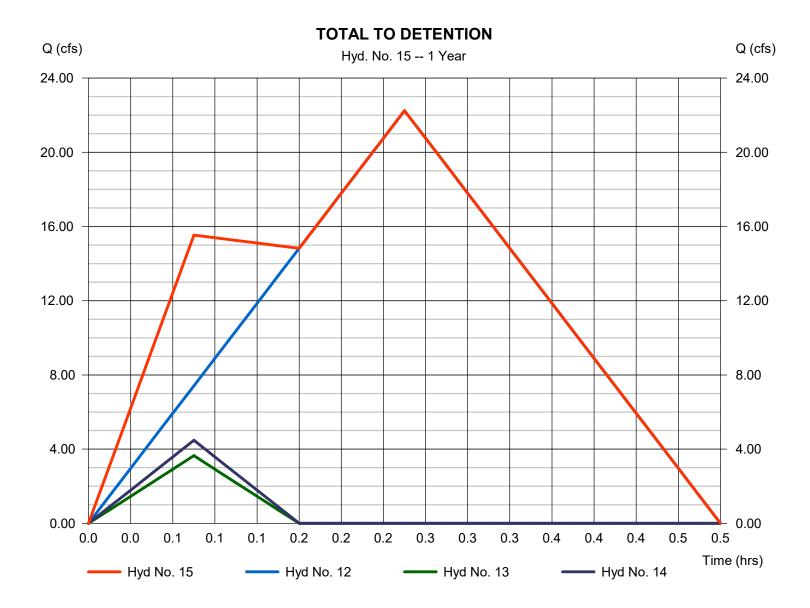

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 16

#### **TOTAL DETENTION**

Hydrograph type Peak discharge = 0.000 cfs= Reservoir Storm frequency = 1 yrsTime to peak = n/aTime interval = 1 min Hyd. volume = 0 cuft Inflow hyd. No. = 15 - TOTAL TO DETENTION Max. Elevation = 982.69 ftReservoir name = Detention Max. Storage = 22,453 cuft

Storage Indication method used.

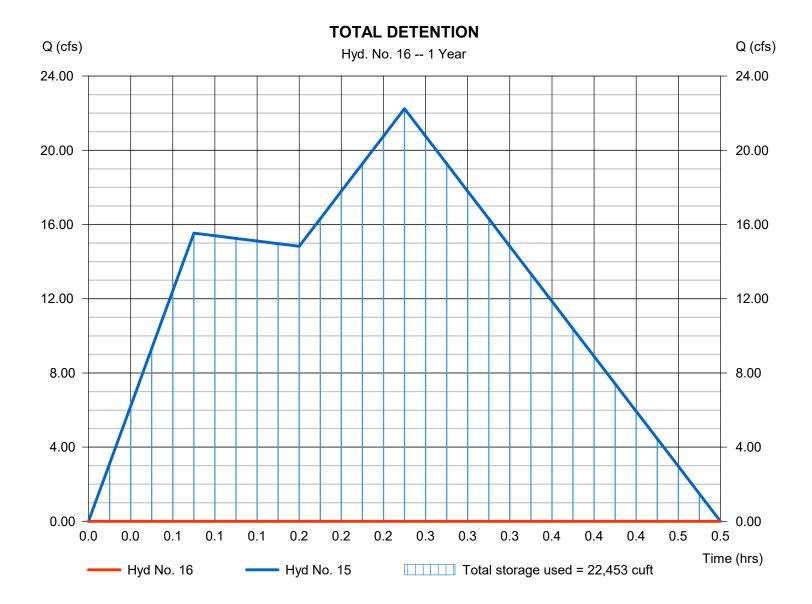

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Pond No. 1 - Detention

#### **Pond Data**

Contours -User-defined contour areas. Conic method used for volume calculation. Begining Elevation = 977.00 ft

#### Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	977.00	803	0	0
1.00	978.00	1,645	1,199	1,199
2.00	979.00	2,795	2,195	3,394
3.00	980.00	3,493	3,137	6,531
4.00	981.00	5,097	4,269	10,800
5.00	982.00	7,032	6,038	16,838
6.00	983.00	9,333	8,155	24,993
7.00	984.00	12,041	10,657	35,650
8.00	985.00	15,215	13,596	49,246
9.00	986.00	18,928	17,036	66,282
10.00	987.00	23,407	21,126	87,408

#### **Culvert / Orifice Structures**

#### **Weir Structures**

	[A]	[B]	[C]	[PrfRsr]		[A]	[B]	[C]	[D]
Rise (in)	= 42.00	Inactive	Inactive	Inactive	Crest Len (ft)	= 16.00	0.00	0.00	0.00
Span (in)	= 42.00	36.00	0.00	1.50	Crest El. (ft)	= 985.88	0.00	0.00	0.00
No. Barrels	= 1	1	0	6	Weir Coeff.	= 2.60	3.33	3.33	3.33
Invert El. (ft)	= 977.00	983.00	0.00	977.00	Weir Type	= Broad			
Length (ft)	= 0.00	0.00	0.00	5.80	Multi-Stage	= Yes	No	No	No
Slope (%)	= 0.00	0.00	0.00	n/a					
N-Value	= .013	.013	.013	n/a					
Orifice Coeff.	= 0.60	0.60	0.60	0.60	Exfil.(in/hr)	= 0.000 (by	Wet area)		
Multi-Stage	= n/a	No	No	No	TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

#### Stage / Storage / Discharge Table

Stage ft	cuft	ft	cfs	cfs	cfs	cfs	Wr A cfs	cfs	cfs	cfs	cfs	user cfs	cfs
0.00	0	977.00	0.00	0.00		0.00	0.00						0.000
0.10	120	977.10	0.00	0.00		0.00	0.00						0.000
0.20	240	977.20	0.00	0.00		0.00	0.00						0.000
0.30	360	977.30	0.00	0.00		0.00	0.00						0.000
0.40	480	977.40	0.00	0.00		0.00	0.00						0.000
0.50	599	977.50	0.00	0.00		0.00	0.00						0.000
0.60	719	977.60	0.00	0.00		0.00	0.00						0.000
0.70	839	977.70	0.00	0.00		0.00	0.00						0.000
0.80	959	977.80	0.00	0.00		0.00	0.00						0.000
0.90	1,079	977.90	0.00	0.00		0.00	0.00						0.000
1.00	1,199	978.00	0.00	0.00		0.00	0.00						0.000
1.10	1,418	978.10	0.00	0.00		0.00	0.00						0.000
1.20	1,638	978.20	0.00	0.00		0.00	0.00						0.000
1.30	1,857	978.30	0.00	0.00		0.00	0.00						0.000
1.40	2,077	978.40	0.00	0.00		0.00	0.00						0.000
1.50	2,296	978.50	0.00	0.00		0.00	0.00						0.000
1.60	2,516	978.60	0.00	0.00		0.00	0.00						0.000
1.70	2,735	978.70	0.00	0.00		0.00	0.00						0.000
1.80	2,955	978.80	0.00	0.00		0.00	0.00						0.000
1.90	3,174	978.90	0.00	0.00		0.00	0.00						0.000
2.00	3,394	979.00	0.00	0.00		0.00	0.00						0.000
2.10	3,707	979.10	0.00	0.00		0.00	0.00						0.000
2.20	4,021	979.20	0.00	0.00		0.00	0.00						0.000
2.30	4,335	979.30	0.00	0.00		0.00	0.00						0.000
2.40	4,648	979.40	0.00	0.00		0.00	0.00						0.000
2.50	4,962	979.50	0.00	0.00		0.00	0.00						0.000
2.60	5,276	979.60	0.00	0.00		0.00	0.00						0.000
2.70	5,590	979.70	0.00	0.00		0.00	0.00						0.000
2.80	5,903	979.80	0.00	0.00		0.00	0.00						0.000
2.90	6,217	979.90	0.00	0.00		0.00	0.00						0.000
3.00	6,531	980.00	0.00	0.00		0.00	0.00						0.000
3.10	6,958	980.10	0.00	0.00		0.00	0.00						0.000

Continues on next page...

Detention

### Stage / Storage / Discharge Table

Stage /	Stage / Storage / Discharge Table												
Stage ft	Storage cuft	Elevation ft	CIv A cfs	Clv B cfs	CIv C cfs	PrfRsr cfs	Wr A cfs	Wr B cfs	Wr C cfs	Wr D cfs	Exfil cfs	User cfs	Total cfs
3.20	7,385	980.20	0.00	0.00		0.00	0.00						0.000
3.30	7,812	980.30	0.00	0.00		0.00	0.00						0.000
3.40	8,238	980.40	0.00	0.00		0.00	0.00						0.000
3.50	8,665	980.50	0.00	0.00		0.00	0.00						0.000
3.60	9,092	980.60	0.00	0.00		0.00	0.00						0.000
3.70	9,519	980.70	0.00	0.00		0.00	0.00						0.000
3.80	9,946	980.80	0.00	0.00		0.00	0.00						0.000
3.90	10,373	980.90	0.00	0.00		0.00	0.00						0.000
4.00	10,800	981.00	0.00	0.00		0.00	0.00						0.000
4.10	11,404	981.10	0.00	0.00		0.00	0.00						0.000
4.20	12,008	981.20	0.00	0.00		0.00	0.00						0.000
4.30	12,612	981.30	0.00	0.00		0.00	0.00						0.000
4.40	13,215	981.40	0.00	0.00		0.00	0.00						0.000
4.50	13,819	981.50	0.00	0.00		0.00	0.00						0.000
4.60	14,423	981.60	0.00	0.00		0.00	0.00						0.000
4.70	15,027	981.70	0.00	0.00		0.00	0.00						0.000
4.80	15,631	981.80	0.00	0.00		0.00	0.00						0.000
4.90	16,234	981.90	0.00	0.00		0.00	0.00						0.000
5.00	16,838	982.00	0.00	0.00		0.00	0.00						0.000
5.10	17,654	982.10	0.00	0.00		0.00	0.00						0.000
5.20	18,469	982.20	0.00	0.00		0.00	0.00						0.000
5.30	19,285	982.30	0.00	0.00		0.00	0.00						0.000
5.40	20,100	982.40	0.00	0.00		0.00	0.00						0.000
5.50	20,915	982.50	0.00	0.00		0.00	0.00						0.000
5.60	21,731	982.60	0.00	0.00		0.00	0.00						0.000
5.70	22,546	982.70	0.00	0.00		0.00	0.00						0.000
5.80	23,362	982.80	0.00	0.00		0.00	0.00						0.000
5.90	24,177	982.90	0.00	0.00		0.00	0.00						0.000
6.00	24,993	983.00	0.00	0.00		0.00	0.00						0.000
6.10	26,058	983.10	0.00	0.00		0.00	0.00						0.000
6.20	27,124	983.20	0.00	0.00		0.00	0.00						0.000
6.30	28,190	983.30	0.00	0.00		0.00	0.00						0.000
6.40	29,256	983.40	0.00	0.00		0.00	0.00						0.000
6.50	30,321	983.50	0.00	0.00		0.00	0.00						0.000
6.60 6.70	31,387	983.60 983.70	0.00 0.00	0.00 0.00		0.00 0.00	0.00						0.000
6.80	32,453 33,518	983.80	0.00	0.00		0.00	0.00						0.000
6.90	34,584	983.90	0.00	0.00		0.00	0.00						0.000
7.00	35,650	984.00	0.00	0.00		0.00	0.00						0.000
7.10	37,010	984.10	0.00	0.00		0.00	0.00						0.000
7.10	38,369	984.20	0.00	0.00		0.00	0.00						0.000
7.30	39,729	984.30	0.00	0.00		0.00	0.00						0.000
7.40	41,088	984.40	0.00	0.00		0.00	0.00						0.000
7.50	42,448	984.50	0.00	0.00		0.00	0.00						0.000
7.60	43,807	984.60	0.00	0.00		0.00	0.00						0.000
7.70	45,167	984.70	0.00	0.00		0.00	0.00						0.000
7.80	46,527	984.80	0.00	0.00		0.00	0.00						0.000
7.90	47,886	984.90	0.00	0.00		0.00	0.00						0.000
8.00	49,246	985.00	0.00	0.00		0.00	0.00						0.000
8.10	50,949	985.10	0.00	0.00		0.00	0.00						0.000
8.20	52,653	985.20	0.00	0.00		0.00	0.00						0.000
8.30	54,356	985.30	0.00	0.00		0.00	0.00						0.000
8.40	56,060	985.40	0.00	0.00		0.00	0.00						0.000
8.50	57,764	985.50	0.00	0.00		0.00	0.00						0.000
8.60	59,467	985.60	0.00	0.00		0.00	0.00						0.000
8.70	61,171	985.70	0.00	0.00		0.00	0.00						0.000
8.80	62,875	985.80	0.00	0.00		0.00	0.00						0.000
8.90	64,578	985.90	0.12 ic	0.00		0.00	0.12						0.116
9.00	66,282	986.00	1.79 ic	0.00		0.00	1.73						1.729
9.10	68,394	986.10	4.32 ic	0.00		0.00	4.29						4.292
9.20	70,507	986.20	7.70 ic	0.00		0.00	7.53						7.529
9.30	72,619	986.30	11.37 ic	0.00		0.00	11.32						11.32
9.40	74,732	986.40	15.81 ic	0.00		0.00	15.59						15.59
9.50	76,845	986.50	20.30 ic	0.00		0.00	20.30						20.30
9.60	78,957	986.60	25.82 ic	0.00		0.00	25.41						25.41
9.70	81,070	986.70	30.96 ic	0.00		0.00	30.88						30.88
9.80	83,182	986.80	36.75 ic	0.00		0.00	36.70						36.70
9.90	85,295	986.90	42.90 ic	0.00		0.00	42.84						42.84
10.00	87,408	987.00	49.42 ic	0.00		0.00	49.31						49.31

...End


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 17

**TOTAL RUNOFF** 

Hydrograph type = Combine Peak discharge = 0.450 cfsStorm frequency Time to peak = 1 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 135 cuft Inflow hyds. = 11, 16 Contrib. drain. area = 0.350 ac

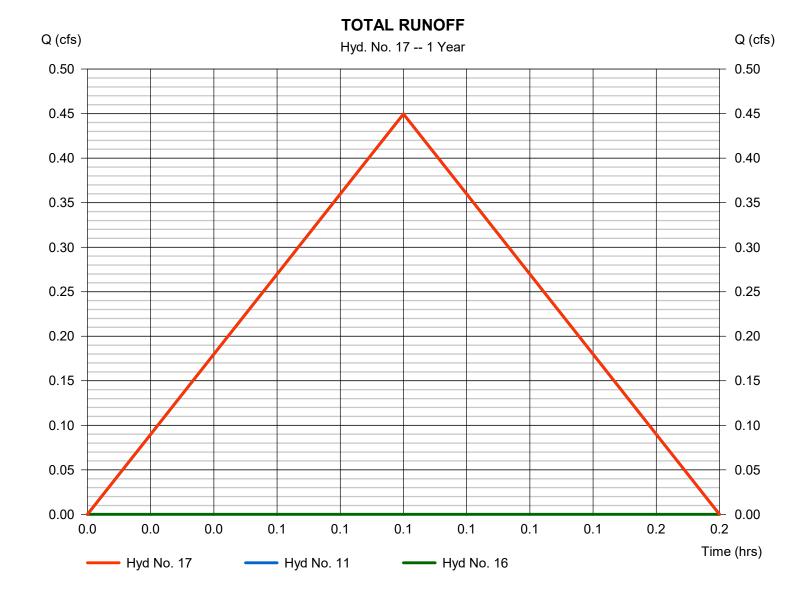

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	10.45	1	15	9,401				Area 2-1
2	Rational	5.000	1	15	4,500				Area 2-2
3	Rational	12.83	1	15	11,545				Area 2-3
4	Rational	3.689	1	5	1,107				Area 2-4
5	Rational	0.681	1	5	204				Area 2-5
6	Rational	4.067	1	5	1,220				Area 2-6
7	Rational	2.378	1	5	714				Area 2-7
8	Rational	1.348	1	5	404				Area 2-8
9	Rational	1.168	1	5	350				Area 2-9
10	Rational	1.700	1	5	510				Area 2-10
11	Rational	0.832	1	5	250				Area 2-11
12	Combine	28.27	1	15	25,446	1, 2, 3,			Combined 1
13	Combine	6.749	1	5	2,025	4, 5, 7,			Combined 2
14	Combine	8.283	1	5	2,485	6, 8, 9,			Combined 3
15	Combine	28.27	1	15	29,955	10, 12, 13, 14			TOTAL TO DETENTION
16	Reservoir	0.000	1	n/a	0	15	983.47	29,955	TOTAL DETENTION
17	Combine	0.832	1	5	250	11, 16			TOTAL RUNOFF
190	)76.Proposed	Condition	s.11.05.	2020.gpw	Return F	Period: 2 Ye	ear	Wednesda	y, 11 / 18 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

= 3.712 in/hr

Wednesday, 11 / 18 / 2020

= 15.00 min

### Hyd. No. 1

Area 2-1

Intensity

Hydrograph type = Rational Peak discharge = 10.45 cfsStorm frequency = 2 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 9,401 cuft

Tc by User

Drainage area Runoff coeff. = 9.380 ac= 0.3

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

= 3.712 in/hr

Wednesday, 11 / 18 / 2020


#### Hyd. No. 2

Area 2-2

Hydrograph type = Rational Peak discharge = 5.000 cfsStorm frequency = 2 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 4,500 cuft

Runoff coeff. Drainage area = 4.490 ac= 0.3

Tc by User Intensity = 15.00 min IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

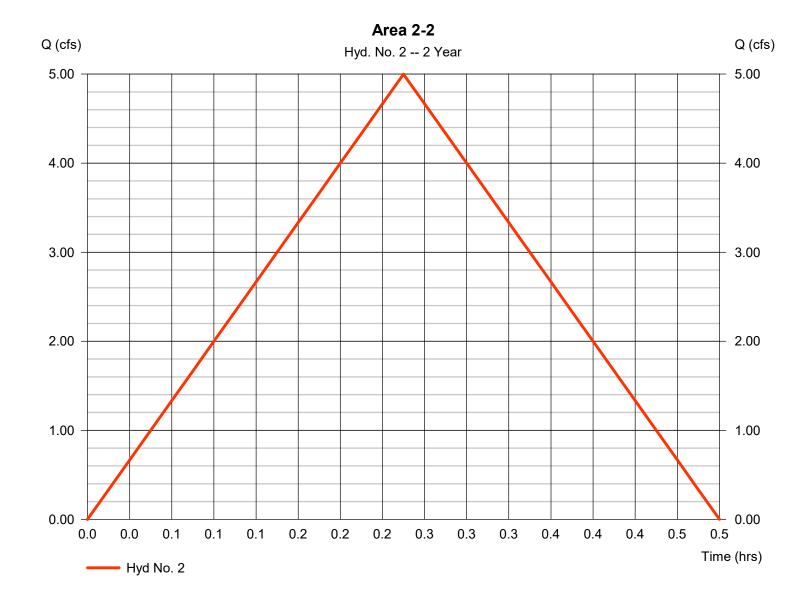

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 3

Area 2-3

Hydrograph type = Rational Peak discharge = 12.83 cfsStorm frequency = 2 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 11,545 cuft

Drainage area Runoff coeff. = 11.520 ac= 0.3

Tc by User = 15.00 min Intensity = 3.712 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1




Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 4

Area 2-4

Hydrograph type = Rational Peak discharge = 3.689 cfsStorm frequency Time to peak = 2 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 1,107 cuftDrainage area Runoff coeff. = 1.050 ac= 0.65Tc by User  $= 5.00 \, \text{min}$ Intensity = 5.406 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

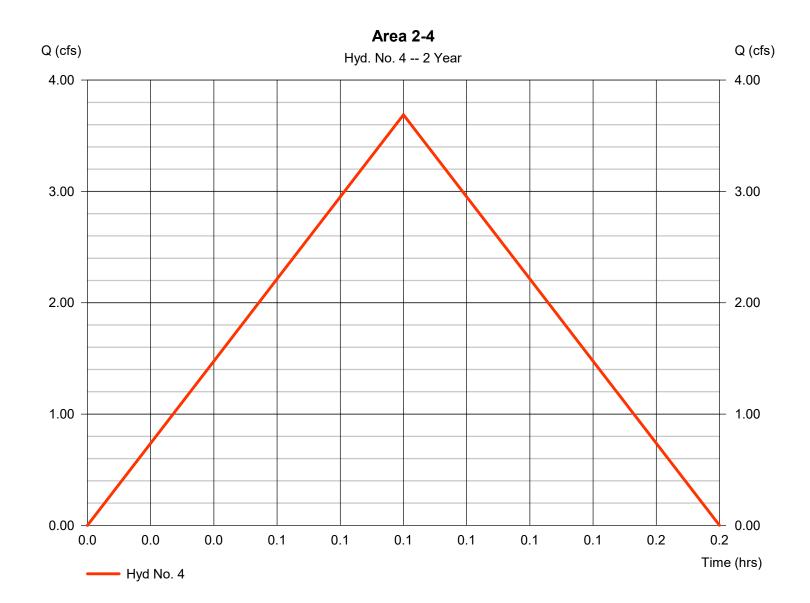


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 5

Area 2-5

Hydrograph type Peak discharge = 0.681 cfs= Rational Storm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 204 cuft Drainage area Runoff coeff. = 0.200 ac= 0.63Tc by User Intensity = 5.406 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

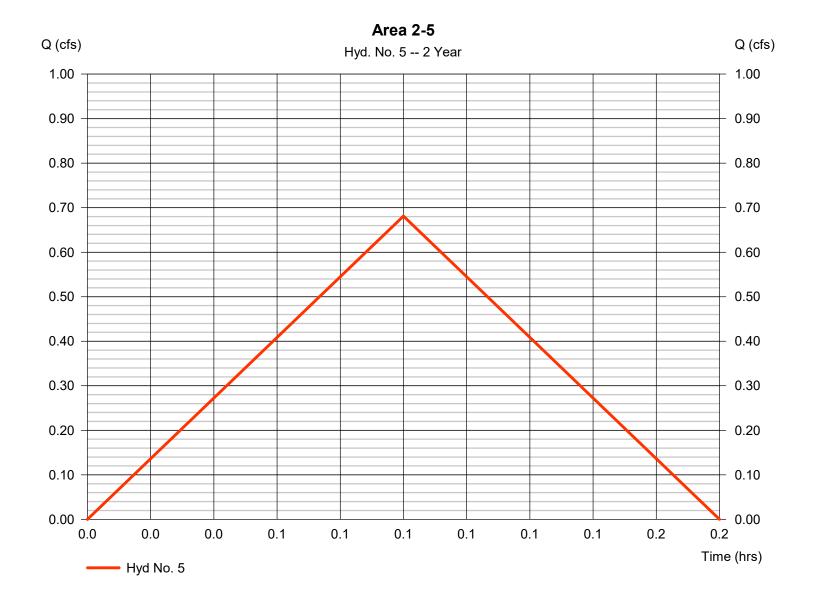


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 6

Area 2-6

Hydrograph type = Rational Peak discharge = 4.067 cfsStorm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 1,220 cuft Drainage area Runoff coeff. = 0.990 ac= 0.76Tc by User  $= 5.00 \, \text{min}$ Intensity = 5.406 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

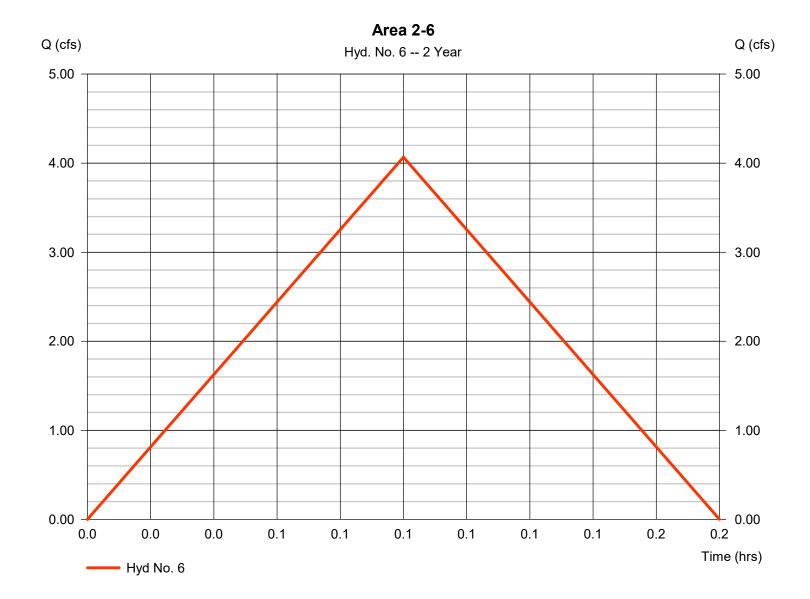


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 7

Area 2-7

= 2.378 cfsHydrograph type = Rational Peak discharge Storm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 714 cuft Drainage area Runoff coeff. = 0.88= 0.500 acTc by User  $= 5.00 \, \text{min}$ Intensity = 5.406 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

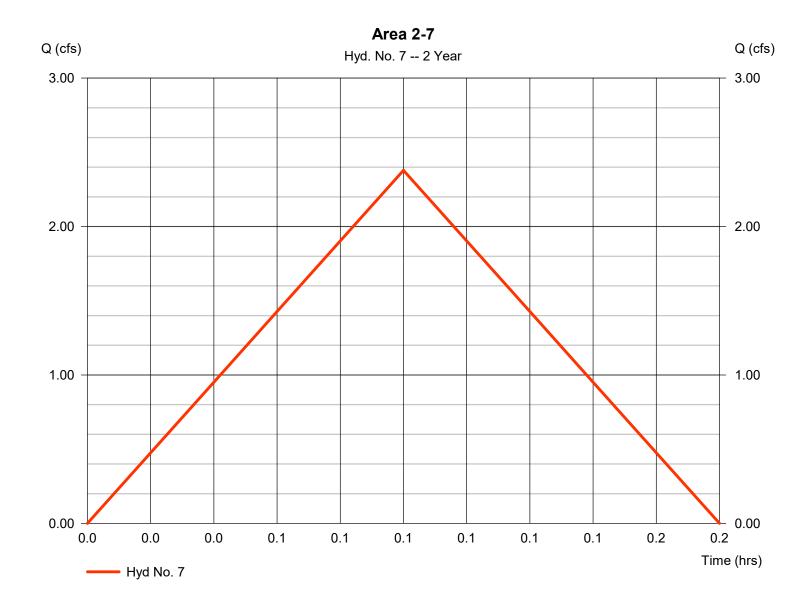


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 8

Area 2-8

Hydrograph type = 1.348 cfs= Rational Peak discharge Storm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 404 cuft Drainage area Runoff coeff. = 0.290 ac= 0.86Tc by User  $= 5.00 \, \text{min}$ Intensity = 5.406 in/hrAsc/Rec limb fact IDF Curve = KCAPWA.IDF = 1/1

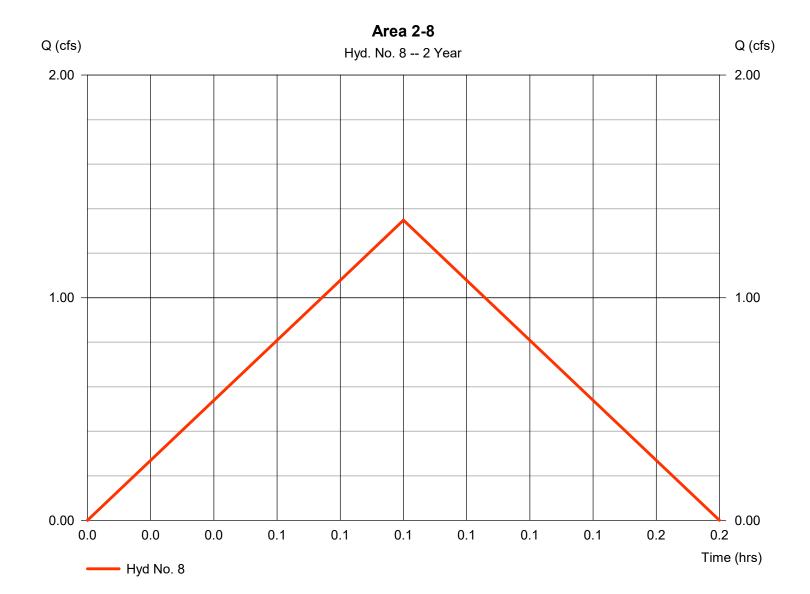


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 9

Area 2-9

Hydrograph type = 1.168 cfs= Rational Peak discharge Storm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 350 cuft Drainage area = 0.240 acRunoff coeff. = 0.9Tc by User  $= 5.00 \, \text{min}$ Intensity = 5.406 in/hrAsc/Rec limb fact IDF Curve = KCAPWA.IDF = 1/1

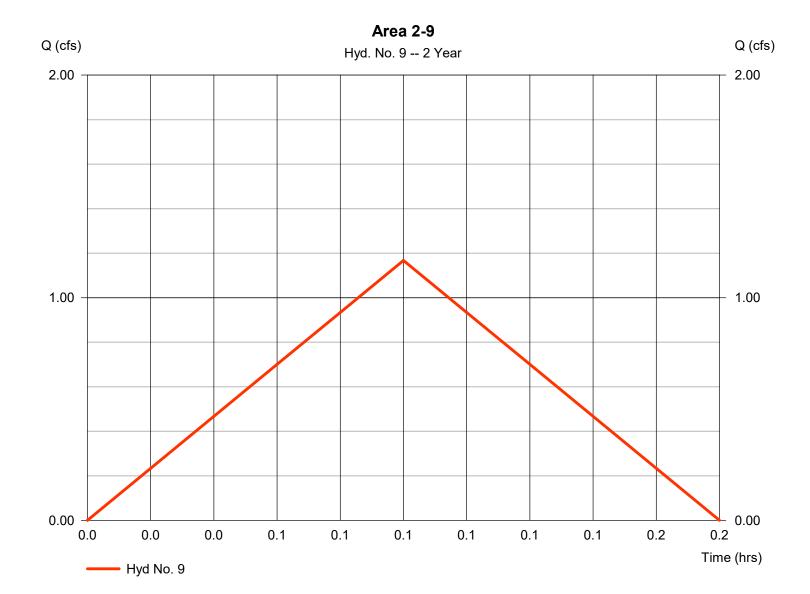


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 10

Area 2-10

Hydrograph type = Rational Peak discharge = 1.700 cfsStorm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 510 cuft Drainage area Runoff coeff. = 0.370 ac= 0.85Tc by User Intensity = 5.406 in/hr $= 5.00 \, \text{min}$ Asc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

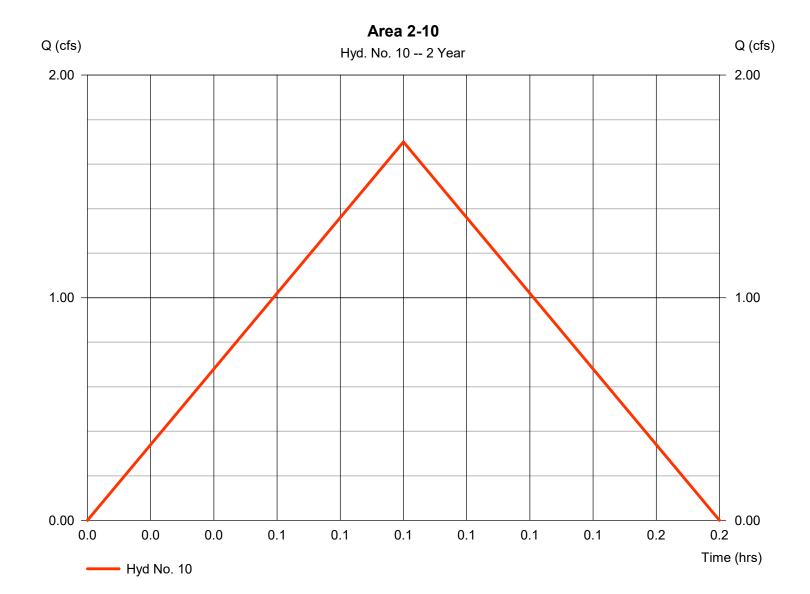


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 11

Area 2-11

Hydrograph type Peak discharge = 0.832 cfs= Rational Storm frequency = 2 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 250 cuft Drainage area Runoff coeff. = 0.350 ac= 0.44Tc by User Intensity = 5.406 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

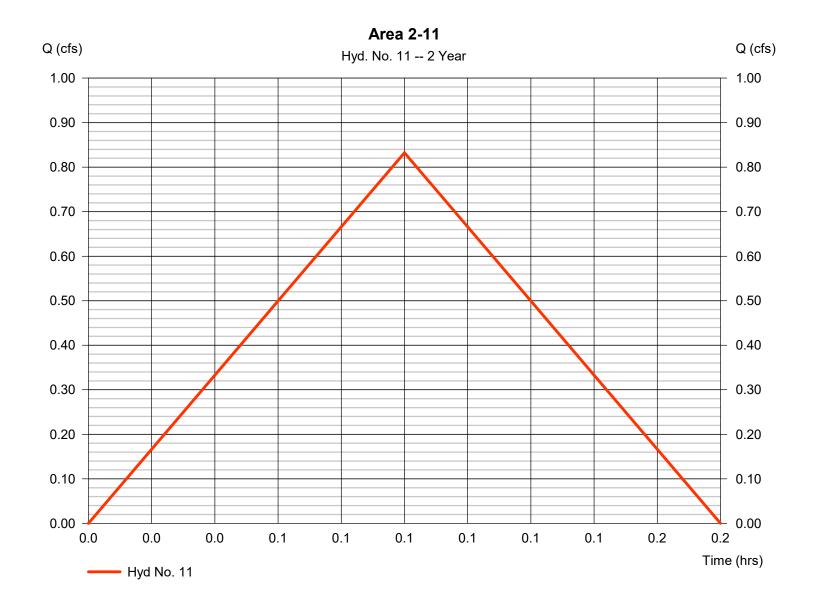

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 12

Combined 1

Hydrograph type = Combine
Storm frequency = 2 yrs
Time interval = 1 min
Inflow hyds. = 1, 2, 3

Peak discharge = 28.27 cfs
Time to peak = 0.25 hrs
Hyd. volume = 25,446 cuft
Contrib. drain. area = 25.390 ac

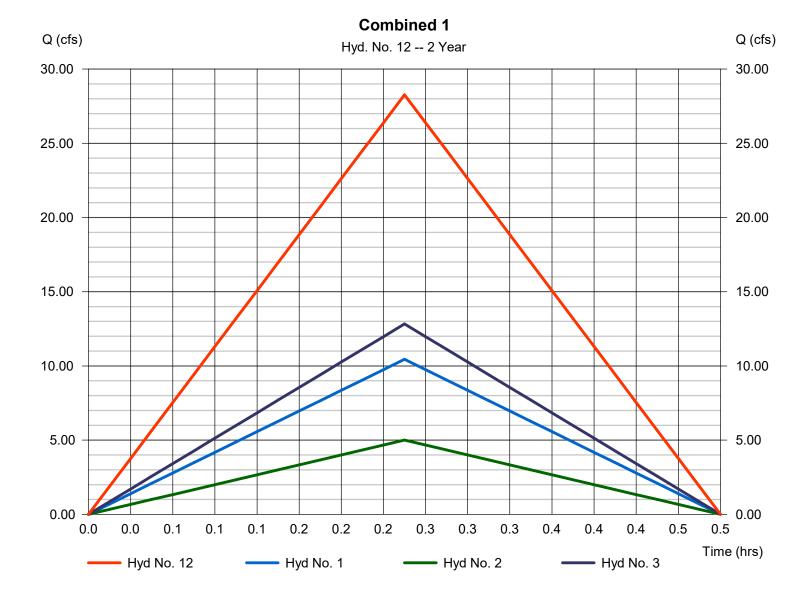

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 13

Combined 2

Hydrograph type = Combine
Storm frequency = 2 yrs
Time interval = 1 min
Inflow hyds. = 4, 5, 7

Peak discharge = 6.749 cfs
Time to peak = 0.08 hrs
Hyd. volume = 2,025 cuft
Contrib. drain. area = 1.750 ac

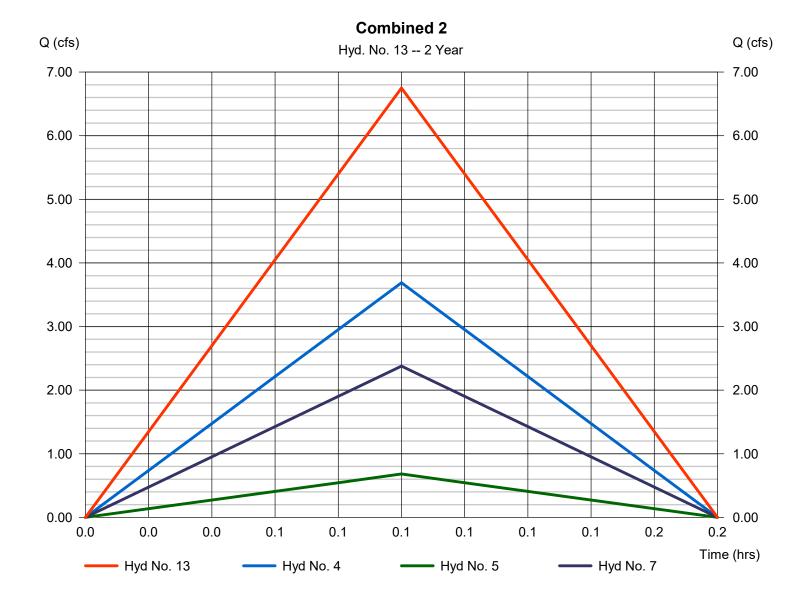


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 14

Combined 3

Hydrograph type = Combine Storm frequency = 2 yrs Time interval = 1 min Inflow hyds. = 6, 8, 9, 10 Peak discharge = 8.283 cfs
Time to peak = 0.08 hrs
Hyd. volume = 2,485 cuft
Contrib. drain. area = 1.890 ac

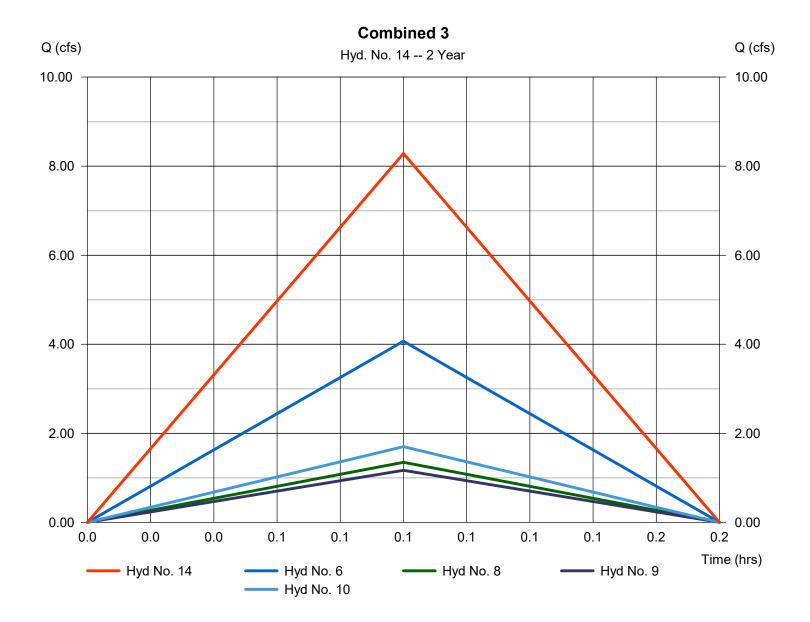


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 15

#### **TOTAL TO DETENTION**

Hydrograph type = Combine Peak discharge = 28.27 cfsStorm frequency = 2 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 29,955 cuft Inflow hyds. = 12, 13, 14 Contrib. drain. area = 0.000 ac

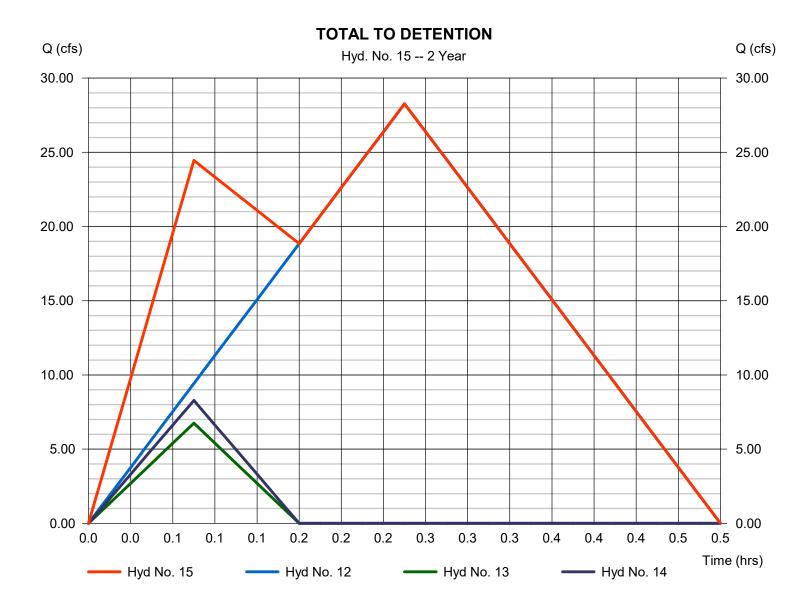

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 16

#### **TOTAL DETENTION**

Hydrograph type Peak discharge = 0.000 cfs= Reservoir Storm frequency = 2 yrsTime to peak = n/aTime interval = 1 min Hyd. volume = 0 cuft = 15 - TOTAL TO DETENTION Max. Elevation Inflow hyd. No. = 983.47 ftReservoir name = Detention Max. Storage = 29,955 cuft

Storage Indication method used.

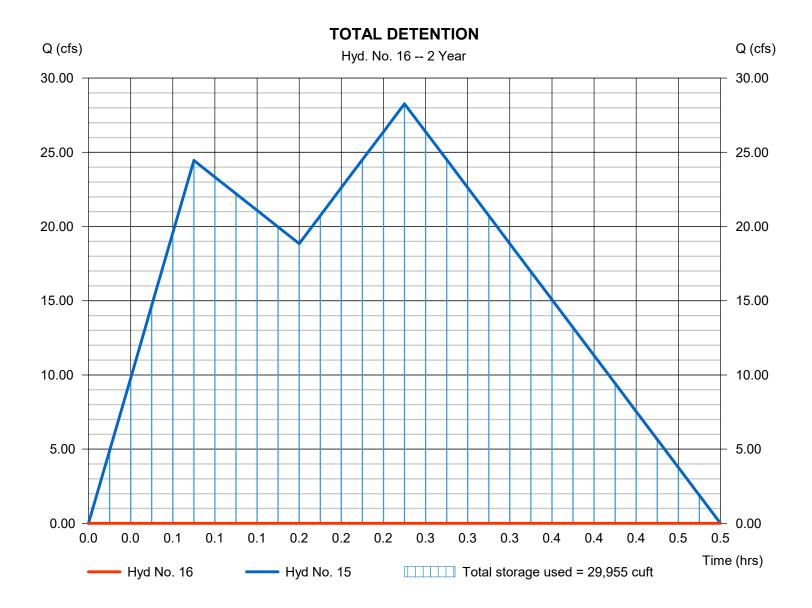


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 17

**TOTAL RUNOFF** 

Hydrograph type = Combine Peak discharge = 0.832 cfsStorm frequency Time to peak = 2 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 250 cuft Inflow hyds. = 11, 16 Contrib. drain. area = 0.350 ac

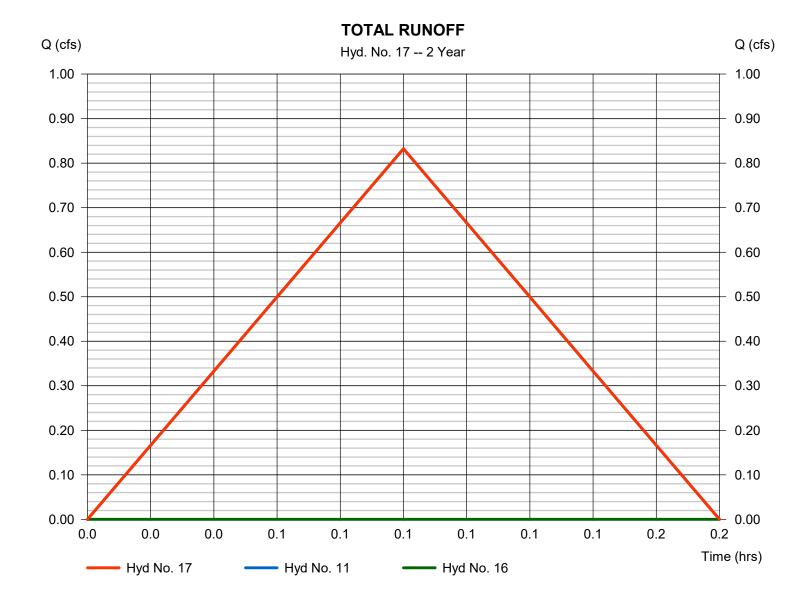

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	14.58	1	15	13,125				Area 2-1
2	Rational	6.981	1	15	6,283				Area 2-2
3	Rational	17.91	1	15	16,120				Area 2-3
1	Rational	5.015	1	5	1,505				Area 2-4
5	Rational	0.926	1	5	278				Area 2-5
3	Rational	5.529	1	5	1,659				Area 2-6
7	Rational	3.233	1	5	970				Area 2-7
3	Rational	1.833	1	5	550				Area 2-8
)	Rational	1.587	1	5	476				Area 2-9
10	Rational	2.311	1	5	693				Area 2-10
11	Rational	1.132	1	5	339				Area 2-11
12	Combine	39.48	1	15	35,528	1, 2, 3,			Combined 1
13	Combine	9.175	1	5	2,752	4, 5, 7,			Combined 2
14	Combine	11.26	1	5	3,378	6, 8, 9,			Combined 3
15	Combine	39.48	1	15	41,659	10, 12, 13, 14			TOTAL TO DETENTION
16	Reservoir	0.000	1	n/a	0	15	984.44	41,659	TOTAL DETENTION
17	Combine	1.132	1	5	339	11, 16			TOTAL RUNOFF
190	076.Proposed	Condition	ns.11.05.	2020.gpw	/ Return	Period: 10 Y	/ear	Wednesda	y, 11 / 18 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 1

Area 2-1

Hydrograph type = Rational Peak discharge = 14.58 cfsStorm frequency = 10 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 13,125 cuft Drainage area Runoff coeff. = 9.380 ac= 0.3

Drainage area = 9.380 ac Runoff coeff. = 0.3 Intensity = 5.183 in/hr Tc by User = 15.00 min

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 2

Area 2-2

Hydrograph type= RationalPeak discharge= 6.981 cfsStorm frequency= 10 yrsTime to peak= 0.25 hrsTime interval= 1 minHyd. volume= 6,283 cuftDrainage area= 4,400 asPunoff coeff= 0.3

Drainage area = 4.490 ac Runoff coeff. = 0.3 Intensity = 5.183 in/hr Tc by User = 15.00 min

IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

= 5.183 in/hr

Wednesday, 11 / 18 / 2020

### Hyd. No. 3

Area 2-3

Hydrograph type = Rational Peak discharge = 17.91 cfsStorm frequency = 10 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 16,120 cuft

Drainage area Runoff coeff. = 11.520 ac= 0.3

Tc by User = 15.00 min Intensity IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1




Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 4

Area 2-4

Hydrograph type = Rational Peak discharge = 5.015 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 1,505 cuftRunoff coeff. Drainage area = 1.050 ac= 0.65Tc by User  $= 5.00 \, \text{min}$ Intensity = 7.348 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

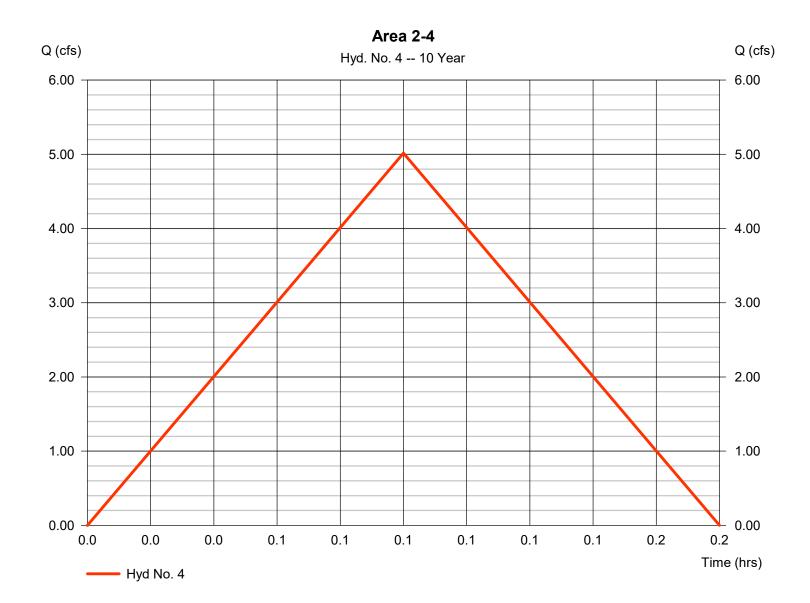


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 5

Area 2-5

Hydrograph type = Rational Peak discharge = 0.926 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 278 cuft Drainage area Runoff coeff. = 0.200 ac= 0.63Tc by User Intensity = 7.348 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

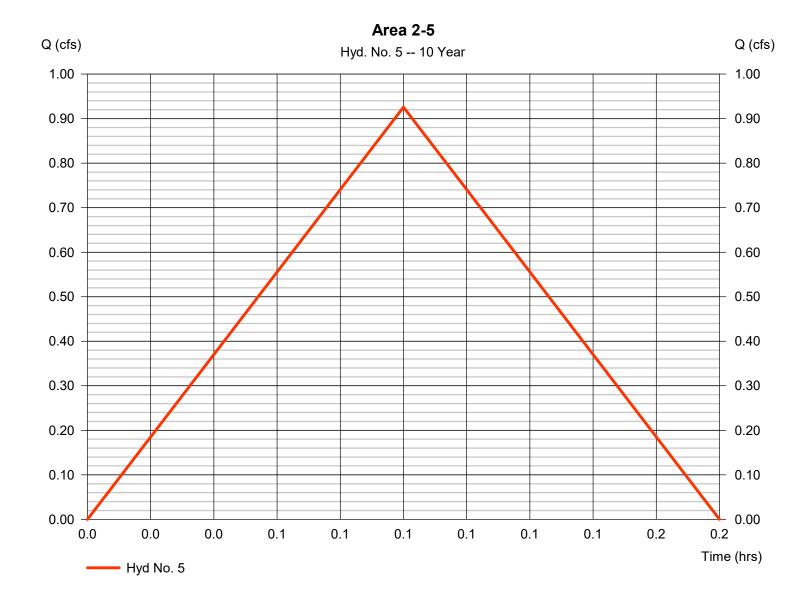


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 6

Area 2-6

Hydrograph type = Rational Peak discharge = 5.529 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 1,659 cuftDrainage area Runoff coeff. = 0.990 ac= 0.76Tc by User  $= 5.00 \, \text{min}$ Intensity = 7.348 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

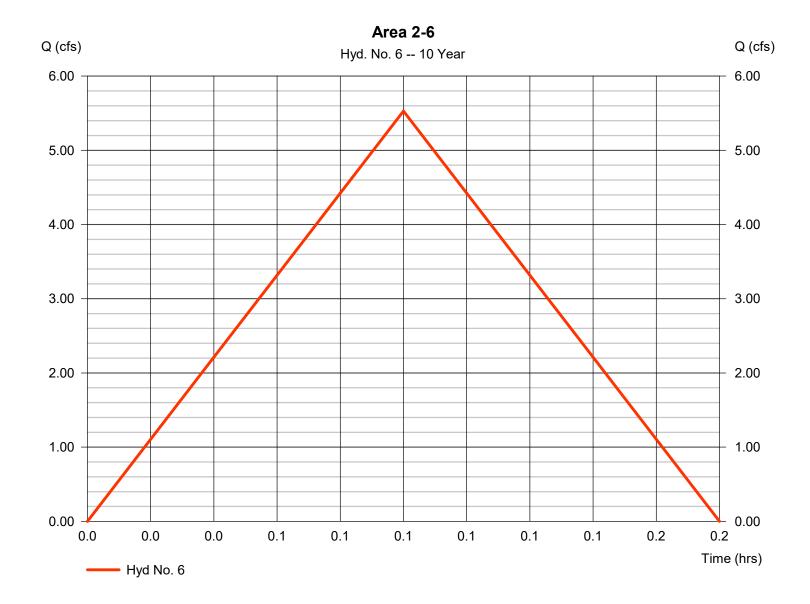


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 7

Area 2-7

Hydrograph type = Rational Peak discharge = 3.233 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 970 cuft Drainage area Runoff coeff. = 0.500 ac= 0.88Tc by User Intensity = 7.348 in/hr $= 5.00 \, \text{min}$ Asc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

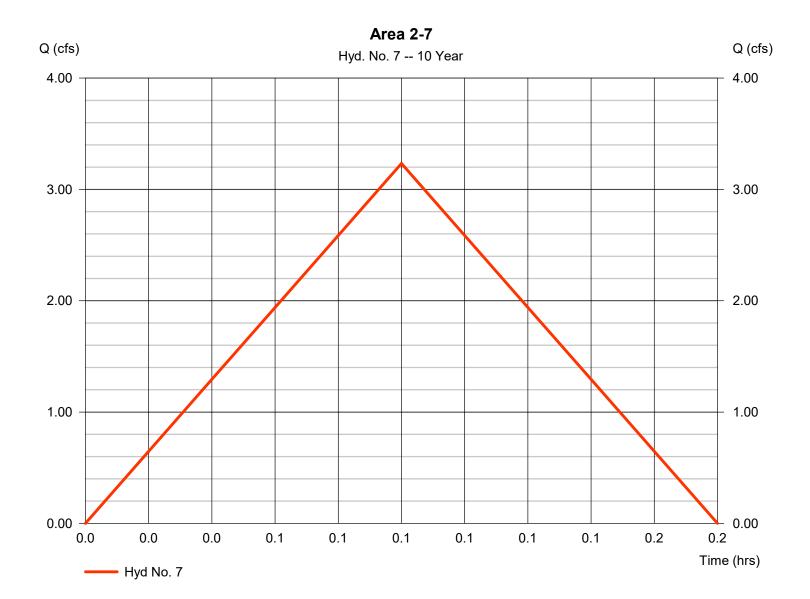


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 8

Area 2-8

Hydrograph type = Rational Peak discharge = 1.833 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 550 cuft Drainage area Runoff coeff. = 0.290 ac= 0.86Tc by User Intensity = 7.348 in/hr $= 5.00 \, \text{min}$ IDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

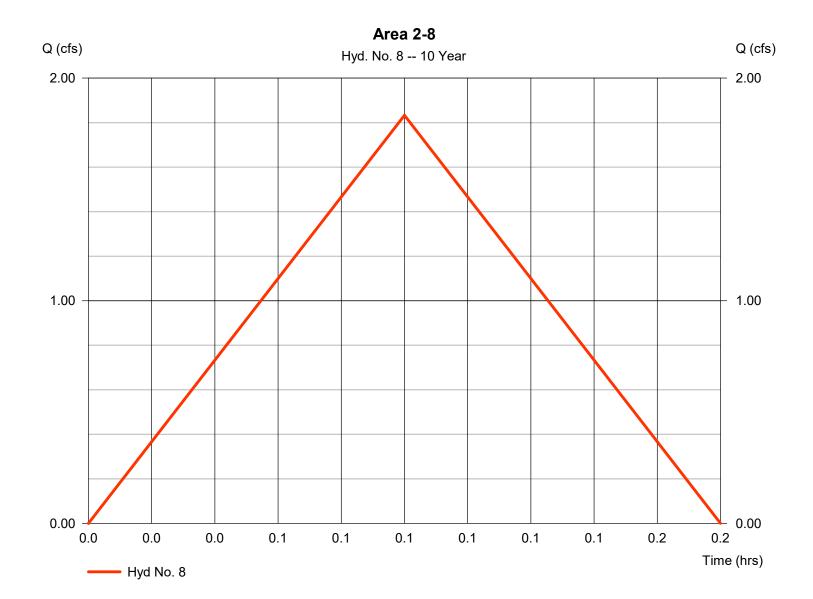


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 9

Area 2-9

Hydrograph type = Rational Peak discharge = 1.587 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 476 cuft Drainage area Runoff coeff. = 0.240 ac= 0.9Tc by User  $= 5.00 \, \text{min}$ Intensity = 7.348 in/hrAsc/Rec limb fact IDF Curve = KCAPWA.IDF = 1/1

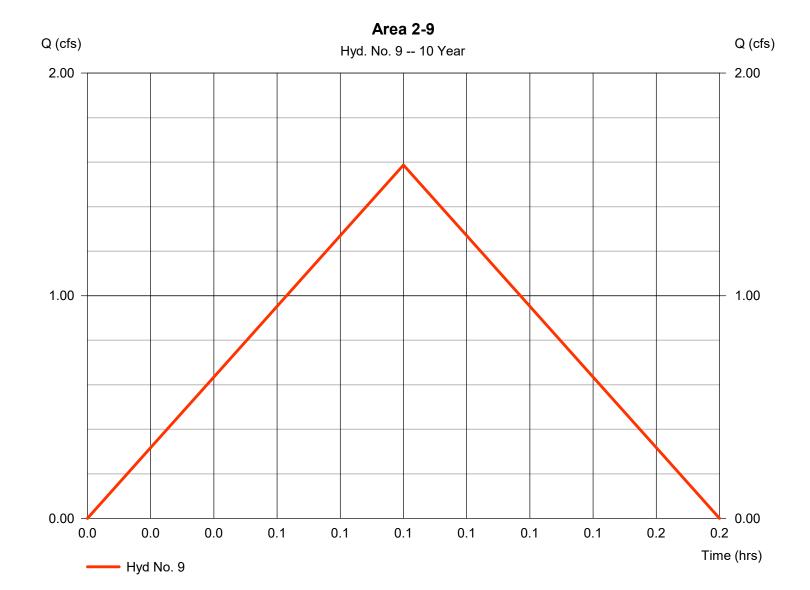


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 10

Area 2-10

Hydrograph type = 2.311 cfs= Rational Peak discharge Storm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 693 cuft Drainage area Runoff coeff. = 0.370 ac= 0.85Tc by User  $= 5.00 \, \text{min}$ Intensity = 7.348 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

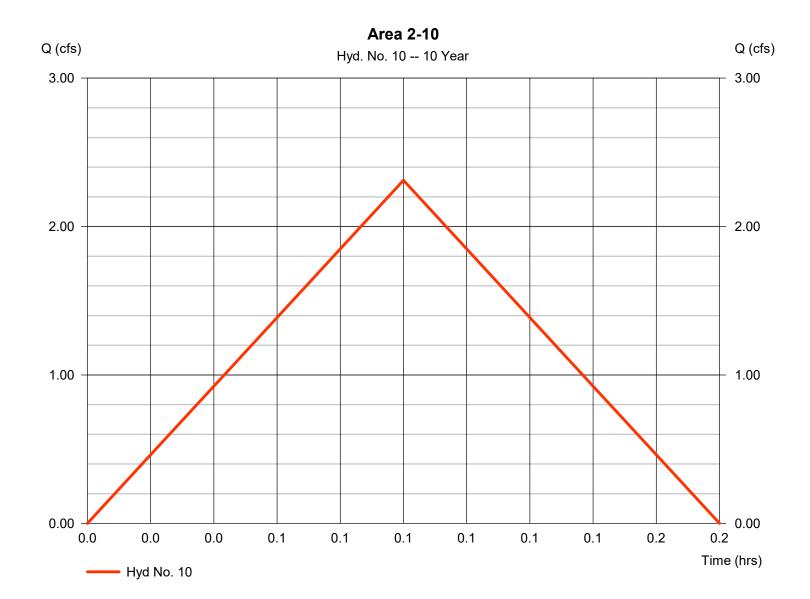


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 11

Area 2-11

Hydrograph type = Rational Peak discharge = 1.132 cfsStorm frequency = 10 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 339 cuft Drainage area Runoff coeff. = 0.350 ac= 0.44Tc by User  $= 5.00 \, \text{min}$ Intensity = 7.348 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

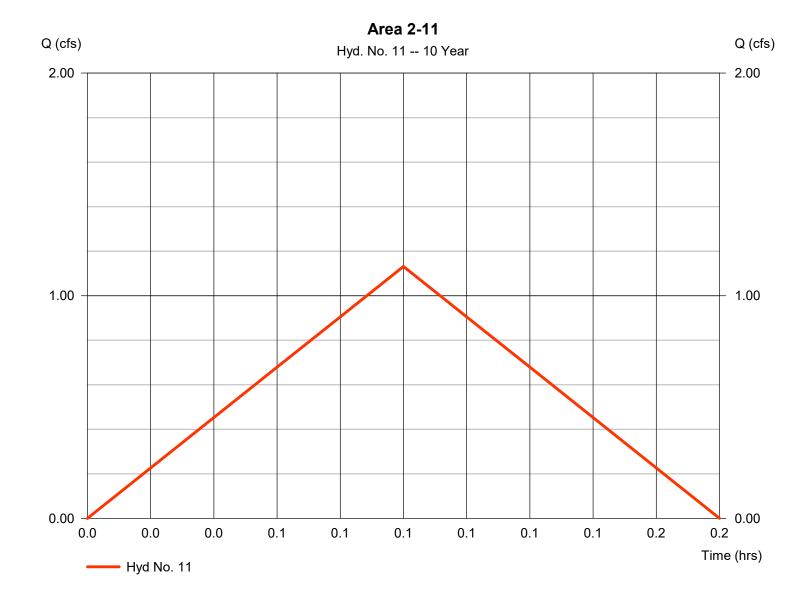

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 12

Combined 1

Hydrograph type = Combine
Storm frequency = 10 yrs
Time interval = 1 min
Inflow hyds. = 1, 2, 3

Peak discharge = 39.48 cfs
Time to peak = 0.25 hrs
Hyd. volume = 35,528 cuft
Contrib. drain. area = 25.390 ac

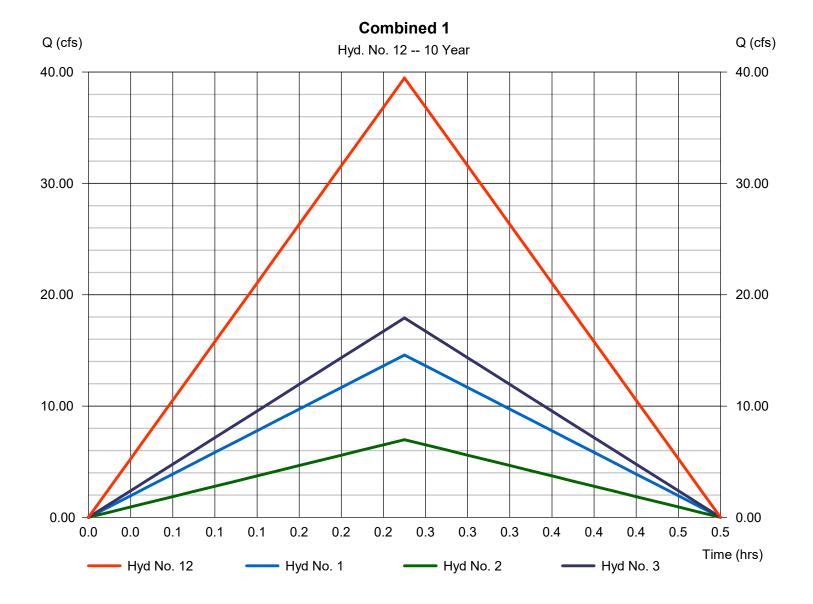

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

### Hyd. No. 13

Combined 2

Hydrograph type = Combine
Storm frequency = 10 yrs
Time interval = 1 min
Inflow hyds. = 4, 5, 7

Peak discharge = 9.175 cfs
Time to peak = 0.08 hrs
Hyd. volume = 2,752 cuft
Contrib. drain. area = 1.750 ac

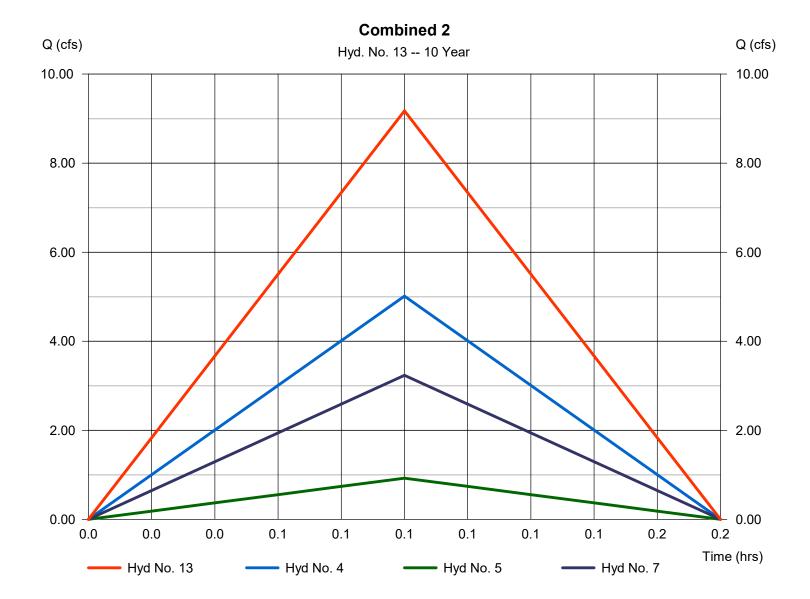

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

### Hyd. No. 14

Combined 3

Hydrograph type = Combine
Storm frequency = 10 yrs
Time interval = 1 min
Inflow hyds. = 6, 8, 9, 10

Peak discharge = 11.26 cfs
Time to peak = 0.08 hrs
Hyd. volume = 3,378 cuft
Contrib. drain. area = 1.890 ac

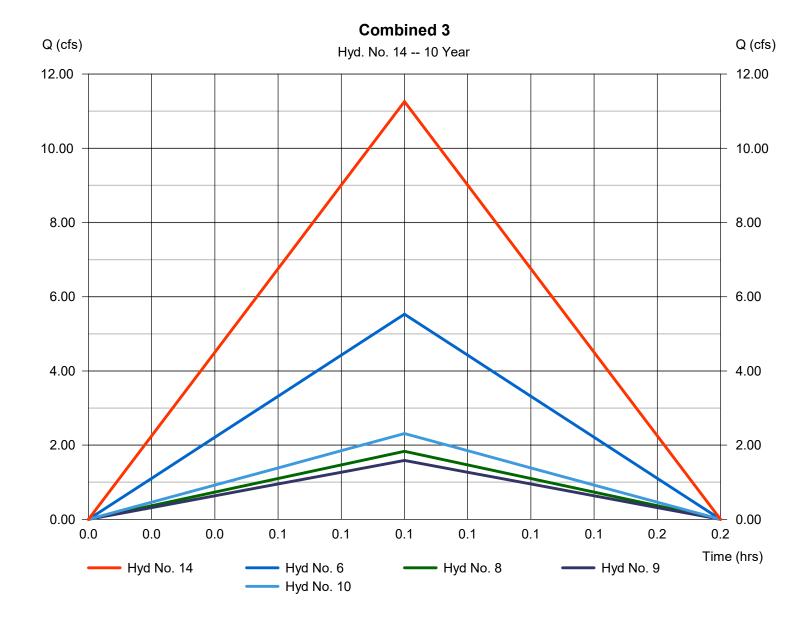


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 15

#### **TOTAL TO DETENTION**

Hydrograph type = Combine Peak discharge = 39.48 cfsStorm frequency Time to peak = 10 yrs $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 41,659 cuftInflow hyds. = 12, 13, 14 Contrib. drain. area = 0.000 ac

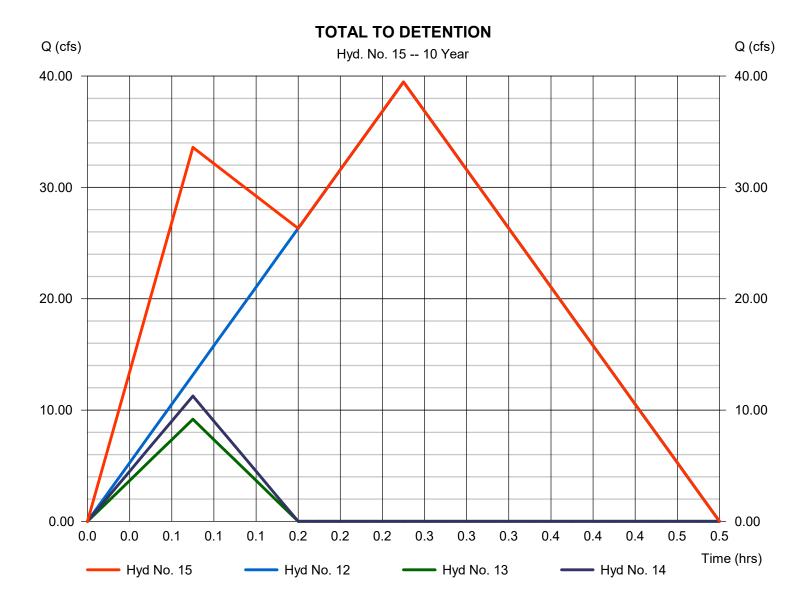

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 16

#### **TOTAL DETENTION**

Hydrograph type = Reservoir Peak discharge = 0.000 cfsStorm frequency = 10 yrsTime to peak = n/aTime interval = 1 min Hyd. volume = 0 cuft Inflow hyd. No. = 15 - TOTAL TO DETENTION Max. Elevation = 984.44 ftReservoir name = Detention Max. Storage = 41,659 cuft

Storage Indication method used.

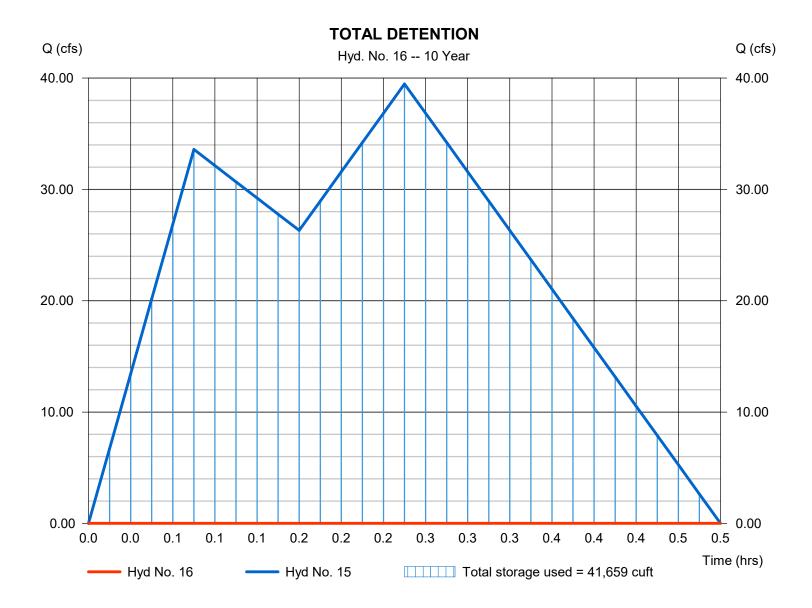


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 17

**TOTAL RUNOFF** 

= 1.132 cfsHydrograph type = Combine Peak discharge Time to peak Storm frequency = 10 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 339 cuft Inflow hyds. = 11, 16 Contrib. drain. area = 0.350 ac

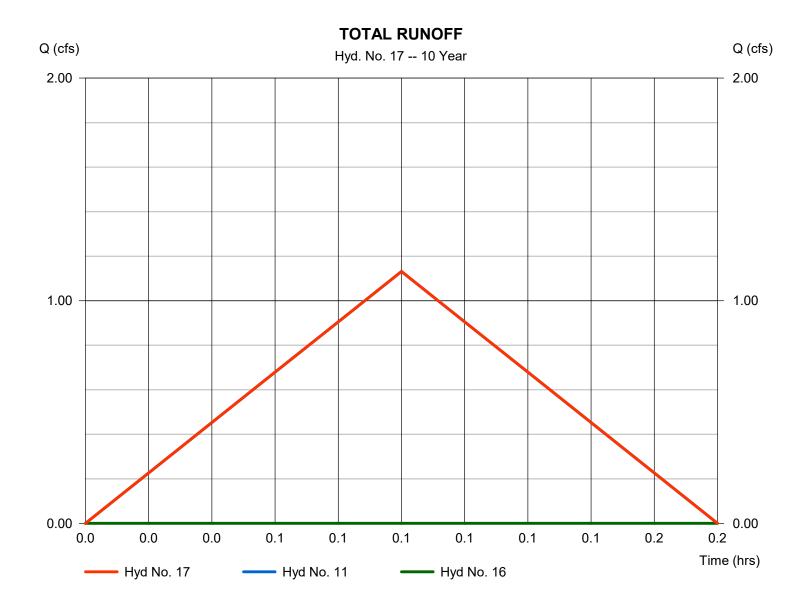

# **Hydrograph Summary Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	Rational	21.97	1	15	19,772				Area 2-1
2	Rational	10.52	1	15	9,464				Area 2-2
3	Rational	26.98	1	15	24,283				Area 2-3
4	Rational	8.784	1	5	2,635				Area 2-4
5	Rational	1.622	1	5	487				Area 2-5
6	Rational	9.684	1	5	2,905				Area 2-6
7	Rational	5.663	1	5	1,699				Area 2-7
8	Rational	3.210	1	5	963				Area 2-8
9	Rational	2.780	1	5	834				Area 2-9
10	Rational	4.048	1	5	1,214				Area 2-10
11	Rational	1.982	1	5	595				Area 2-11
12	Combine	59.47	1	15	53,519	1, 2, 3,			Combined 1
13	Combine	16.07	1	5	4,821	4, 5, 7,			Combined 2
14	Combine	19.72	1	5	5,917	6, 8, 9, 10,			Combined 3
15	Combine	59.47	1	15	64,257	12, 13, 14			TOTAL TO DETENTION
16	Reservoir	0.093	1	30	1,367	15	985.88	64,244	TOTAL DETENTION
17	Combine	1.982	1	5	1,962	11, 16			TOTAL RUNOFF
190	76.Proposed	Condition	s.11.05.	2020.gpw	Return F	Period: 100	Year	Wednesda	y, 11 / 18 / 2020

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 1

Area 2-1

Hydrograph type = Rational Peak discharge = 21.97 cfsStorm frequency = 100 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 19,772 cuft

Drainage area Runoff coeff. = 9.380 ac= 0.3

Tc by User = 15.00 min Intensity = 7.807 in/hrIDF Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1



Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

= 7.807 in/hr

Wednesday, 11 / 18 / 2020


### Hyd. No. 2

Area 2-2

Hydrograph type = Rational Peak discharge = 10.52 cfsStorm frequency = 100 yrsTime to peak  $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 9,464 cuft

Drainage area Runoff coeff. = 4.490 ac= 0.3

Tc by User = 15.00 min Intensity **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

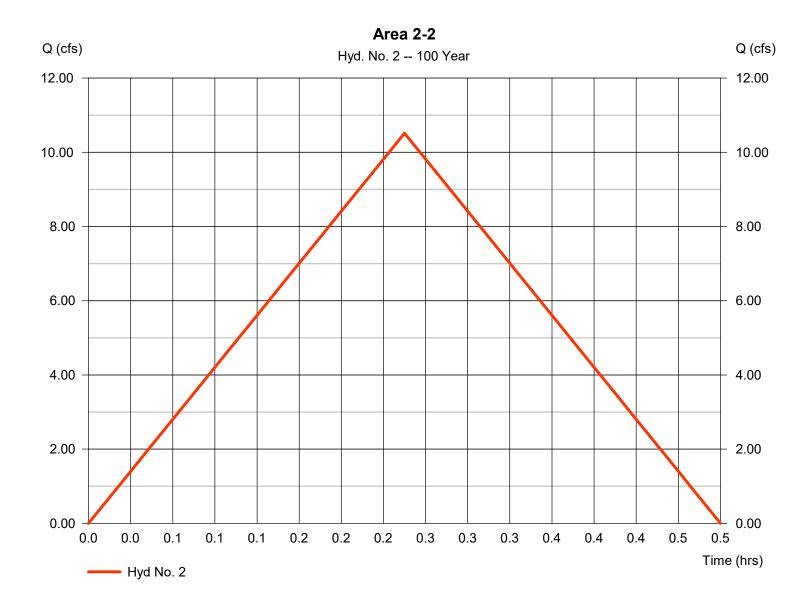

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 3


Area 2-3

Hydrograph type Peak discharge = 26.98 cfs= Rational Storm frequency = 100 yrsTime to peak  $= 0.25 \, hrs$ = 24,283 cuft Time interval = 1 min Hyd. volume

Drainage area Runoff coeff. = 11.520 ac= 0.3

Tc by User Intensity = 7.807 in/hr= 15.00 min

**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

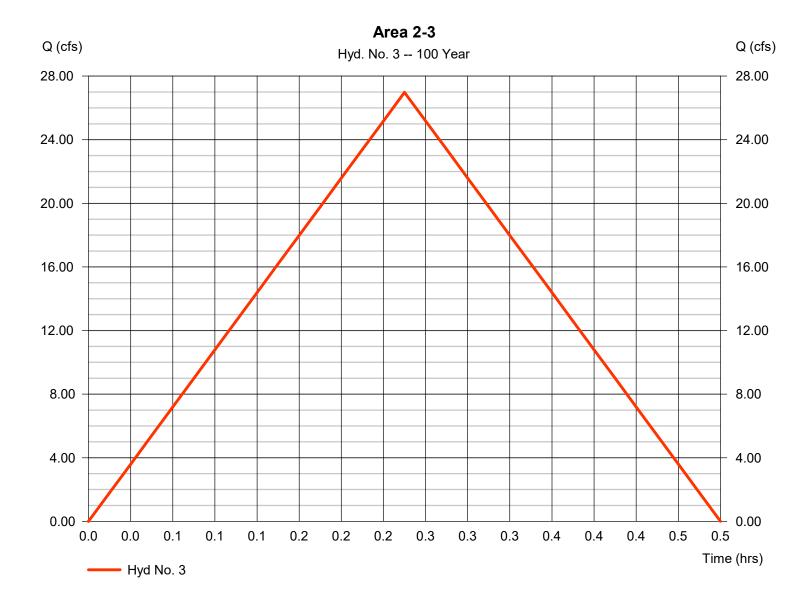


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 4

Area 2-4

Hydrograph type = Rational Peak discharge = 8.784 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 2,635 cuftDrainage area Runoff coeff. = 1.050 ac= 0.65Tc by User  $= 5.00 \, \text{min}$ Intensity = 12.871 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

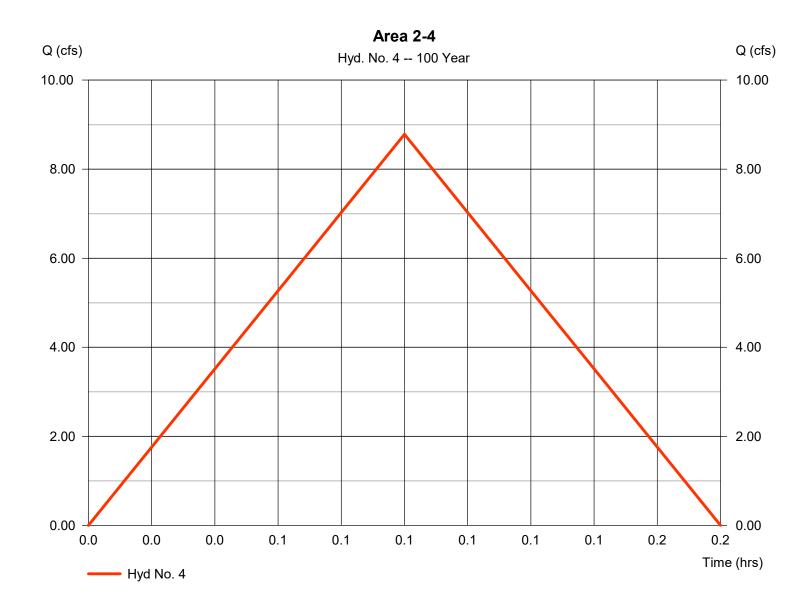


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 5

Area 2-5

Hydrograph type = Rational Peak discharge = 1.622 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 487 cuft Drainage area Runoff coeff. = 0.200 ac= 0.63Tc by User Intensity = 12.871 in/hr $= 5.00 \, \text{min}$ Asc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

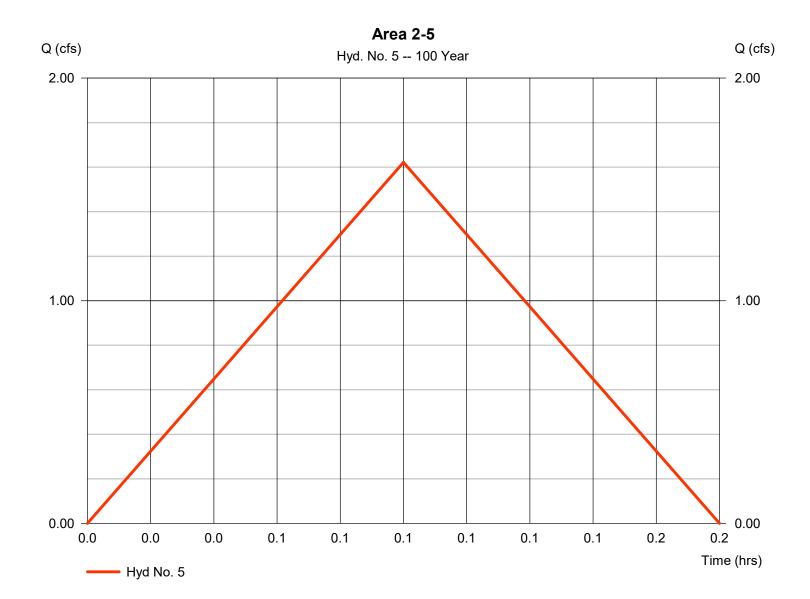


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 6

Area 2-6

Hydrograph type = Rational Peak discharge = 9.684 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 2,905 cuftDrainage area Runoff coeff. = 0.76= 0.990 acTc by User  $= 5.00 \, \text{min}$ Intensity = 12.871 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

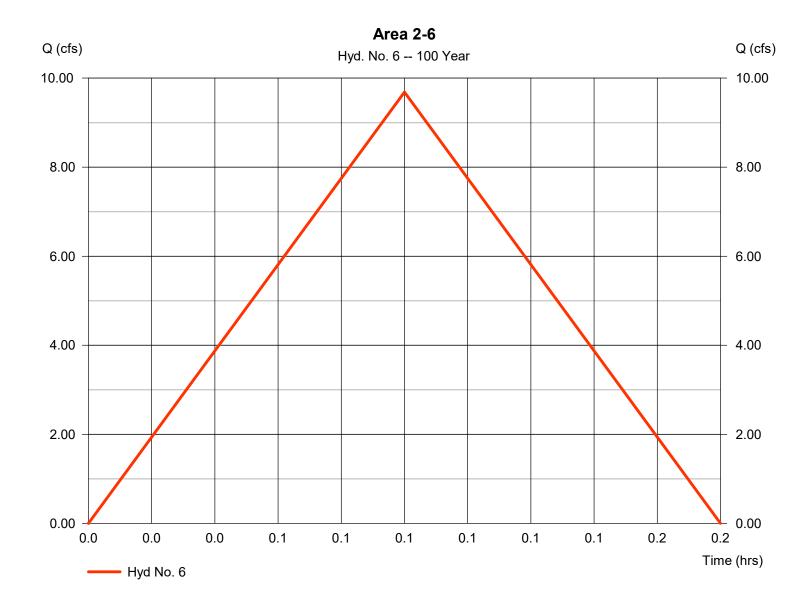


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 7

Area 2-7

= Rational Hydrograph type Peak discharge = 5.663 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 1,699 cuft Runoff coeff. Drainage area = 0.500 ac= 0.88Tc by User  $= 5.00 \, \text{min}$ Intensity = 12.871 in/hr**IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

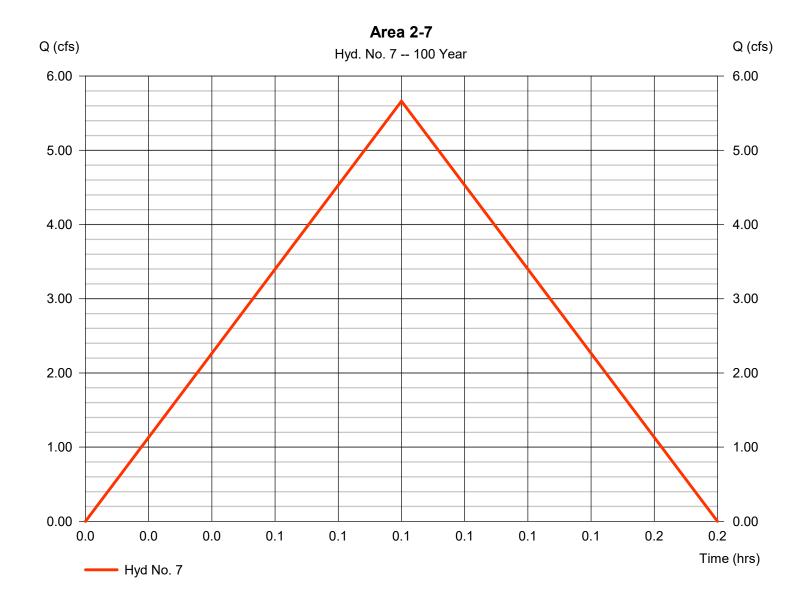


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 8

Area 2-8

Hydrograph type = Rational Peak discharge = 3.210 cfsStorm frequency Time to peak = 100 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 963 cuft Drainage area Runoff coeff. = 0.290 ac= 0.86Tc by User Intensity = 12.871 in/hr $= 5.00 \, \text{min}$ Asc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

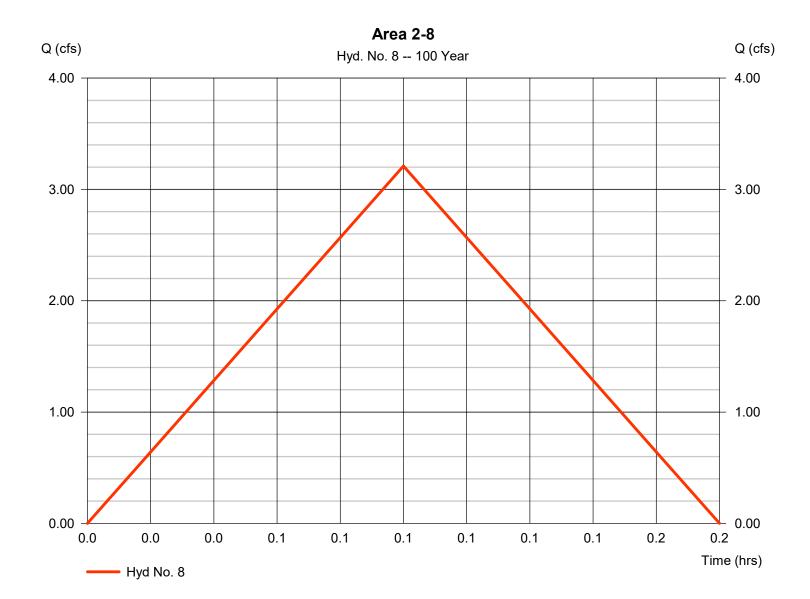


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 9

Area 2-9

Hydrograph type = 2.780 cfs= Rational Peak discharge Storm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 834 cuft Drainage area Runoff coeff. = 0.240 ac= 0.9Tc by User  $= 5.00 \, \text{min}$ Intensity = 12.871 in/hrAsc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

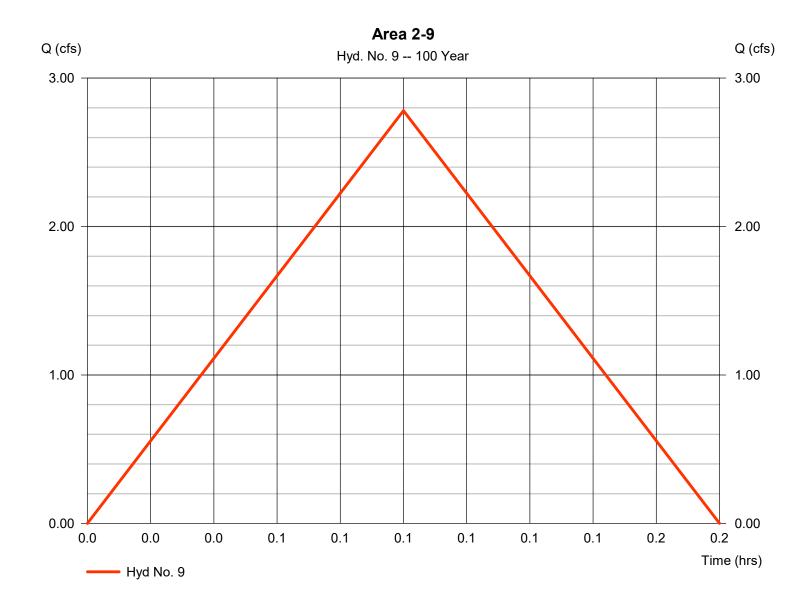


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 10

Area 2-10

Hydrograph type = Rational Peak discharge = 4.048 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 1,214 cuft Drainage area Runoff coeff. = 0.370 ac= 0.85Tc by User Intensity = 12.871 in/hr $= 5.00 \, \text{min}$ Asc/Rec limb fact **IDF** Curve = KCAPWA.IDF = 1/1

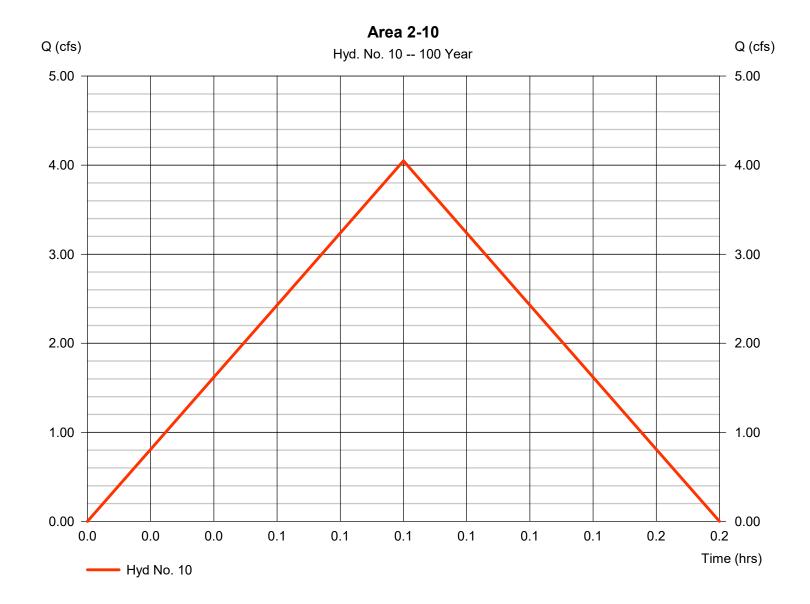


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

### Hyd. No. 11

Area 2-11

Hydrograph type = Rational Peak discharge = 1.982 cfsStorm frequency = 100 yrsTime to peak = 0.08 hrsTime interval = 1 min Hyd. volume = 595 cuft Drainage area Runoff coeff. = 0.350 ac= 0.44Tc by User Intensity = 12.871 in/hr $= 5.00 \, \text{min}$ **IDF** Curve = KCAPWA.IDF Asc/Rec limb fact = 1/1

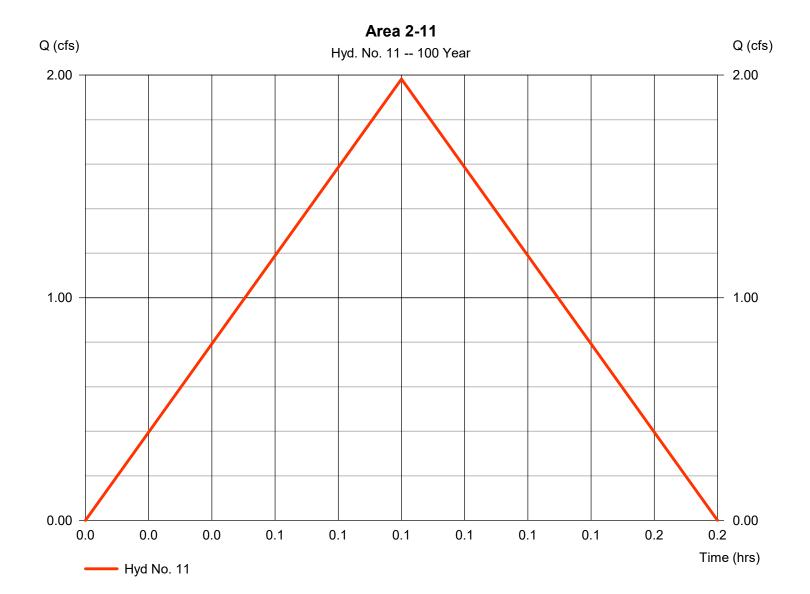

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 12

Combined 1

Hydrograph type = Combine
Storm frequency = 100 yrs
Time interval = 1 min
Inflow hyds. = 1, 2, 3

Peak discharge = 59.47 cfs
Time to peak = 0.25 hrs
Hyd. volume = 53,519 cuft
Contrib. drain. area = 25.390 ac

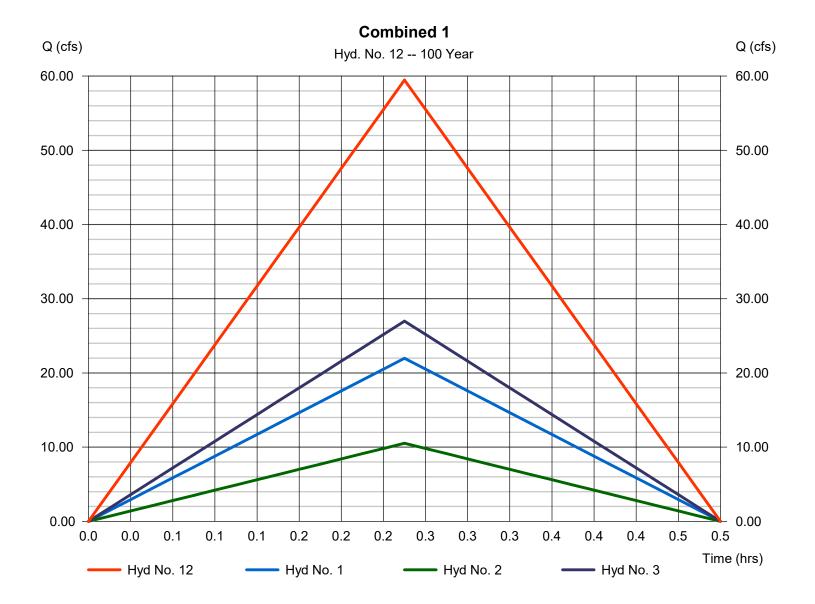

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

= 16.07 cfs

= 0.08 hrs


= 1.750 ac

= 4,821 cuft

#### **Hyd. No. 13**

Combined 2

Hydrograph type= CombinePeak dischargeStorm frequency= 100 yrsTime to peakTime interval= 1 minHyd. volumeInflow hyds.= 4, 5, 7Contrib. drain. area

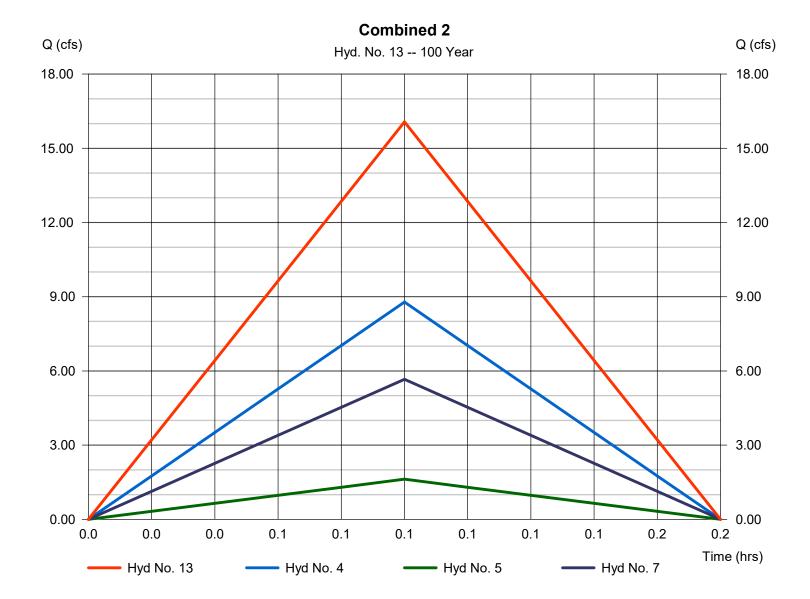


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 14

Combined 3

Hydrograph type = Combine Storm frequency = 100 yrs Time interval = 1 min Inflow hyds. = 6, 8, 9, 10 Peak discharge = 19.72 cfs
Time to peak = 0.08 hrs
Hyd. volume = 5,917 cuft
Contrib. drain. area = 1.890 ac

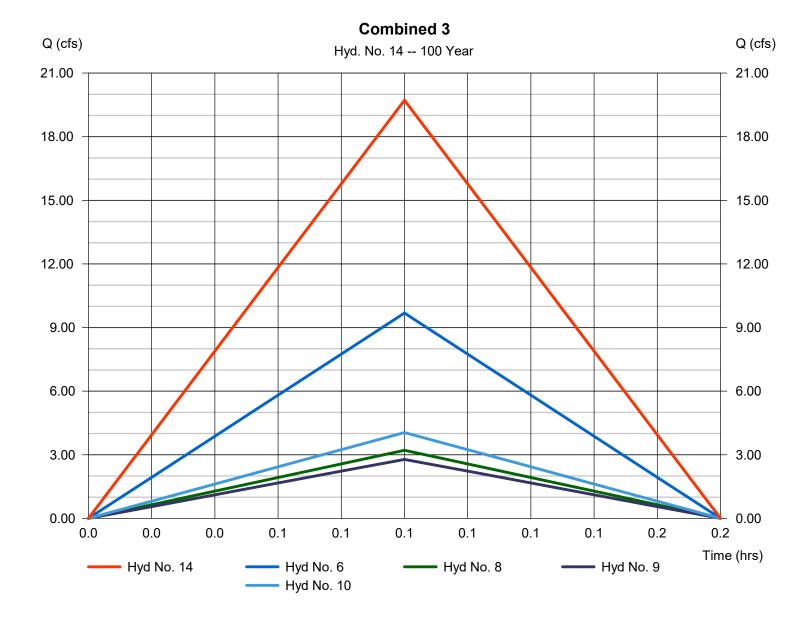


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 15

#### **TOTAL TO DETENTION**

Hydrograph type = Combine Peak discharge = 59.47 cfsStorm frequency Time to peak = 100 yrs $= 0.25 \, hrs$ Time interval = 1 min Hyd. volume = 64,257 cuft Inflow hyds. = 12, 13, 14 Contrib. drain. area = 0.000 ac

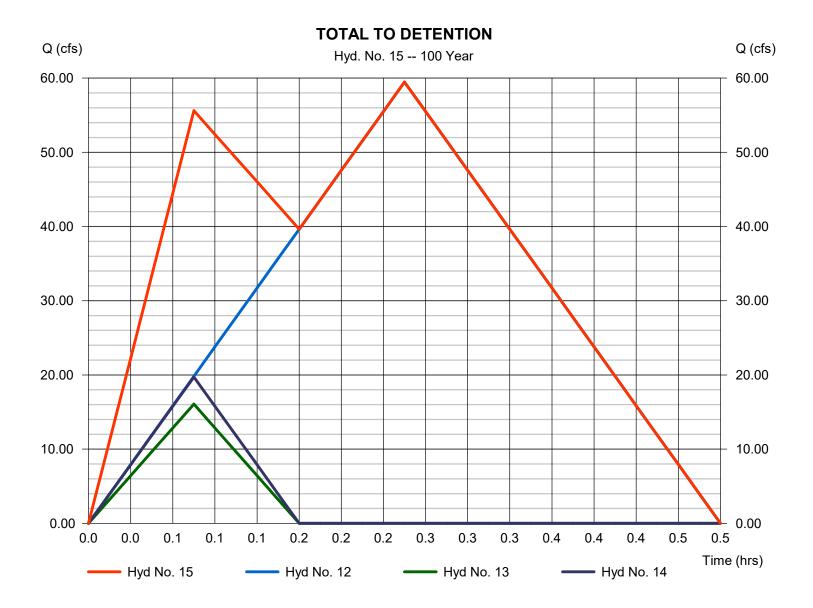

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 11 / 18 / 2020

#### Hyd. No. 16

#### **TOTAL DETENTION**

Hydrograph type Peak discharge = 0.093 cfs= Reservoir Storm frequency = 100 yrsTime to peak = 0.50 hrsTime interval = 1 min Hyd. volume = 1,367 cuftInflow hyd. No. = 15 - TOTAL TO DETENTION Max. Elevation = 985.88 ft Reservoir name = Detention Max. Storage = 64,244 cuft

Storage Indication method used.

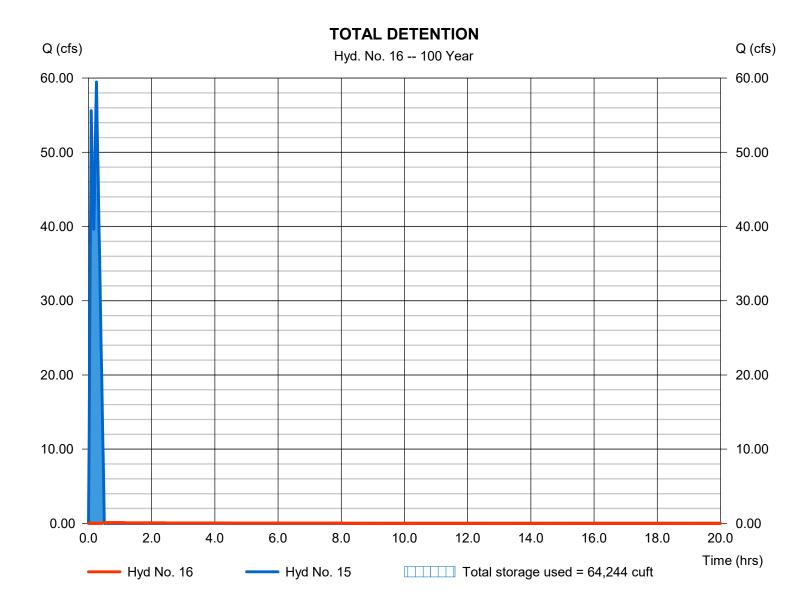


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

#### Hyd. No. 17

**TOTAL RUNOFF** 

Hydrograph type = Combine Peak discharge = 1.982 cfsTime to peak Storm frequency = 100 yrs= 0.08 hrsTime interval = 1 min Hyd. volume = 1,962 cuft Inflow hyds. = 11, 16 Contrib. drain. area = 0.350 ac

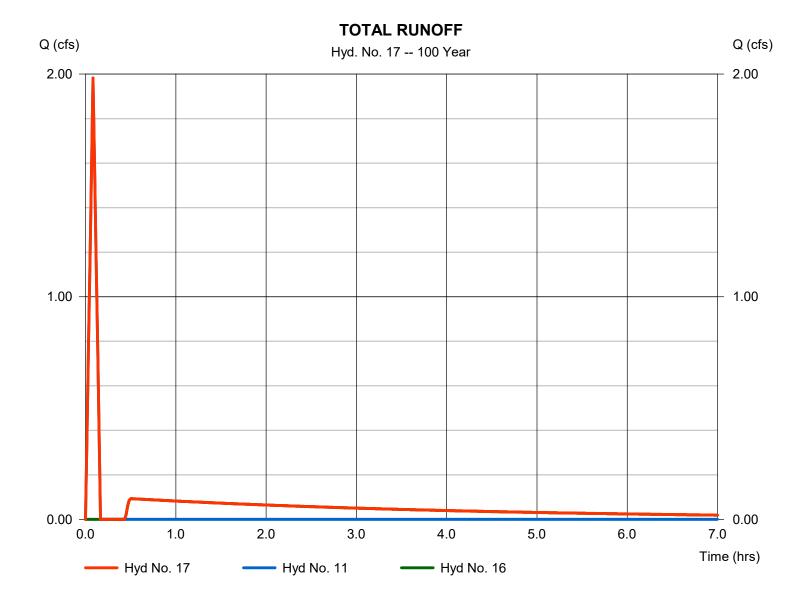

# **Hydraflow Rainfall Report**

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 11 / 18 / 2020

Return Period	Intensity-Duration-Frequency Equation Coefficients (FHA)									
(Yrs)	В	D	E	(N/A)						
1	2.9200	0.1000	0.0000							
2	110.7137	16.5000	0.9842							
3	0.0000	0.0000	0.0000							
5	168.3971	19.5000	1.0189							
10	183.3473	19.2000	1.0096							
25	12318.8496	51.4998	1.8037							
50	235.4014	19.9000	1.0020							
100	83.7894	6.1000	0.7783							

File name: KCAPWA.IDF

#### Intensity = $B / (Tc + D)^E$

Return Period (Yrs)	Intensity Values (in/hr)											
	5 min	10	15	20	25	30	35	40	45	50	55	60
1	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92	2.92
2	5.41	4.40	3.71	3.21	2.83	2.53	2.29	2.09	1.92	1.78	1.66	1.55
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	6.47	5.35	4.56	3.98	3.52	3.16	2.86	2.62	2.41	2.24	2.08	1.95
10	7.35	6.08	5.18	4.52	4.00	3.59	3.26	2.98	2.74	2.54	2.37	2.22
25	8.52	7.31	6.35	5.57	4.93	4.40	3.95	3.57	3.24	2.96	2.72	2.50
50	9.39	7.82	6.70	5.86	5.20	4.68	4.25	3.90	3.60	3.34	3.12	2.92
100	12.87	9.64	7.81	6.62	5.77	5.14	4.65	4.25	3.92	3.65	3.41	3.21

Tc = time in minutes. Values may exceed 60.

Precip. file name: bluesprings.pcp

	Rainfall Precipitation Table (in)										
Storm Distribution	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr			
SCS 24-hour	2.90	3.50	0.00	4.50	5.30	6.10	6.80	7.70			
SCS 6-Hr	0.00	2.65	0.00	3.30	3.45	4.50	5.10	5.70			
Huff-1st	0.00	1.55	0.00	2.75	4.00	5.38	6.50	8.00			
Huff-2nd	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
Huff-3rd	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
Huff-4th	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
Huff-Indy	0.00	1.55	0.00	2.75	4.00	5.38	6.50	8.00			
Custom	0.00	1.75	0.00	2.80	3.90	5.25	6.00	7.10			