

VAPORTITE LED VBGL/VWGL WET LOCATION LED

Cat.#

Job

Type

FIXTURE TYPE "K"



HUBBELL
Outdoor Lighting

Approvals

SPECIFICATIONS

Intended Use:

Wall/Ceiling/Pendant entry, corridor, tunnel, service area, stairwell, or retro-accent application. Compact size ideal for traditional vaportite locations

Construction:

- Rugged die-cast aluminum housing with removable cast aluminum guard included
- Gray powder paint provides corrosion resistance and clean finish
- Frosted glass lens distributes light evenly without any LED brightness or glare
- Vandal resistant set screws attach globe to fixture body

LED:

- 1 high powered COB LED delivers 757 lumens
- 4100K CCT, 80 CRI

Optical/Electrical

- Frosted glass globe
- 120V-277V, 50/60Hz 11w, 250mA, 70 LPW
- Operating temperature -30°C - 40°C
- IP66 and RoHS compliant driver
- Color globes available as an accessory: Green, Blue, Yellow and Red

Installation:

- Wall mount model covers up to 4.5" j-box with 1/2" x 14 NPS threaded conduit entry and four side conduit entries
- Pendant/ceiling mount version accommodates traditional 1/2" x 14 NPS threaded top conduit entry and four side conduit entries

Listings:

- IP66
- Listed to UL1598 for use in wet locations (unit is not rated for use in hazardous locations)

Warranty:

For more information visit:
<http://www.hubbelloutdoor.com/resources/warranty/>


PRODUCT IMAGE(S)



VBGL-1

VWGL-1

DIMENSIONS

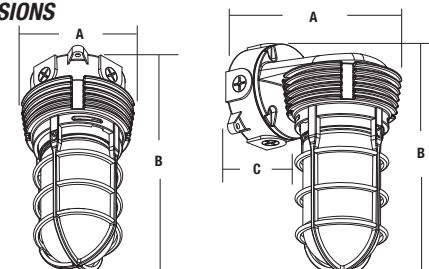

	A	B	C
VBGL-1	5.2" 132 mm	10.37" 263 mm	—
VWGL-1	7.34" 186 mm	11" 280 mm	5.2" 132 mm

SHIPPING INFORMATION

Catalog Number	G.W(kg)/CTN	Carton Dimensions		
		Length Inch (cm)	Width Inch (cm)	Height Inch (cm)
VBGL-1 (Single carton 1pc.)	1.8	10.82"	5.71"	11.42"
VBGL-1 (Master carton 2pcs.)	3.6	12.21"	11.62"	8.27"
VWGL-1 (Single carton 1pc.)	2.0	10.82"	5.71"	11.62"
VWGL-1 (Master carton 2pcs.)	4.0	12.21"	11.81"	8.66"

Carton dimensions for shipping purposes only

CERTIFICATIONS/LISTINGS



ORDERING INFORMATION

Catalog Number	Construction	Mount	Wattage	Drive Current	Voltage	Color Temperature	Lumens	LPW	Weight lbs. (kg)
VBGL-1	Globe refractor	Ceiling/Pendant	11	250mA	120-277V	4100K	757	70	3.4 (1.54)
VWGL-1	Globe refractor	Wall	11	250mA	120-277V	4100K	757	70	3.6 (1.63)

REPLACEMENT PARTS (GLOBES) - Order Separately

Catalog Number	Description
VGL-FG	Frosted globe
VGL-GUARD	Guard with set screws
Colored Globes	
VGL-GN	Green globe
VGL-YW	Yellow globe
VGL-BU	Blue globe
VGL-RD	Red globe



HUBBELL
Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 20115 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: www.hubbelloutdoor.com • Printed in USA

VBGLVWGLLED-SPEC 4/15

PERFORMANCE DATA

# OF LEDS	DRIVE CURRENT (MILLIAMPS)	SYSTEM WATTS	DISTRIBUTION TYPE	4K (4000K NOMINAL, 80 CRI)				
				LUMENS	LPW	B	U	G
1 (COB)	250mA	11W	Globe	757	70	0	3	1

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment, application and inherent performance tolerances of the electrical components.

LUMINAIRE AMBIENT TEMPERATURE FACTOR (LATF)

AMBIENT TEMPERATURE		LUMEN MULTIPLIER
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Use these factors to determine relative lumen output for average ambient temperatures from 40°C (32-104°F).

PROJECTED LUMEN MAINTENANCE


AMBIENT TEMP.	0	25,000	50,000	¹ TM-21-11 60,000	100,000	Calculated L70 (HOURS)
25°C/77°F	1.00	92.8	86.4	83.9	74.7	>127,000
40°C/104°F	0.99	91.8	85.6	83.4	74.6	>127,000

¹ Citizen CLL022


ELECTRICAL DATA

# OF LEDS	NUMBER OF DRIVERS	DRIVE CURRENT (mA)	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (W)
1 (COB)	1	STD. (250mA)	120	0.09	11
			277	0.05	11

PHOTOMETRICS For additional photometric information and IES downloads, visit our web site at www.hubbelloutdoor.com

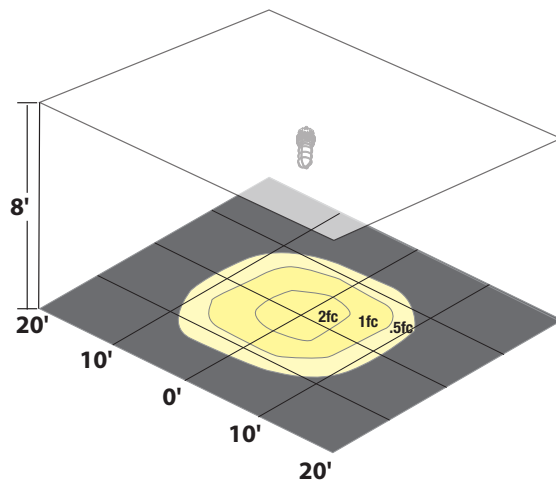

Ceiling Mount 8'

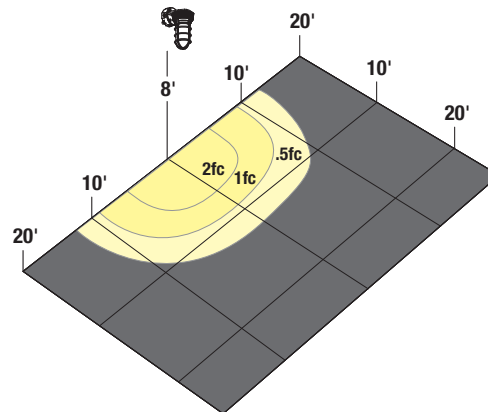

Wall Mount 8'



HUBBELL
Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2015 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: www.hubbelloutdoor.com • Printed in USA

VBGLVWGLLED-SPEC 4/15

DESCRIPTION

The Entri LED luminaire features a classic and stylish design with the added benefits of solid state lighting technology, offering outstanding uniformity and energy savings. Using Cooper Lighting Solutions' proprietary LED LightSquare technology and AccuLED Optics™ system, the Entri LED luminaire offers designers vast versatility in system design, function and performance. Use Entri LED for wall mount architectural lighting applications and egress lighting requirements. UL/cUL listed for use in wet locations.

SPECIFICATION FEATURES

Construction

HOUSING: Heavy wall, one-piece, die-cast aluminum construction for precise tolerance control and repeatability in manufacturing. Integral extruded aluminum heat sink provides superior thermal heat transfer in +40°C ambient environments. **FACEPLATE / DOOR:** One-piece, die-cast aluminum construction. Captive, side hinged faceplate swings open via release of one flush mount die-cast aluminum latch on housing side panel. **GASKET:** One-piece molded silicone gasket mates perfectly between the door and housing for repeatable seal. **LENS:** Uplight lens is impact-resistant, 5/32" thick tempered frosted glass sealed to housing with continuous bead silicone gasket. Downlight lens is an LED LightSquare with integral optics sealed for IP66 rating. **HARDWARE:** Stainless steel mounting screws and latch hardware allow access to electrical components for installation and servicing.

Optics

Choice of 9 patented, high efficiency AccuLED Optics™ distributions. Optics are precisely designed to shape the light output, maximizing efficiency and application spacing. AccuLED Optics technology creates consistent distributions with the

scalability to meet customized application requirements. CRI and CCT offering includes 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, and 5700K with minimum 70CRI and 2700K and 3000K with minimum 80CRI all within 5-step MacAdam ellipse.

Electrical

LED drivers mount to die-cast aluminum back housing for optimal heat sinking, operation efficacy, and prolonged life. Standard drivers feature electronic universal voltage (120-277V 50/60Hz), 347V 60Hz or 480V 60Hz operation. 480V is compatible for use with 480V Wye systems only. Greater than 0.9 power factor, less than 20% harmonic distortion, and is suitable for operation in -40°C to 40°C ambient environments and optional 50C construction available. All fixtures are shipped standard with 10kV/10kA common – and differential – mode surge protection. LightSquare feature an IP66 enclosure rating and maintain greater than 98% lumen maintenance at 60,000 hours per IESNA TM-21. Emergency egress options for -20°C ambient environments, WaveLinX™, occupancy sensor, and dimming options available.

Mounting

JUNCTION BOX: Standard with


zinc-plated, quick-mount junction box plate that mounts directly to 4" J-Box. LightSquare mounts facing downward. Fixture slides over mounting plate and is secured with two stainless steel fasteners. Mounting plate features a one-piece EPDM gasket on back side of plate to firmly seal fixture to wall surface, forbidding entry of moisture and particulates. Optional mounting arrangements utilize a die-cast mounting adaptor box to allow for LED battery pack, surface conduit and trough branch wiring. The Entri LED luminaire is approved for mounting on combustible surfaces.

Finish

Housing is finished in five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. LightSquare cover plates are standard white and may be specified to match finish of luminaire housing. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult Outdoor Architectural Colors brochure for a complete selection.

Warranty

Five-year warranty.

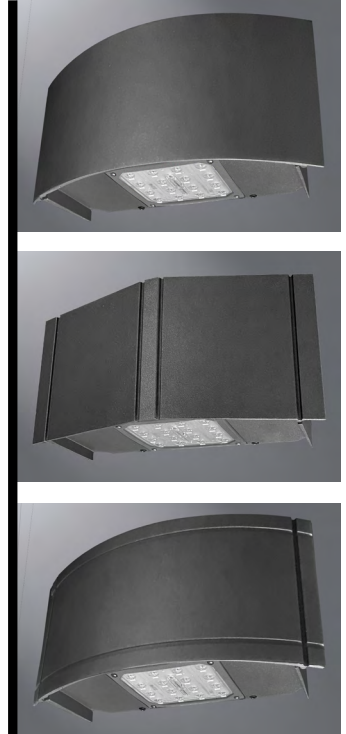


ENC/ENT/ENV ENTRI LED

LightSquare
Solid State LED


**ARCHITECTURAL WALL
LUMINAIRE**

DIMENSIONS


ENC (Round Clean)

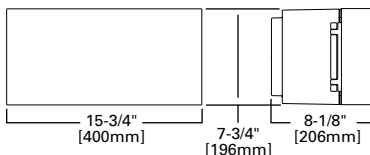


ENT (Triangle Reveals)

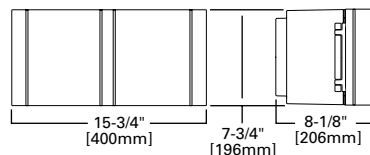

ENV (Round Reveals)

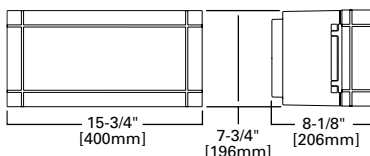

CONDUIT MOUNT / BATTERY BACK BOX



CERTIFICATION DATA

DesignLights Consortium® Qualified*
UL/cUL Listed
ISO 9001
IP66 LightSquares
LM79 / LM80 Compliant

ENERGY DATA

Electronic LED Driver

>0.9 Power Factor
<20% Total Harmonic Distortion
120-277V/50 & 60Hz, 347V/60Hz, 480V/60Hz
-30°C Minimum Temperature
40°C Ambient Temperature Rating (Optional)

SHIPPING DATA

Approximate Net Weight:
15.2 lbs. (6.9 kgs.) - Without backbox
29.1 lbs. (13.2 kgs.) - With backbox

ORDERING INFORMATION

Sample Number: ENC-SA1C-740-U-T4W-GM-ULG-HA-ZW-SWPD4BK

Product Family ¹	Light Engine		Color Temperature	Voltage	Distribution	Finish
	Configuration	Drive Current				
ENC=Entri Round Clean ENT=Entri Triangle Reveals ENV=Entri Round Reveals	SA1=1 Square	A=350mA B=450mA C=600mA D=800mA E=1000mA F=1200mA	722=70CRI, 2200K ³ 727=70CRI, 2700K ³ 730=70CRI, 3000K ³ 735=70CRI, 3500K 740=70CRI, 4000K 750=70CRI, 5000K ³ 760=70CRI, 5700K ³ 827=80CRI, 2700K ³ 830=80CRI, 3000K ³ 835=80CRI, 3500K ³	U=UNV (120-277) 1=120 2=208 3=240 4=277 8=480 9=347	T2=Type II T3=Type III T4FT=Type IV Forward Throw T4W=Type IV Wide SL2=Type II w/Spill Control SL3=Type III w/Spill Control SL4=Type IV w/Spill Control SLL=90° Spill Light Eliminator Left SLR=90° Spill Light Eliminator Right	BZ=Bronze AP=Grey BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White
Options (Add as Suffix)				Accessories (Order Separately)		
F=Singled fused (Must specify voltage, fused on single hot leg of 120, 277, or 347) FF=Doubled fused (Must specify voltage, fused on both hot legs of 208, 240, or 480) X=Driver Surge Protection (6kV) Only 20K=Series 20kV UL 1449 Surge Protective Device DIM=0-10V Dimming Driver ^{5,6} EBP=Battery Pack with Back Box (Must specify voltage, available in 120V or 277V) ^{2,4,9} CBP=Battery Pack with Back Box, Cold Weather Rated (Must specify voltage, available in 120V or 277V) ^{2,4,10} CBP-CEC=Battery Pack with Back Box, Cold Weather Rated, CEC compliant (Must specify voltage, available in 120V or 277V) ^{2,4,10} R90=Rotated Right 90° L90=Rotated Left 90° HSS=Factory Installed House Side Shield ¹⁶ LCF=LightSquare Trim Plate Matches Housing Finish ¹⁵ ULG=Uplight Glow ⁷ HA=50°C High Ambient ⁸ WG=Wire Guard TR=Tamper Resistant Hardware BOX=Empty back box (1/2" NPT, each side with plugs installed) BPC=Button Type Photocontrol (Must specify voltage, available in 120, 208, 240, 277V, 347, and 480) AHD145=After Hours Dim, 5 Hours, 50% ¹⁷ AHD245=After Hours Dim, 6 Hours, 50% ¹⁷ AHD255=After Hours Dim, 7 Hours, 50% ¹⁷ AHD355=After Hours Dim, 8 Hours, 50% ¹⁷ SPB1=Dimming Occupancy Sensor with Bluetooth Interface, <8' Mounting ^{13,22} SPB2=Dimming Occupancy Sensor with Bluetooth Interface, 8'-20' Mounting ^{13,22} SPB4=Dimming Occupancy Sensor with Bluetooth Interface, 21'-40' Mounting ^{13,22} MS-L08=Motion Sensor for ON/OFF Operation, Up to 8' Mounting Height ^{11,12,13} MS-L20=Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height ^{11,12,13} MS/DIM-L08=Motion Sensor for Dimming Operation, Up to 8' Mounting Height ^{11,12,13} MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height ^{11,12,13} ZW=Wavelinx-enabled 4-PIN Twistlock Receptacle ^{19,20} ZW-SWPD4XX=Wavelinx Wireless Sensor, 7' - 15' Mounting Height ^{19,20,21} ZW-SWPD5XX=Wavelinx Wireless Sensor, 15' - 40' Mounting Height ^{19,20,21} CC=Coastal Construction ²³				MA1253=10kV Circuit Module Replacement MA1253-480V=10kV Circuit Module Replacement (480V only) FSIR-100-PK=Wireless Configuration Tool for Occupancy Sensor ¹¹ VA6172SA=Wireguard Accessory VA6173=Tamper-Resistant Driver Bit VA6174=Vandal Shield Accessory VA2001-XX=Thru-Way Conduit Box SWPD4-XX=Wavelinx Wireless Sensor, 7' - 15' Mounting Height (Available colors: BZ=Bronze; WH=White; BK=Black) ^{19,20,21} SWPD5-XX=Wavelinx Wireless Sensor, 15' - 40' Mounting Height (Available colors: BZ=Bronze; WH=White; BK=Black) ^{19,20,21} WOLC-7P-10A=WaveLinX Outdoor Control Module (7-pin) LS/HSS=House Side Shield (Works with all distributions listed for Entri)		

NOTES:

- DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details. DLC Family Code: MMMSPQ
- EBP or CBP options limited to 25°C, 120-277V only. Control option limited to BPC=Button Type Photocontrol (must specify voltage).
- Extended lead times apply. Use dedicated IES files when performing layouts.
- Not available with HA option.
- Cannot be used with other control options.
- Low voltage control lead brought out 18" outside fixture.
- ULG only available in 740
- Not available with ULG option
- EBP is rated for minimum operating temperature of 0°C (32°F). Operates downlight for 90-minutes.
- CBP is rated for minimum operating temperature of -20°C (-4°F). Operates downlight for 90-minutes.
- The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting
- Replace LXX with the available mounting height options: L08, L20, L40 or L40W are the only choices.
- Includes integral photosensor.
- Bronze sensor is shipped with Bronze fixtures. White sensor shipped on all other housing color options.
- Not available with HSS option.
- Only for use with SL2, SL3 and SL4 distributions. The light square trim plate is painted black when the HSS option is selected.
- Requires the use of BPC photocontrol. See After Hours Dim supplemental guide for additional information.
- Control option limited to BPC=Button Type Photocontrol (must specify voltage).
- WAC Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed.
- Requires ZW.
- Replace XX with sensor color (WH, BZ, or BK).
- Smart device with mobile application required to change system defaults. See controls section for details.
- Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654.

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
722 CCT	T2 (Type II)	Lumens	565	2,000	2,508	3,300	4,131	5,147	5,696
		Lumens per Watt [†]	33.0	99.5	98.7	99.1	95.8	90.0	86.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	429	1,521	1,907	2,509	3,141	3,913	4,331
		Lumens per Watt [†]	43.5	75.7	75.1	75.3	72.9	68.4	65.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	578	2,046	2,566	3,376	4,226	5,265	5,827
		Lumens per Watt [†]	44.5	101.8	101.0	101.4	4,226	92.0	88.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	436	1,544	1,936	2,548	3,189	3,973	4,398
		Lumens per Watt [†]	33.5	76.8	76.2	76.5	74.0	69.5	66.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	543	1,924	2,413	3,175	3,974	4,951	5,480
		Lumens per Watt [†]	41.8	95.7	95.0	95.3	92.2	86.6	82.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	402	1,423	1,785	2,349	2,939	3,662	4,054
		Lumens per Watt [†]	30.9	70.8	70.3	70.5	68.2	64.0	61.3
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	567	2,009	2,520	3,316	4,150	5,171	5,723
		Lumens per Watt [†]	43.6	100.0	99.2	99.6	96.3	90.4	86.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	423	1,499	1,879	2,473	3,095	3,856	4,268
		Lumens per Watt [†]	32.5	74.6	74.0	74.3	71.8	67.4	64.6
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1
	SL2 (Type II w/ Spill Control)	Lumens	560	1,985	2,489	3,275	4,099	5,108	5,653
		Lumens per Watt [†]	43.1	98.8	98.0	98.3	95.1	89.3	85.5
		BUG Rating	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/ Spill Control, House Side Shield)	Lumens	459	1,624	2,037	2,680	3,355	4,180	4,626
		Lumens per Watt [†]	35.3	80.8	80.2	80.5	77.8	73.1	70.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL3 (Type III w/ Spill Control)	Lumens	557	1,971	2,472	3,253	4,072	5,073	5,615
		Lumens per Watt [†]	42.8	98.1	97.3	97.7	94.5	88.7	84.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/ Spill Control, House Side Shield)	Lumens	475	1,684	2,111	2,779	3,478	4,333	4,796
		Lumens per Watt [†]	36.5	83.8	83.1	83.5	80.7	75.8	72.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL4 (Type IV w/ Spill Control)	Lumens	538	1,905	2,389	3,144	3,935	4,903	5,427
		Lumens per Watt [†]	41.4	94.8	94.1	94.4	91.3	85.7	82.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/ Spill Control, House Side Shield)	Lumens	466	1,649	2,068	2,721	3,406	4,243	4,696
		Lumens per Watt [†]	35.8	82.0	81.4	81.7	79.0	74.2	71.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
722 CCT	SLR (90° Spill Light Eliminator Right)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [‡]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [‡]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	502	1,777	2,228	2,932	3,670	4,572	5,061
		Lumens per Watt [‡]	38.6	88.4	87.7	88.0	85.2	79.9	76.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888	4,303
		Lumens per Watt [‡]	32.8	75.2	74.6	74.9	72.4	68.0	65.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
727 CCT	T2 (Type II)	Lumens	642	2,275	2,853	3,755	4,699	5,855	6,481
		Lumens per Watt [‡]	49.4	113.2	112.3	112.8	109.0	102.4	98.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	488	1,730	2,169	2,855	3,573	4,452	4,927
		Lumens per Watt [‡]	37.5	86.1	85.4	85.7	82.9	77.8	74.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	657	2,328	2,919	3,841	4,807	5,990	6,630
		Lumens per Watt [‡]	50.5	115.8	114.9	115.3	111.5	104.7	100.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	496	1,757	2,203	2,899	3,628	4,520	5,003
		Lumens per Watt [‡]	38.2	87.4	86.7	87.1	84.2	79.0	75.7
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	618	2,189	2,745	3,612	4,521	5,633	6,234
		Lumens per Watt [‡]	47.5	108.9	108.1	108.5	104.9	98.5	94.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	457	1,619	2,030	2,672	3,344	4,166	4,612
		Lumens per Watt [‡]	35.2	80.5	79.9	80.2	77.6	72.8	69.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	645	2,286	2,867	3,772	4,721	5,883	6,511
		Lumens per Watt [‡]	49.6	113.7	112.9	113.3	109.5	102.8	98.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	481	1,705	2,138	2,813	3,521	4,387	4,856
		Lumens per Watt [‡]	37.0	84.8	84.2	84.5	81.7	76.7	73.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	638	2,258	2,832	3,726	4,664	5,811	6,431
		Lumens per Watt [‡]	49.1	112.3	111.5	111.9	108.2	101.6	97.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	522	1,848	2,317	3,049	3,817	4,755	5,263
		Lumens per Watt [‡]	40.2	91.9	91.2	91.6	88.6	83.1	79.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
727 CCT	SL3 (Type III w/Spill Control)	Lumens	633	2,243	2,813	3,701	4,632	5,771	6,388
		Lumens per Watt†	48.7	111.6	110.7	111.1	107.5	100.9	96.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	541	1,915	2,402	3,161	3,956	4,929	5,456
		Lumens per Watt†	41.6	95.3	94.6	94.9	91.8	86.2	82.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	612	2,168	2,718	3,577	4,477	5,578	6,174
		Lumens per Watt†	47.1	107.9	107.0	107.4	103.9	97.5	93.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	530	1,876	2,352	3,096	3,874	4,827	5,343
		Lumens per Watt†	40.8	93.3	92.6	93.0	89.9	84.4	80.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	571	2,021	2,535	3,336	4,175	5,202	5,758
		Lumens per Watt†	43.9	100.5	99.8	100.2	96.9	90.9	87.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	485	1,719	2,156	2,837	3,550	4,423	4,896
		Lumens per Watt†	37.3	85.5	84.9	85.2	82.4	77.3	74.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	571	2,021	2,535	3,336	4,175	5,202	5,758
		Lumens per Watt†	43.9	100.5	99.8	100.2	96.9	90.9	87.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	485	1,719	2,156	2,837	3,550	4,423	4,896
		Lumens per Watt†	37.3	85.5	84.9	85.2	82.4	77.3	74.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
730 CCT	T2 (Type II)	Lumens	700	2,478	3,107	4,089	5,117	6,376	7,057
		Lumens per Watt†	53.8	123.3	122.3	122.8	118.7	111.5	106.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	532	1,884	2,362	3,109	3,891	4,848	5,366
		Lumens per Watt†	40.9	93.7	93.0	93.4	90.3	84.8	81.2
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2
	T3 (Type III)	Lumens	716	2,535	3,179	4,183	5,235	6,523	7,219
		Lumens per Watt†	55.1	126.1	125.2	125.6	121.5	114.0	109.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	540	1,913	2,399	3,157	3,951	4,922	5,448
		Lumens per Watt†	41.5	95.2	94.4	94.8	91.7	86.0	82.4
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	673	2,384	2,989	3,933	4,923	6,134	6,789
		Lumens per Watt†	51.8	118.6	117.7	118.1	114.2	107.2	102.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	498	1,763	2,211	2,910	3,642	4,537	5,022
		Lumens per Watt†	38.3	87.7	87.0	87.4	84.5	79.3	76.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
730 CCT	T4W (Type IV Wide)	Lumens	703	2,489	3,122	4,108	5,141	6,406	7,090
		Lumens per Watt [†]	54.1	123.8	122.9	123.4	119.3	112.0	107.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	524	1,857	2,328	3,064	3,835	4,778	5,288
		Lumens per Watt [†]	40.3	92.4	91.7	92.0	89.0	83.5	80.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	694	2,459	3,084	4,058	5,079	6,328	7,004
		Lumens per Watt [†]	53.4	122.3	121.4	121.9	117.8	110.6	106.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	568	2,012	2,524	3,321	4,156	5,178	5,732
		Lumens per Watt [†]	43.7	100.1	99.4	99.7	96.4	90.5	86.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	690	2,442	3,063	4,030	5,044	6,285	6,956
		Lumens per Watt [†]	53.1	121.5	120.6	121.0	117.0	109.9	105.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	589	2,086	2,616	3,442	4,308	5,368	5,941
		Lumens per Watt [†]	45.3	103.8	103.0	103.4	100.0	93.8	89.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	666	2,361	2,960	3,895	4,875	6,074	6,723
		Lumens per Watt [†]	51.2	117.5	116.5	117.0	113.1	106.2	101.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	577	2,043	2,562	3,371	4,219	5,257	5,818
		Lumens per Watt [†]	44.4	101.6	100.9	101.2	97.9	91.9	88.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	622	2,201	2,761	3,633	4,547	5,665	6,270
		Lumens per Watt [†]	47.8	109.5	108.7	109.1	105.5	99.0	94.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	529	1,872	2,347	3,089	3,866	4,817	5,331
		Lumens per Watt [†]	40.7	93.1	92.4	92.8	89.7	84.2	80.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	622	2,201	2,761	3,633	4,547	5,665	6,270
		Lumens per Watt [†]	47.8	109.5	108.7	109.1	105.5	99.0	94.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	529	1,872	2,347	3,089	3,866	4,817	5,331
		Lumens per Watt [†]	40.7	93.1	92.4	92.8	89.7	84.2	80.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
735 CCT	T2 (Type II)	Lumens	722	2,556	3,205	4,218	5,279	6,577	7,279
		Lumens per Watt [†]	55.5	127.2	126.2	126.7	122.5	115.0	110.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	549	1,943	2,437	3,207	4,013	5,000	5,535
		Lumens per Watt [†]	42.2	96.7	95.9	96.3	93.1	87.4	83.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
735 CCT	T3 (Type III)	Lumens	738	2,614	3,279	4,314	5,400	6,728	7,447
		Lumens per Watt [†]	56.8	130.0	129.1	129.5	125.3	117.6	112.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	557	1,973	2,474	3,256	4,075	5,077	5,620
		Lumens per Watt [†]	42.8	98.2	97.4	97.8	94.5	88.8	85.0
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4FT (Type IV Forward Throw)	Lumens	694	2,459	3,083	4,057	5,078	6,327	7,003
		Lumens per Watt [†]	53.4	122.3	121.4	121.8	117.8	110.6	105.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	514	1,819	2,281	3,001	3,756	4,680	5,180
		Lumens per Watt [†]	39.5	90.5	89.8	90.1	87.1	81.8	78.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	725	2,568	3,220	4,237	5,303	6,608	7,314
		Lumens per Watt [†]	55.8	127.8	126.8	127.2	123.0	115.5	110.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	541	1,915	2,402	3,160	3,955	4,928	5,455
		Lumens per Watt [†]	41.6	95.3	94.6	94.9	91.8	86.2	82.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	716	2,536	3,181	4,186	5,239	6,527	7,224
		Lumens per Watt [†]	55.1	126.2	125.2	125.7	121.6	114.1	109.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	586	2,076	2,603	3,425	4,287	5,341	5,912
		Lumens per Watt [†]	45.1	103.3	102.5	102.9	99.5	93.4	89.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	711	2,519	3,159	4,157	5,203	6,483	7,175
		Lumens per Watt [†]	54.7	125.3	124.4	124.8	120.7	113.3	108.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	608	2,152	2,698	3,551	4,444	5,537	6,128
		Lumens per Watt [†]	46.8	107.1	106.2	106.6	103.1	96.8	92.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	687	2,435	3,053	4,018	5,029	6,266	6,935
		Lumens per Watt [†]	52.8	121.1	120.2	120.7	116.7	109.5	104.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	595	2,107	2,642	3,477	4,352	5,422	6,001
		Lumens per Watt [†]	45.8	104.8	104.0	104.4	101.0	94.8	90.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	641	2,271	2,847	3,747	4,690	5,843	6,467
		Lumens per Watt [†]	49.3	113.0	112.1	112.5	108.8	102.2	97.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	545	1,931	2,421	3,186	3,988	4,968	5,499
		Lumens per Watt [†]	41.9	96.1	95.3	95.7	92.5	86.9	83.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
735 CCT	SLL (90° Spill Light Eliminator Left)	Lumens	641	2,271	2,847	3,747	4,690	5,843	6,467
		Lumens per Watt [‡]	49.3	113.0	112.1	112.5	108.8	102.2	97.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	545	1,931	2,421	3,186	3,988	4,968	5,499
		Lumens per Watt [‡]	41.9	96.1	95.3	95.7	92.5	86.9	83.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
740 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001	7,749
		Lumens per Watt [‡]	59.1	135.4	134.3	134.8	130.4	122.4	117.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,323	5,892
		Lumens per Watt [‡]	44.9	102.9	102.1	102.5	99.1	93.1	89.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T2-ULG (Type III, House Side Shield)	Lumens	768	4,499	5,190	6,268	7,397	8,779	9,527
		Lumens per Watt [‡]	59.1	122.3	123.3	125.4	123.7	118.8	115.1
		BUG Rating	--	--	--	--	--	--	--
	T2-HSS-ULG (Type III, House Side Shield)	Lumens	584	3,847	4,372	5,192	6,050	7,101	7,670
		Lumens per Watt [‡]	44.9	104.5	103.8	103.8	101.2	96.1	92.6
		BUG Rating	--	--	--	--	--	--	--
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162	7,927
		Lumens per Watt [‡]	60.5	138.5	137.4	137.9	133.4	125.2	119.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405	5,982
		Lumens per Watt [‡]	45.6	104.5	103.7	104.1	100.6	94.5	90.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-ULG (Type III, House Side Shield)	Lumens	786	4,561	5,268	6,371	7,526	8,940	9,705
		Lumens per Watt [‡]	60.5	123.9	125.1	127.4	125.9	121.0	117.2
		BUG Rating	--	--	--	--	--	--	--
	T3-HSS-ULG (Type III, House Side Shield)	Lumens	593	3,878	4,412	5,244	6,116	7,183	7,760
		Lumens per Watt [‡]	45.6	105.4	104.8	104.9	102.3	97.2	93.7
		BUG Rating	--	--	--	--	--	--	--
	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735	7,455
		Lumens per Watt [‡]	56.8	130.2	129.2	129.7	125.4	117.7	112.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982	5,514
		Lumens per Watt [‡]	42.1	96.3	95.6	95.9	92.8	87.1	83.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-ULG (Type III, House Side Shield)	Lumens	739	4,395	5,060	6,097	7,184	8,513	9,233
		Lumens per Watt [‡]	56.8	119.4	120.2	121.9	120.1	115.2	111.5
		BUG Rating	--	--	--	--	--	--	--
	T4FT-HSS-ULG (Type III, House Side Shield)	Lumens	547	3,714	4,206	4,973	5,777	6,760	7,292
		Lumens per Watt [‡]	42.1	100.9	99.9	99.5	96.6	91.5	88.1
		BUG Rating	--	--	--	--	--	--	--

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
740 CCT	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034	7,785
		Lumens per Watt [†]	59.4	136.0	135.0	135.5	131.0	123.0	117.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246	5,806
		Lumens per Watt [†]	44.3	101.4	100.6	101.0	97.7	91.7	87.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-ULG (Type III, House Side Shield)	Lumens	772	4,511	5,206	6,289	7,424	8,812	9,563
		Lumens per Watt [†]	59.4	122.6	123.7	125.8	124.1	119.2	115.5
		BUG Rating	--	--	--	--	--	--	--
	T4W-HSS-ULG (Type III, House Side Shield)	Lumens	576	3,817	4,334	5,142	5,988	7,024	7,584
		Lumens per Watt [†]	44.3	103.7	102.9	102.8	100.1	95.0	91.6
		BUG Rating	--	--	--	--	--	--	--
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948	7,690
		Lumens per Watt [†]	58.6	134.3	133.3	133.8	129.4	121.5	116.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
	"SL2-HSS (Type II w/Spill Control, House Side Shield)"	Lumens	624	2,210	2,771	3,646	4,564	5,686	6,293
		Lumens per Watt [†]	48.0	110.0	109.1	109.5	105.9	99.4	95.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	"SL2-ULG (Type III, House Side Shield)"	Lumens	762	4,478	5,164	6,234	7,355	8,726	9,468
		Lumens per Watt [†]	58.6	121.7	122.7	124.7	123.0	118.1	114.3
		BUG Rating	--	--	--	--	--	--	--
	"SL2-HSS-ULG (Type III, House Side Shield)"	Lumens	624	3,988	4,549	5,424	6,342	7,464	8,071
		Lumens per Watt [†]	48.0	108.4	108.1	108.5	106.1	101.0	97.5
		BUG Rating	--	--	--	--	--	--	--
	"SL3 (Type III w/Spill Control)"	Lumens	757	2,682	3,363	4,425	5,539	6,901	7,638
		Lumens per Watt [†]	58.2	133.4	132.4	132.9	128.5	120.6	115.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	"SL3-HSS (Type III w/Spill Control, House Side Shield)"	Lumens	647	2,290	2,872	3,780	4,731	5,894	6,524
		Lumens per Watt [†]	49.8	113.9	113.1	113.5	109.8	103.0	98.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	"SL3-ULG (Type III, House Side Shield)"	Lumens	757	4,460	5,141	6,203	7,317	8,679	9,416
		Lumens per Watt [†]	58.2	121.2	122.1	124.1	122.4	117.4	113.7
		BUG Rating	--	--	--	--	--	--	--
	"SL3-HSS-ULG (Type III, House Side Shield)"	Lumens	647	4,068	4,650	5,558	6,509	7,672	8,302
		Lumens per Watt [†]	49.8	110.5	110.5	111.2	108.8	103.8	100.3
		BUG Rating	--	--	--	--	--	--	--
	"SL4 (Type IV w/Spill Control)"	Lumens	732	2,592	3,250	4,277	5,353	6,670	7,383
		Lumens per Watt [†]	56.3	129.0	128.0	128.4	124.2	116.6	111.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	"SL4-HSS (Type IV w/Spill Control, House Side Shield)"	Lumens	633	2,243	2,813	3,701	4,633	5,772	6,389
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9	96.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
740 CCT	SL4-ULG (Type III, House Side Shield)	Lumens	732	4,370	5,028	6,055	7,131	8,448	9,161
		Lumens per Watt [‡]	56.3	118.8	119.4	121.1	119.2	114.3	110.6
		BUG Rating	--	--	--	--	--	--	--
	SL4-HSS-ULG (Type III, House Side Shield)	Lumens	633	4,021	4,591	5,479	6,411	7,550	8,167
		Lumens per Watt [‡]	48.7	109.3	109.0	109.6	107.2	102.2	98.6
		BUG Rating	--	--	--	--	--	--	--
	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [‡]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [‡]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLR-ULG (Type III, House Side Shield)	Lumens	682	4,195	4,809	5,767	6,770	7,998	8,663
		Lumens per Watt [‡]	52.5	114.0	114.2	115.3	113.2	108.2	104.6
		BUG Rating	--	--	--	--	--	--	--
	SLR-HSS-ULG (Type III, House Side Shield)	Lumens	580	3,833	4,355	5,170	6,023	7,067	7,632
		Lumens per Watt [‡]	44.6	104.2	103.4	103.4	100.7	95.6	92.2
		BUG Rating	--	--	--	--	--	--	--
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [‡]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [‡]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-ULG (Type III, House Side Shield)	Lumens	682	4,195	4,809	5,767	6,770	7,998	8,663
		Lumens per Watt [‡]	52.5	114.0	114.2	115.3	113.2	108.2	104.6
		BUG Rating	--	--	--	--	--	--	--
	SLL-HSS-ULG (Type III, House Side Shield)	Lumens	580	3,833	4,355	5,170	6,023	7,067	7,632
		Lumens per Watt [‡]	44.6	104.2	103.4	103.4	100.7	95.6	92.2
		BUG Rating	--	--	--	--	--	--	--
750 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001	7,749
		Lumens per Watt [‡]	59.1	135.4	134.3	134.8	130.4	122.4	117.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,323	5,892
		Lumens per Watt [‡]	44.9	102.9	102.1	102.5	99.1	93.1	89.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162	7,927
		Lumens per Watt [‡]	60.5	138.5	137.4	137.9	133.4	125.2	119.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405	5,982
		Lumens per Watt [‡]	45.6	104.5	103.7	104.1	100.6	94.5	90.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
750 CCT	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735	7,455
		Lumens per Watt [†]	56.8	130.2	129.2	129.7	125.4	117.7	112.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982	5,514
		Lumens per Watt [†]	42.1	96.3	95.6	95.9	92.8	87.1	83.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034	7,785
		Lumens per Watt [†]	59.4	136.0	135.0	135.5	131.0	123.0	117.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246	5,806
		Lumens per Watt [†]	44.3	101.4	100.6	101.0	97.7	91.7	87.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948	7,690
		Lumens per Watt [†]	58.6	134.3	133.3	133.8	129.4	121.5	116.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	624	2,210	2,771	3,646	4,564	5,686	6,293
		Lumens per Watt [†]	48.0	110.0	109.1	109.5	105.9	99.4	95.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	757	2,682	3,363	4,425	5,539	6,901	7,638
		Lumens per Watt [†]	58.2	133.4	132.4	132.9	128.5	120.6	115.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	647	2,290	2,872	3,780	4,731	5,894	6,524
		Lumens per Watt [†]	49.8	113.9	113.1	113.5	109.8	103.0	98.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	732	2,592	3,250	4,277	5,353	6,670	7,383
		Lumens per Watt [†]	56.3	129.0	128.0	128.4	124.2	116.6	111.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	633	2,243	2,813	3,701	4,633	5,772	6,389
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9	96.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)		ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)		EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±	13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V	--	0.17	0.22	0.29	0.38	0.48	0.56
	277V	--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V	--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V	--	0.07	0.08	0.11	0.15	0.18	0.21
	480V	--	0.05	0.06	0.08	0.11	0.13	0.16
Optics								
760 CCT	T2 (Type II)	Lumens	768	2,721	3,412	4,490	5,619	7,001
		Lumens per Watt [†]	59.1	135.4	134.3	134.8	130.4	122.4
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	584	2,069	2,594	3,414	4,272	5,892
		Lumens per Watt [†]	44.9	102.9	102.1	102.5	99.1	93.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	T3 (Type III)	Lumens	786	2,783	3,490	4,593	5,748	7,162
		Lumens per Watt [†]	60.5	138.5	137.4	137.9	133.4	125.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	593	2,100	2,634	3,466	4,338	5,405
		Lumens per Watt [†]	45.6	104.5	103.7	104.1	100.6	94.5
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4FT (Type IV Forward Throw)	Lumens	739	2,617	3,282	4,319	5,406	6,735
		Lumens per Watt [†]	56.8	130.2	129.2	129.7	125.4	117.7
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	547	1,936	2,428	3,195	3,999	4,982
		Lumens per Watt [†]	42.1	96.3	95.6	95.9	92.8	87.1
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	772	2,733	3,428	4,511	5,646	7,034
		Lumens per Watt [†]	59.4	136.0	135.0	135.5	131.0	123.0
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	576	2,039	2,556	3,364	4,210	5,246
		Lumens per Watt [†]	44.3	101.4	100.6	101.0	97.7	91.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)	Lumens	762	2,700	3,386	4,456	5,577	6,948
		Lumens per Watt [†]	58.6	134.3	133.3	133.8	129.4	121.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B2-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	624	2,210	2,771	3,646	4,564	5,686
		Lumens per Watt [†]	48.0	110.0	109.1	109.5	105.9	99.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	757	2,682	3,363	4,425	5,539	6,901
		Lumens per Watt [†]	58.2	133.4	132.4	132.9	128.5	120.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	647	2,290	2,872	3,780	4,731	5,894
		Lumens per Watt [†]	49.8	113.9	113.1	113.5	109.8	103.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	732	2,592	3,250	4,277	5,353	6,670
		Lumens per Watt [†]	56.3	129.0	128.0	128.4	124.2	116.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	633	2,243	2,813	3,701	4,633	5,772
		Lumens per Watt [†]	48.7	111.6	110.7	111.1	107.5	100.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
760 CCT	SLR (90° Spill Light Eliminator Right)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SLL (90° Spill Light Eliminator Left)	Lumens	682	2,417	3,031	3,989	4,992	6,220	6,885
		Lumens per Watt [†]	52.5	120.2	119.3	119.8	115.8	108.7	104.2
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	580	2,055	2,577	3,392	4,245	5,289	5,854
		Lumens per Watt [†]	44.6	102.2	101.5	101.9	98.5	92.5	88.6
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
827 CCT	T2 (Type II)	Lumens	565	2,000	2,508	3,300	4,131	5,147	5,696
		Lumens per Watt [†]	43.5	99.5	98.7	99.1	95.8	90.0	86.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	429	1,521	1,907	2,509	3,141	3,913	4,331
		Lumens per Watt [†]	33.0	75.7	75.1	75.3	72.9	68.4	65.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	578	2,046	2,566	3,376	4,226	5,265	5,825
		Lumens per Watt [†]	44.5	101.8	101.0	101.4	98.1	92.0	88.1
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	436	1,544	1,936	2,548	3,189	3,973	4,398
		Lumens per Watt [†]	33.5	76.8	76.2	76.5	74.0	69.5	66.5
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	543	1,924	2,413	3,175	3,974	4,951	5,480
		Lumens per Watt [†]	41.8	95.7	95.0	95.3	92.2	86.6	82.9
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	402	1,423	1,785	2,349	2,939	3,662	4,054
		Lumens per Watt [†]	30.9	70.8	70.3	70.5	68.2	64.0	61.3
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4W (Type IV Wide)	Lumens	567	2,009	2,520	3,316	4,150	5,171	5,723
		Lumens per Watt [†]	43.6	100.0	99.2	99.6	96.3	90.4	86.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	423	1,499	1,879	2,473	3,095	3,856	4,268
		Lumens per Watt [†]	32.5	74.6	74.0	74.3	71.8	67.4	64.6
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1
	SL2 (Type II w/Spill Control)	Lumens	560	1,985	2,489	3,275	4,099	5,108	5,653
		Lumens per Watt [†]	43.1	98.8	98.0	98.3	95.1	89.3	85.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	459	1,624	2,037	2,680	3,355	4,180	4,626
		Lumens per Watt [†]	35.3	80.8	80.2	80.5	77.8	73.1	70.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

POWER AND LUMENS

1 LightSquare (SA Series)		ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)		EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±	13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V	--	0.17	0.22	0.29	0.38	0.48	0.56
	277V	--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V	--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V	--	0.07	0.08	0.11	0.15	0.18	0.21
	480V	--	0.05	0.06	0.08	0.11	0.13	0.16
Optics								
827 CCT	SL3 (Type III w/Spill Control)	Lumens	557	1,971	2,472	3,253	4,072	5,615
		Lumens per Watt [†]	42.8	98.1	97.3	97.7	94.5	84.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	475	1,684	2,111	2,779	3,478	4,796
		Lumens per Watt [†]	36.5	83.8	83.1	83.5	80.7	75.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SL4 (Type IV w/Spill Control)	Lumens	538	1,905	2,389	3,144	3,935	5,427
		Lumens per Watt [†]	41.4	94.8	94.1	94.4	91.3	85.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	466	1,649	2,068	2,721	3,406	4,243
		Lumens per Watt [†]	35.8	82.0	81.4	81.7	79.0	74.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	502	1,777	2,228	2,932	3,670	4,572
		Lumens per Watt [†]	38.6	88.4	87.7	88.0	85.2	79.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888
		Lumens per Watt [†]	32.8	75.2	74.6	74.9	72.4	68.0
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	502	1,777	2,228	2,932	3,670	4,572
		Lumens per Watt [†]	38.6	88.4	87.7	88.0	85.2	79.9
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	427	1,511	1,895	2,493	3,121	3,888
		Lumens per Watt [†]	32.8	75.2	74.6	74.9	72.4	68.0
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
830 CCT	T2 (Type II)	Lumens	610	2,162	2,711	3,568	4,465	5,563
		Lumens per Watt [†]	46.9	107.6	106.7	107.1	103.6	97.3
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T2-HSS (Type II, House Side Shield)	Lumens	464	1,644	2,061	2,713	3,395	4,230
		Lumens per Watt [†]	35.7	81.8	81.1	81.5	78.8	74.0
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1
	T3 (Type III)	Lumens	624	2,212	2,773	3,650	4,568	5,691
		Lumens per Watt [†]	48.0	110.0	109.2	109.6	106.0	99.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T3-HSS (Type III, House Side Shield)	Lumens	471	1,669	2,093	2,754	3,447	4,295
		Lumens per Watt [†]	36.2	83.0	82.4	82.7	80.0	75.1
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1
	T4FT (Type IV Forward Throw)	Lumens	587	2,080	2,608	3,432	4,296	5,352
		Lumens per Watt [†]	45.2	103.5	102.7	103.1	99.7	93.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	T4FT-HSS (Type IV Forward Throw, House Side Shield)	Lumens	434	1,538	1,929	2,539	3,177	3,959
		Lumens per Watt [†]	33.4	76.5	75.9	76.2	73.7	69.2
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2

POWER AND LUMENS

1 LightSquare (SA Series)			ENC (Entri - Round Clean) / ENT (Entri - Triangle Reveals) / ENV (Entri - Round Reveals)						
Drive Current (mA)			EBP / CBP	SA1A (350mA)	SA1B (450mA)	SA1C (600mA)	SA1D (800mA)	SA1E (1000mA)	SA1F (1200mA)
Power (Watts)	120-277V±		13	20.1	25.4	33.3	43.1	57.2	66.1
Current (A)	120V		--	0.17	0.22	0.29	0.38	0.48	0.56
	277V		--	0.09	0.1	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V		--	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V		--	0.07	0.08	0.11	0.15	0.18	0.21
	480V		--	0.05	0.06	0.08	0.11	0.13	0.16
Optics									
830 CCT	T4W (Type IV Wide)	Lumens	613	2,172	2,724	3,584	4,486	5,590	6,187
		Lumens per Watt [‡]	47.2	108.1	107.2	107.6	104.1	97.7	93.6
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	T4W-HSS (Type IV Wide, House Side Shield)	Lumens	457	1,620	2,032	2,673	3,346	4,169	4,614
		Lumens per Watt [‡]	35.2	80.6	80.0	80.3	77.6	72.9	69.8
		BUG Rating	B0-U0-G0	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G2
	SL2 (Type II w/Spill Control)1	Lumens	606	2,146	2,691	3,541	4,431	5,521	6,111
		Lumens per Watt [‡]	46.6	106.8	105.9	106.3	102.8	96.5	92.5
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL2-HSS (Type II w/Spill Control, House Side Shield)	Lumens	496	1,756	2,202	2,898	3,626	4,518	5,001
		Lumens per Watt [‡]	38.2	87.4	86.7	87.0	84.1	79.0	75.7
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL3 (Type III w/Spill Control)	Lumens	602	2,131	2,672	3,517	4,401	5,484	6,070
		Lumens per Watt [‡]	46.3	106.0	105.2	105.6	102.1	95.9	91.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL3-HSS (Type III w/Spill Control, House Side Shield)	Lumens	514	1,820	2,282	3,004	3,759	4,684	5,184
		Lumens per Watt [‡]	39.5	90.5	89.8	90.2	87.2	81.9	78.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2
	SL4 (Type IV w/Spill Control)	Lumens	582	2,060	2,583	3,399	4,254	5,300	5,867
		Lumens per Watt [‡]	44.8	102.5	101.7	102.1	98.7	92.7	88.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	SL4-HSS (Type IV w/Spill Control, House Side Shield)	Lumens	503	1,782	2,235	2,941	3,681	4,587	5,077
		Lumens per Watt [‡]	38.7	88.7	88.0	88.3	85.4	80.2	76.8
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B0-U0-G1	B0-U0-G1	B1-U0-G2	B1-U0-G2
	SLR (90° Spill Light Eliminator Right)	Lumens	542	1,921	2,409	3,170	3,967	4,943	5,471
		Lumens per Watt [‡]	41.7	95.6	94.8	95.2	92.0	86.4	82.8
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLR-HSS (90° Spill Light Eliminator Right, House Side Shield)	Lumens	461	1,633	2,048	2,695	3,373	4,203	4,652
		Lumens per Watt [‡]	35.5	81.2	80.6	80.9	78.3	73.5	70.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL (90° Spill Light Eliminator Left)	Lumens	542	1,921	2,409	3,170	3,967	4,943	5,471
		Lumens per Watt [‡]	42	96	95	95	92	86	83
		BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1
	SLL-HSS (90° Spill Light Eliminator Left, House Side Shield)	Lumens	461	1,633	2,048	2,695	3,373	4,203	4,652
		Lumens per Watt [‡]	35.5	81.2	80.6	80.9	78.3	73.5	70.4
		BUG Rating	B0-U0-G0	B0-U0-G1	B0-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1

LUMEN MAINTENANCE


SA1 (All Drive Currents)					
Hours	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 (Hours)**
25 °C	99.4%	99.0%	98.9%	98.3%	2,471,000
40 °C	99.4%	99.0%	98.9%	98.3%	2,471,000
50 °C	99.4%	99.0%	98.9%	98.3%	2,471,000

* Supported by IES TM-21 standards

** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

LUMEN MULTIPLIER

Ambient Temperature	SA1 (All Drive Currents)
0 °C	1.02
10 °C	1.01
25 °C	1.00
40 °C	0.99
50 °C	0.97

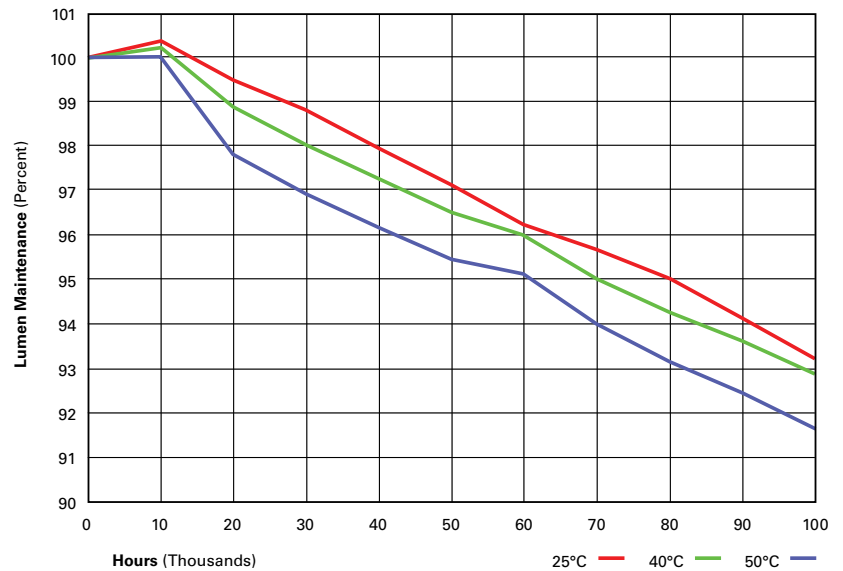

CONTROL OPTIONS

0-10V

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (BPC)




Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

Dimming Occupancy Sensor (MS/DIM-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

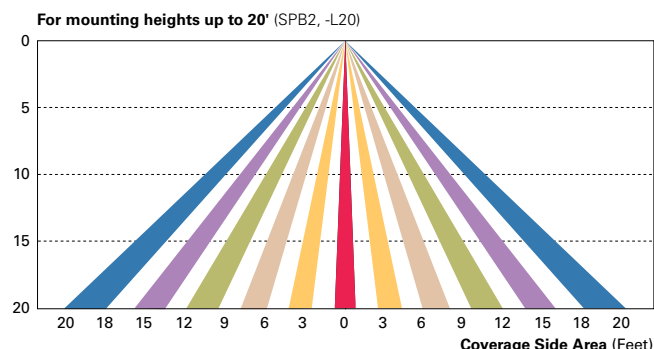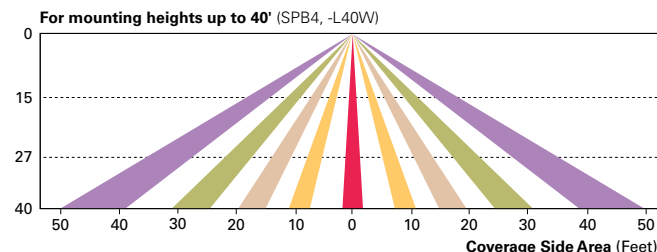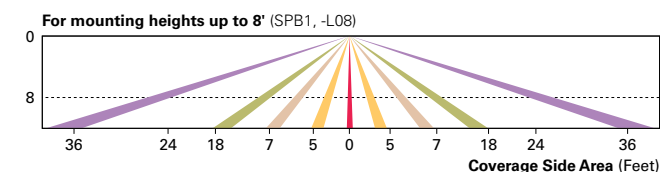

WaveLinx Wireless Control and Monitoring System

Available in 7-PIN or 4-PIN configurations, the WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. Use the WaveLinx Mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets). WaveLinx Outdoor Control Module (WOLC-7P-10A) A photocontrol that enables astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn. WaveLinx Wireless Sensor (SWPD4 and SWPD5) These outdoor sensors offer passive infrared (PIR) occupancy and a photocell for closed loop daylight sensing. These sensors can be factory installed or field-installed via simple, tool-less integration into luminaires equipped with the Zhaga Book 18 compliant 4-PIN receptacle (ZW). These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected. These occupancy sensors include an integral photocell for "dusk-to-dawn" control or daylight harvesting that is factory-enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-20', only applies for typical wall packs.

FALDO LED

Architectural Outdoor



PROJECT:

TYPE:

PO#:

QTY:

COMMENTS:


FIXTURE TYPE "R2"

FEATURES

- Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Heat-Sink Plate
- Aluminum Solid Top and Bottom End Plates
- Luminous White Acrylic Panels
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area w/ Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Mounts Directly to 4" Junction Box (By Others)
- ADA Compliant
- CSA Listed Wet Location
- LED Light Fixture
- Mounting Hardware Included


LINE DRAWING

LINE DRAWING NOT TO SCALE

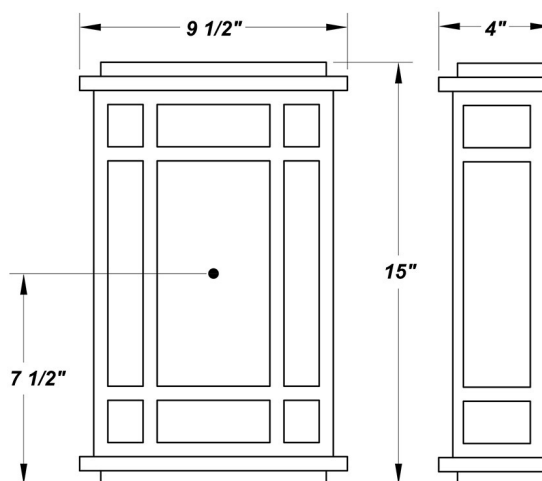

FINISHES


Antique Copper




Antique Silver



Bronze Mist




Matte Silver




Metallic Black




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match -
Contact Teron Lighting Inc.

FALDO LED

Architectural Outdoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
FL - Faldo	L18.0-TE500 - 18W @ 500mA ELV Dimming Driver L37.0-ZE1100 - 37.0W @ 1100mA 4-Wire 0-10V Dimming Driver	120V 277V	Not Applicable
ORDER INFO			
FL	L18.0-TE500	120V	Not Applicable

Example ^ (may not represent a manufacturable product)

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist MB - Metallic Black SM - Matte Silver SN - Sand SW - Swedish Steel TB - Textured Black (Standard) BZ - Textured Bronze TW - Textured White	27K - 2700K Color Temp 30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	F - Fused TP - Tamper-Proof Screw
ORDER INFO			
Not Applicable	AC	27K	F

Example ^ (may not represent a manufacturable product)

PROD	SOURCE	30K SPECS				
Faldo	L18.0	• 80 CRI Typ. • 30K - 3000K Color Temp • 2484 LED Source Lumens • 138 LED Source Lumens Per Watt				
	L37.0	• 80 CRI Typ. • 30K - 3000K Color Temp • 3835 LED Source Lumens • 103.6 LED Source Lumens Per Watt				

REPLACEMENT PART	PART NO	NOTES
White Acrylic Lens Panel Set	9800660	Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
33 DONALD DR, FAIRFIELD, OH 45014
P: 513.858.6004 F: 513.858.6038
E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

