

2-DIRECTIONAL LED WALL MOUNT

ROUND AND SQUARE | 2-DIRECTIONAL LED DOWNLIGHT | (2)850 LM - (2)2,600LM

Housing

Constructed from a round high grade aluminum extrusion with a rectangular extrusion arm, two (2) faceplates and a mounting plate with a powder coat finish. Includes COB LED, reflector and LED driver. Mounting plate is secured to arm with four (4) flat head Phillips stainless steel screws. Mounting plate installs onto a junction box. Consult factory for junction box mounting sizes.

Benefits

- Uniform, low glare illumination
- Durable, Corrosion-resistant finish
- Emergency back up available
- Singular COB Light Source
- 5 year limited warranty
- Tamper resistant



Dimming

(-DUN) option is a universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers.



Finish

A 7-stage electrostatic, polymer process provides a finish that delivers outstanding durability, superior anti-aging, resistance to corrosion and UV-degradation. Standard finishes are White, Dark Silver, Basic Bronze, Black. Special order finishes are Light Silver*, Dark Grey*, Metallic Gold and Metallic Black*.

Emergency Options

Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included.

LED

Energy efficient Chip-On-Board (COB) Singular LED Light Source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED Source products. Binned with 4-step MacAdam ellipses as recommended by ANSI Standard.

Faceplate

Round one piece extruded aluminum with powder coat finish, clear tempered glass lens, and silicone o-ring. Faceplate is secured to the housing by threads.

Warranty

Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Fixture should not be installed in applications with ambient temperature above 60 degrees C. Doing so will result in reduced lamp life and voided warranty.



* Special Order. Minimum order. Extended lead time may apply. Consult Factory.


** Select models.

Application

This WD2 Series Double directional wall luminaire can be used in both interior and outdoor settings. Typical locations are in commercial and retail spaces that contain walls and/or columns that require directional lighting. Dual reflector design allows for direct and indirect lighting from a single fixture.


4" WALL MOUNT LED 2-DIRECTION

WD2340 | **ROUND** (2x)1,000LM/1,500LM | IP65 | (2x)15W

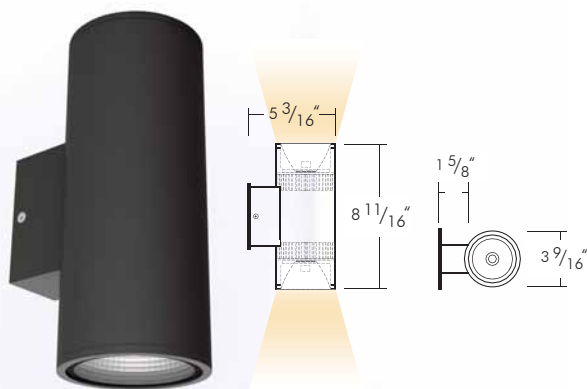


6" WALL MOUNT LED 2-DIRECTION

WD2360 | **ROUND** (2x)1,000LM-2,600LM | IP65 | (2x)22W

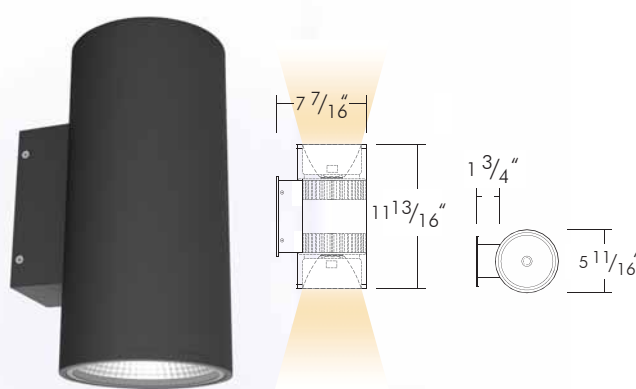


4" WALL MOUNT LED 2-DIRECTION

WD2Q340 | **SQUARE** (2x)850LM/1,300LM | IP65 | (2x)15W

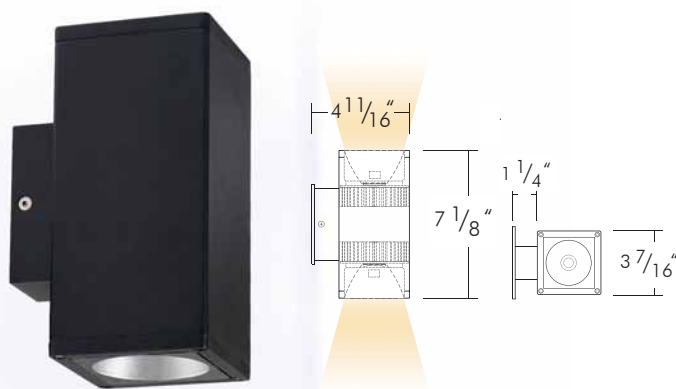

6" WALL MOUNT LED 2-DIRECTION

WD2Q360 | **SQUARE** (2x)1,000LM-2,600LM | IP65 | (2x)22W

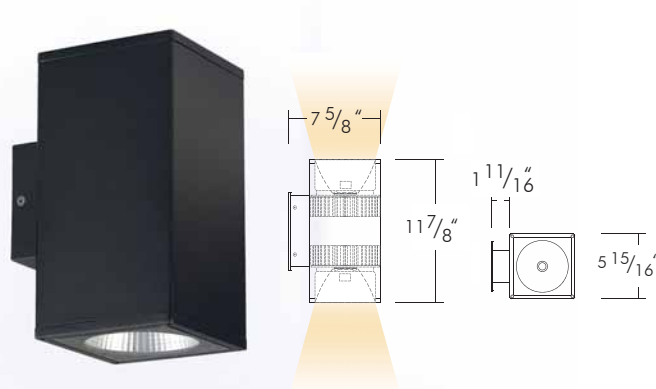

ORDERING 2-DIRECTIONAL LED WALL MOUNT

Example: **WD2340B-T27**

ITEM	FINISH	BEAM (DOWN)	BEAM (UP)	DIMMING	LED
WD2340	W: White	Blank: Wide Flood	Blank: Wide Flood	Blank: Non Dimming (120V)	Blank: 4000K
WD2360	DS: Dark Silver	-BD10: Narrow Spot	-BU02: 2° Pencil Beam	UE-DUN: UniDim™ (120V/277V)	-T17: 1700K**
WD2Q340	BZ: Basic Bronze	-BD20: Spot	-BU10: Narrow Spot		-T25: 2500K**
WD2Q360	B: Black	-BD45: Flood	-BU20: Spot		-T27: 2700K*
	LS: Light Silver*	-BDIV: Type IV	-BU45: Flood		-T27-C97: 2700K, 97CRI***
	S: Dark Grey*	(forward throw) **			-T30: 3000K
	MG: Metallic Gold*				-T30-C97: 3000K, 97CRI***
	MB: Metallic Black*				-T35: 3500K*
					-T50: 5000K*
					-T56: 5600K*
					-TAM: 590nm Amber** **

* Special order, minimum order, and ext. lead time may apply. Consult. ** Ext. lead time may apply. Consult. ***Only available in 2700K and 3000K ** Only for WD2360 and WD2Q360.