

# **PRELIMINARY STORMWATER MANAGEMENT REPORT**

**WHATABURGER**  
**NE Quadrant of M 150 Hwy and SW Hollywood Drive**  
**Lee's Summit, MO 64082**

***PREPARED FOR***




***PREPARED BY***



**ms consultants, inc.**

engineers, architects, planners  
2221 Schrock Road  
Columbus, Ohio 43229-1547  
p 614.898.7100  
f 614.898.7570  
[www.msconsultants.com](http://www.msconsultants.com)



**FIRST SUBMITTAL: FEBRUARY 2022**  
**REVISED: MARCH 2022**



## **Table of Contents**

General Information.....	1
Methodology.....	1
Existing Conditions Analysis.....	2
Proposed Conditions Analysis.....	2
Conclusions and Recommendations.....	3

## **Appendices**

**Appendix A: Project Location Map and FEMA Map**

**Appendix B: Pre-Developed and Post-Developed Drainage Area Maps**

**Appendix C: Stormwater Calculations**

**Appendix D: Soils Information**

**Appendix E: Storm Sewer Pipe Calculations**



## General Information

Whataburger is proposing to construct a new restaurant in Lee's Summit, Missouri.

The subject parcel is located in the City of Lee's Summit, Jackson County, Missouri, in the northeast quadrant of the M 150 Hwy & SW Hollywood Drive intersection. The subject parcel is 1.45 acres and is an undeveloped lot. The site drains to the south and to the east. Adjacent land use in the project area is commercial. Proposed work includes the construction of the new Whataburger Restaurant, the associated parking lot, utility service lines and mainline connections, and a stormwater conveyance system, and storm water detention basin. A Project Location Map is provided in **Appendix A**.

The project is located in the FEMA Flood Zone X (Area with Minimal Flood Hazard). The FIRMette condensed map of the FEMA floodplain map (FIRM 47157C0470F, Eff. September 28, 2007) is included in **Appendix A**.

The Soil Survey for Jackson County, Missouri, developed by the United States Department of Agriculture Soil Conservation Service, was referenced to determine the predominant soil types at the project site. One soil type was identified within the project limits and has been listed in the table below. The Custom Soil Resource Report for Jackson County, Missouri, which includes a soils map, can be found in **Appendix D**.

Soil Types for the Project Site				
Symbol	Description	Slope	Hydrologic Soil Group	Hydric Rating
10082	Arisburg-Urban land complex	1 to 5%	C	No

## Methodology

Hydrologic calculations were performed using SCS methodology (TR-55), in accordance with the City of Lee's Summit requirements and APWA Sections 5602 and 5608, and implemented through Hydroflow Hydrograph's computation software. A theoretical Point of Interest, or Point of Analysis, was used as the basis for determining the release rate off-site from all proposed work within the project limits. Per the requirements, the site was analyzed for the 2 year, 10 year and 100 year storm events.

Analysis of the storm conveyance system, which ultimately discharges into the City of Lee's Summit municipal storm sewer system, was also performed. Hydraulic calculations were performed utilizing the Rational methodology for the 10-year storm event, and implemented through the Hydraflow Storm Sewer computation software.

## Existing Conditions Analysis

The existing site is currently a combination of brush, trees and grass. It drains to both the south (towards Highway 150) and to the east (toward Arby's). The existing conditions analysis can be found in **Appendix C**. The existing conditions map with the time of concentration can be found in **Appendix B**. The pre-development time of concentration was determined to be 23.23 minutes based on the current site conditions. There is one point of interest (POI) for the project which is located in the northeast corner of the site – the existing manhole since the proposed site drainage will be connect to it.



The land cover curve numbers used for the existing conditions TR-55 runoff analysis are as follows:

Cover Type	Hydrologic Soil Type	Curve Number	Area
Open Space (Good)	C	74	1.44 ac
Impervious	C	98	0.01 ac

Storm Event	Existing Runoff (cfs)	Allowable Release Rate
2 Year	1.86	0.5 x site area = 0.5 x 1.45ac = 0.73 cfs
10 Year	4.02	2.0 x site area = 2.0 x 1.45ac = 2.90 cfs
100 Year	8.41	3.0 x site area = 3.0 x 1.45ac = 4.35 cfs

### Proposed Conditions Analysis

The proposed site is currently a combination of impervious and grass. The post-developed undetained area drains to both the south (towards Highway 150) and to the east (toward Arby's). The post-developed detained area drains to the northeast to the existing manhole on SW Summitcrest Drive. The proposed conditions analysis can be found in **Appendix C**. The proposed conditions map with the time of concentrations can be found in **Appendix B**. The post-development time of concentration was determined to be 14.4 minutes for the undetained area and 8.10 minutes for the detained area based on the proposed site conditions. There is one point of interest (POI) for the project which is located in the northeast corner of the site – the existing manhole since the proposed site drainage will be connect to it.

The land cover curve numbers used for the proposed undetained conditions TR-55 runoff analysis are as follows:

Cover Type	Hydrologic Soil Type	Curve Number	Area
Open Space (Good)	C	74	0.31 ac
Impervious	C	98	0.01 ac

The land cover curve numbers used for the proposed detained conditions TR-55 runoff analysis are as follows:

Cover Type	Hydrologic Soil Type	Curve Number	Area
Open Space (Good)	C	74	0.24 ac
Impervious	C	98	0.89 ac

The detained area will drain to an underground detention basin to be located on the east side of the site under the parking lot. The underground detention basin will then discharge connect into the manhole along SW Summitcrest Drive.

Storm Event	Allowable Runoff (cfs)	Total Postdeveloped Runoff (cfs)
2 Year	0.73	0.71
10 Year	2.09	1.37
100 Year	4.35	3.80



The site was analyzed for water quality. The 1.37"/24-hour storm was calculated for the site and the underground basin will release this storm within 40-hour extended detention requirement. Additionally, the underground detention system will have an isolation row which will be sized to hand the "first flush" of storm runoff. The calculation is in the Hydroflow Hydrograph routing as the 1-year storm event in **Appendix C**.

### **Conclusions and Recommendations**



Whataburger is proposing to construct a new restaurant in Lee's Summit, Missouri. The existing site is currently a combination of brush, trees and grass. The proposed site will be a combination of grass and paving. Stormwater management will consist of an underground detention system designed to reduce the runoff to the required rates. As indicated above and shown by the attached calculations, the project is in compliance with the City of Lee's Summit / Kansas City Metropolitan Chapter of APWA Design Criteria stormwater requirements.

## **APPENDIX A**

Project Location Map and FEMA Map



NOTICE: THIS ARCHITECTURAL & ENGINEERING DRAWING IS GIVEN IN CONFIDENCE AND SHALL BE USED ONLY PURSUANT TO THE AGREEMENT WITH THE ARCHITECT. NO OTHER USE, DISSEMINATION, OR DUPLICATION MAY BE MADE WITHOUT PRIOR WRITTEN CONSENT OF THE ARCHITECT. ALL COMMON LAW RIGHTS OF COPYRIGHT AND OTHERWISE ARE HEREBY SPECIFICALLY RESERVED.

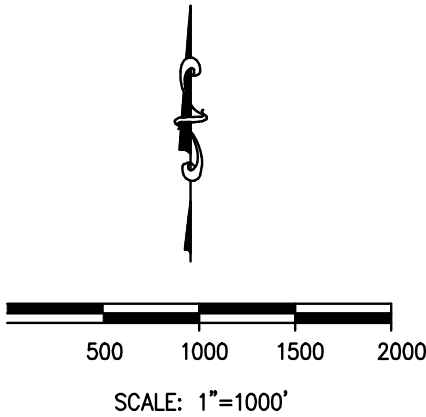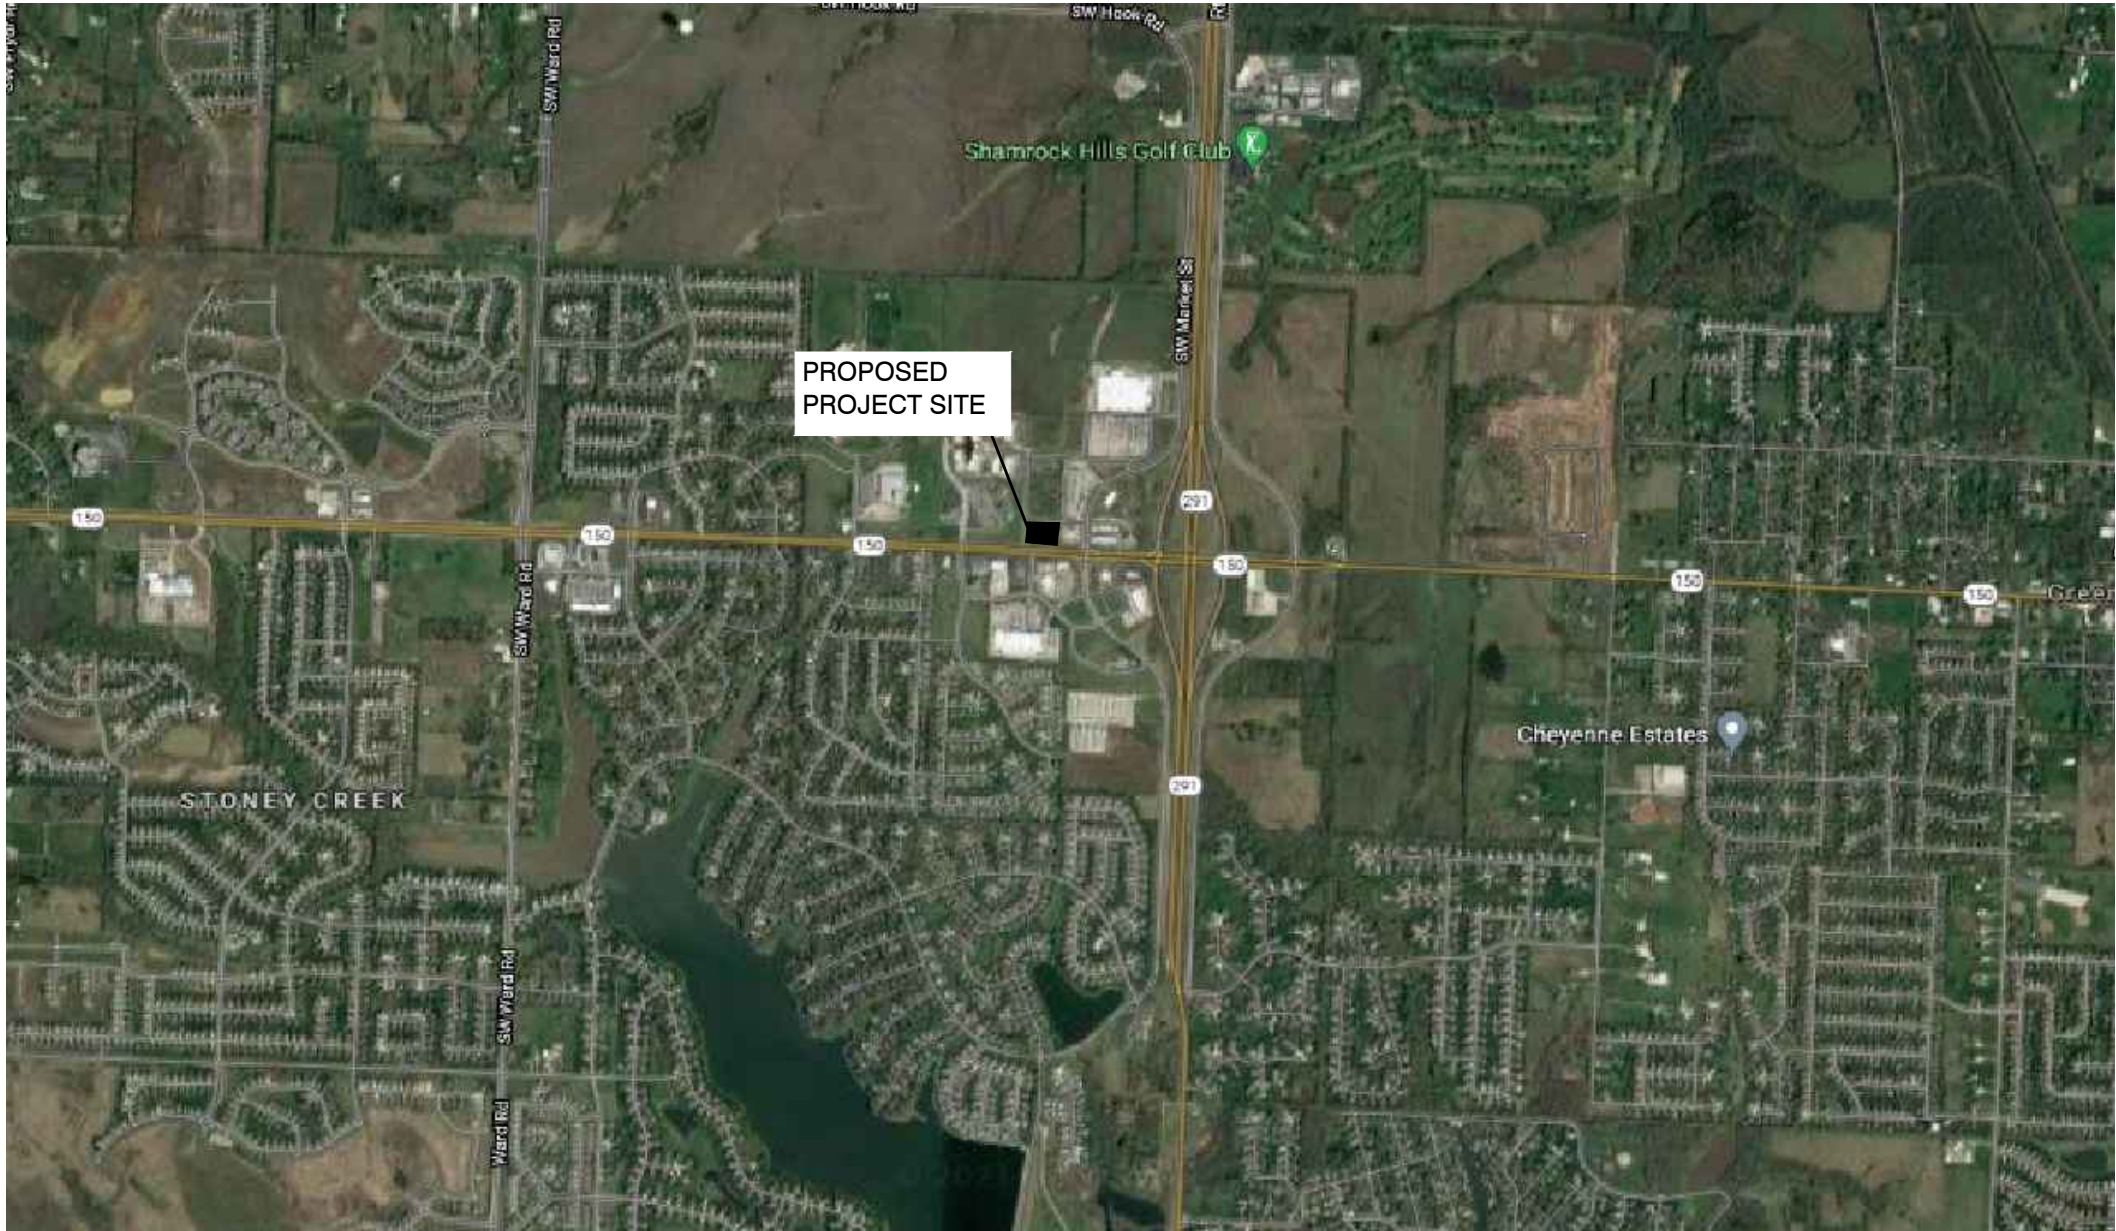

NOT FOR CONSTRUCTION


DRAWN BY		TDB
CHECKED BY		PJK
APPROVED BY		
ISSUE DATE		09/13/21
REVISION		
#	DATE	DESCRIPTION
		
		
<b>ms consultants, inc.</b> engineers, architects, planners 2221 Schrock Road Columbus, Ohio 43229 phone (614) 898-7100 fax (614) 898-7570		
PROJECT WHATABURGER		
NEQ HWY 150 & SW HOLLYWOOD DR. LEE'S SUMMIT, MO 64082 JACKSON COUNTY		
PROJECT NO.: 40497-21		
SHEET TITLE PROJECT LOCATION MAP		
SHEET		



# National Flood Hazard Layer FIRMette



94°23'13"W 38°51'22"N

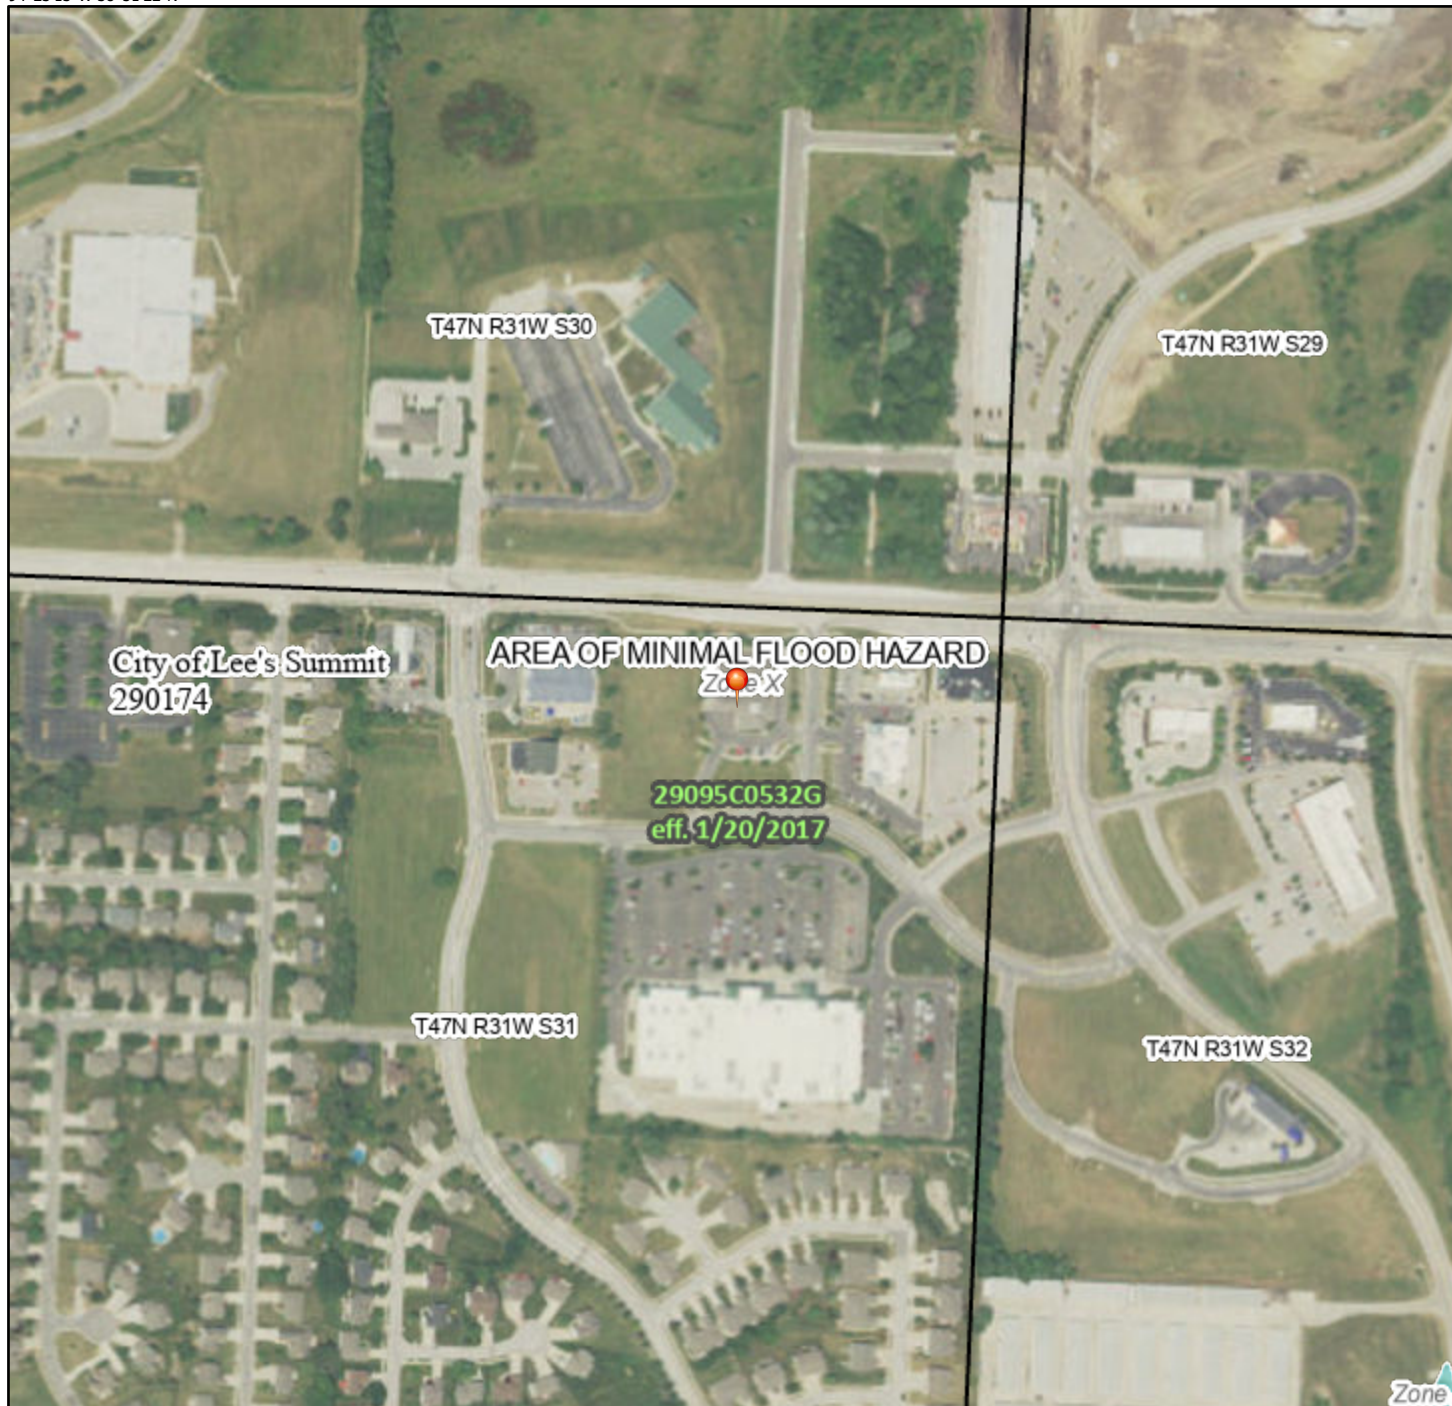

## Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

SPECIAL FLOOD HAZARD AREAS		Without Base Flood Elevation (BFE) Zone A, V, A99
		With BFE or Depth Zone AE, AO, AH, VE, AR
		Regulatory Floodway
OTHER AREAS OF FLOOD HAZARD		0.2% Annual Chance Flood Hazard, Areas of 1% annual chance flood with average depth less than one foot or with drainage areas of less than one square mile Zone X
		Future Conditions 1% Annual Chance Flood Hazard Zone X
		Area with Reduced Flood Risk due to Levee. See Notes. Zone X
		Area with Flood Risk due to Levee Zone D
OTHER AREAS		NO SCREEN Area of Minimal Flood Hazard Zone X
		Effective LOMRs
		Area of Undetermined Flood Hazard Zone D
GENERAL STRUCTURES		Channel, Culvert, or Storm Sewer
		Levee, Dike, or Floodwall
OTHER FEATURES		20.2 Cross Sections with 1% Annual Chance Water Surface Elevation
		17.5 Cross Sections with 1% Annual Chance Water Surface Elevation
		Coastal Transect
		Base Flood Elevation Line (BFE)
		Limit of Study
		Jurisdiction Boundary
		Coastal Transect Baseline
		Profile Baseline
MAP PANELS		Digital Data Available
		No Digital Data Available
		Unmapped



The pin displayed on the map is an approximate point selected by the user and does not represent an authoritative property location.

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on **8/27/2021 at 1:40 PM** and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

0 250 500 1,000 1,500 2,000 Feet 1:6,000

94°22'35"W 38°50'54"N

Basemap: USGS National Map: Orthoimagery: Data refreshed October, 2020



## **APPENDIX B**

Predeveloped and Postdeveloped Drainage Area Maps

N:\03\6240497\01-Lee's Summit, MO Market\Docs\Cals\Civil\STORM\pre and post DA.dwg, 3/25/2022 11:35 AM, bummer, taylor



LEGEND

FEATURE	DESCRIPTION
<span style="color: red;">---</span>	DRAINAGE AREA
<span style="color: orange;">---</span>	PRE-TIME OF CONCENTRATION
<span style="background-color: #90EE90; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	OPEN SPACE/GRASS

ANALYSIS AREA  
BREAKDOWN


PRE-CONSTRUCTION CONDITIONS	
COVER	ACRES
OPEN SPACE	1.44
IMPERVIOUS AREA	0.01
TOTAL	1.45

REVISION/DATE/DESCRIPTION

SIR UPDATES	09/13/21
60% SET	01/24/22
PDP APPLICATION TO CITY	02/24/22
RESPONSE TO CITY COMMENTS I	03/29/22

NOTICE

THIS ARCHITECTURAL AND ENGINEERING DRAWING IS GIVEN IN CONFIDENCE AND SHALL BE USED ONLY PURSUANT TO THE AGREEMENT WITH THE ARCHITECT. NO OTHER USE, DISSEMINATION, OR DUPLICATION MAY BE MADE WITHOUT PRIOR WRITTEN CONSENT OF THE ARCHITECT. ALL COMMON LAW RIGHTS OF COPYRIGHT AND OTHERWISE ARE HEREBY SPECIFICALLY RESERVED.

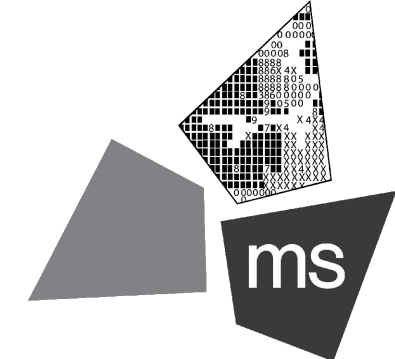

**ms consultants, inc.**  
engineers, architects, planners  
2221 Schrock Road  
Columbus, Ohio 43229-1547  
phone 614.898.7100  
fax 614.898.7570

PROJECT

PROPOSED PT20M  
BUILDING

NEQ HWY 150 & SW  
HOLLYWOOD DR.  
LEE'S SUMMIT, MO 64082

SHEET TITLE

PRE DRAINAGE  
MAP


DRAWN BY: TDB

CHECKED BY: PJK

PROJECT NO: 40497-21


DRAWING

C-5.0

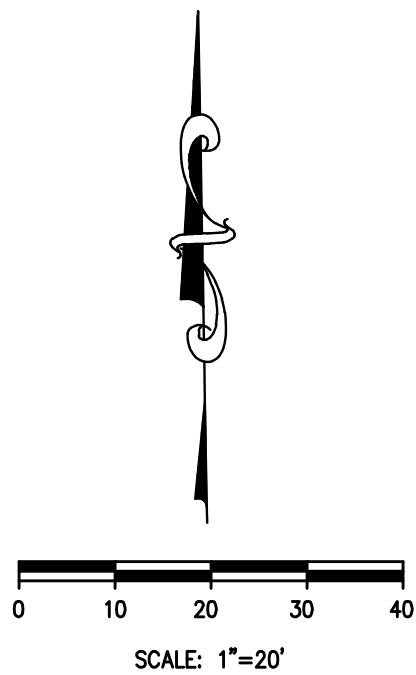



N:\03\6240497\21-Lee's Summit, MO Market\Docs\Cals\Civil\STORM\pre and post DA.dwg, 3/29/2022 9:21 AM, bunnier, taylor

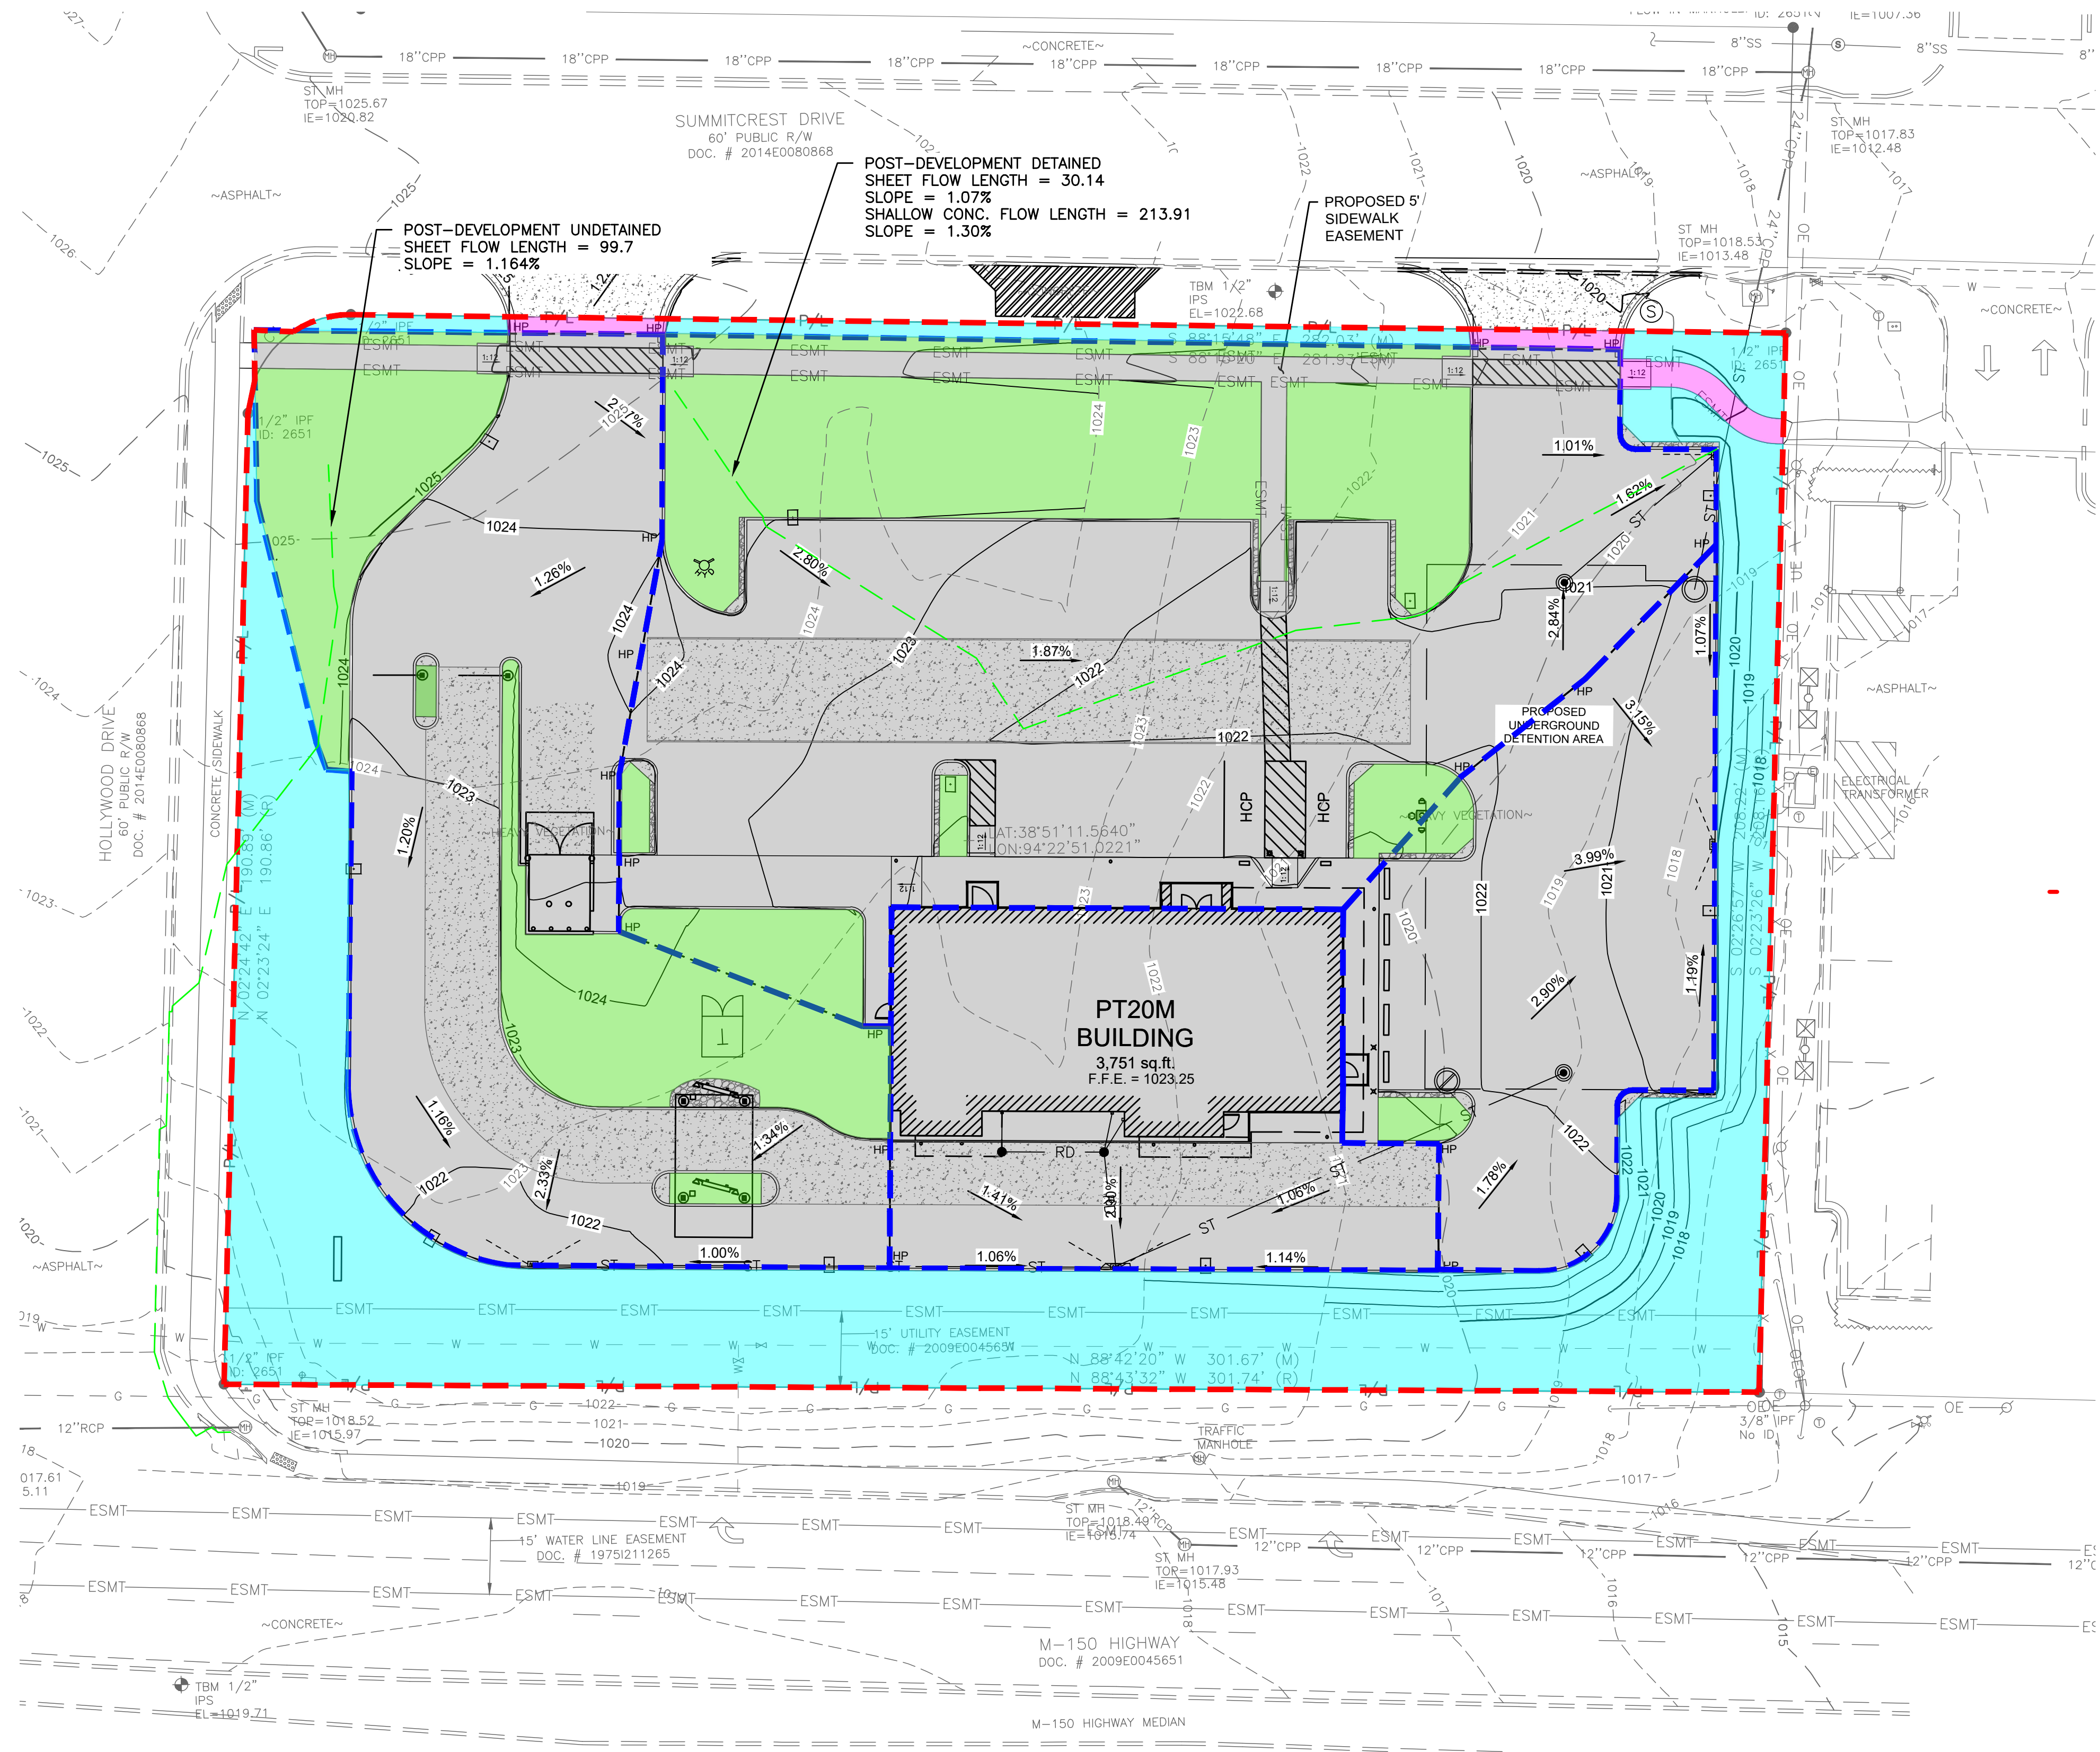


LEGEND

FEATURE	DESCRIPTION
<span style="color: red;">---</span>	UNDETAINED DRAINAGE AREA
<span style="color: blue;">---</span>	DETAINED DRAINAGE AREA
<span style="color: green;">---</span>	POST TIME OF CONCENTRATION
<span style="background-color: #90EE90; border: 1px solid black;"></span>	DETAINED OPEN SPACE/GRASS
<span style="background-color: #A9A9A9; border: 1px solid black;"></span>	DETAINED IMPERVIOUS/GRAVEL AREA
<span style="background-color: #00FFFF; border: 1px solid black;"></span>	UNDETAINED OPEN SPACE/GRASS
<span style="background-color: #FF00FF; border: 1px solid black;"></span>	UNDETAINED IMPERVIOUS AREA/GRAVEL AREA

ANALYSIS AREA BREAKDOWN

POST-CONSTRUCTION CONDITIONS		
DETAINED	COVER	ACRES
	OPEN SPACE	0.24
UNDETAINED	IMPERVIOUS AREA	0.89
	OPEN SPACE	0.31
	IMPERVIOUS AREA	0.01
	TOTAL	1.45

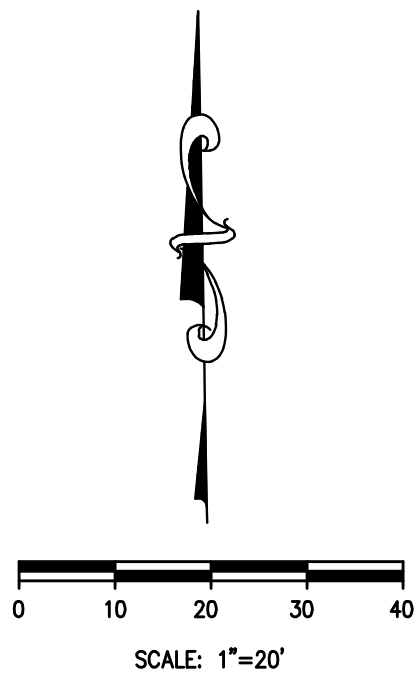


REVISION/DATE/DESCRIPTION

SIR UPDATES	09/13/21
60% SET	01/24/22
PDP APPLICATION TO CITY	02/24/22
RESPONSE TO CITY COMMENTS I	03/29/22

NOTICE

THIS ARCHITECTURAL AND ENGINEERING DRAWING IS GIVEN IN CONFIDENCE AND SHALL BE USED ONLY PURSUANT TO THE AGREEMENT WITH THE ARCHITECT. NO OTHER USE, DISSEMINATION, OR DUPLICATION MAY BE MADE WITHOUT PRIOR WRITTEN CONSENT OF THE ARCHITECT. ALL COMMON LAW RIGHTS OF COPYRIGHT AND OTHERWISE ARE HEREBY SPECIFICALLY RESERVED.

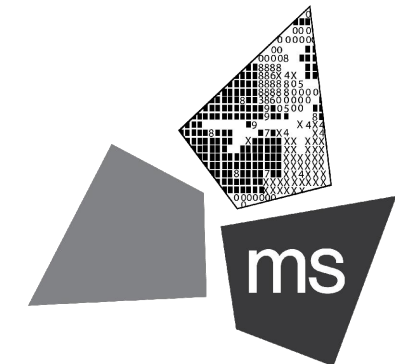

ms consultants, inc.  
engineers, architects, planners  
2221 Schrock Road  
Columbus, Ohio 43229-1547  
phone 614.898.7100  
fax 614.898.7570

PROJECT

PROPOSED PT20M BUILDING

NEQ HWY 150 & SW HOLLYWOOD DR.  
LEE'S SUMMIT, MO 64082

SHEET TITLE

POST DRAINAGE MAP

DRAWN BY:	TDB
CHECKED BY:	PJK
PROJECT NO:	40497-21
DRAWING	

C-5.0


## **APPENDIX C**

### Stormwater Calculations



# Watershed Model Schematic

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

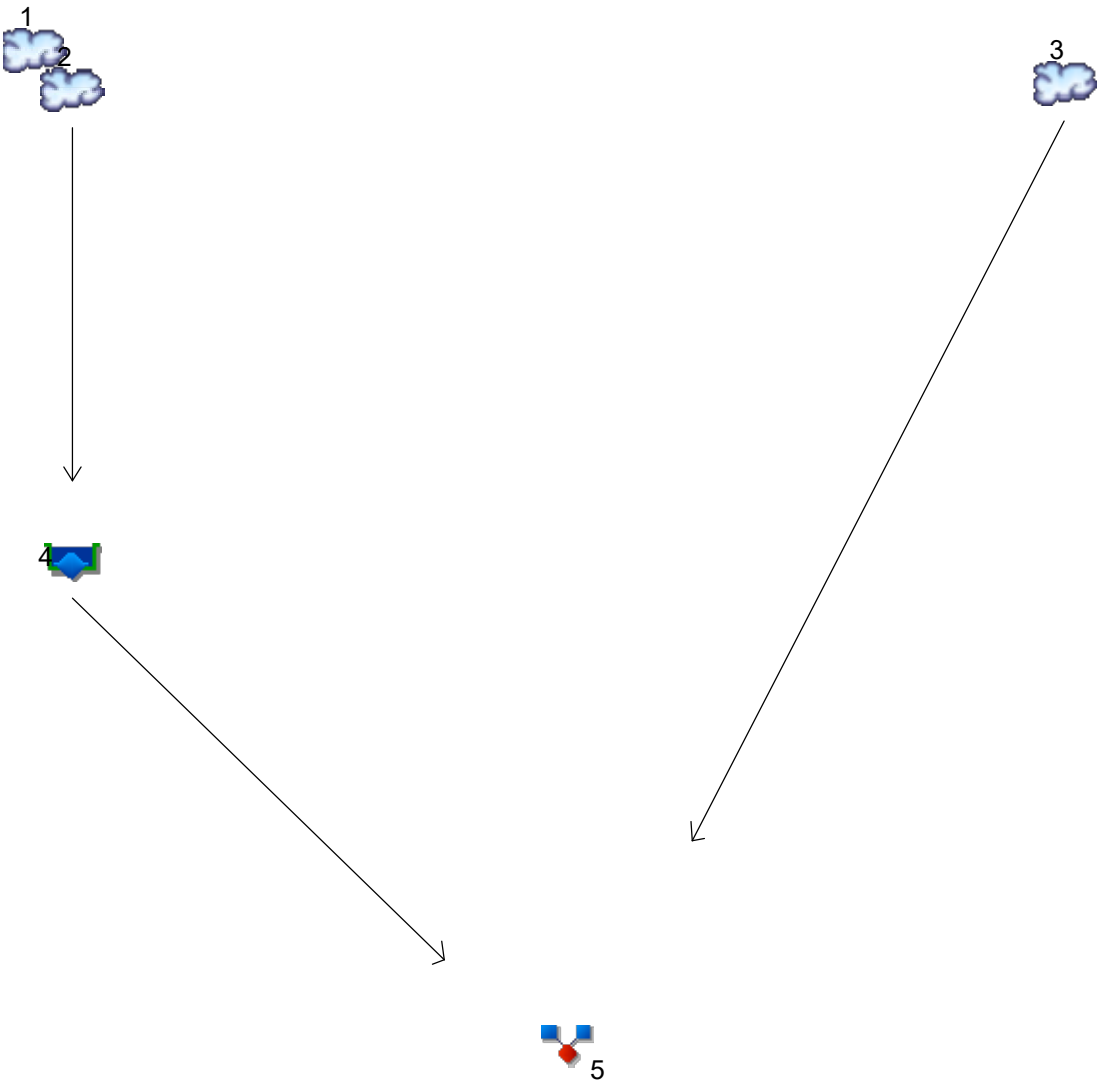

**Legend**

Hyd.	Origin	Description
1	SCS Runoff	Lee's Summit - Pre Development 1 to POI
2	SCS Runoff	Lee's Summit Post Model Detained
3	SCS Runoff	lee's Summit - Post Development Undetained
4	Reservoir	DETAINED ROUTING
5	Combine	TOTAL POST DEVELOPED RUNOFF



# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	0.056	2	736	552	-----	-----	-----	Lee's Summit - Pre Development 1 to
2	SCS Runoff	1.338	2	718	3,066	-----	-----	-----	Lee's Summit Post Model Detained
3	SCS Runoff	0.016	2	728	121	-----	-----	-----	lee's Summit - Post Development Un
4	Reservoir	0.105	2	758	3,043	2	1014.38	1,538	DETAINED ROUTING
5	Combine	0.118	2	730	3,163	3, 4	-----	-----	TOTAL POST DEVELOPED RUNOF
Lee's Summit Hydraflow Hydragraph - PGD.gpw					Return Period: 1 Year			Wednesday, 02 / 23 / 2022	

# Hydrograph Report

## Hyd. No. 1

Lee's Summit - Pre Development 1 to POI

Hydrograph type	=	SCS Runoff	Peak discharge	=	0.056 cfs
Storm frequency	=	1 yrs	Time to peak	=	736 min
Time interval	=	2 min	Hyd. volume	=	552 cuft
Drainage area	=	1.450 ac	Curve number	=	74
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	26.20 min
Total precip.	=	1.37 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

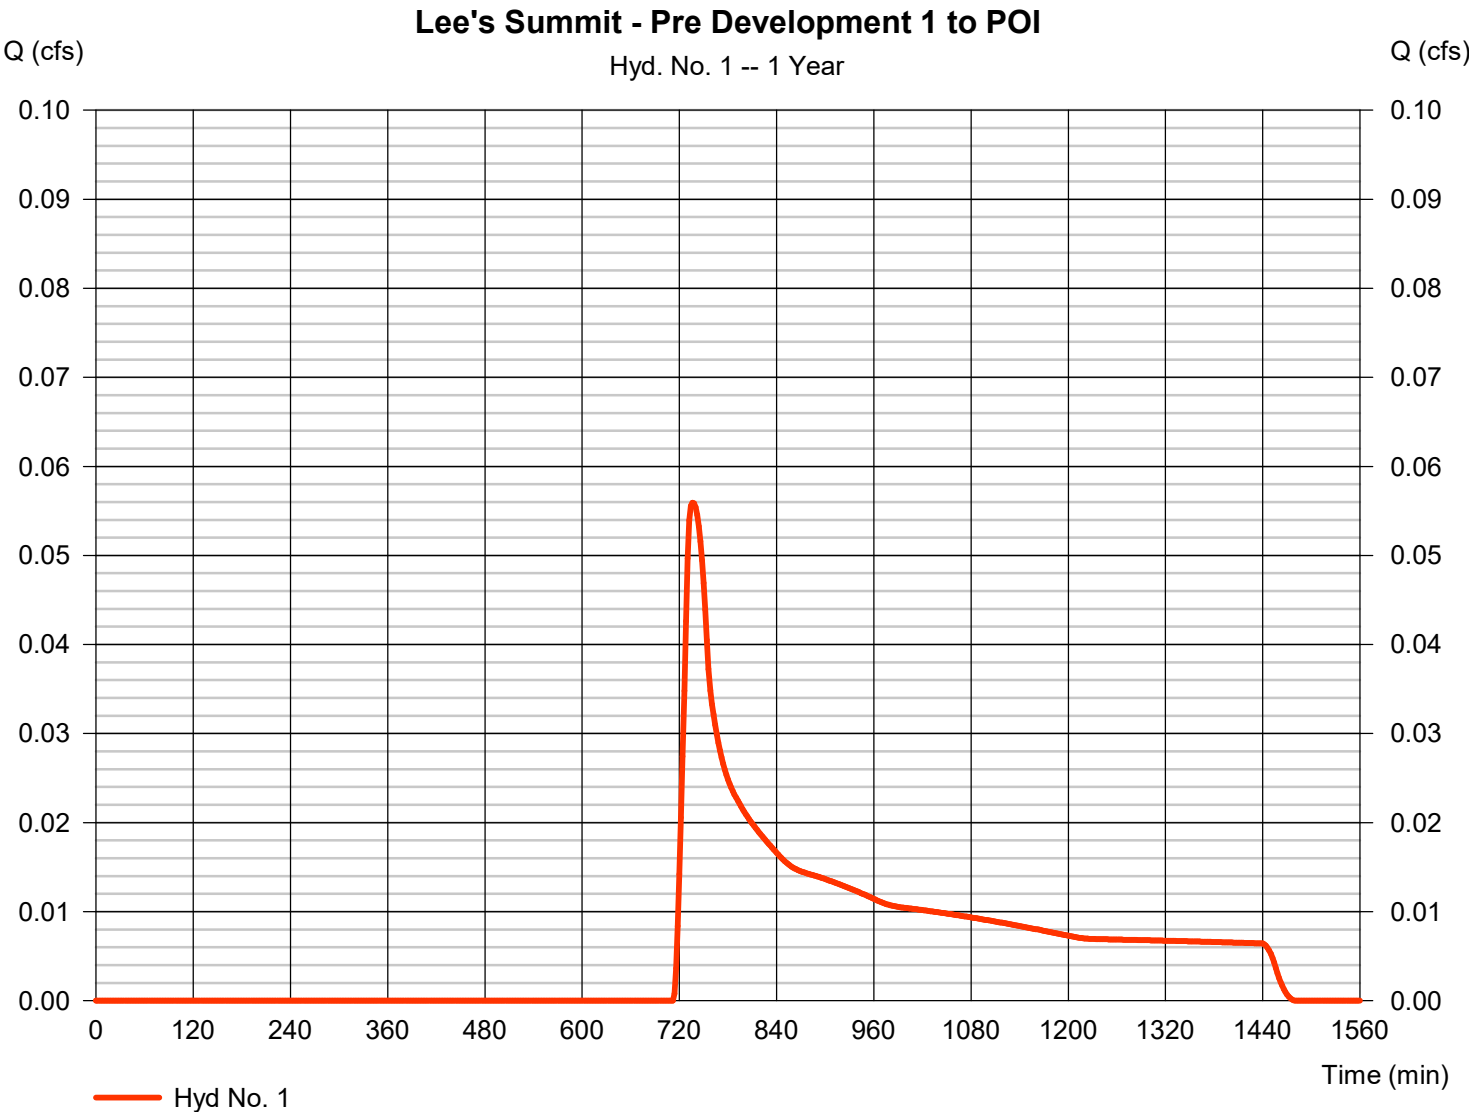



# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

## Hyd. No. 1

Lee's Summit - Pre Development 1 to POI


<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.400	0.400	0.400	
Flow length (ft)	= 170.0	0.0	0.0	
Two-year 24-hr precip. (in)	= 3.68	0.00	0.00	
Land slope (%)	= 2.94	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 26.24</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 26.24</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 0.00	0.00	0.00	
Watercourse slope (%)	= 0.00	0.00	0.00	
Surface description	= Unpaved	Unpaved	Unpaved	
Average velocity (ft/s)	=0.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 0.00</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	(0)0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b>	<b>0.00</b>	<b>+</b>
			<b>0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>26.20 min</b>

# Hydrograph Report

## Hyd. No. 2

Lee's Summit Post Model Detained

Hydrograph type	=	SCS Runoff	Peak discharge	=	1.338 cfs
Storm frequency	=	1 yrs	Time to peak	=	718 min
Time interval	=	2 min	Hyd. volume	=	3,066 cuft
Drainage area	=	1.120 ac	Curve number	=	93
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	8.10 min
Total precip.	=	1.37 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

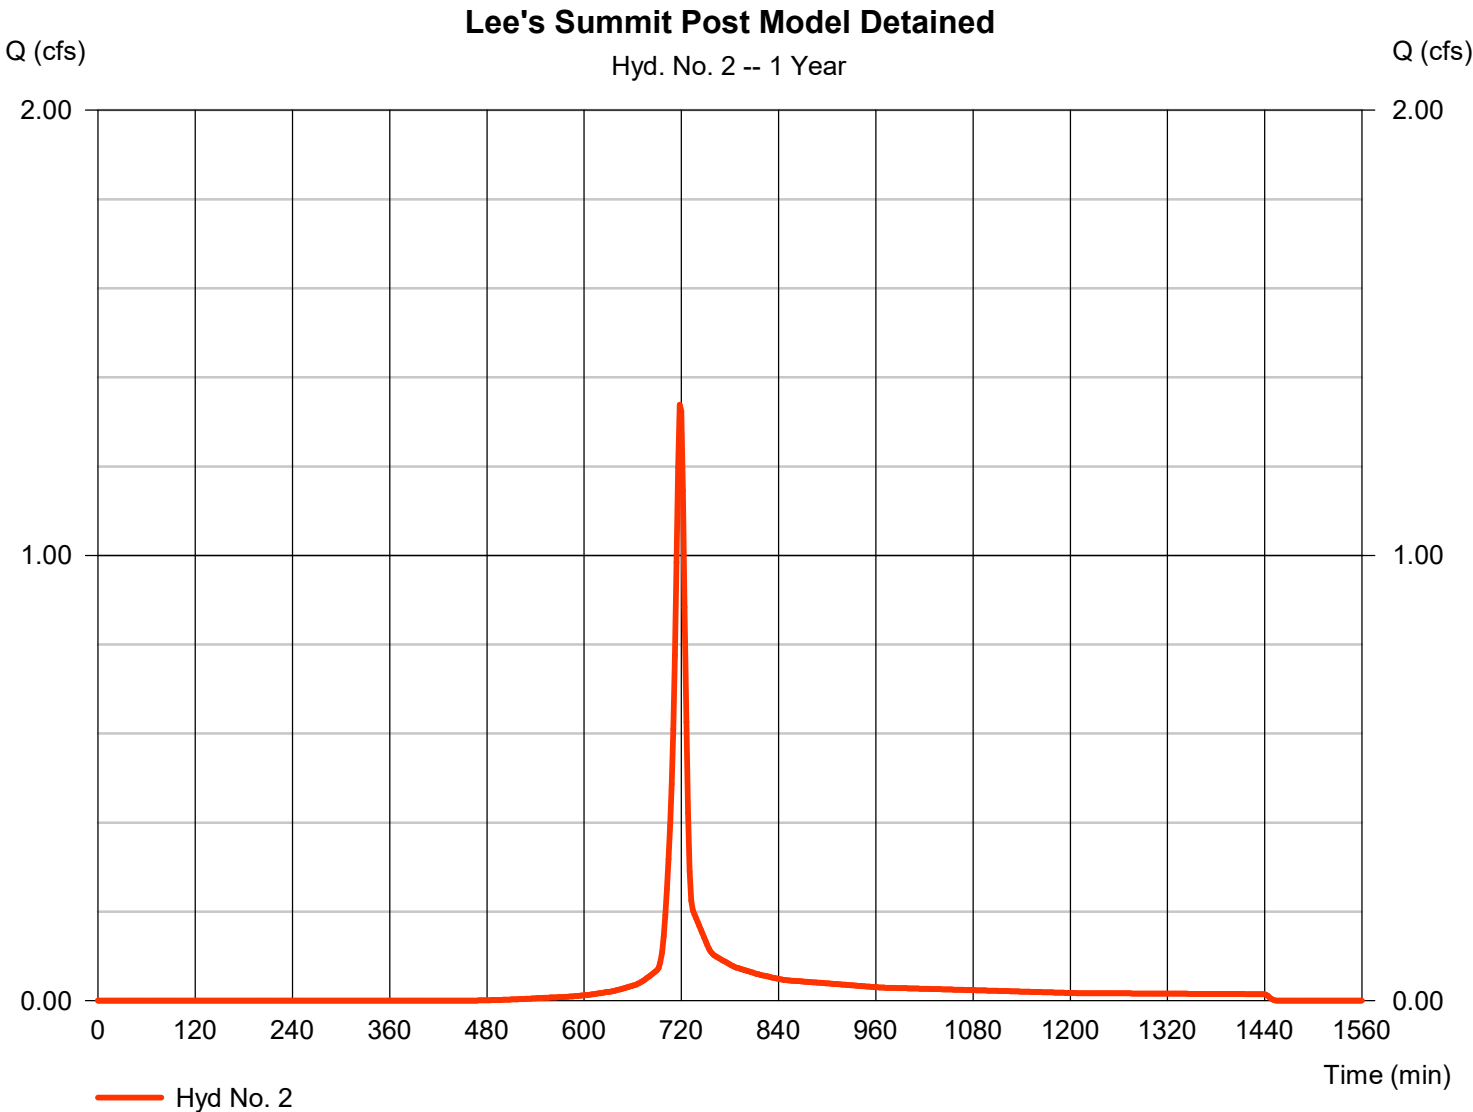

# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

## Hyd. No. 2

Lee's Summit Post Model Detained

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>			
<b>Sheet Flow</b>							
Manning's n-value	= 0.240	0.240	0.240				
Flow length (ft)	= 30.1	0.0	0.0				
Two-year 24-hr precip. (in)	= 3.68	0.00	0.00				
Land slope (%)	= 1.07	0.00	0.00				
<b>Travel Time (min)</b>	<b>= 6.55</b>	<b>+</b>	<b>0.00</b>	<b>+</b>	<b>0.00</b>	<b>=</b>	<b>6.55</b>
<b>Shallow Concentrated Flow</b>							
Flow length (ft)	= 213.91	0.00	0.00				
Watercourse slope (%)	= 1.30	0.00	0.00				
Surface description	= Paved	Paved	Paved				
Average velocity (ft/s)	=2.32	0.00	0.00				
<b>Travel Time (min)</b>	<b>= 1.54</b>	<b>+</b>	<b>0.00</b>	<b>+</b>	<b>0.00</b>	<b>=</b>	<b>1.54</b>
<b>Channel Flow</b>							
X sectional flow area (sqft)	= 0.00	0.00	0.00				
Wetted perimeter (ft)	= 0.00	0.00	0.00				
Channel slope (%)	= 0.00	0.00	0.00				
Manning's n-value	= 0.015	0.015	0.015				
Velocity (ft/s)	=0.00	0.00	0.00				
Flow length (ft)	((0})0.0	0.0	0.0				
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b>	<b>0.00</b>	<b>+</b>	<b>0.00</b>	<b>=</b>	<b>0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>8.10 min</b>			

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 3

lee's Summit - Post Development Undetained

Hydrograph type	= SCS Runoff	Peak discharge	= 0.016 cfs
Storm frequency	= 1 yrs	Time to peak	= 728 min
Time interval	= 2 min	Hyd. volume	= 121 cuft
Drainage area	= 0.320 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 14.40 min
Total precip.	= 1.37 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

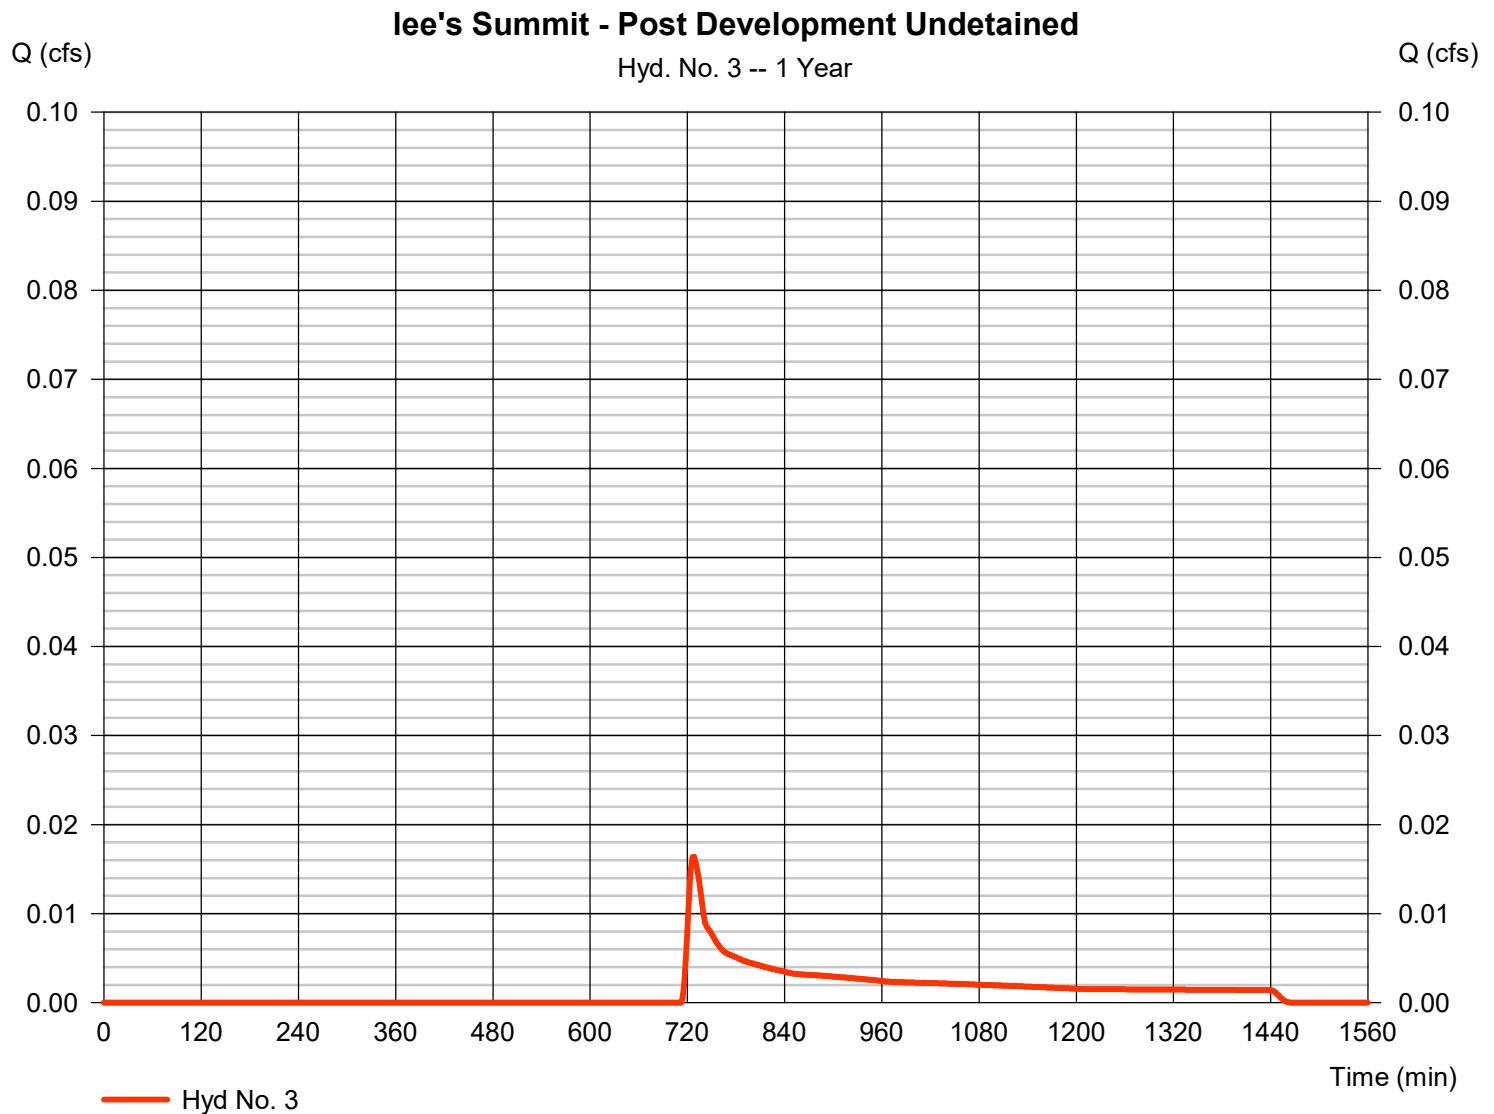



# TR55 Tc Worksheet

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

## Hyd. No. 3

lee's Summit - Post Development Undetained

<u>Description</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>Totals</u>
<b>Sheet Flow</b>				
Manning's n-value	= 0.240	0.240	0.240	
Flow length (ft)	= 99.7	0.0	0.0	
Two-year 24-hr precip. (in)	= 3.68	0.00	0.00	
Land slope (%)	= 1.64	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 14.37</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 14.37</b>
<b>Shallow Concentrated Flow</b>				
Flow length (ft)	= 0.00	0.00	0.00	
Watercourse slope (%)	= 0.00	0.00	0.00	
Surface description	= Paved	Paved	Paved	
Average velocity (ft/s)	=0.00	0.00	0.00	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.00</b>
<b>Channel Flow</b>				
X sectional flow area (sqft)	= 0.00	0.00	0.00	
Wetted perimeter (ft)	= 0.00	0.00	0.00	
Channel slope (%)	= 0.00	0.00	0.00	
Manning's n-value	= 0.015	0.015	0.015	
Velocity (ft/s)	=0.00	0.00	0.00	
Flow length (ft)	(0)0.0	0.0	0.0	
<b>Travel Time (min)</b>	<b>= 0.00</b>	<b>+</b> <b>0.00</b>	<b>+</b> <b>0.00</b>	<b>= 0.00</b>
<b>Total Travel Time, Tc .....</b>				<b>14.40 min</b>

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 4

### DETAINED ROUTING

Hydrograph type	= Reservoir	Peak discharge	= 0.105 cfs
Storm frequency	= 1 yrs	Time to peak	= 758 min
Time interval	= 2 min	Hyd. volume	= 3,043 cuft
Inflow hyd. No.	= 2 - Lee's Summit Post Model Detained	Detained Elevation	= 1014.38 ft
Reservoir name	= ADS POND	Max. Storage	= 1,538 cuft

Storage Indication method used.

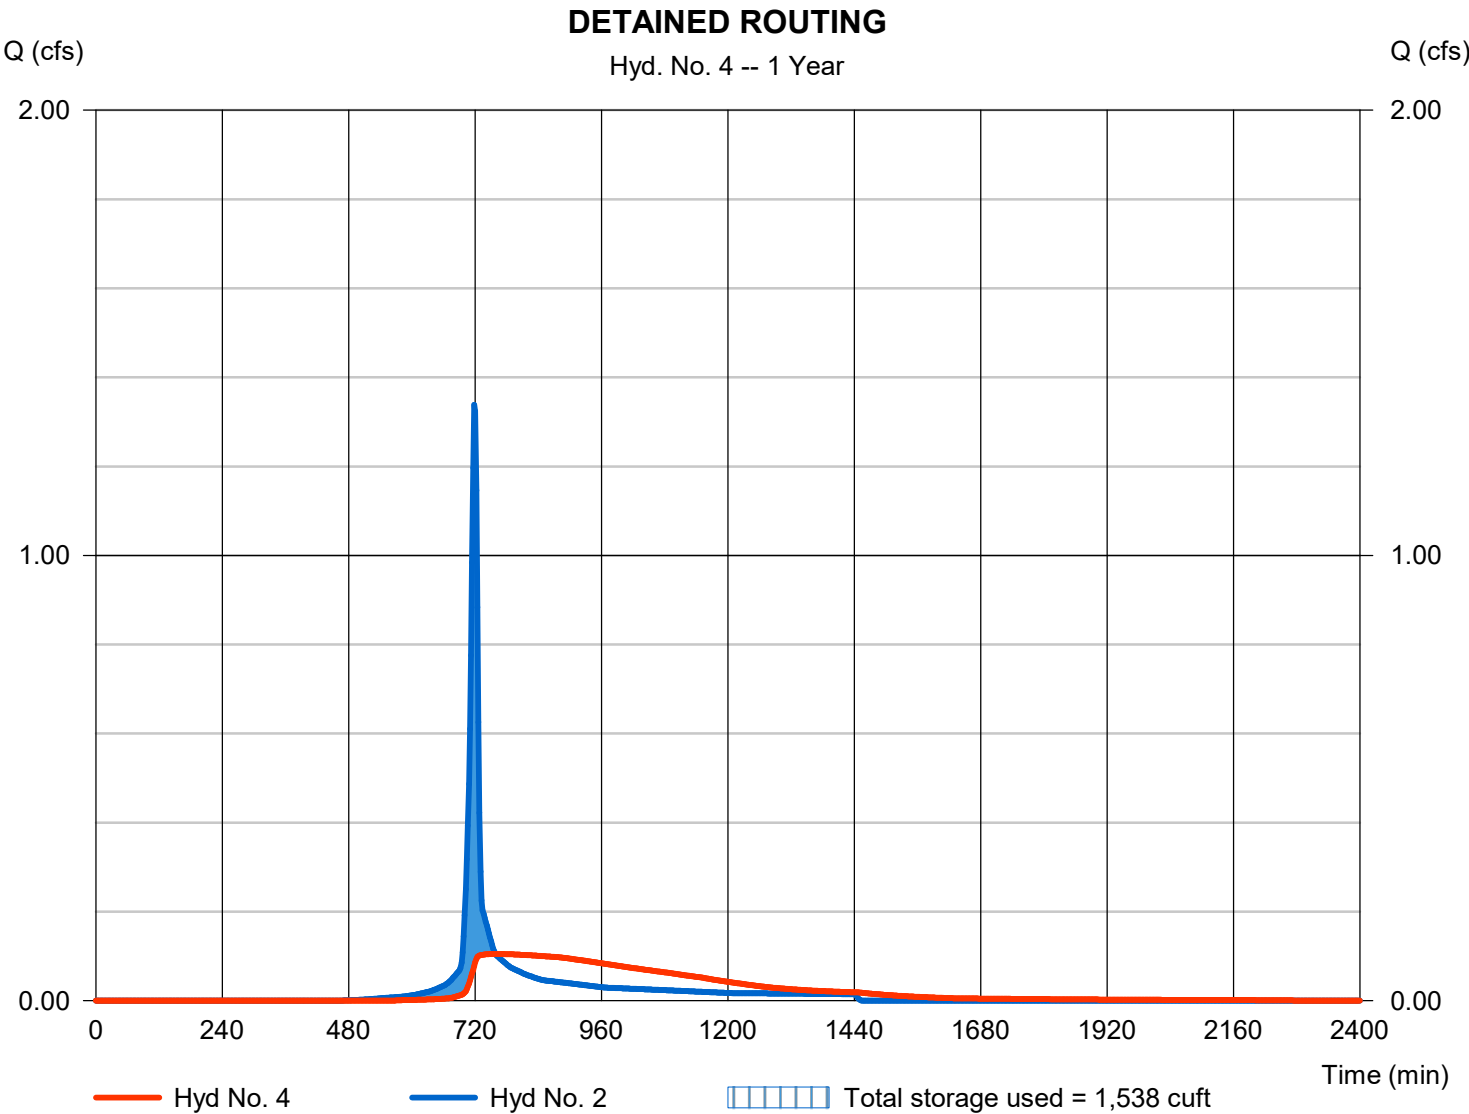

# Pond Report

11

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Pond No. 2 - ADS POND

### Pond Data

**UG Chambers** -Invert elev. = 1014.50 ft, Rise x Span = 3.75 x 3.75 ft, Barrel Len = 98.00 ft, No. Barrels = 11, Slope = 0.00%, Headers = Yes  
**Encasement** -Invert elev. = 1013.75 ft, Width = 4.75 ft, Height = 5.50 ft, Voids = 40.00%

### Stage / Storage Table

Stage (ft)	Elevation (ft)	Contour area (sqft)	Incr. Storage (cuft)	Total storage (cuft)
0.00	1013.75	n/a	0	0
0.55	1014.30	n/a	1,236	1,236
1.10	1014.85	n/a	2,166	3,402
1.65	1015.40	n/a	2,678	6,080
2.20	1015.95	n/a	2,624	8,704
2.75	1016.50	n/a	2,534	11,238
3.30	1017.05	n/a	2,397	13,634
3.85	1017.60	n/a	2,194	15,828
4.40	1018.15	n/a	1,856	17,684
4.95	1018.70	n/a	1,277	18,961
5.50	1019.25	n/a	1,236	20,197

### Culvert / Orifice Structures

	[A]	[B]	[C]	[PrfRsr]
Rise (in)	= 15.00	2.40	0.00	0.00
Span (in)	= 15.00	2.40	0.00	0.00
No. Barrels	= 1	1	0	0
Invert El. (ft)	= 1013.75	1013.75	0.00	0.00
Length (ft)	= 32.00	0.00	0.00	0.00
Slope (%)	= 0.88	0.00	0.00	n/a
N-Value	= .013	.013	.013	n/a
Orifice Coeff.	= 0.60	0.60	0.60	0.60
Multi-Stage	= n/a	Yes	No	No

### Weir Structures

	[A]	[B]	[C]	[D]
Crest Len (ft)	= 2.00	0.00	0.00	0.00
Crest El. (ft)	= 1018.00	0.00	0.00	0.00
Weir Coeff.	= 3.33	3.33	3.33	3.33
Weir Type	= Rect	---	---	---
Multi-Stage	= No	No	No	No
Exfil.(in/hr)	= 0.000 (by Contour)			
TW Elev. (ft)	= 0.00			

Note: Culvert/Orifice outflows are analyzed under inlet (ic) and outlet (oc) control. Weir risers checked for orifice conditions (ic) and submergence (s).

### Stage / Storage / Discharge Table

Stage ft	Storage cuft	Elevation ft	Clv A cfs	Clv B cfs	Clv C cfs	PrfRsr cfs	Wr A cfs	Wr B cfs	Wr C cfs	Wr D cfs	Exfil cfs	User cfs	Total cfs
0.00	0	1013.75	0.00	0.00	---	---	0.00	---	---	---	---	---	0.000
0.55	1,236	1014.30	0.10 ic	0.10 ic	---	---	0.00	---	---	---	---	---	0.097
1.10	3,402	1014.85	0.15 ic	0.15 ic	---	---	0.00	---	---	---	---	---	0.146
1.65	6,080	1015.40	0.18 ic	0.18 ic	---	---	0.00	---	---	---	---	---	0.183
2.20	8,704	1015.95	0.21 ic	0.21 ic	---	---	0.00	---	---	---	---	---	0.213
2.75	11,238	1016.50	0.24 ic	0.24 ic	---	---	0.00	---	---	---	---	---	0.241
3.30	13,634	1017.05	0.27 ic	0.26 ic	---	---	0.00	---	---	---	---	---	0.265
3.85	15,828	1017.60	0.29 ic	0.29 ic	---	---	0.00	---	---	---	---	---	0.287
4.40	17,684	1018.15	0.31 ic	0.31 ic	---	---	0.39	---	---	---	---	---	0.695
4.95	18,961	1018.70	0.33 ic	0.33 ic	---	---	3.90	---	---	---	---	---	4.228
5.50	20,197	1019.25	0.35 ic	0.35 ic	---	---	9.31	---	---	---	---	---	9.654

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 5

### TOTAL POST DEVELOPED RUNOFF

Hydrograph type	= Combine	Peak discharge	= 0.118 cfs
Storm frequency	= 1 yrs	Time to peak	= 730 min
Time interval	= 2 min	Hyd. volume	= 3,163 cuft
Inflow hyds.	= 3, 4	Contrib. drain. area	= 0.320 ac

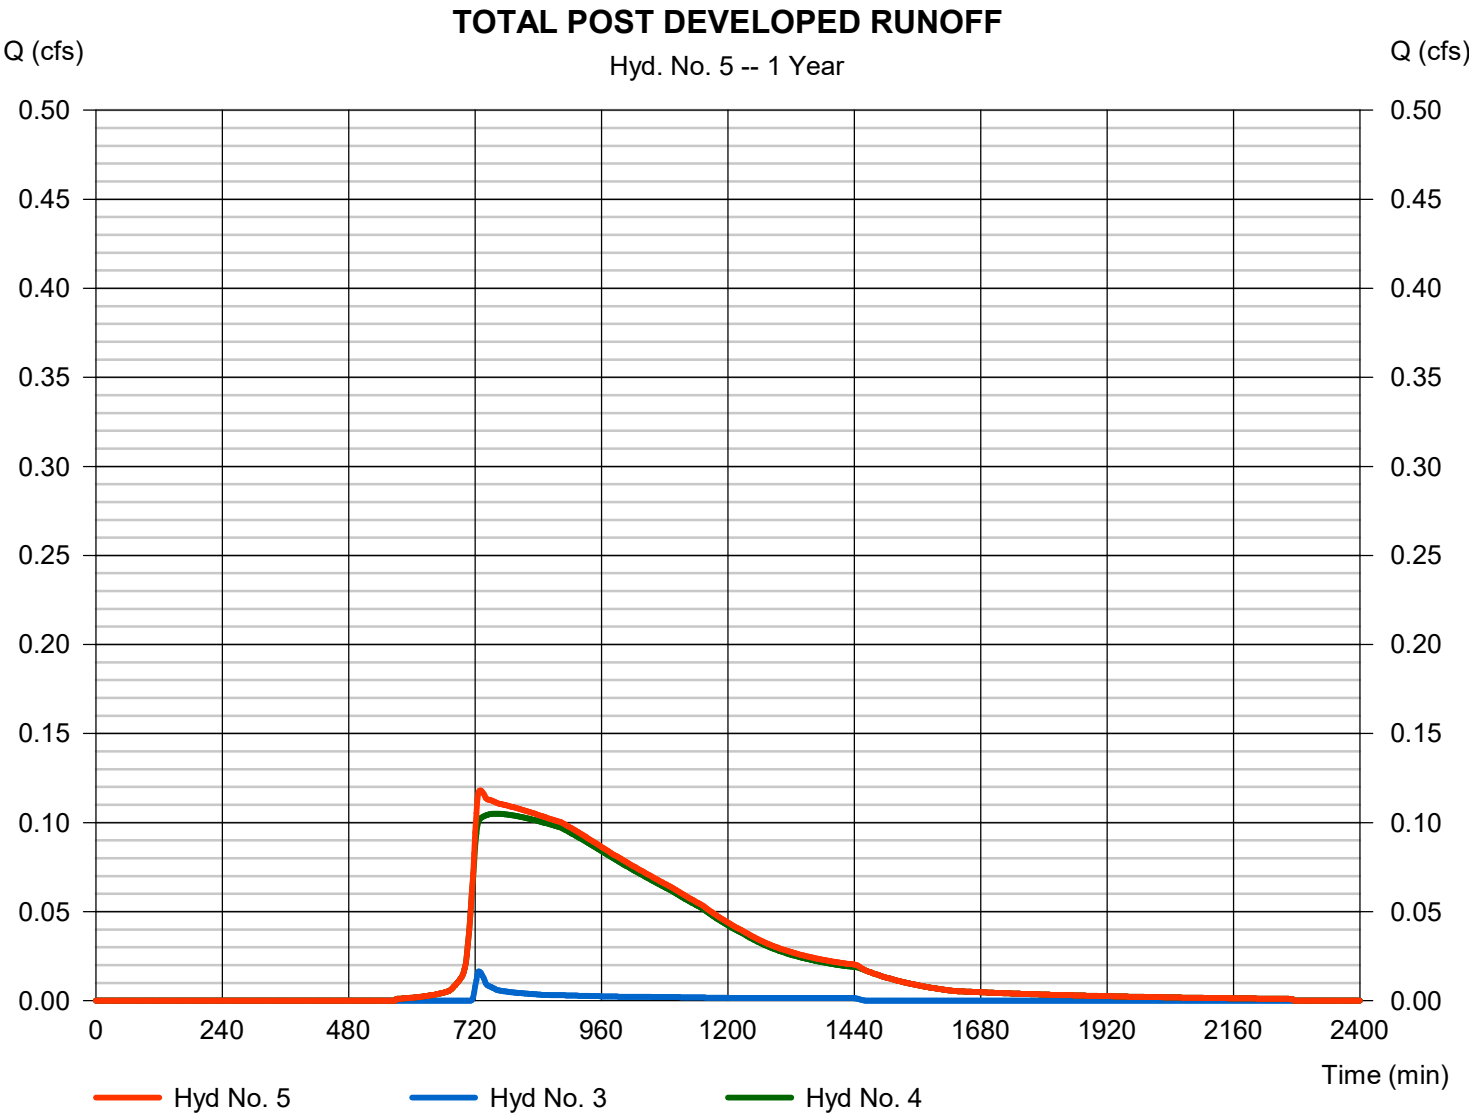



# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	1.857	2	730	7,076	-----	-----	-----	Lee's Summit - Pre Development 1 to
2	SCS Runoff	4.888	2	718	11,827	-----	-----	-----	Lee's Summit Post Model Detained
3	SCS Runoff	0.537	2	722	1,547	-----	-----	-----	lee's Summit - Post Development Un
4	Reservoir	0.193	2	812	11,804	2	1015.58	6,938	DETAINED ROUTING
5	Combine	0.712	2	724	13,351	3, 4	-----	-----	TOTAL POST DEVELOPED RUNOF
Lee's Summit Hydraflow Hydragraph - PGD.gpw					Return Period: 2 Year			Wednesday, 02 / 23 / 2022	

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 1

Lee's Summit - Pre Development 1 to POI

Hydrograph type	= SCS Runoff	Peak discharge	= 1.857 cfs
Storm frequency	= 2 yrs	Time to peak	= 730 min
Time interval	= 2 min	Hyd. volume	= 7,076 cuft
Drainage area	= 1.450 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.20 min
Total precip.	= 3.68 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

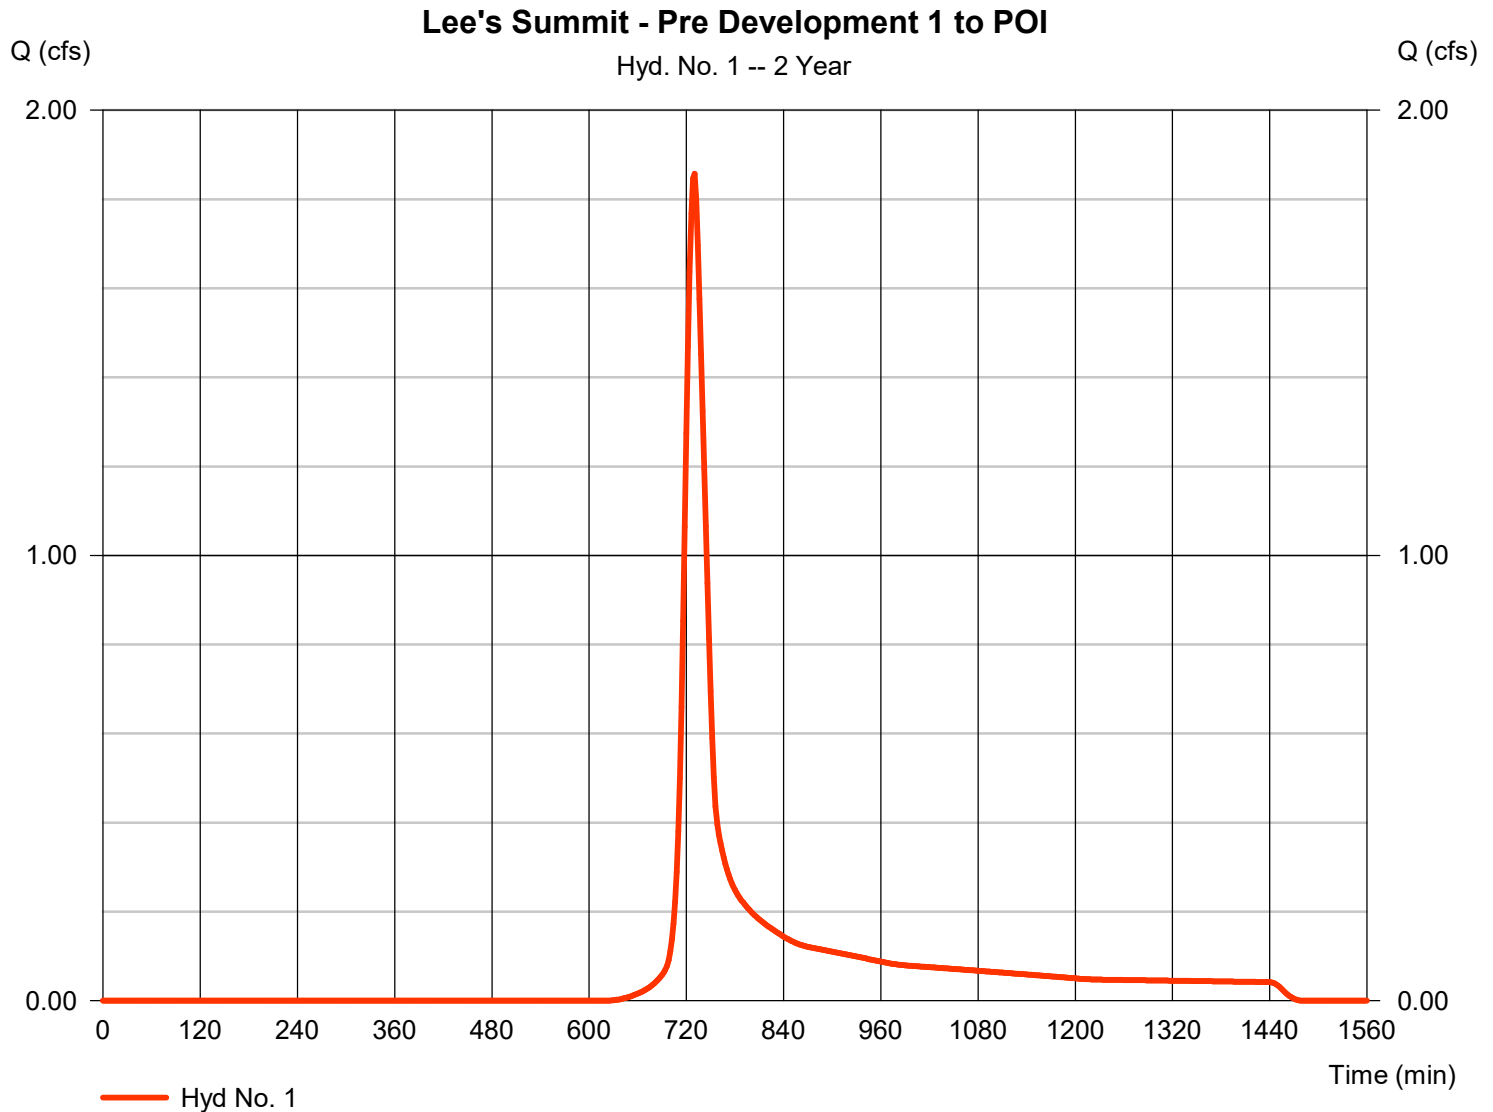


# Hydrograph Report

## Hyd. No. 2

Lee's Summit Post Model Detained

Hydrograph type	=	SCS Runoff	Peak discharge	=	4.888 cfs
Storm frequency	=	2 yrs	Time to peak	=	718 min
Time interval	=	2 min	Hyd. volume	=	11,827 cuft
Drainage area	=	1.120 ac	Curve number	=	93
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	8.10 min
Total precip.	=	3.68 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

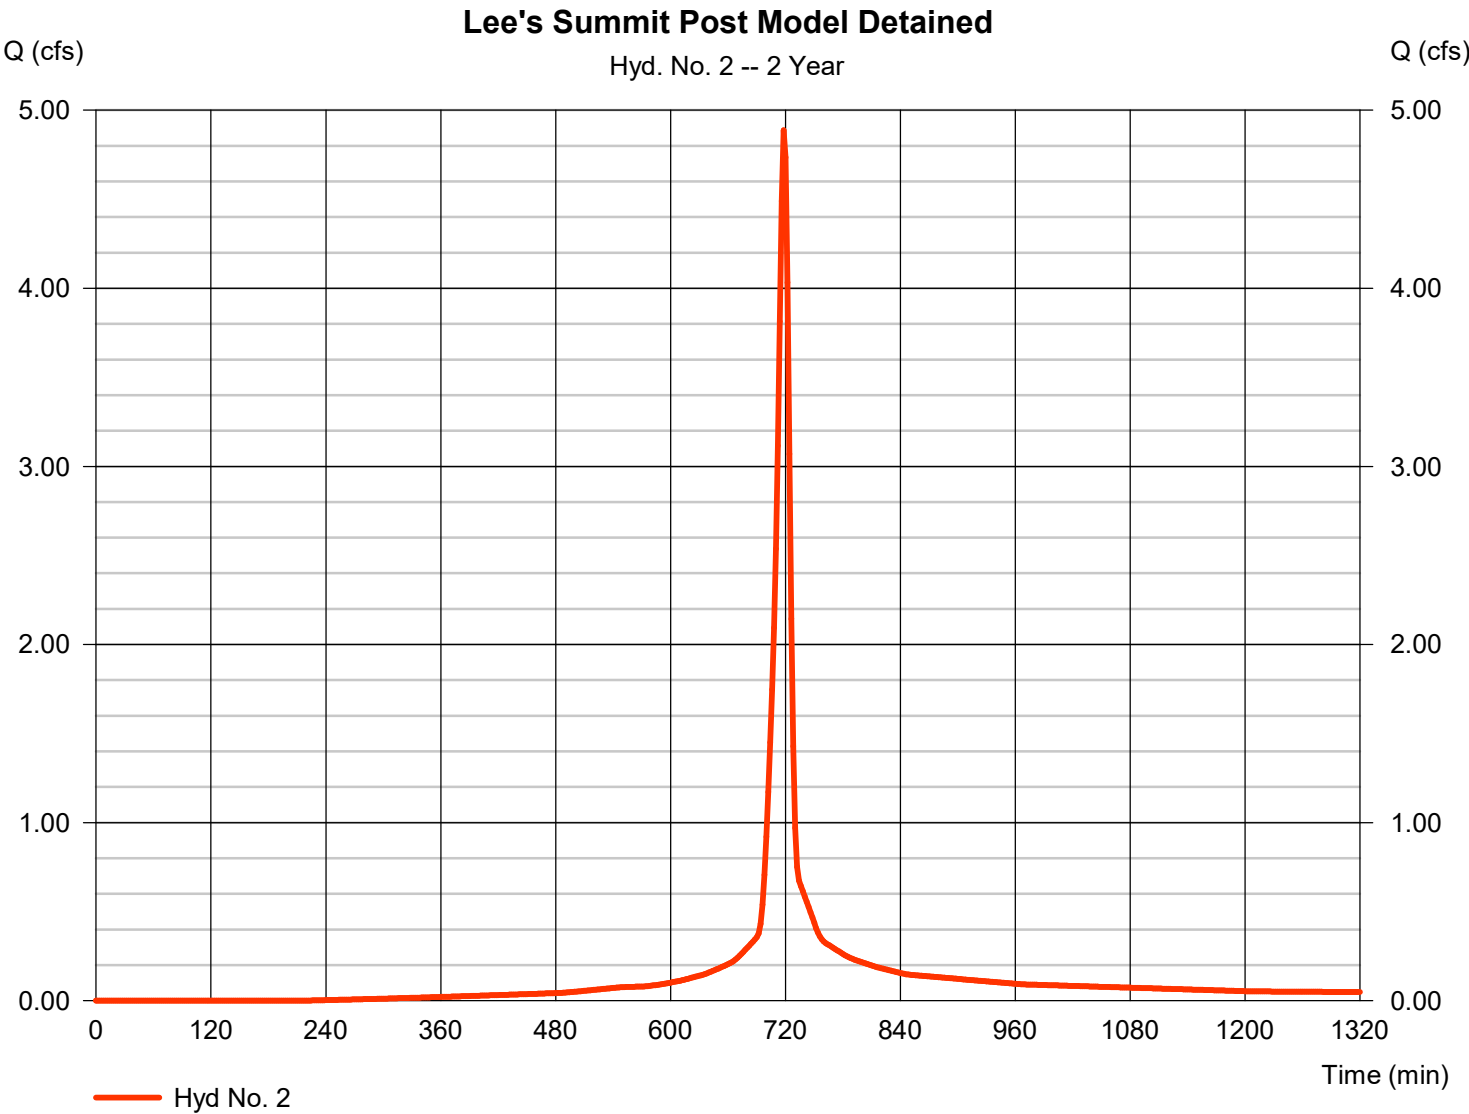

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 3

lee's Summit - Post Development Undetained

Hydrograph type	=	SCS Runoff	Peak discharge	=	0.537 cfs
Storm frequency	=	2 yrs	Time to peak	=	722 min
Time interval	=	2 min	Hyd. volume	=	1,547 cuft
Drainage area	=	0.320 ac	Curve number	=	74
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	14.40 min
Total precip.	=	3.68 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

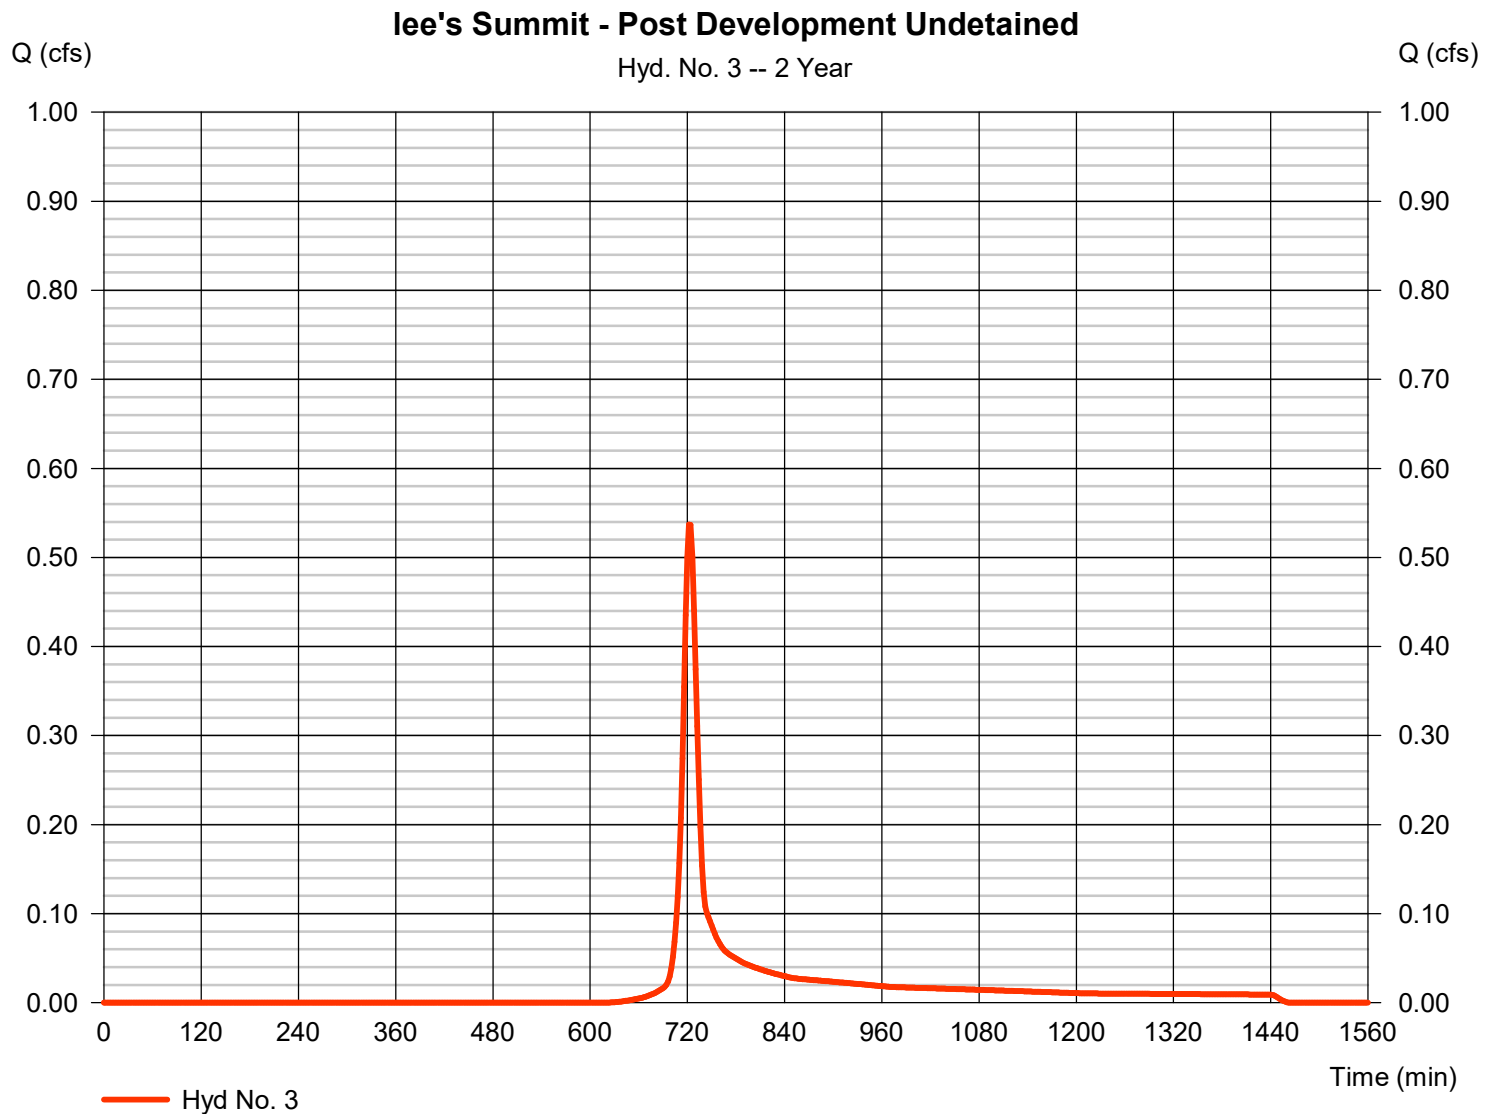

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 4

### DETAINED ROUTING

Hydrograph type	= Reservoir	Peak discharge	= 0.193 cfs
Storm frequency	= 2 yrs	Time to peak	= 812 min
Time interval	= 2 min	Hyd. volume	= 11,804 cuft
Inflow hyd. No.	= 2 - Lee's Summit Post Model Detained	Detained Elevation	= 1015.58 ft
Reservoir name	= ADS POND	Max. Storage	= 6,938 cuft

Storage Indication method used.

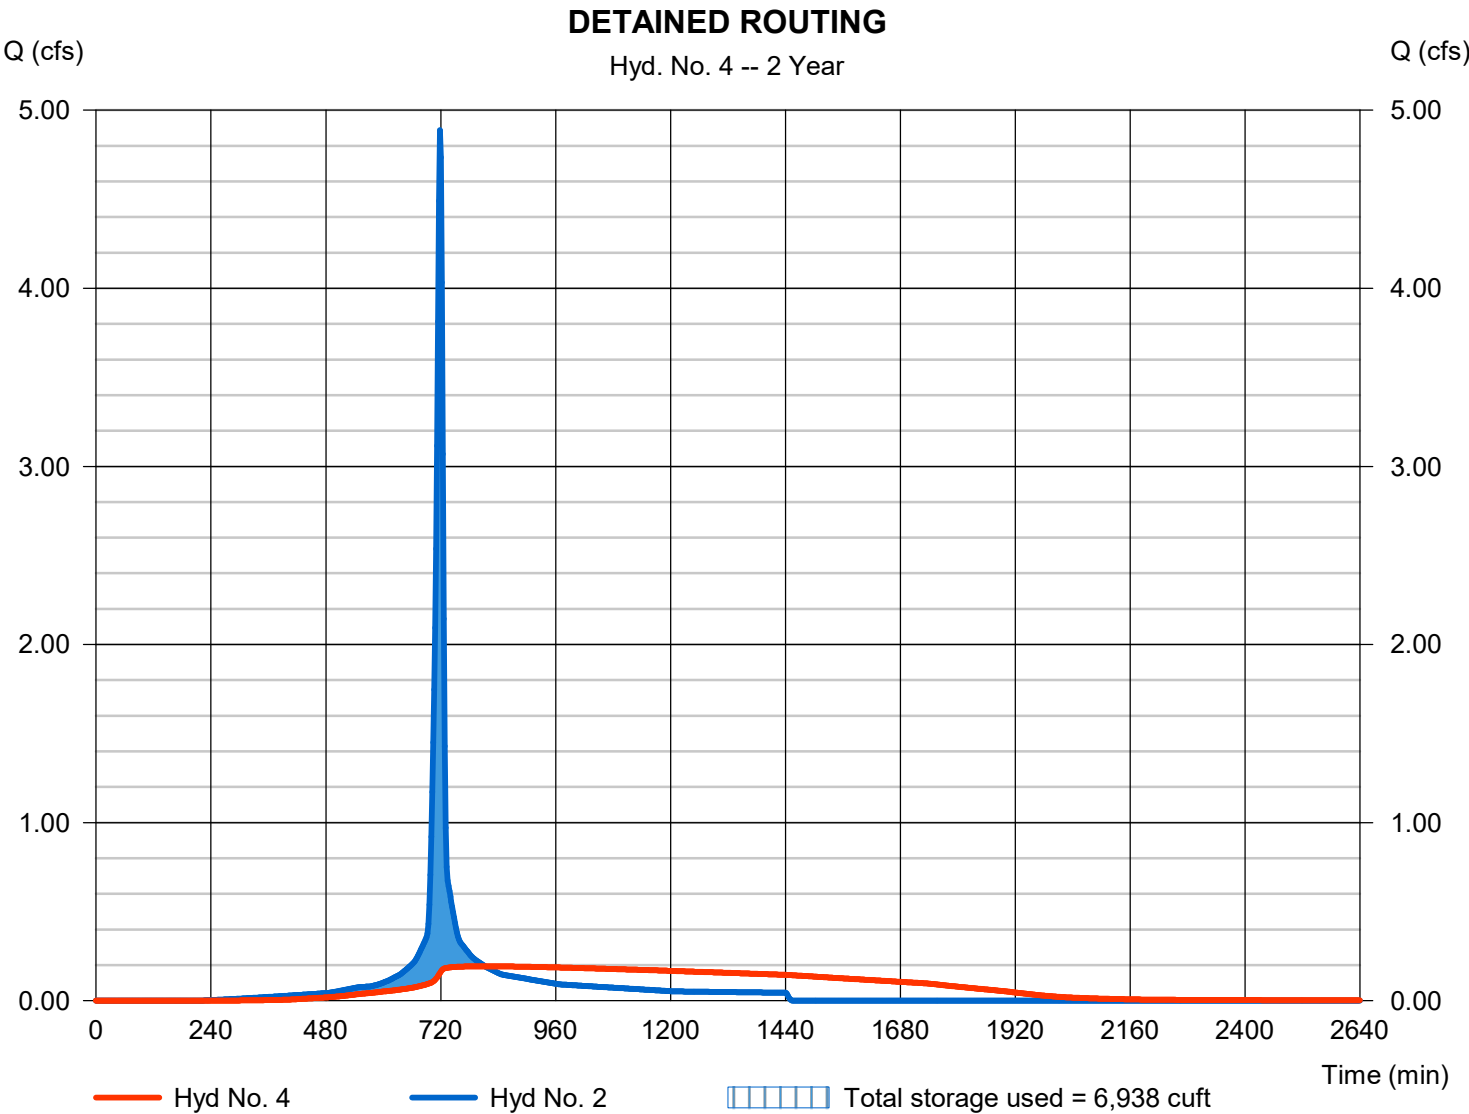

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 5

### TOTAL POST DEVELOPED RUNOFF

Hydrograph type = Combine  
 Storm frequency = 2 yrs  
 Time interval = 2 min  
 Inflow hyds. = 3, 4

Peak discharge = 0.712 cfs  
 Time to peak = 724 min  
 Hyd. volume = 13,351 cuft  
 Contrib. drain. area = 0.320 ac

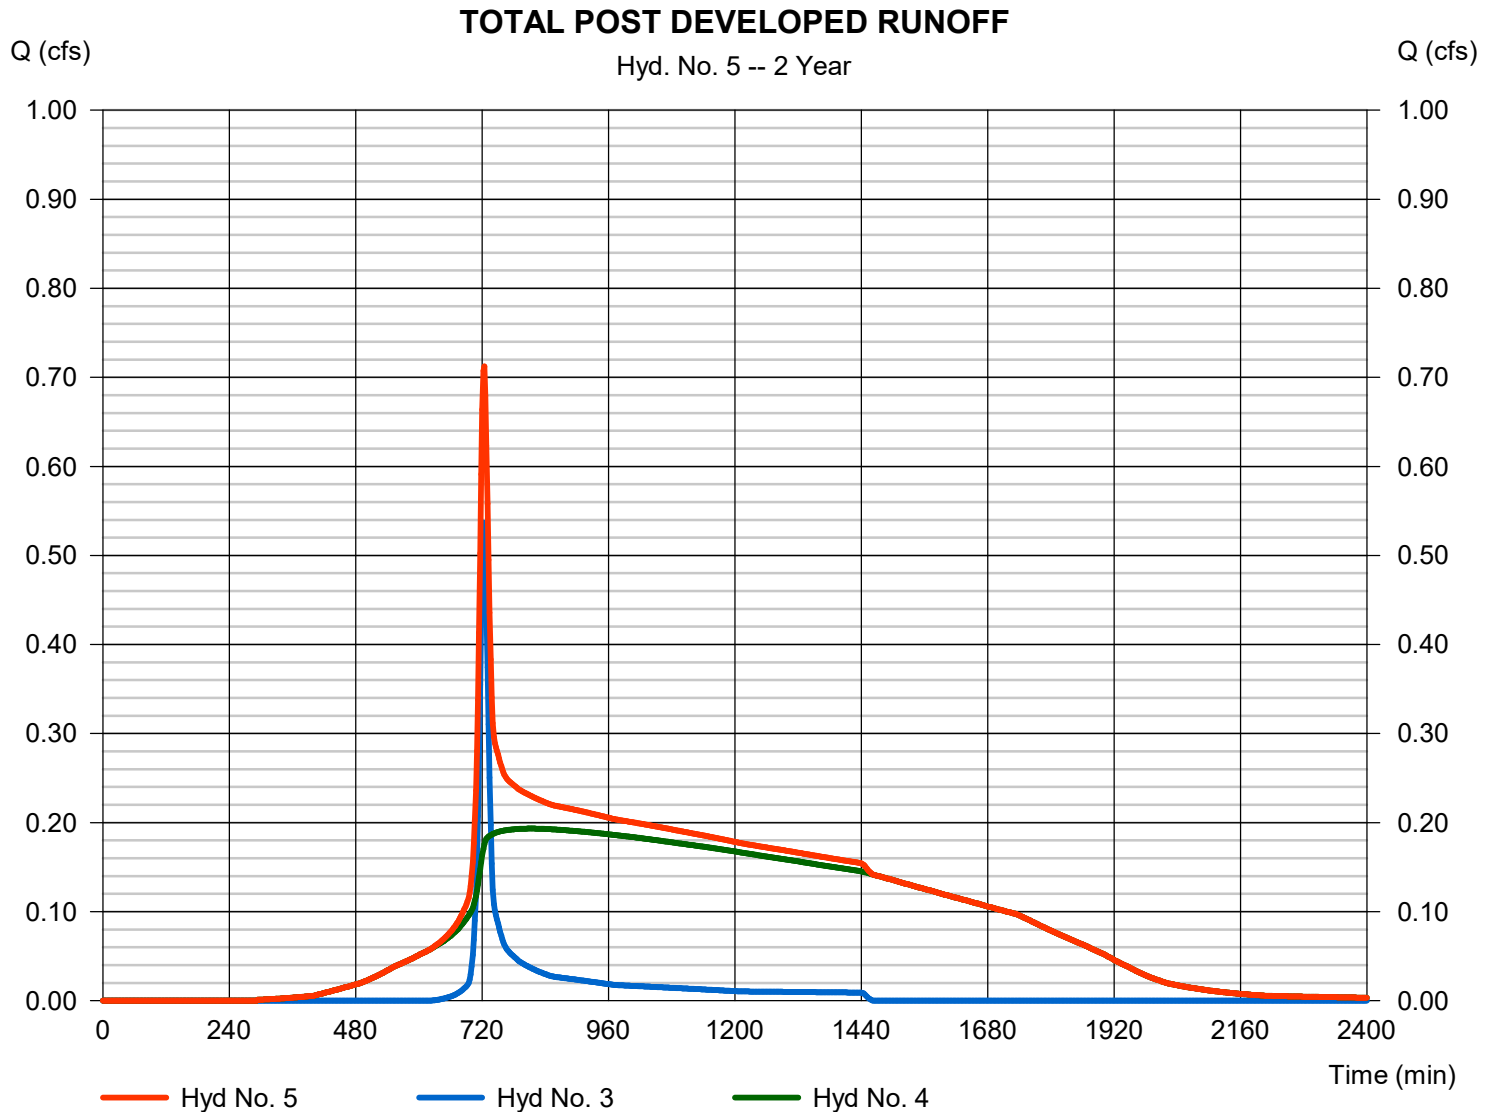

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	4.021	2	728	14,817	-----	-----	-----	Lee's Summit - Pre Development 1 to
2	SCS Runoff	7.818	2	718	19,507	-----	-----	-----	Lee's Summit Post Model Detained
3	SCS Runoff	1.155	2	722	3,239	-----	-----	-----	lee's Summit - Post Development Un
4	Reservoir	0.248	2	838	19,484	2	1016.67	11,998	DETAINED ROUTING
5	Combine	1.369	2	722	22,723	3, 4	-----	-----	TOTAL POST DEVELOPED RUNOF
Lee's Summit Hydraflow Hydragraph - PGD.gpw					Return Period: 10 Year			Wednesday, 02 / 23 / 2022	



# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 1

Lee's Summit - Pre Development 1 to POI

Hydrograph type	= SCS Runoff	Peak discharge	= 4.021 cfs
Storm frequency	= 10 yrs	Time to peak	= 728 min
Time interval	= 2 min	Hyd. volume	= 14,817 cuft
Drainage area	= 1.450 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.20 min
Total precip.	= 5.61 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

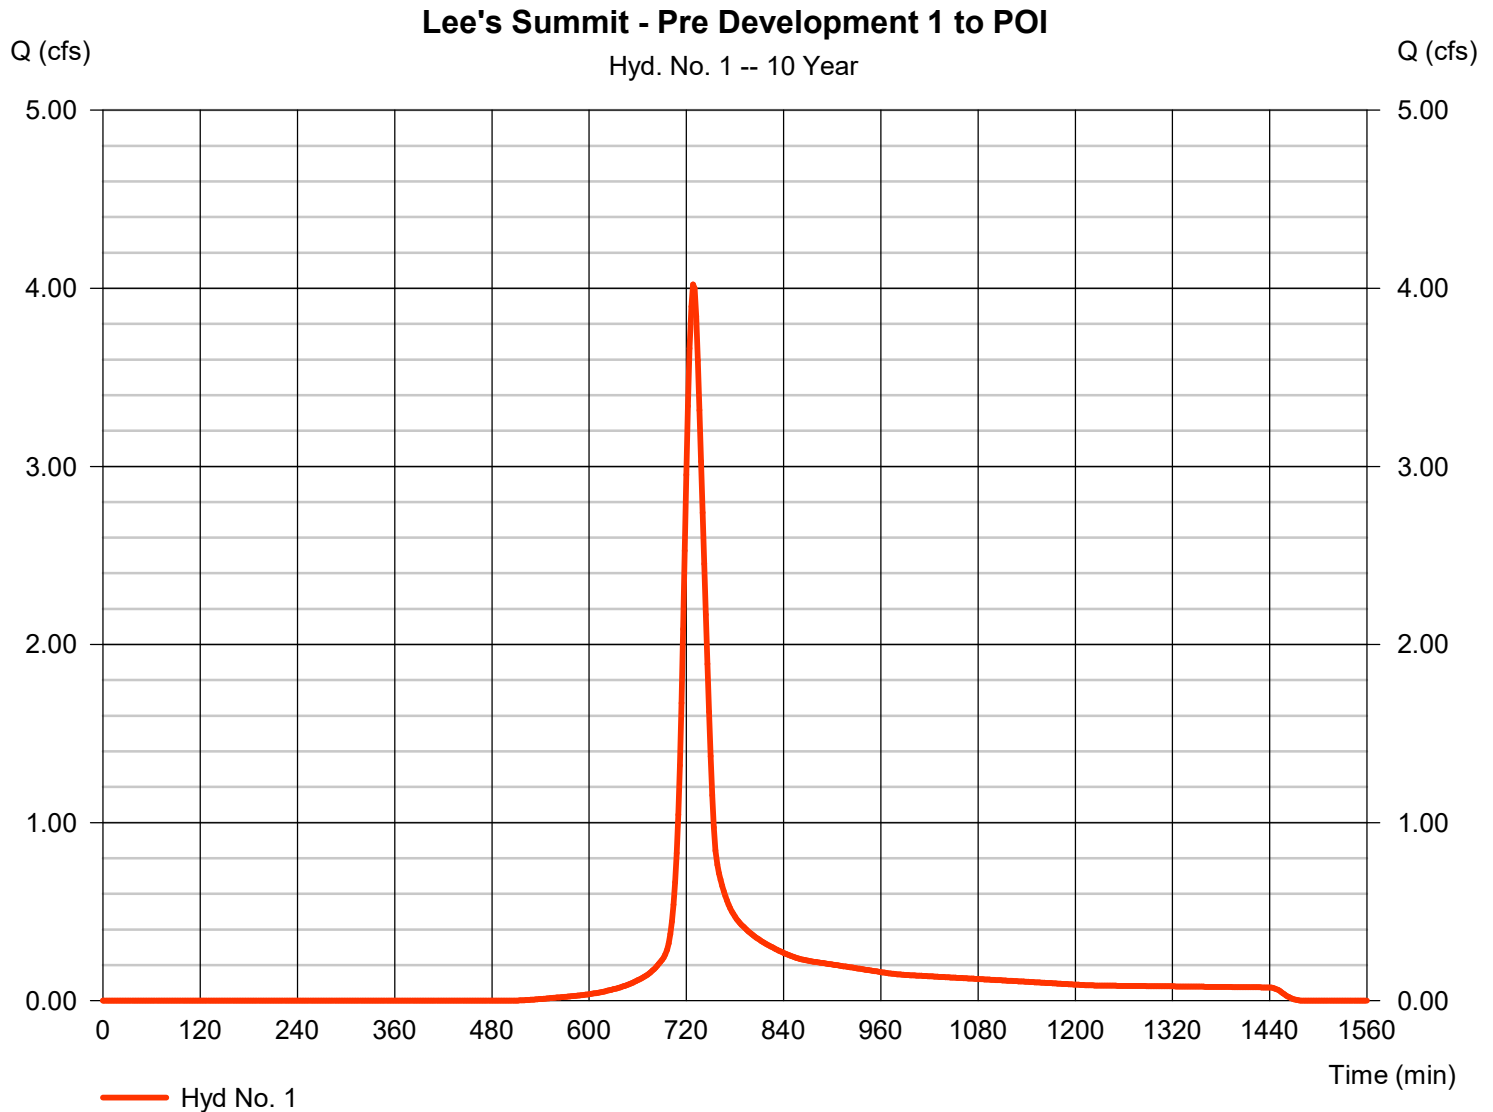

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 2

Lee's Summit Post Model Detained

Hydrograph type	=	SCS Runoff	Peak discharge	=	7.818 cfs
Storm frequency	=	10 yrs	Time to peak	=	718 min
Time interval	=	2 min	Hyd. volume	=	19,507 cuft
Drainage area	=	1.120 ac	Curve number	=	93
Basin Slope	=	0.0 %	Hydraulic length	=	0 ft
Tc method	=	TR55	Time of conc. (Tc)	=	8.10 min
Total precip.	=	5.61 in	Distribution	=	Type II
Storm duration	=	24 hrs	Shape factor	=	484

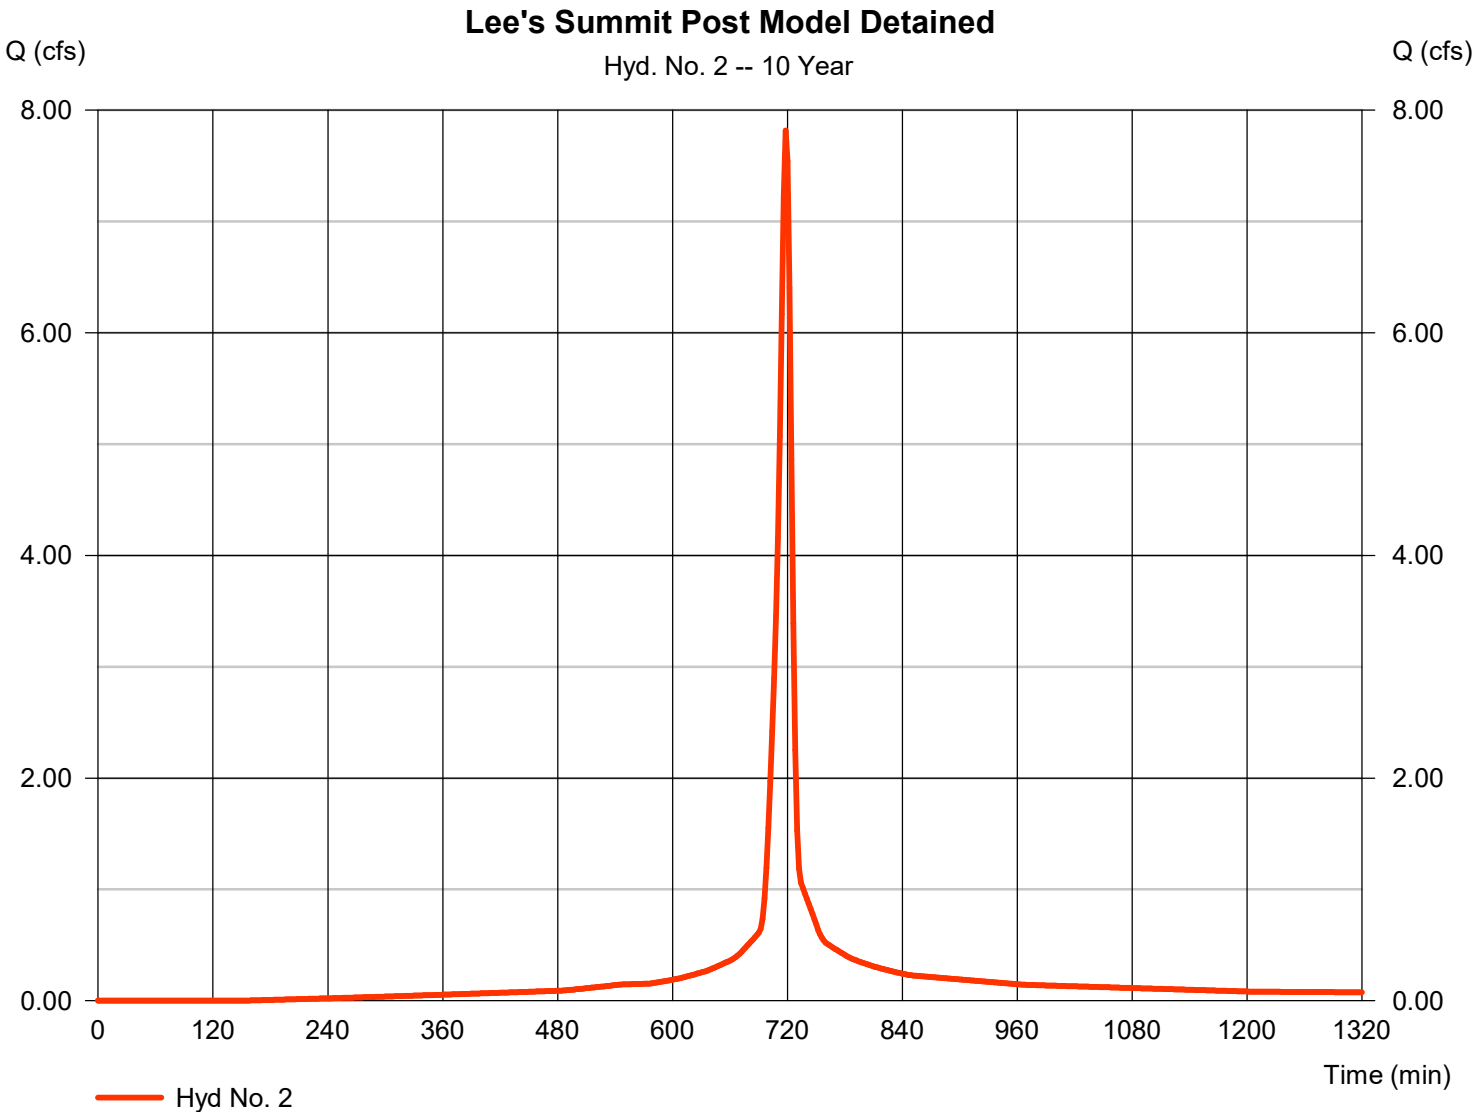

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 3

lee's Summit - Post Development Undetained

Hydrograph type	= SCS Runoff	Peak discharge	= 1.155 cfs
Storm frequency	= 10 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 3,239 cuft
Drainage area	= 0.320 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 14.40 min
Total precip.	= 5.61 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

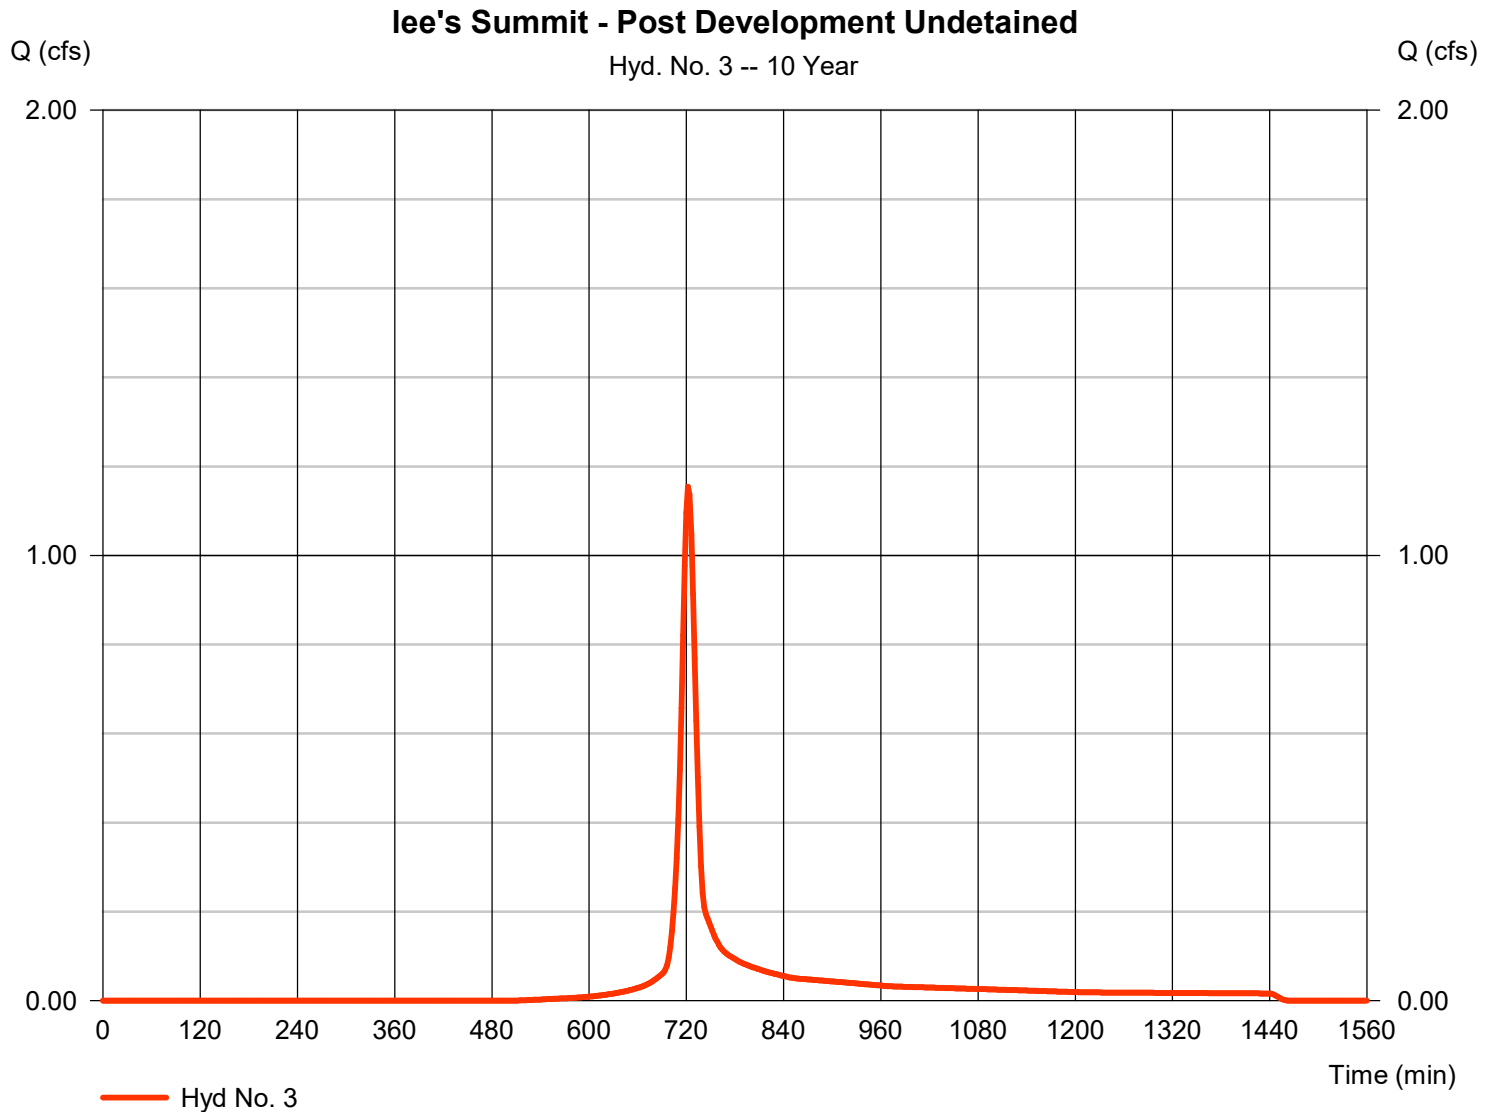

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 4

### DETAINED ROUTING

Hydrograph type	= Reservoir	Peak discharge	= 0.248 cfs
Storm frequency	= 10 yrs	Time to peak	= 838 min
Time interval	= 2 min	Hyd. volume	= 19,484 cuft
Inflow hyd. No.	= 2 - Lee's Summit Post Model Detained	Detained Elevation	= 1016.67 ft
Reservoir name	= ADS POND	Max. Storage	= 11,998 cuft

Storage Indication method used.

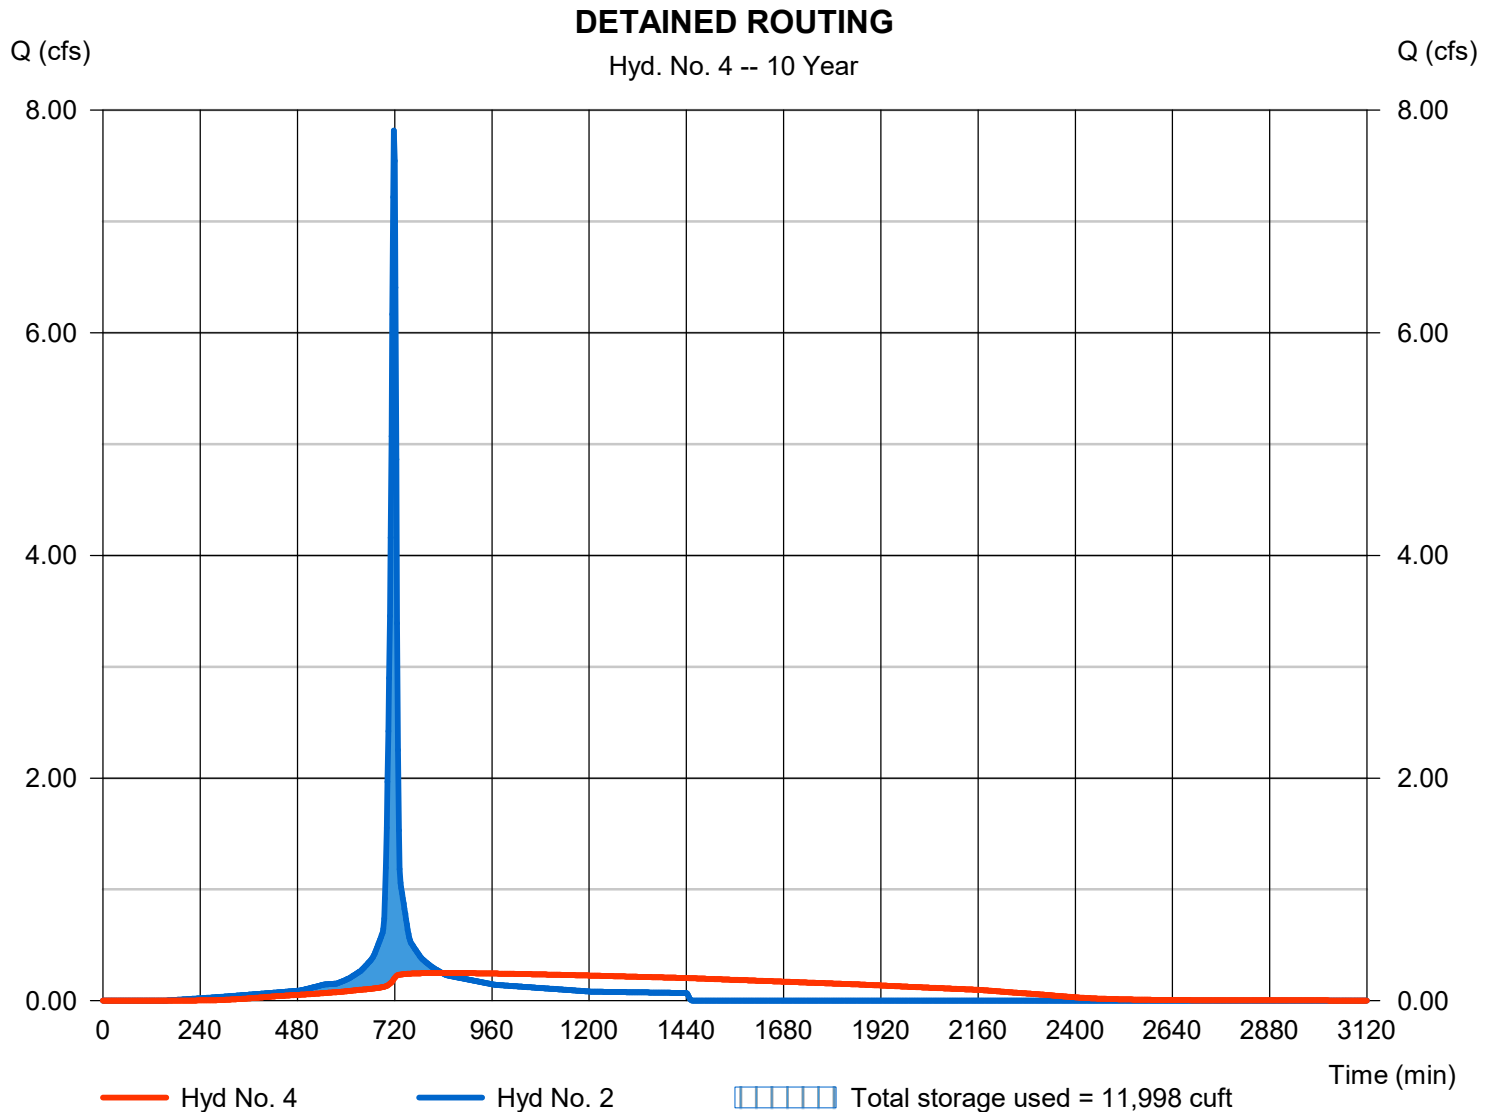

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 5

### TOTAL POST DEVELOPED RUNOFF

Hydrograph type = Combine  
Storm frequency = 10 yrs  
Time interval = 2 min  
Inflow hyds. = 3, 4

Peak discharge = 1.369 cfs  
Time to peak = 722 min  
Hyd. volume = 22,723 cuft  
Contrib. drain. area = 0.320 ac

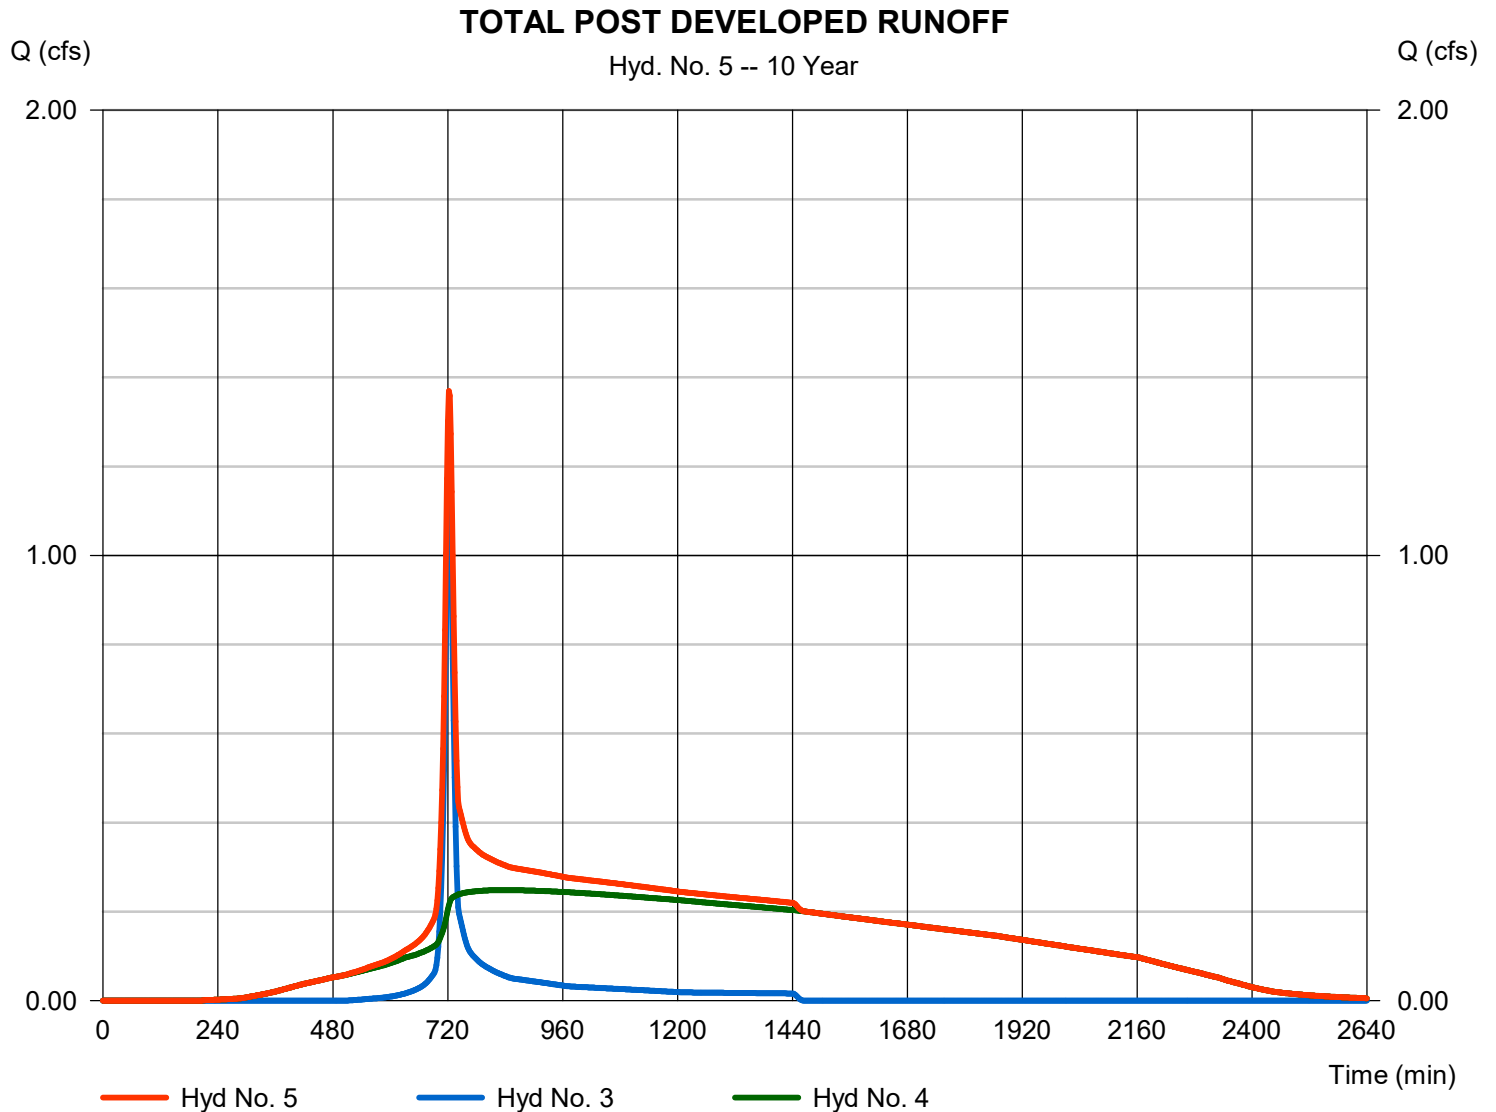

# Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Hyd. No.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	8.411	2	728	30,958	-----	-----	-----	Lee's Summit - Pre Development 1 to
2	SCS Runoff	13.13	2	718	33,805	-----	-----	-----	Lee's Summit Post Model Detained
3	SCS Runoff	2.393	2	722	6,767	-----	-----	-----	lee's Summit - Post Development Un
4	Reservoir	2.257	2	730	33,782	2	1018.44	18,355	DETAINED ROUTING
5	Combine	3.796	2	730	40,549	3, 4	-----	-----	TOTAL POST DEVELOPED RUNOF
Lee's Summit Hydraflow Hydragraph - PGD.gpw					Return Period: 100 Year			Wednesday, 02 / 23 / 2022	

# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 1

Lee's Summit - Pre Development 1 to POI

Hydrograph type	= SCS Runoff	Peak discharge	= 8.411 cfs
Storm frequency	= 100 yrs	Time to peak	= 728 min
Time interval	= 2 min	Hyd. volume	= 30,958 cuft
Drainage area	= 1.450 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 26.20 min
Total precip.	= 9.16 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

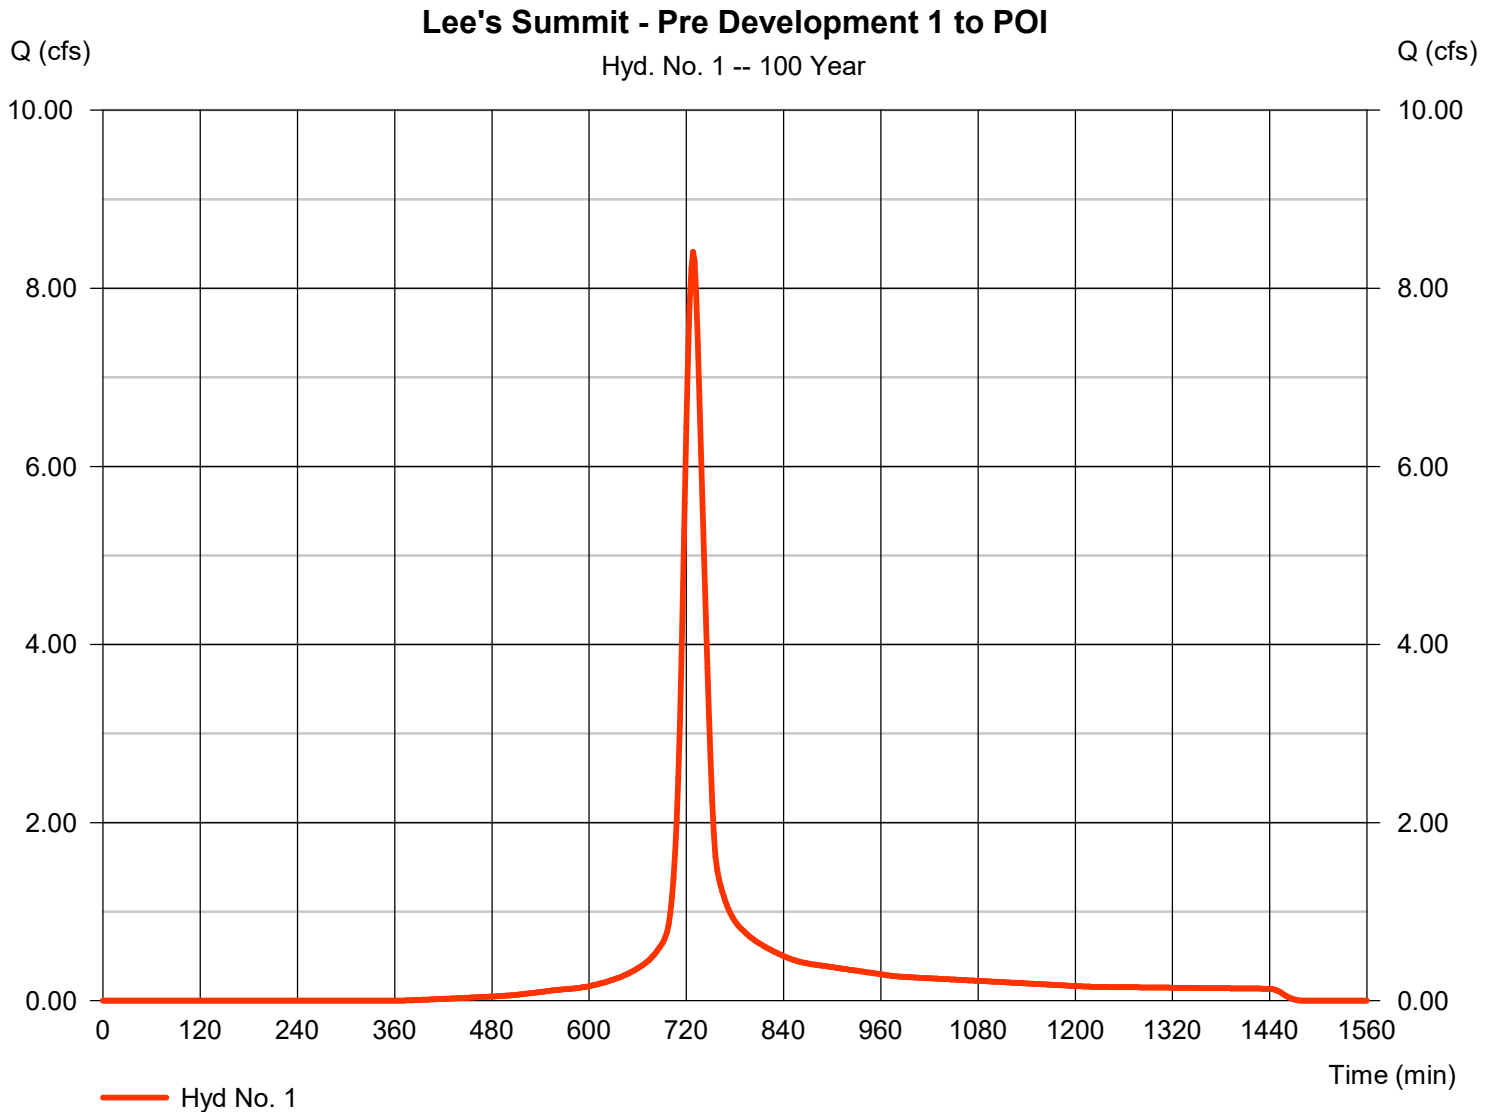

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 2

Lee's Summit Post Model Detained

Hydrograph type	= SCS Runoff	Peak discharge	= 13.13 cfs
Storm frequency	= 100 yrs	Time to peak	= 718 min
Time interval	= 2 min	Hyd. volume	= 33,805 cuft
Drainage area	= 1.120 ac	Curve number	= 93
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 8.10 min
Total precip.	= 9.16 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

### Lee's Summit Post Model Detained

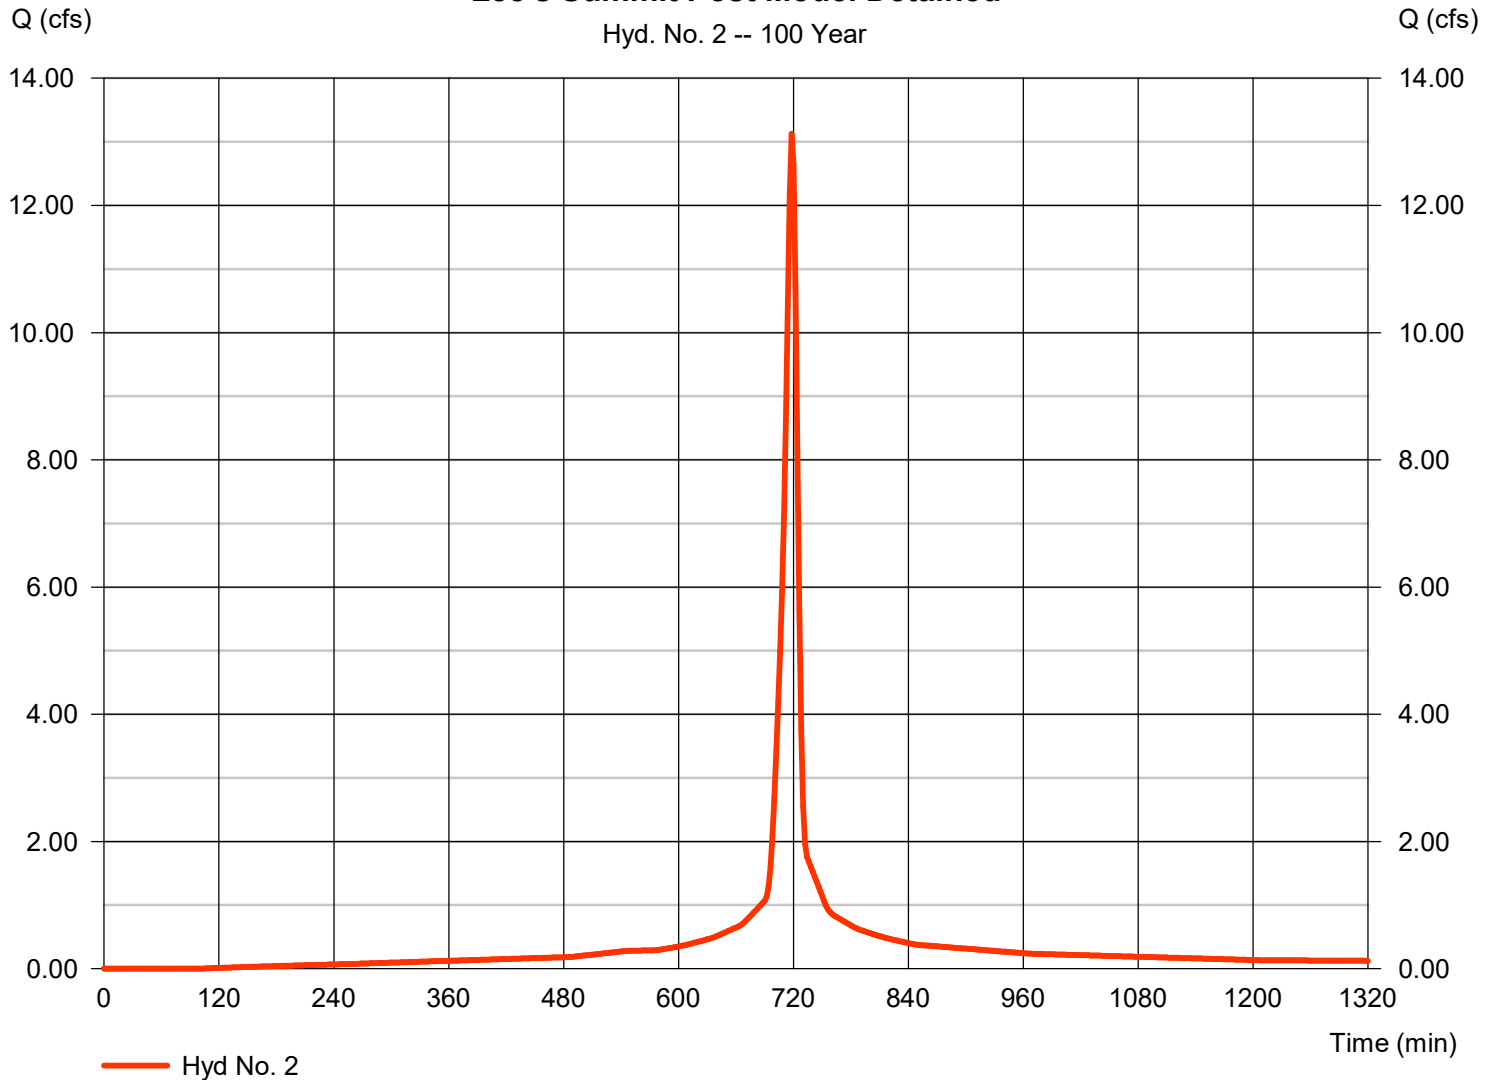



# Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020

Wednesday, 02 / 23 / 2022

## Hyd. No. 3

lee's Summit - Post Development Undetained

Hydrograph type	= SCS Runoff	Peak discharge	= 2.393 cfs
Storm frequency	= 100 yrs	Time to peak	= 722 min
Time interval	= 2 min	Hyd. volume	= 6,767 cuft
Drainage area	= 0.320 ac	Curve number	= 74
Basin Slope	= 0.0 %	Hydraulic length	= 0 ft
Tc method	= TR55	Time of conc. (Tc)	= 14.40 min
Total precip.	= 9.16 in	Distribution	= Type II
Storm duration	= 24 hrs	Shape factor	= 484

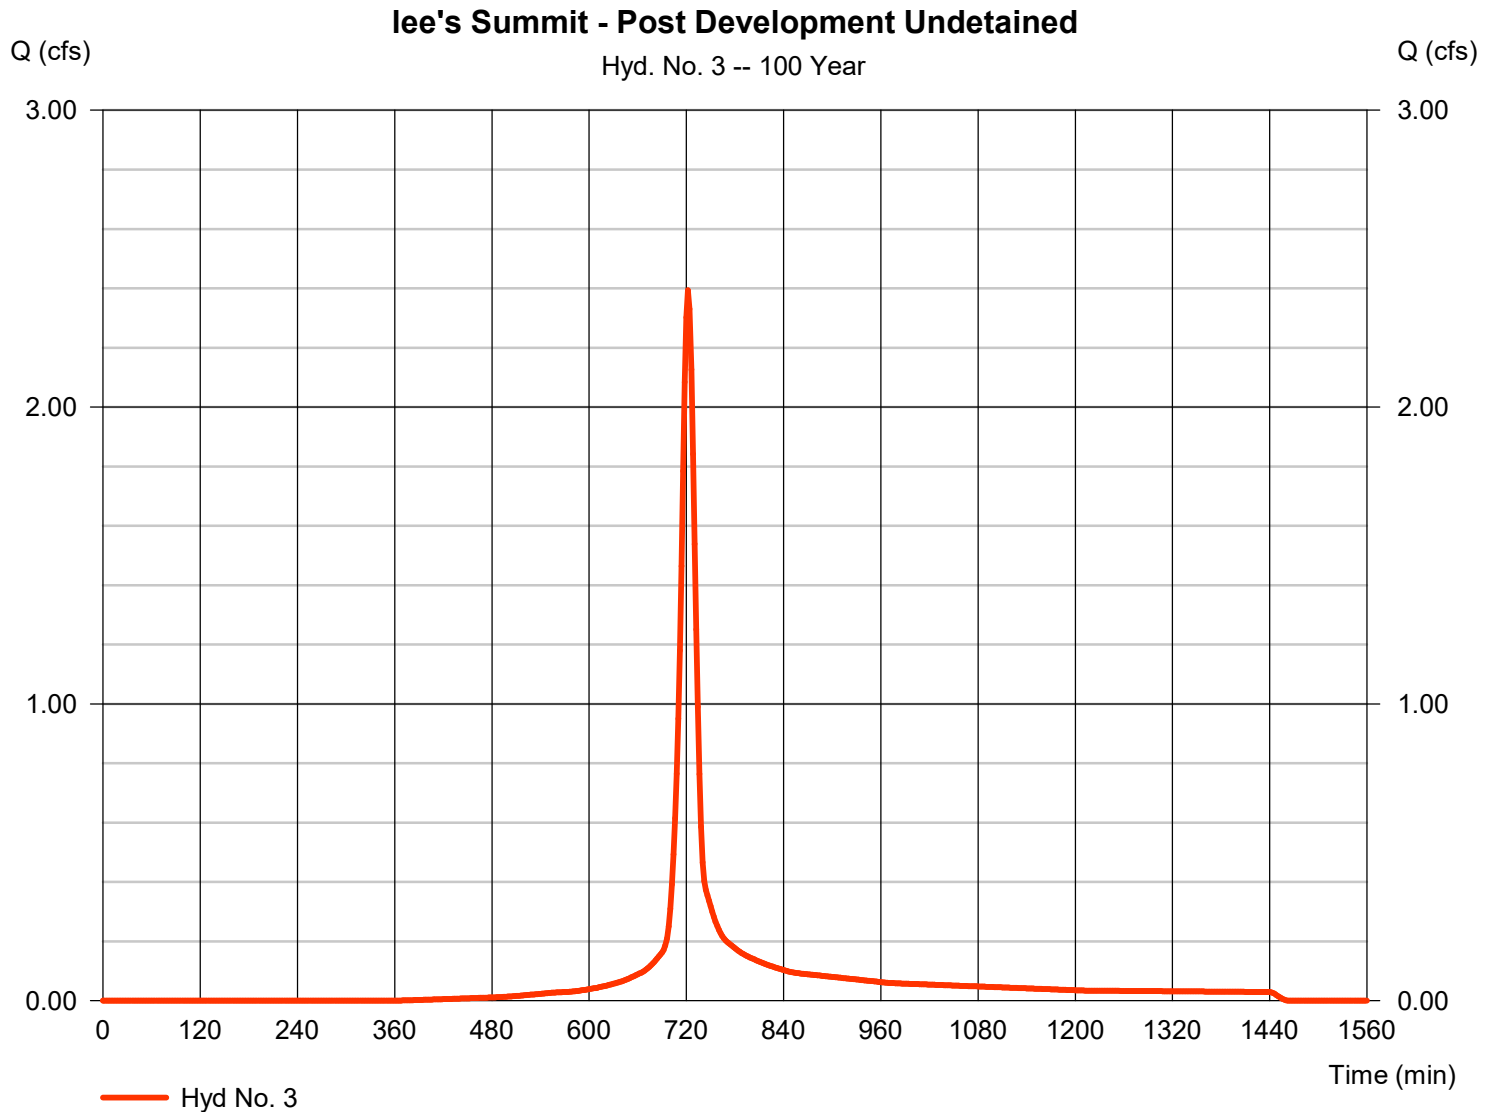

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 4

### DETAINED ROUTING

Hydrograph type	= Reservoir	Peak discharge	= 2.257 cfs
Storm frequency	= 100 yrs	Time to peak	= 730 min
Time interval	= 2 min	Hyd. volume	= 33,782 cuft
Inflow hyd. No.	= 2 - Lee's Summit Post Model Detained	Detained Elevation	= 1018.44 ft
Reservoir name	= ADS POND	Max. Storage	= 18,355 cuft

Storage Indication method used.

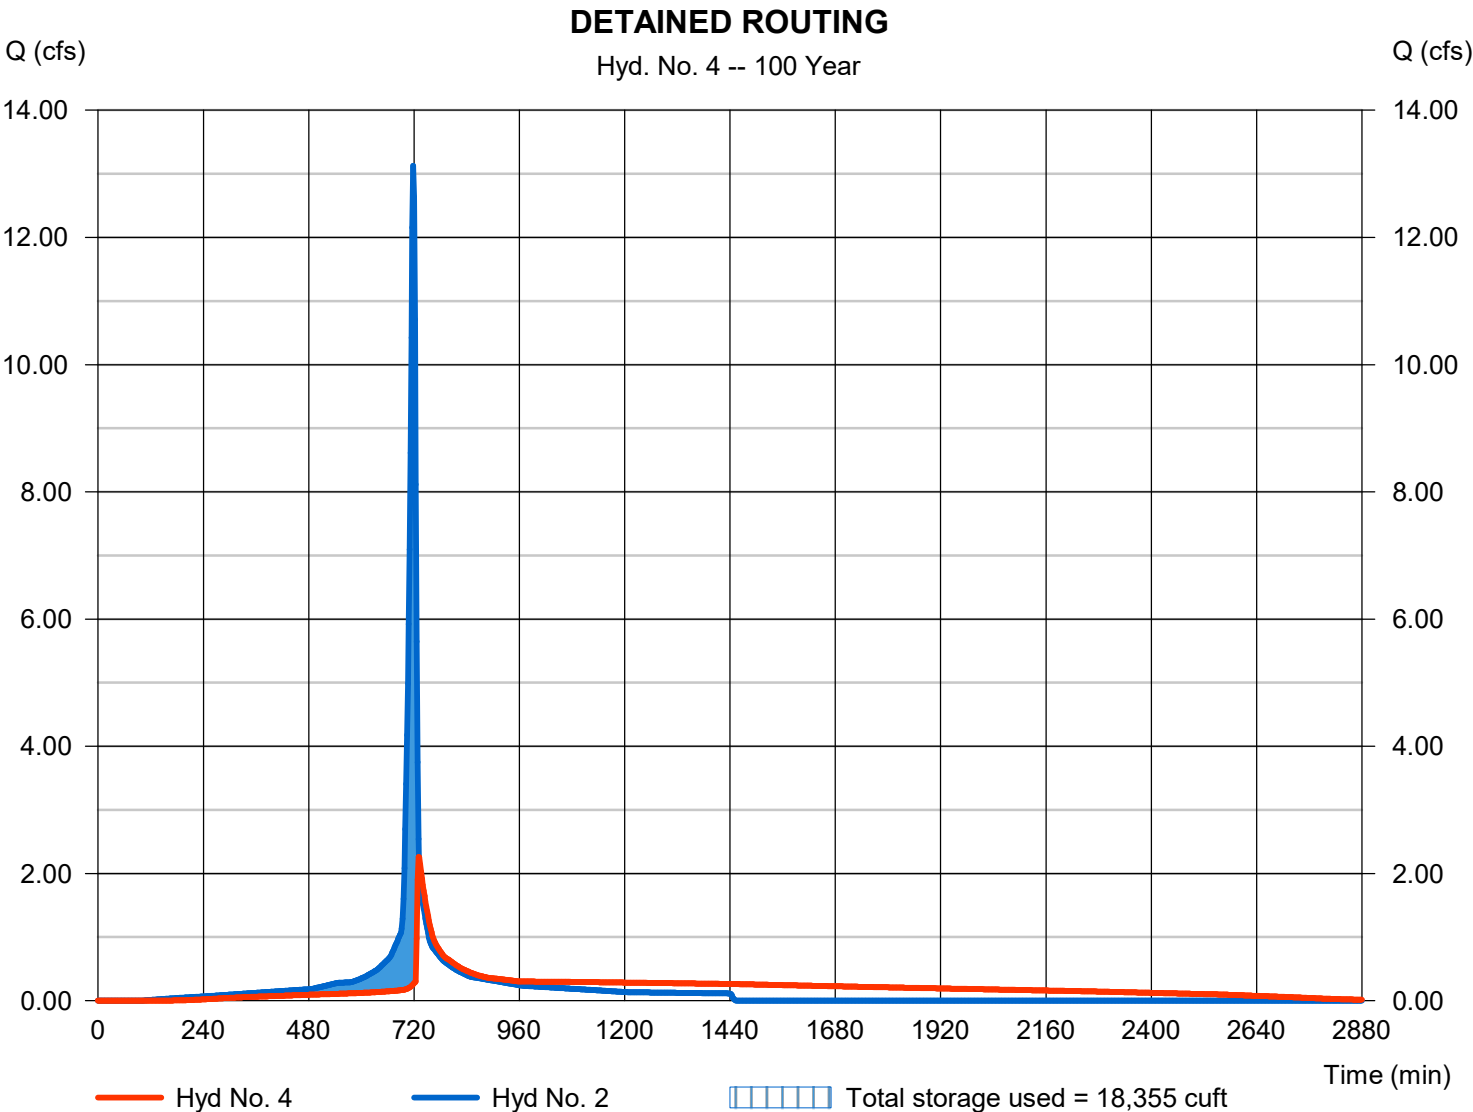

# Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2020


Wednesday, 02 / 23 / 2022

## Hyd. No. 5


### TOTAL POST DEVELOPED RUNOFF

Hydrograph type = Combine  
 Storm frequency = 100 yrs  
 Time interval = 2 min  
 Inflow hyds. = 3, 4

Peak discharge = 3.796 cfs  
 Time to peak = 730 min  
 Hyd. volume = 40,549 cuft  
 Contrib. drain. area = 0.320 ac

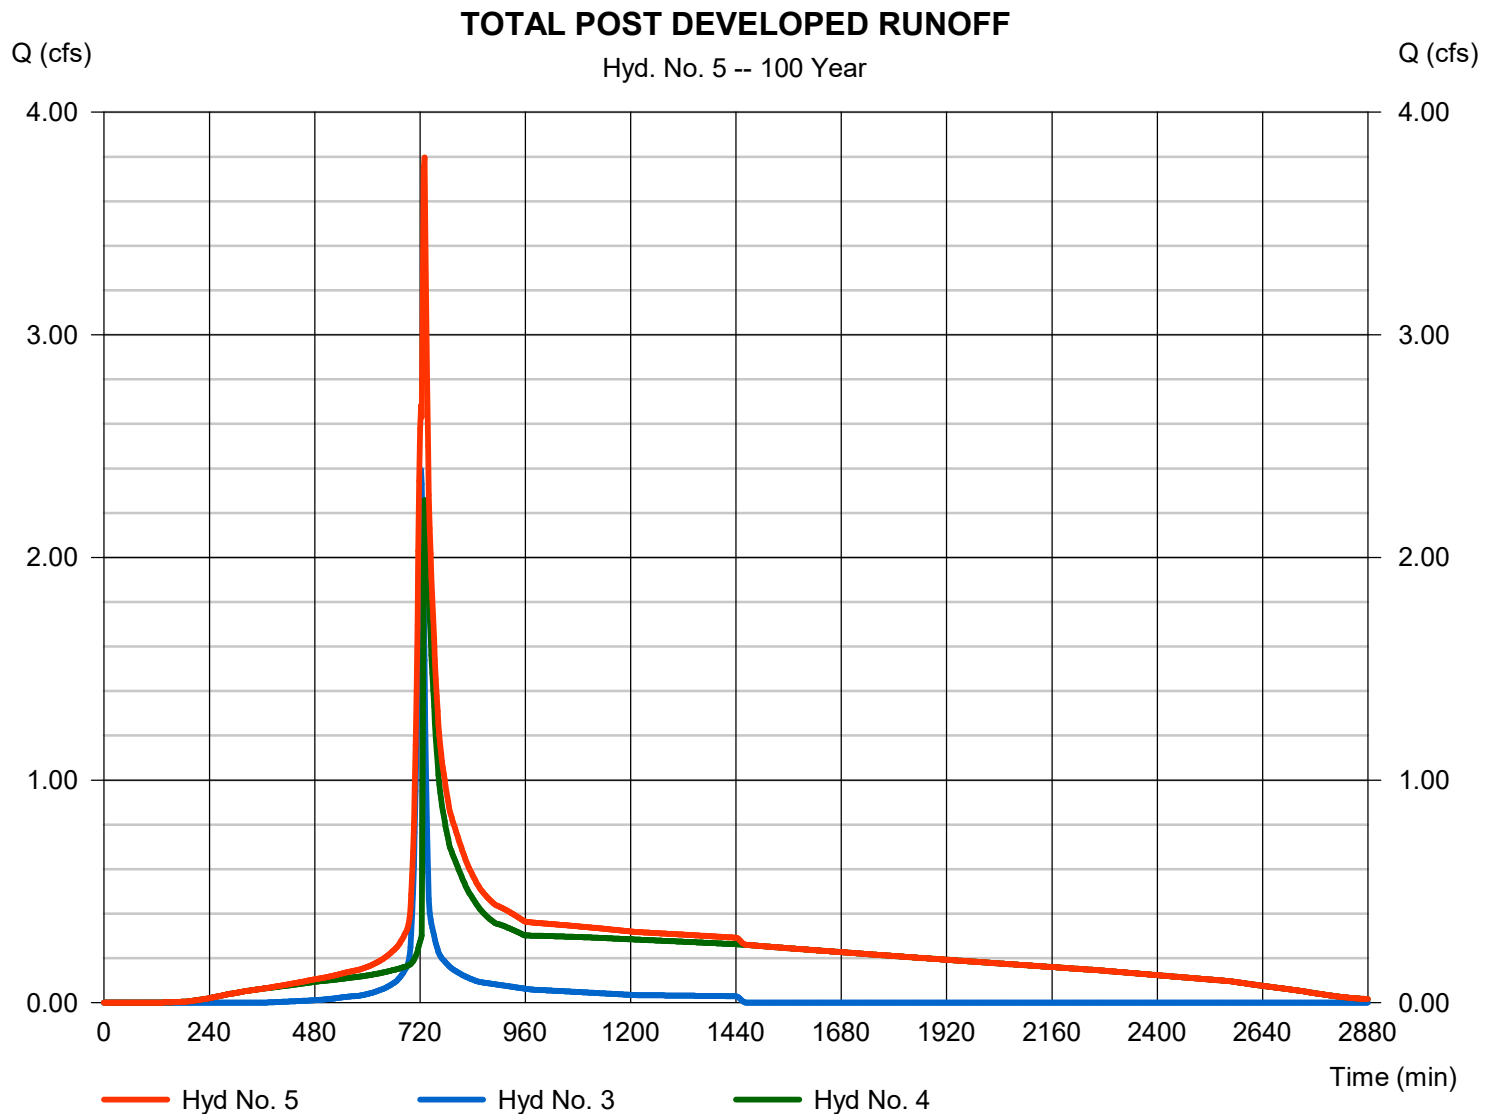

N:\03\6240497\21-Lee's Summit, MO Market\Docs\Cals\Civil\STORM\catchment areas.dwg, 2/24/2022 1:14 PM, bunnar, taylor

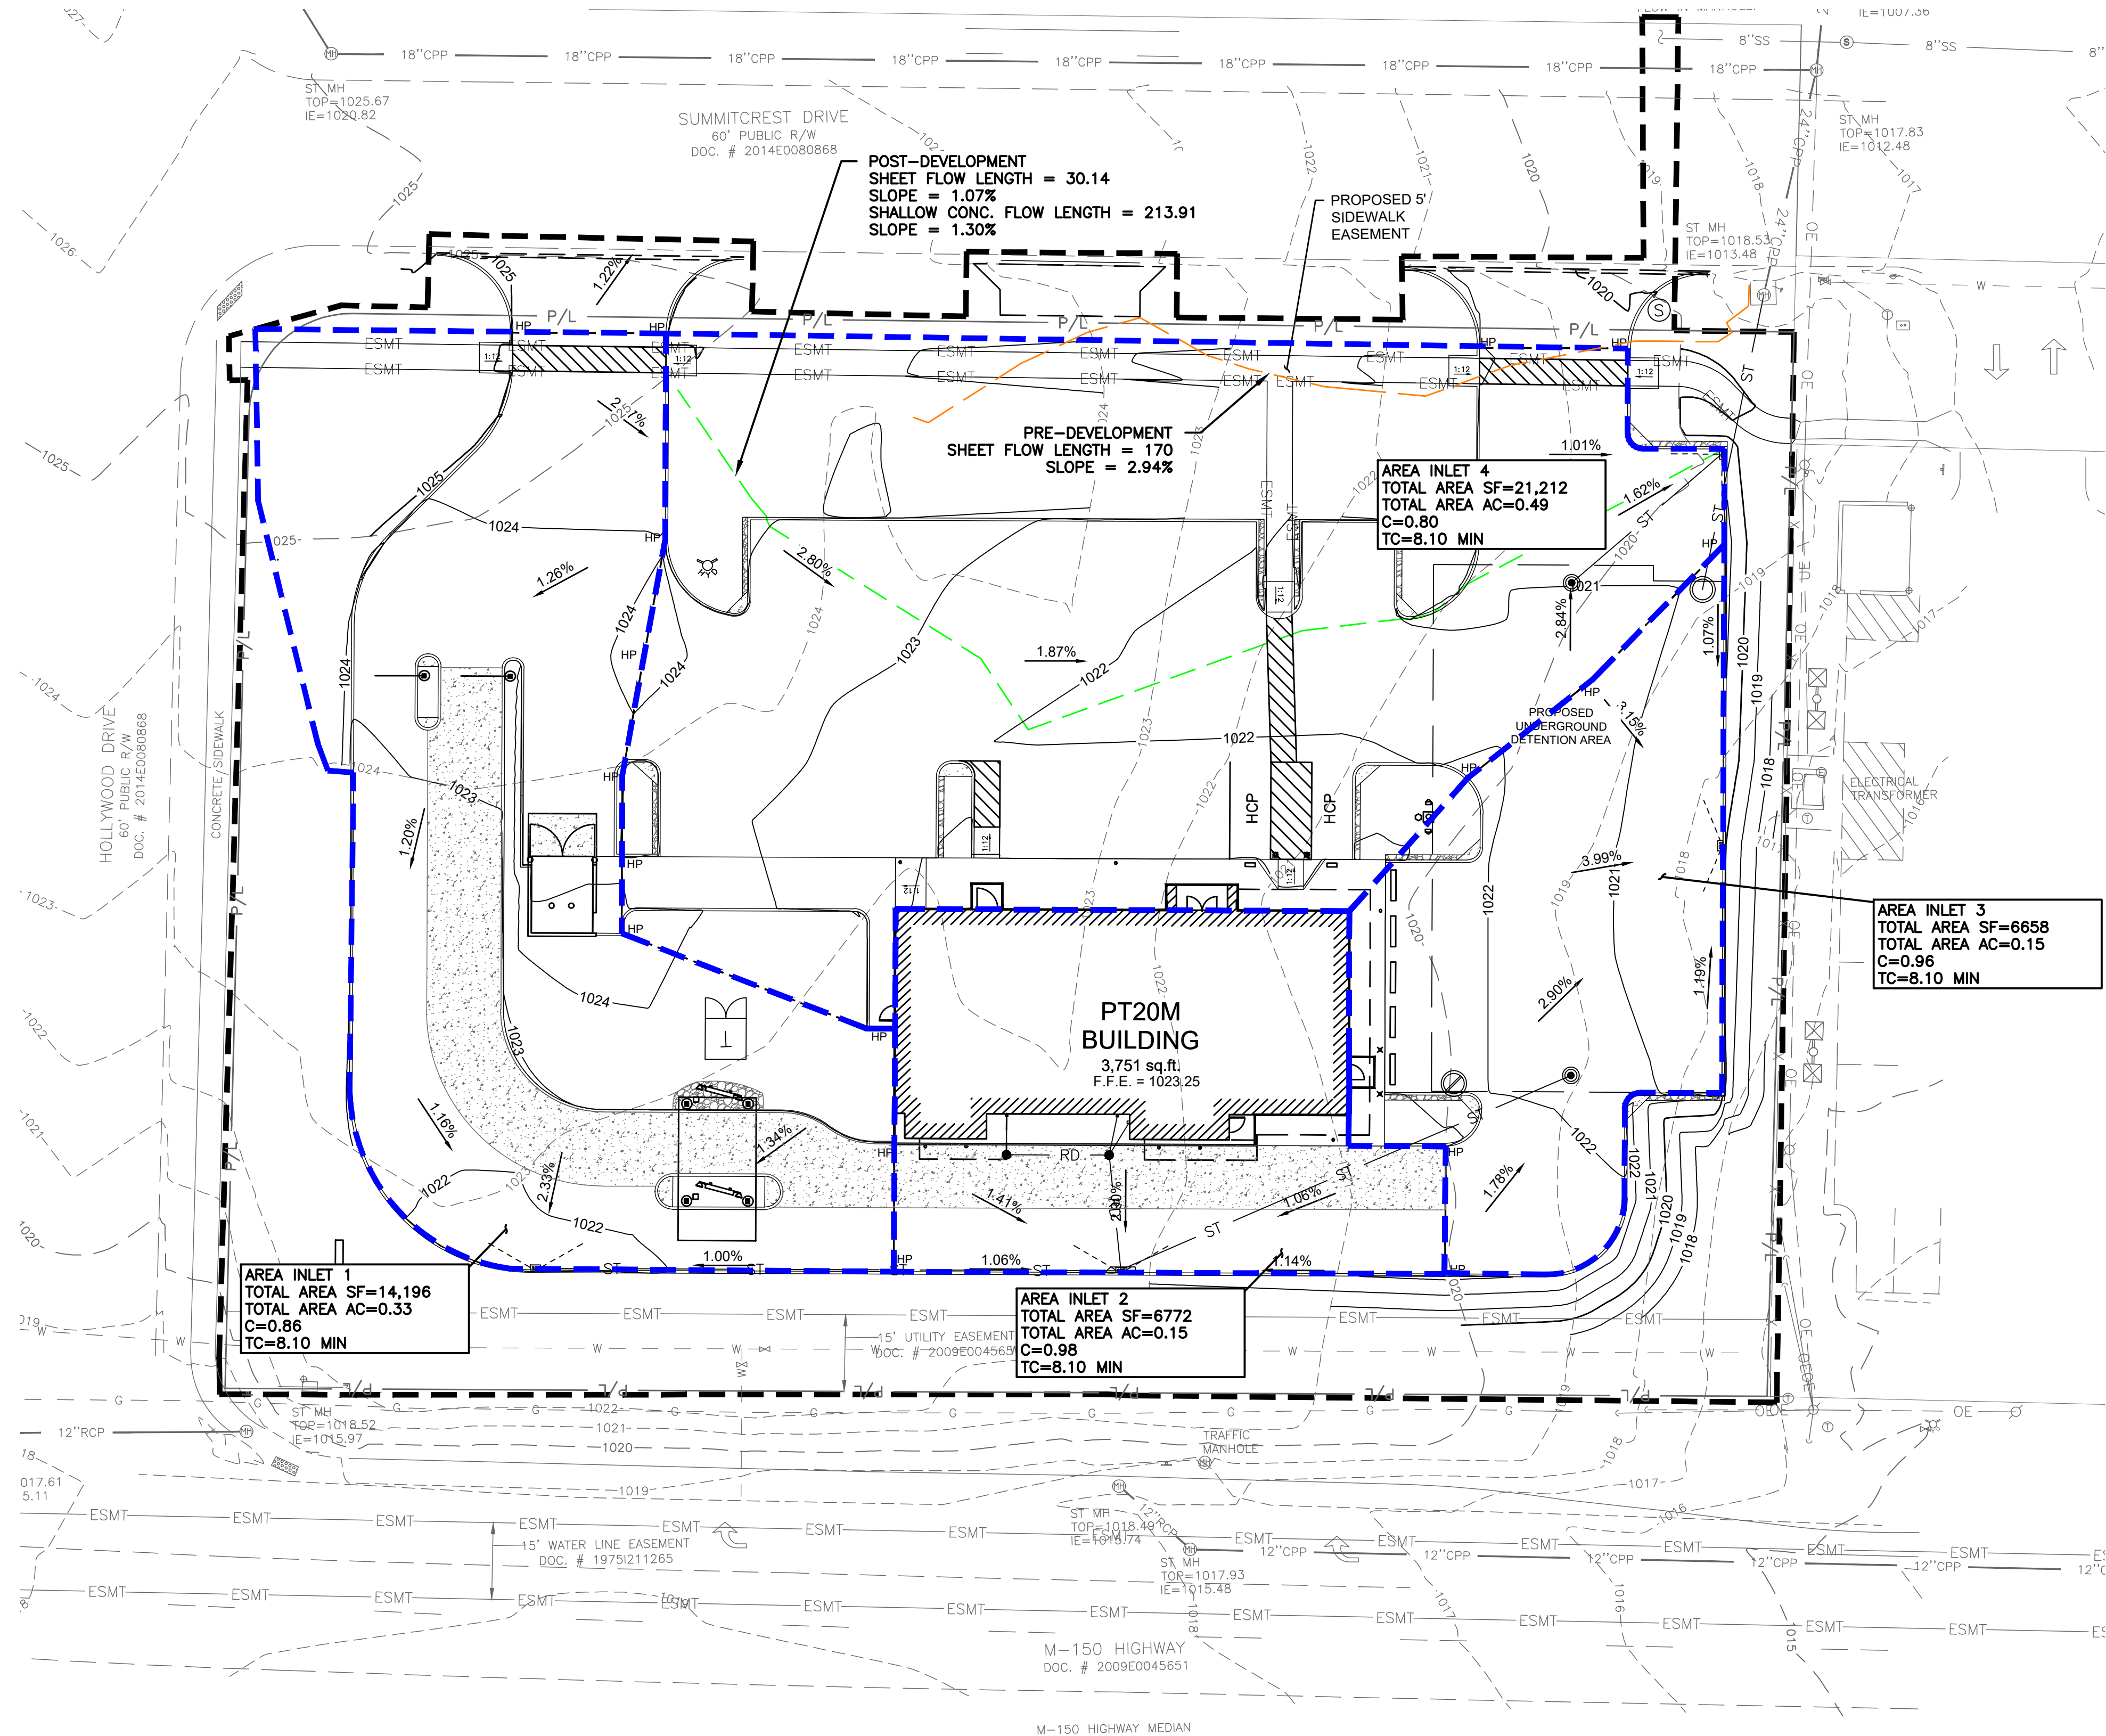

LEGEND


FEATURE	DESCRIPTION
<span style="color: orange;">---</span>	PRE-DEVELOPMENT TC PATH
<span style="color: green;">---</span>	POST-DEVELOPMENT TC PATH
<span style="color: blue;">---</span>	CATCHMENT AREA

REVISION /DATE/DESCRIPTION

SIR UPDATES	09/13/21
60% SET	01/24/22

NOTICE

THIS ARCHITECTURAL AND ENGINEERING DRAWING IS GIVEN IN CONFIDENCE AND SHALL BE USED ONLY PURSUANT TO THE AGREEMENT WITH THE ARCHITECT. NO OTHER USE, DISSEMINATION, OR DUPLICATION MAY BE MADE WITHOUT PRIOR WRITTEN CONSENT OF THE ARCHITECT. ALL COMMON LAW RIGHTS OF COPYRIGHT AND OTHERWISE ARE HEREBY SPECIFICALLY RESERVED.

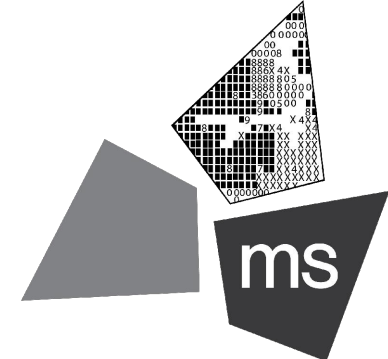

ms consultants, inc.  
engineers, architects, planners  
2221 Schrock Road  
Columbus, Ohio 43229-1547  
phone 614.898.7100  
fax 614.898.7570

PROJECT

PROPOSED PT20M  
BUILDING

NWQ HWY 150 &  
HOLLYWOOD ST.  
LEE'S SUMMIT, MO 64082

SHEET TITLE

CATCHMENT AREAS


DRAWN BY: TDB

CHECKED BY: PJK

PROJECT NO: 40497-21

DRAWING

# Hydraflow Storm Sewers Extension for Autodesk® Civil 3D® Plan

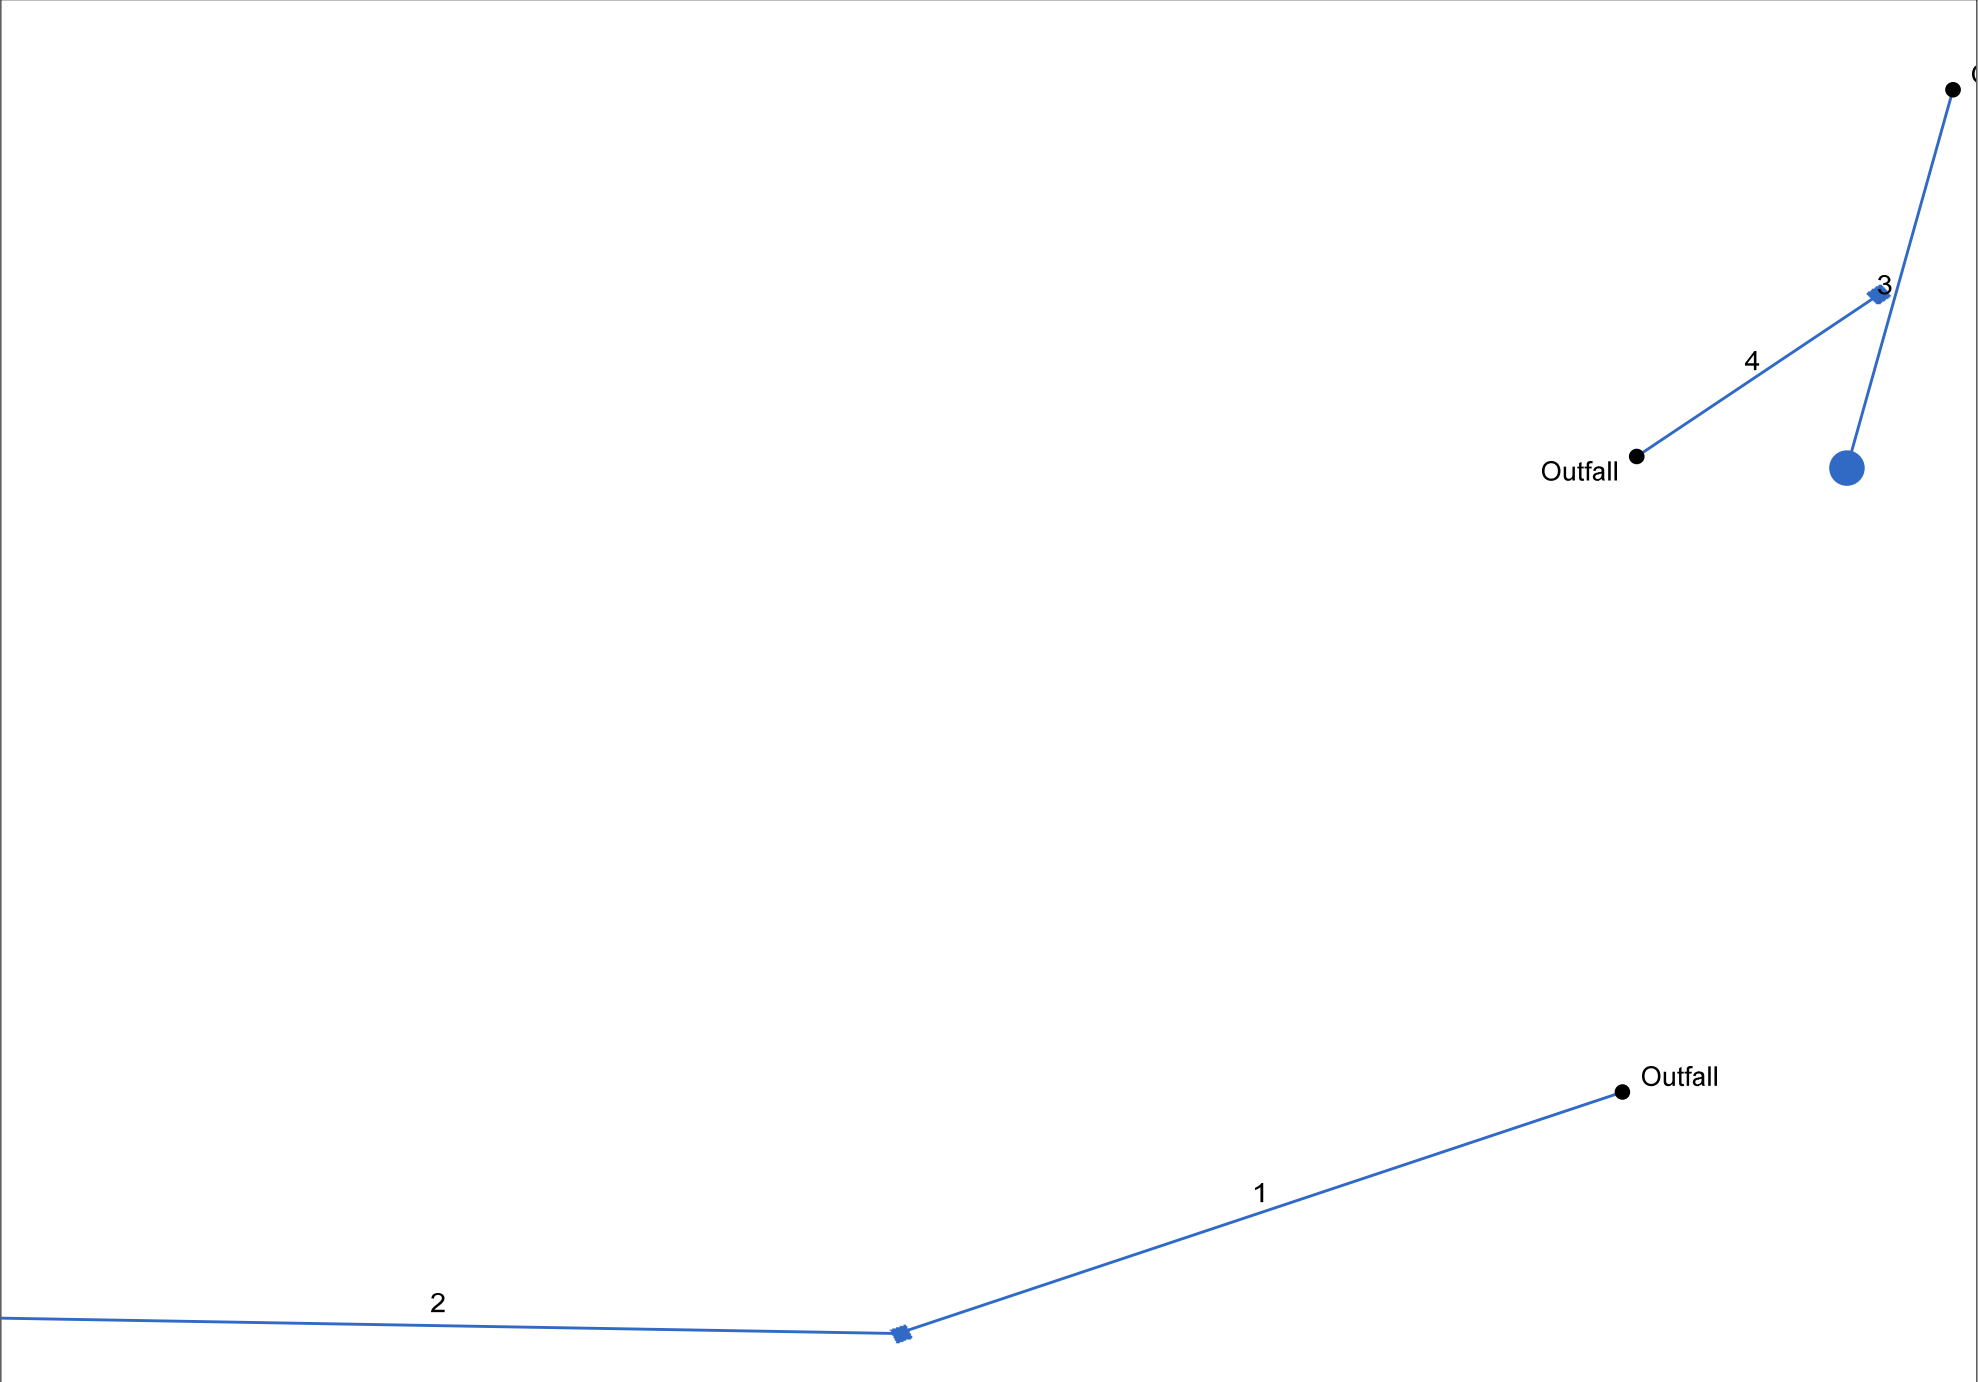

Project File: New.stm	Number of lines: 4	Date: 2/24/2022
-----------------------	--------------------	-----------------

# Storm Sewer Summary Report

Line No.	Line ID	Flow rate (cfs)	Line Size (in)	Line shape	Line length (ft)	Invert EL Dn (ft)	Invert EL Up (ft)	Line Slope (%)	HGL Down (ft)	HGL Up (ft)	Minor loss (ft)	HGL Junct (ft)	Dns Line No.	Junction Type
1	Pipe - 10	2.80	15	Cir	95.943	1013.75	1014.71	1.001	1014.42	1015.38	0.19	1015.38	End	Curb-Horiz
2	Pipe - 9	1.96	15	Cir	114.529	1014.71	1015.85	0.995	1015.38	1016.41	n/a	1016.41 j	1	Curb-Horiz
3	Pipe - 11	0.19	15	Cir	58.829	1013.48	1013.75	0.459	1013.65	1013.94	0.04	1013.98	End	Manhole
4	Pipe - 12	2.71	15	Cir	38.674	1013.75	1014.14	1.008	1014.41	1014.80	0.26	1014.80	End	Curb-Horiz
Project File: New.stm									Number of lines: 4			Run Date: 2/24/2022		
NOTES: Return period = 10 Yrs. ; j - Line contains hyd. jump.														

# Storm Sewer Tabulation

Station		Len	Drng Area		Rnoff coeff	Area x C		Tc		Rain (I)	Total flow	Cap full	Vel	Pipe		Invert Elev		HGL Elev		Grnd / Rim Elev		Line ID
Line	To Line		Incr	Total		Incr	Total	Inlet	Syst					Size	Slope	Dn	Up	Dn	Up	Dn	Up	
		(ft)	(ac)	(ac)	(C)			(min)	(min)	(in/hr)	(cfs)	(cfs)	(ft/s)	(in)	(%)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	
1	End	95.943	0.15	0.48	0.98	0.15	0.43	8.1	9.3	6.5	2.80	6.46	4.17	15	1.00	1013.75	1014.71	1014.42	1015.38	-1.27	-1.17	Pipe - 10
2	1	114.529	0.33	0.33	0.86	0.28	0.28	8.1	8.1	6.9	1.96	6.44	3.31	15	1.00	1014.71	1015.85	1015.38	1016.41	-1.17	1015.86	Pipe - 9
3	End	58.829	0.00	0.00	0.00	0.00	0.00	0.0	0.0	0.0	0.19	4.37	1.78	15	0.46	1013.48	1013.75	1013.65	1013.94	-1.17	1013.75	Pipe - 11
4	End	38.674	0.49	0.49	0.80	0.39	0.39	8.1	8.1	6.9	2.71	6.48	4.12	15	1.01	1013.75	1014.14	1014.41	1014.80	-1.17	1014.14	Pipe - 12
Project File: New.stm																Number of lines: 4				Run Date: 2/24/2022		
NOTES:Intensity = 38.88 / (Inlet time + 4.60) ^ 0.68; Return period =Yrs. 10 ; c = cir e = ellip b = box																						

## **APPENDIX D**

### Soils Information





United States  
Department of  
Agriculture

**NRCS**

Natural  
Resources  
Conservation  
Service

A product of the National  
Cooperative Soil Survey,  
a joint effort of the United  
States Department of  
Agriculture and other  
Federal agencies, State  
agencies including the  
Agricultural Experiment  
Stations, and local  
participants

# Custom Soil Resource Report for **Jackson County, Missouri**



February 9, 2022

# Preface

---

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (<http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/>) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (<https://offices.sc.egov.usda.gov/locator/app?agency=nrcs>) or your NRCS State Soil Scientist ([http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2\\_053951](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2_053951)).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

# Contents

---

<b>Preface</b> .....	2
<b>How Soil Surveys Are Made</b> .....	5
<b>Soil Map</b> .....	8
Soil Map.....	9
Legend.....	10
Map Unit Legend.....	11
Map Unit Descriptions.....	11
Jackson County, Missouri.....	13
10082—Arisburg-Urban land complex, 1 to 5 percent slopes.....	13
<b>References</b> .....	15

# How Soil Surveys Are Made

---

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.

After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

## Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

# Soil Map

---

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.



# Custom Soil Resource Report Soil Map



# Custom Soil Resource Report

## MAP LEGEND

### Area of Interest (AOI)

 Area of Interest (AOI)

### Soils

 Soil Map Unit Polygons

 Soil Map Unit Lines

 Soil Map Unit Points

### Special Point Features

 Blowout

 Borrow Pit

 Clay Spot

 Closed Depression

 Gravel Pit

 Gravelly Spot

 Landfill

 Lava Flow

 Marsh or swamp

 Mine or Quarry

 Miscellaneous Water

 Perennial Water

 Rock Outcrop


 Saline Spot

 Sandy Spot

 Severely Eroded Spot


 Sinkhole

 Slide or Slip

 Sodic Spot

 Spoil Area

 Stony Spot

 Very Stony Spot

 Wet Spot

 Other

 Special Line Features

### Water Features

 Streams and Canals

### Transportation

 Rails

 Interstate Highways

 US Routes

 Major Roads

 Local Roads

### Background

 Aerial Photography

## MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24,000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL:

Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri

Survey Area Data: Version 23, Sep 1, 2021

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Sep 6, 2019—Nov 16, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

## Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
10082	Arisburg-Urban land complex, 1 to 5 percent slopes	2.0	100.0%
<b>Totals for Area of Interest</b>		<b>2.0</b>	<b>100.0%</b>

## Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

## Custom Soil Resource Report

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

## Jackson County, Missouri

### 10082—Arisburg-Urban land complex, 1 to 5 percent slopes

#### Map Unit Setting

*National map unit symbol:* 2w7ld  
*Elevation:* 750 to 1,130 feet  
*Mean annual precipitation:* 39 to 45 inches  
*Mean annual air temperature:* 50 to 55 degrees F  
*Frost-free period:* 177 to 220 days  
*Farmland classification:* All areas are prime farmland

#### Map Unit Composition

*Arisburg and similar soils:* 61 percent  
*Urban land:* 30 percent  
*Minor components:* 9 percent  
*Estimates are based on observations, descriptions, and transects of the mapunit.*

#### Description of Arisburg

##### Setting

*Landform:* Interfluves  
*Landform position (two-dimensional):* Summit  
*Landform position (three-dimensional):* Interfluve  
*Down-slope shape:* Convex  
*Across-slope shape:* Convex  
*Parent material:* Loess

##### Typical profile

*Ap - 0 to 6 inches:* silt loam  
*A - 6 to 13 inches:* silt loam  
*Bt - 13 to 19 inches:* silty clay loam  
*Btg - 19 to 56 inches:* silty clay loam  
*BCg - 56 to 79 inches:* silty clay loam

##### Properties and qualities

*Slope:* 1 to 5 percent  
*Depth to restrictive feature:* More than 80 inches  
*Drainage class:* Somewhat poorly drained  
*Capacity of the most limiting layer to transmit water (Ksat):* Moderately high (0.20 to 0.60 in/hr)  
*Depth to water table:* About 18 to 30 inches  
*Frequency of flooding:* None  
*Frequency of ponding:* None  
*Maximum salinity:* Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)  
*Available water supply, 0 to 60 inches:* High (about 11.5 inches)

##### Interpretive groups

*Land capability classification (irrigated):* None specified  
*Land capability classification (nonirrigated):* 2e  
*Hydrologic Soil Group:* C  
*Ecological site:* R107BY007MO - Loess Upland Prairie  
*Hydric soil rating:* No

## Description of Urban Land

### Interpretive groups

*Land capability classification (irrigated):* None specified

*Land capability classification (nonirrigated):* 8

*Hydric soil rating:* No

## Minor Components

### Sampsel

*Percent of map unit:* 3 percent

*Landform:* Hills

*Landform position (two-dimensional):* Backslope

*Landform position (three-dimensional):* Side slope

*Down-slope shape:* Convex

*Across-slope shape:* Concave

*Ecological site:* R109XY010MO - Interbedded Sedimentary Upland Savanna

*Hydric soil rating:* Yes

### Greenton

*Percent of map unit:* 3 percent

*Landform:* Hillslopes

*Landform position (two-dimensional):* Shoulder

*Landform position (three-dimensional):* Side slope

*Down-slope shape:* Convex

*Across-slope shape:* Convex

*Ecological site:* R109XY002MO - Loess Upland Prairie

*Hydric soil rating:* No

### Sharpsburg

*Percent of map unit:* 3 percent

*Landform:* Ridges

*Landform position (two-dimensional):* Summit

*Landform position (three-dimensional):* Interfluve

*Down-slope shape:* Linear

*Across-slope shape:* Linear

*Ecological site:* R109XY002MO - Loess Upland Prairie

*Hydric soil rating:* No

# References

---

- American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.
- American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.
- Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.
- Federal Register. July 13, 1994. Changes in hydric soils of the United States.
- Federal Register. September 18, 2002. Hydric soils of the United States.
- Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.
- National Research Council. 1995. Wetlands: Characteristics and boundaries.
- Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_054262](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262)
- Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053577](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053577)
- Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053580](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053580)
- Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.
- United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.
- United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2\\_053374](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2_053374)
- United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. <http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084>

## Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2\\_054242](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242)

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. [http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2\\_053624](http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624)

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_052290.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf)