


STANDARD BRIGHTNESS

TivoTape™ Outdoor (factory installed power lead wires)



24V DC

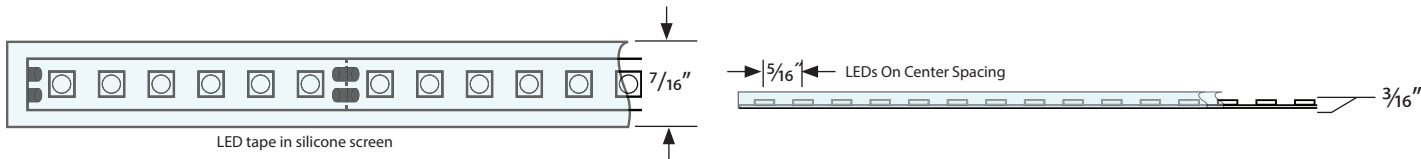

3 W/ft | 210 LM/ft



Non-Field Cuttable
(See page 2 for details)



Max Continuous Run



Dimmable



VHB Tape



Silicone Jacket



90+ CRI



Warranty



2200K



2400K



2700K



3000K



3500K



4000K



5000K

Ordering Information

PRODUCT CODE	INTENSITY	INSTALL	LED COLOR	VOLTAGE
TPLD	SB	O	35	24
TPLD Tivotape DEFINE 90+ CRI	SB Standard Brightness	O Outdoor	22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 50 5000K	24 24V DC



TivoTape Run Lengths & End Preps

Please specify length of run with quantity of run(s) and end prep type at time of ordering.
Note: Only (1) end prep needed for each run (see page 2)
Outdoor TivoTape is non-field cuttable - Factory Prep Only

Electrical & Photometric Data (Based on 90+ CRI / 3000K)

Input Voltage	24V DC						
Dimming Option	MLV/ELV/0-10V <i>Consult factory for DMX dimming</i>						
Power Supply	Class 2						
Wire Size (End Prep)	18 AWG, 2 wire						
Power Consumption	3 W/ft.						
Color Temperature (CCT)	2200K	2400K	2700K	3000K	3500K	4000K	5000K
Lumen Output	164	168	205	210	214	216	220
Efficacy	65	69	72	73	75	78	79
Color Rendering Index (CRI)	93	92	92	92	90	90	90
R9	>50						


Physical

LED Package	3528
Cut Increments	2" (non-field cuttable - Factory prep only)
LEDs/ft	36
Operating Temperature	-40°F (-40°C) ~ 140°F (60°C)
Environment	IP67 Wet Location, Conformally Coated
Maximum Run Length	32'
Copper Trace	3 Ounce
Adhesive	3M VHB Tape
Dimension	7/16" (11.11mm) Jacket

Performance

Certification	UL Listed
Lumen Maintenance (L70) Hours	60,000
Binning Tolerance	2 Step MacAdam Elipse
Warranty	3 Years

MOSHER



MOSR-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



MOSR-LNS-OP-6.5
Lens, opal, length 6.5'



MOSR-EC-01
Solid End Cap




MOSR-EC-02
Powerfeed End Cap



MTBK-03
Mounting Clip

DYER



DYER-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



DYER-LNS-OP-6.5
Lens, opal, length 6.5'



DYER-EC-01
Solid End Cap






DYER-EC-02
Powerfeed End Cap



DYER-MTBK
Mounting Clip

VALENCIA

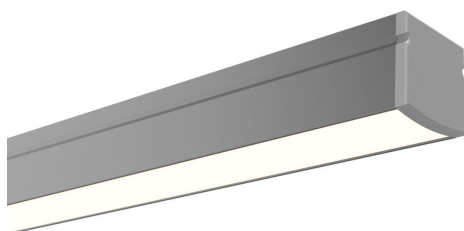

VALN-CHAN-SLV-6.5
Anodized Aluminum Extrusion,
available in 6.5' lengths



VALN-LNS-OP-6.5
Lens, opal, length 6.5'



VALN-EC-01
Solid End Cap



VALN-EC-02
Powerfeed End Cap



VALN-MTBK
Mounting Clip

Recommended Power Supplies

ADNM - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-D	Indoor / Outdoor	100-277V AC 5ø60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-D				1	96W	4A
	ADNM-240-2-4-24-D				2	2x96W	2x4A
	ADNM-320-3-4-24-D				3	3x96W	3x4A

ADNM - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DOT	Indoor / Outdoor	100-277V AC 5ø60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DOT				1	96W	4A
	ADNM-240-2-4-24-DOT				2	2x96W	2x4A
	ADNM-320-3-4-24-DOT				3	3x96W	3x4A

ADNM - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-90-1-4-24-DIN	Indoor / Outdoor	100-277V AC 5ø60 Hz	24V DC	1	90W	3.75A
	ADNM-120-1-4-24-DIN				1	96W	4A
	ADNM-240-2-4-24-DIN				2	2x96W	2x4A
	ADNM-320-3-4-24-DIN				3	3x96W	3x4A

ADNM - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-240-2-4-24-DIN-2	Indoor / Outdoor	100-277V AC 5ø60 Hz	24V DC	2	2x96W	2x4A
	ADNM-320-3-4-24-DIN-3				3	3x96W	3x4A

ADNM - DMX/DALI FLICKER-FREE FOR TV STUDIO

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADNM Series Class 2 Transformer	ADNM-120-1-4-24-DTV	Indoor / Outdoor	100-277V AC 5ø60 Hz	24V DC	1	1x96W	1x4A
	ADNM-240-2-4-24-DTV				2	2x96W	2x4A
	ADNM-320-3-4-24-DTV				3	3x96W	3x4A