





BUILDING BANDS

- Shipped in 12' lengths at 4.25" projection
- Cut to length in the field -no field measurements are needed
- Pre-made corners
- LED Tape Lights (Outsourced)

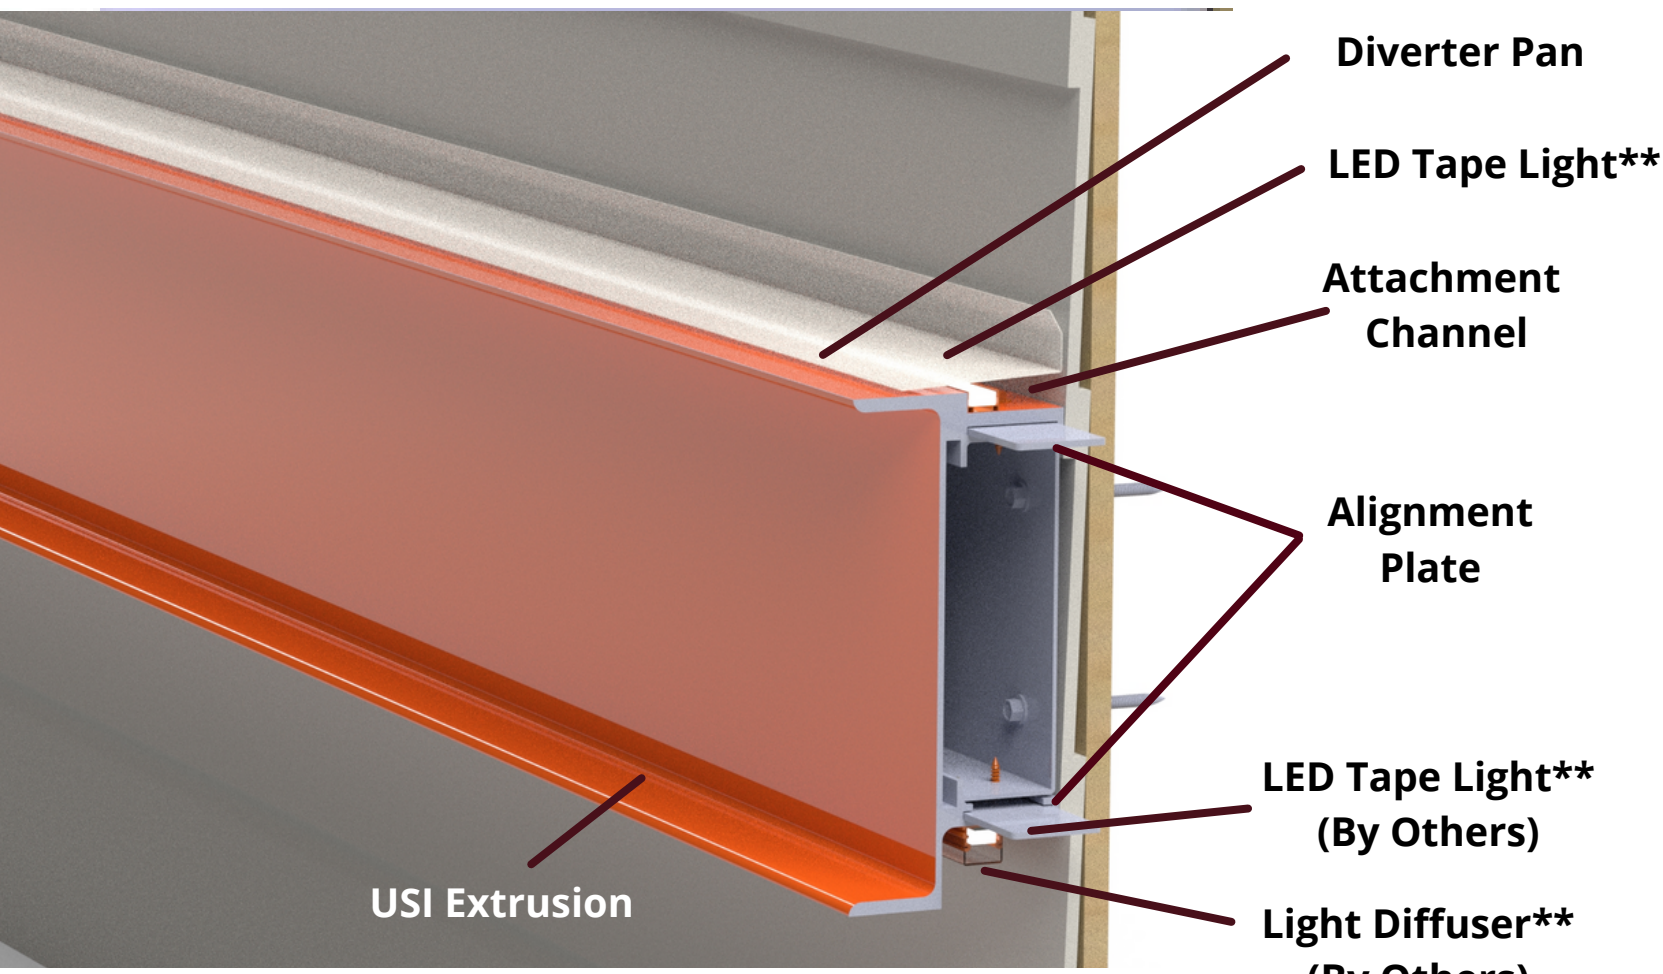

Orange Building Bands	\$50/ Linear Ft
Corners (Inside & Outside)	\$90
Left & Right Attachment Plates	\$45

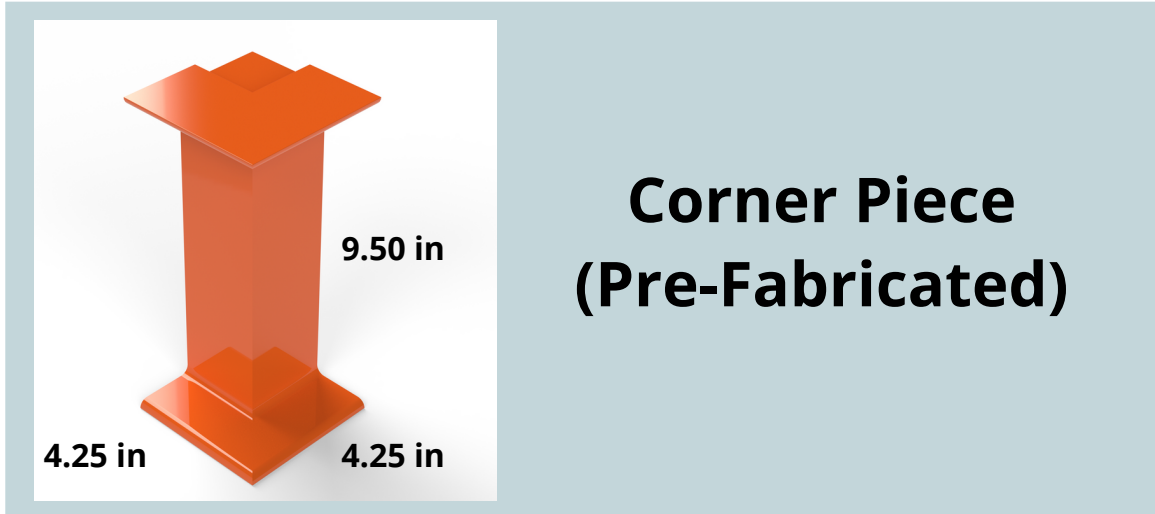

**Corner Piece
(Pre-Fabricated)**

BUILDING CANOPIES



- Turnbuckles required
- 3'x 6" Projection (Dunkin' Standard)
- Comes fully assembled w/ 3" downlights
- All hardware provided
- Can be installed in all building types
- The width will vary by location
- Requires 2x blocking

*Standard \$250 design fee, per project

8'W x 3'6"D x 10"H (C-Channel) w/2 LED downlights & 2 turnbuckles	
6'W x 3'6"D x 10"H (C-Channel) w/ 1 LED downlight & 2 turnbuckles	
Custom Width x 3'6"D	



Pre-Fabricated Building Canopy

NOTE: Architectural drawings must be provided in order to determine the quantity. When complete, please email this form and the site plans to dunkin@unistructures.com