



Submittal Spec Sheet

Dynamically Generated

Series: CNY

Date: 3/4/2023 G

Project: _____

Group/Type: _____

Qty: 0

CNY LED Canopy

LED Canopy Luminaire



Product Submittal Description:

CNY, LED, Package 2, 4000K, 120-277V, Dark bronze finish



The product images shown are for illustration purposes only and may not be an exact representation of the product.

[IES Files](#) [BIM Models](#) [Full Spec Sheet](#)

Product Webpage: www.acuitybrands.com/products/detail/854385

Warranty: www.acuitybrands.com/support/warranty/terms-and-conditions

Model #: CNY LED P2 40K MVOLT DDB ✓

Series*		Lamp Type*		LED Configuration*		Correlated Color Temperature*	
CNY	CNY	LED	LED	P1	Package 1	40K	4000K
				P2	Package 2	50K	5000K

This is a dynamic specification sheet that is based on certain selections made by the user. All results generated are for informational purposes only. The user should validate the results with its agency sales representative to determine whether the product has been configured correctly before ordering. Acuity Brands Lighting is not responsible for any loss resulting from product configuration errors.

Not all versions of the product are available with all options.

Specifications subject to change without notice.

Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

See the full specification sheet at the product page link above for full product information and detailed ordering information.

Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.

Visit: <http://www.acuitybrandslighting.com/library/documents/specsheets/acrylic-polycarbonate-compatibility.pdf> for Acrylic-Polycarbonate Compatibility table for suitable uses.

All trademarks referenced are property of their respective owners.



One Lithonia Way Conyers, GA 30012 • Phone: 800-705-7378 • www.acuitybrands.com

© 2023 Acuity Brands Lighting, Inc. All rights reserved.

Created Date: 3/4/2023 2:31 PM

Page 1 of 1

CSVT LED Vapor Tight

Vapor Tight LED Fixture



Product Submittal Description:

Contractor Select LED Vaportight, 48IN, Switchable Lumens - 3000LM, 4000LM and 5000LM, 120V-277V, 4000K, 80 color rendering index



The product images shown are for illustration purposes only and may not be an exact representation of the product.

[IES Files](#)

[BIM Models](#)

[Full Spec Sheet](#)

Product Webpage: www.acuitybrands.com/products/detail/1460144

Warranty: www.acuitybrands.com/support/warranty/terms-and-conditions

Model #: CSVT L48 ALO3 MVOLT 40K 80CRI (Incomplete)

Series*		Fixture Length		Lumen Package			
CSVT	Contractor Select LED Vaporlight	L48	48IN	1000LM	10,000LM	ALD4	Switchable Lumens - 6000LM, 8000LM and 10000LM
		L96	96IN	12000LM	12,000LM		
				3000LM	3,000LM		
				4000LM	4,000LM		
				5000LM	5,000LM		
				6000LM	6,000LM		
				8000LM	8,000LM		
				ALO3	Switchable Lumens - 3000LM, 4000LM and 5000LM		
Voltage		Color Temperature		CRI		Battery Pack	
120	120V	35K	3500K	80CRI	80 color rendering index	IETWCP	IOTA 7W Constant Power battery pack
347	347V	40K	4000K			IETWCPHE	IOTA 7W Constant Power battery pack
MVOLT	120V-277V	50K	5000K				
		SWW3	Switchable CCT- 3500K, 4000K and 5000K				
Cordsets		Latches		Verbiage 1			
CPSBW	6FT white damp location cord with straight blade plug (voltage matches fixture)	STSL	Stainless steel latches	LATCH	Latch		



D-Series Size 1 LED Area Luminaire



d[®]series

Catalog
Number

Notes

Type

P1

(R) the factory or in service (R) page to see all interactive events



Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Specifications

EPA:	0.69 ft ² (0.06 m ²)
Length:	32.71" (83.1 cm)
Width:	14.26" (36.2 cm)
Height H1:	7.88" (20.0 cm)
Height H2:	2.73" (6.9 cm)
Weight:	34 lbs (15.4 kg)

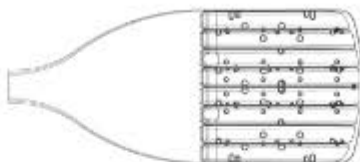

Ordering Information

DSX1 LED						
Series	LEDs	Color temperature ¹	Color Rendering Index ²	Distribution	Voltage	Mounting
DSX1 LED	Forward optics P1 P6 P2 P7 P3 P8 P4 P9 PS Rotated optics P10 ¹ P12 ¹ P11 ¹ P13 ¹	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare ³ T4M Type IV medium T4LG Type IV low glare ³ TFTM Forward throw medium	IVOLT (120V-277V) ⁴ HVOLT (347V-480V) ^{5,6} XVOLT (277V - 480V) ^{7,8}	Shipped included SPA Square pole mounting (#8 drilling) RPA Round pole mounting (#8 drilling) SPA5 Square pole mounting #5 drilling ⁹ RPA5 Round pole mounting #5 drilling ⁹ SPA8N Square narrow pole mounting #8 drilling WBA Wall bracket ¹⁰

Control options	Other options	Finish required
Shipped installed NLTAIR2 PIRHN nLight AIR get 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. ^{11, 12, 20, 21} PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. ^{13, 20, 21} PER NEMA twist-lock receptacle only (controls ordered separately) ¹⁴ PERS Five-pin receptacle only (controls ordered separately) ^{14, 15}	PER7 Seven-pin receptacle only (controls ordered separately) ^{16, 21} FAO Field adjustable output ^{16, 21} BL30 Bi-level switched dimming, 30% ^{16, 21} BL50 Bi-level switched dimming, 50% ^{16, 21} DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷ DS Dual switching ^{18, 19, 21} SPD20KV 20KV surge protection HS Houseside shield (black finish standard) ²¹ L90 Left rotated optics ¹ R90 Right rotated optics ¹ CCE Coastal Construction ²³ Shipped separately EGSR External Glare Shield (reversible, field install required, matches housing finish) BSD8 Bird Spikes (field install required)	DOBXD Dark Bronze DBLXD Black DNAXD Natural Aluminum DWHXD White DOBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



D-Series Size 1 LED Area Luminaire



Catalog
Number

Notes

Type
P2

Use the table key at the bottom of this page to see all table descriptions.



Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Specifications

EPA:	0.69 ft ² (0.06 m ²)
Length:	32.71" (83.1 cm)
Width:	14.26" (36.2 cm)
Height H1:	7.88" (20.0 cm)
Height H2:	2.73" (6.9 cm)
Weight:	34 lbs (15.4 kg)

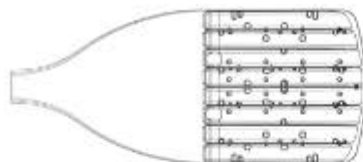

Ordering Information


DSX1 LED							
Series	LEDs	Color temperature ¹	Color Rendering Index ²	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics	(this section 70CRI only)		AFR Automotive front row	T5M Type V medium	MVOLT (120V-277V) ⁴	Shipped included
	P1 P6	30K 3000K	70CRI	T1S Type I short	T5LG Type V low glare	HVOLT (347V-480V) ^{5,6}	SPA Square pole mounting (#8 drilling)
	P2 P7	40K 4000K	70CRI	T2M Type II medium	T5W Type V wide	XVOLT (277V-480V) ^{7,8}	RPA Round pole mounting (#8 drilling)
	P3 P8	50K 5000K	70CRI	T3M Type III medium	BLC3 Type II backlight control ⁹		SPA5 Square pole mounting #5 drilling ⁹
	P4 P9			T3LG Type III low glare ³	BLC4 Type IV backlight control ³		RPA5 Round pole mounting #5 drilling ⁹
	P5	(this section 80CRI only, extended lead times apply)		T4M Type IV medium	LCCO Left corner cutoff ⁹		SPA8N Square narrow pole mounting #8 drilling
	Rotated optics			T4LG Type IV low glare ³	RCCO Right corner cutoff ⁹		WBA Wall bracket ¹⁰
	P10 ¹ P12 ¹	27K 2700K	80CRI	TFTM Forward throw medium			
	P11 ¹ P13 ¹	30K 3000K	80CRI				
		35K 3500K	80CRI				
		40K 4000K	80CRI				
		50K 5000K	80CRI				

Control options	Other options	Finish (required)
Shipped installed	Shipped installed	DOBXD Dark Bronze
NLTAIR2 PIRHN nLight AIR ger 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{11, 12, 20, 21}	SPD20KV 20KV surge protection	DBLXD Black
PIR High/Low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{13, 30, 23}	HS Houseside shield (black finish standard) ²⁴	DNAXD Natural Aluminum
PER NEMA twist-lock receptacle only (controls ordered separately) ¹⁶	L90 Left rotated optics ¹	DWHXD White
PERS Five-pin receptacle only (controls ordered separately) ^{14, 21}	R90 Right rotated optics ¹	DOBTXD Textured dark bronze
	CCE Coastal Construction ²⁸	DBLBXD Textured black
	Shipped separately	DNATXD Textured natural aluminum
	EGSR External Glare Shield (reversible, field install required, matches housing finish)	DWHGXD Textured white
	BSDB Bird Spikes (field install required)	



d[#]series

EPA:	0.69 ft ² (0.06 m ²)
Length:	32.71" (83.1 cm)
Width:	14.26" (36.2 cm)
Height H1:	7.88" (20.0 cm)
Height H2:	2.73" (6.9 cm)
Weight:	34 lbs (15.4 kg)

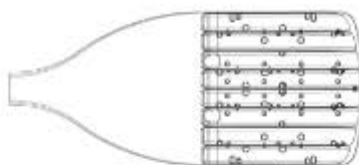

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

DSX1 LED									
Series	LEDs	Color temperature ²	Color Rendering Index ³	Distribution		Voltage	Mounting		
DSX1 LED	Forward optics		(this section 70CRI only)	AFR	Automotive front row	TSM	Type V medium	Shipped included SPA Square pole mounting #8 drilling RPA Round pole mounting #8 drilling SPA5 Square pole mounting #5 drilling ⁵ RPA5 Round pole mounting #5 drilling ⁵ SPA8N Square narrow pole mounting #8 drilling WBA Wall bracket ¹⁹	
	P1	P6	30K 3000K	70CRI	T1S	Type I short	TSLG		Type V low glare
	P2	P7	40K 4000K	70CRI	T2M	Type II medium	TSW		Type V wide
	P3	P8	50K 5000K	70CRI	T3M	Type III medium	BLC3		Type II backlight control ³
	P4	P9	(this section 80CRI only, extended lead times apply)		T3LG	Type III low glare ³	BLC4		Type IV backlight control ³
	PS				T4M	Type IV medium	LCCO		Left corner cutoff ³
	Rotated optics				T4LG	Type IV low glare ³	RCCO		Right corner cutoff ³
	P10 ¹	P12 ¹	27K 2700K	80CRI	TFTM	Forward throw medium			
			30K 3000K	80CRI					
			35K 3500K	80CRI					
			40K 4000K	80CRI					
			50K 5000K	80CRI					
							MVOLT		(120V-277V) ⁴
						HVOLT	(347V-480V) ¹⁶		
						XVOLT	(277V - 480V) ¹⁶		

Control options		Other options		Finish (required)	
Shipped installed		Shipped installed		DOBXD	Dark Bronze
NLTAIR2 PIRHN	nLight AIR ger 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{11, 12, 20, 21}	PER7	Seven-pin receptacle only (controls ordered separately) ^{16, 21}	DBLXD	Black
PIR	High/Amb, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc ^{13, 20, 21}	FAO	Field adjustable output ^{15, 21}	DNAXD	Natural Aluminum
PER	NEMA twist-lock receptacle only (controls ordered separately) ¹⁶	BL30	Bi-level switched dimming, 30% ^{16, 21}	DWHXD	White
PER5	Five-pin receptacle only (controls ordered separately) ^{14, 21}	BL50	Bi-level switched dimming, 50% ^{16, 21}	DBBTXD	Textured dark bronze
		DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷	DBL BXD	Textured black
		DS	Dual switching ^{18, 19, 21}	DNATXD	Textured natural aluminum
				DWHGXD	Textured white
			Shipped separately		
			EGSR	External Glare Shield (reversible, field install required, matches housing finish)	
			BSDB	Bird Spikes (field install required)	



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2011-2023 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 01/24/23
Page 1 of 10

FEATURES & SPECIFICATIONS

INTENDED USE

Provides years of maintenance-free illumination for outdoor use in residential & commercial applications. Ideal for applications such as lighting walkways and stairways for safety and security.

CONSTRUCTION

Cast-aluminum housing with corrosion-resistant paint in either dark bronze or white finish.

ADA compliant.

OPTICS

4000K CCT LEDs.

Polycarbonate lens protects the LED from moisture, dirt and other contaminants.

LUMEN MAINTENANCE: The LED will deliver 70% of its initial lumens at 50,000 hour average LED life. See Lighting Facts label on page 2 for performance details.

ELECTRICAL

MOVOLT driver operates on any line voltage from 120-277V

Operating temperature -30°C to 40°C.

1KV surge protection standard.

INSTALLATION

Surface mounts to universal junction box (provided by others).

LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations.

Tested in accordance with IESNA LM-79 and LM-80 standards.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

www.aclitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number	
Notes	
Type	D

Outdoor General Purpose


OLLWD & OLLWU

LED WALL CYLINDER LIGHT



Specifications

All dimensions are inches (centimeters)

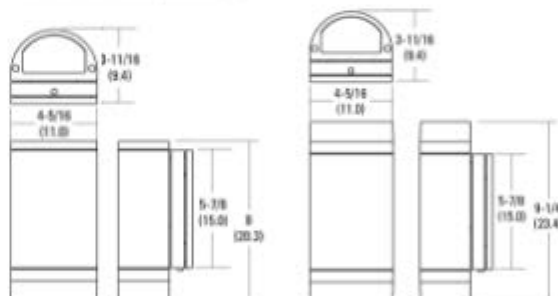

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: OLLWD LED P1 40K MOVOLT DDB

Series	Performance Package	Color temperature (CCT)	Voltage	Finish
OLLWD LED Downlight OLLWU LED Up & downlight	P1	40K 4000K	MOVOLT 120V-277V 120V ¹	DDB Dark bronze WH White ²

Notes

1. Only available with OLLWU and in DDB.
2. Only available with OLLWU.



Submittal Spec Sheet

Dynamically Generated

Series: WDGE1

Date: 3/4/2023 F

Project:

Group/Type:

Qty: 0

WDGE1 LED Wall Mount

Architectural Wall Luminaire Size 1 – up to 2,000 lumens



Product Submittal Description:

Wall pack, LED, Package 2, 4000K, 80CRI, Visual wide, 120-277V,
Surface mount, Dark bronze finish, super durable



The product images shown are for illustration purposes only
and may not be an exact representation of the product.

[IES Files](#) [BIM Models](#) [Full Spec Sheet](#)

Product Webpage: www.acuitybrands.com/products/detail/1008034

Warranty: www.acuitybrands.com/support/warranty/terms-and-conditions

Model #: WDGE1 LED P2 40K 80CRI VW MVOLT SRM DDBXD ✓

Series*		Lamp Type*		LED Configuration*		Correlated Color Temperature*	
WDGE1	Wall pack	LED	LED	P1	Package 1	27K	2700K
				P2	Package 2	30K	3000K
						35K	3500K
						40K	4000K
						50K	5000K
Color Rendering Index*		Distribution*		Voltage*		Mounting*	
80CRI	80CRI	VF	Visual forward throw	347	347V	ICW	Indirect Canopy/Ceiling Washer
90CRI	90CRI	VW	Visual wide	MVOLT	120-277V	PBBW	Premium Backbox for IWS LED 2016 design
						SRM	Surface mount
Mounting 2		Driver Configuration		Dimming Wires		Photocell	
AWS	Architectural Wall Spacer	DS	Dual switching: Provides 5050 luminaire operation via two independent drivers on two separate circuits	DMG	0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)	PE	Photocell, butyltype

