


ngineer stamped structural cold-formed metal aming and/or fire resistant studs, sheathed in istant plywood. Structure will need to be ndent of Temp Kitchen trailers. Walls ed white both sides. EPDM or TPO roofing apped over edges of porch roof 6" or as per nanufacturer instructions. Typical at deck erimeter of Temporary Kitchens. Walls on both ides @ ramps. Rough openings at steps. Valls fastened to asphalt parking lot by natever means necessary to obtain structural agineer sign off. Assume top of asphalt to nished floor will be 4'. Deck and ramps by thers. Unsure what modifications can be made deck to allow for posts next to building, ssume as minimal modification. - Nab-LO, 2025.06.09

EXISTING

CANOPY

DOOR TYPES



- 16 GA KNOCKDOWN FRAME -

FRAME TYPE A* **FRAME TYPE**

ABBREVATIONS		
ABBREVATIONS	DESCRIPTION	
AL	ALUMINUM	
GL	GLAZING	
НМ	HOLLOW METAL	
IHM	INSULATED HOLLOW METAL	
IPSF	INSULATED PRESSED STEEL FRAME	
ML	METAL	
PA	PAINT	
PO	PRIMER ONLY	
PP	PUSH/PULL	
PRE	PREFINISHED	
PREM	PREMANUFACTURED	
PSF	PRESS STEEL FRAME	
SS	STAINLESS STEEL	
W	WOOD	
WF	WIDE-FLANGE	

HOLLOW METAL FRAME CRITERIA:

GAGE: 16, GALVANEALED LHR/ RHR SWING FIRE LABELING: NONE SPECIFIED CONSTRUCTION TYPE: AFTER DRYWALL KNOCKDOWN WRAPAF JAMB DEPTH: 9" WITH 8" THROAT - DEPTH AS SPECIFIED REINFORCED FOR SVR EXIT DEVICE STRIKES AND DOOR CLOS TOTAL FLAME COUNT: 1 EACH

EXTERIOR HOLLOW METAL DOOR CRITERIA:

FIRE LABELING: NONE SPECIFIED SIZE: VARIES
CONSTRUCTION: POLYSTYRENE FOAM INSULATED

PREPARED FOR SVR EXIT DEVICES WITH LEVER TRIMS. REINFORCED FOR DOOR CLOSER EXTERIOR HOLLOW METAL DOOR LEAF COUNT: 2 EACH U-FACTOR: 0.37

FINISH HARDWARE:

GAGE: 18 GALVANEALED

ONE LOT OF FINISH HARDWARE INCLUDING: 6 EACH - HINGES, BALL BEARING WITH NON-REMOVABLE PINS 2 EACH - HAGER SURFACE VERTICAL ROD (SVR) EXIST DEVICE, GRADE 1 W/ LOCKING LEVER TRIMS


2 EACH - HAGER DOOR CLOSER, HEAVY DUTY 1 EACH - BRUSH PERIMETER WEATHER-STRIPPING KIT

1 EACH - BRUSH MEETING STILE GASKET SET 2 EACH - BRUSH DOOR BOTTOM SWEEPS

1 EACH - ALUMINUM THRESHOLD 1 EACH - NESC9800 RIGID ENTRANCE LOCKSET, ANTI-MICROBIAL COATING

GRAPHIC SYMBOLS LEGEND

D101 DOOR NUMBER

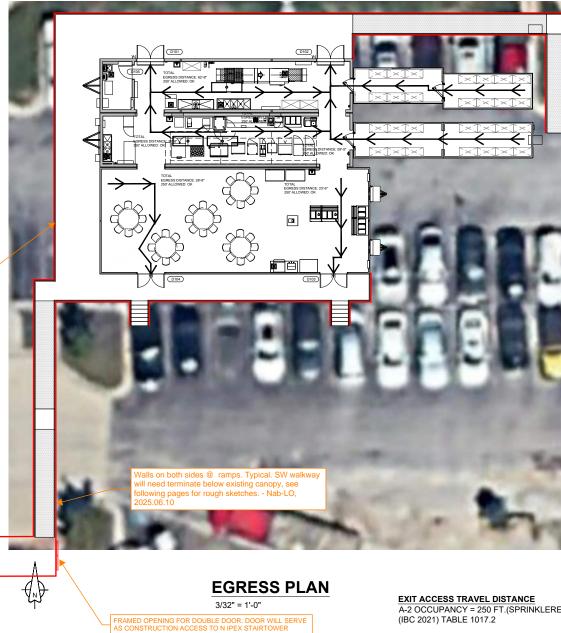

A-2 OCCUPANCY = 250 FT.(SPRINKLERED)

NOTE:
ACCESSIBLE RAMPS, PLATFORMS, STAIRS, HANDRAILS AND GENERAL ACCESS TO THE BUILDING BY GC ON SITE.

KITCHENS TO GO

P

1:04:05

4/11/2025

We Keep You Cooking!"

131 WEST JEFFERSON AVE. SUITE 223 NAPERVILLE, IL. 60540 630-355-1660 www.kitchenstogo.com

RANSOM

MCGRATH RENTCORP. DBA KITCHENS TO GO BY MOBILE MODULAR DBA MOBILE MANAGEMENT CORP. 9876 WEST OLD US 30 ETNA GREEN, IN 46524

FDBY LEE'S SUMMIT MEDICAL CENTER

2100 SE Blue Pkwy Lee's Summit. MO 64063

EV.	DATE	DES	CRIPTION	NAM
DI	ELT.	A -	REV	-
	n By: MMS	Approved HB/RR	Ву:	
L24-050		M820, M	BER 821, M681, M6	82
1x17 SCALE: 2x34 SCALE:				

Door Schedule & Egress Plan


Sheet

ഗ

₹

SUBMIT

G-003

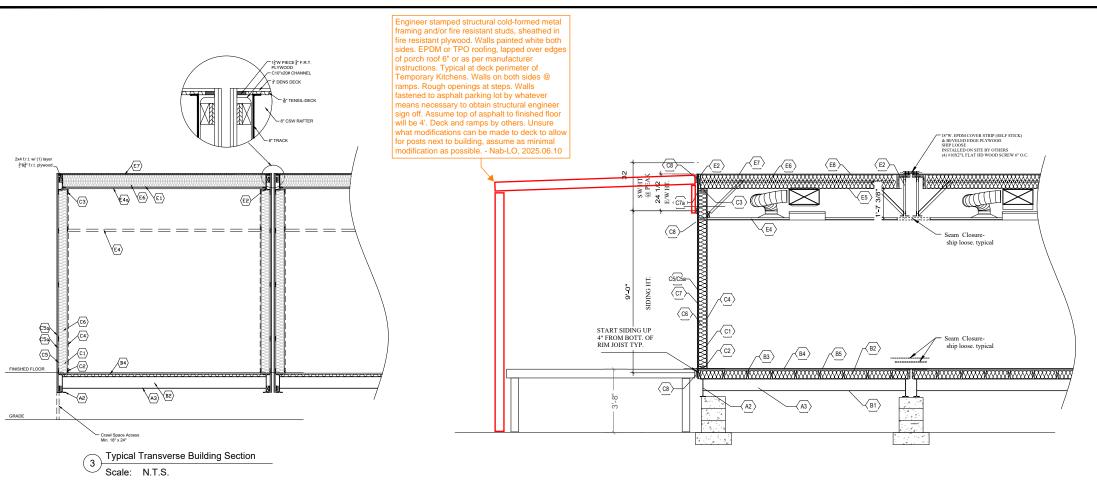


KTG MODULAR UNIT TYPICAL TYPE 2A CONSTRUCTION (SEE KEYNOTES)

	FRAME		
A2	MAIN BEAM:	W12" x 22# I-BEAM (ROLLED)	
A3	X-MEMBER:	W8" x 13# @48" O.C.	

	FLOOR ASSEMBLY		
B1	BOTTOM BOARD:	30 GAUGE GALVANIZED	
B2	INSULATION:	R-19 KRAFT FACED FIBERGLASS BATT	
B3	JOISTS:	2 x 6 (#2 SPF) AT 16" O.C. NOMINAL	
B4	DECKING:	5/8" T&G CDX PLYWOOD (RATED 40/20)	
		UNDER 5/8" SQ. EDGE UNDERLAYMENT PLYWOOD (RATED 40/20)	
B5	COVERING:	SEE FINISH SCHEDULE	

EXTERIOR WALL ASSEMBLY		
C1	STUDS	2 x 6 (SPF STUD) @ 16" O.C
C2	BOTTOM PLATE	(1) 2 x 6 (#3 SPF)
C3	TOP PLATE	(2) 2x6 (#3 SPF) RAFTER DIRECTLY OVER STUD
C4	INT. COVERING	.090 FRP LAMINATED TO 5/8" UNIFINISHED GYPSUM BOARD
C5	SHEATHING	5/8" DENSGLASS (TYPE-X) INSTALLED OVER FRAMING
C5a	SHEATHING	1/2" F.R.T. EXTERIOR GRADE PLYWOOD - B-C or B-D (RATED 32/16) INSTALLED OVER 5/8" DENS-GLASS
C5b	SHEATHING	AIR INFILTRATION BARRIER (TYVEK OR EQUAL) BETWEEN DENSGLASS AND PLYWOOD
C6	INSULATION	R-19 OR R-21 KRAFT FACED FIBERGLASS BATT

ROOF ASSEMBLY		
E1	RAFTERS:	2 x 10 (#2 SPF), UNTAPERED
E3	SIDE WALL BEAM:	C10"x 20 # CHANNEL
E4	CEILING	SUSPENDED (T-GRID) W/ 2' X 4' LAY-IN TILE
E5	TRUE CEILING	(1) LAYER 5/8" TYPE "X" UNFINISHED GYP. B'D
E6	INSULATION	R-30 KRAFT FACED (R-19 OVER R-11)
E7	SHEATHING:	5/8" EXTERIOR GRADE PLYWOOD - B-C or B-D (RATED 40/20)
E8	ROOFING	SEE FINISH SCHEDULE
E11	VENTS	AURA VENT SYSTEM



KTG MODULAR UNIT TYPICAL TYPE 5B CONSTRUCTION
(SEE KEYNOTES)

2	MAIN BEAM:	W12" x 22# I-BEAM (ROLLED)
43	X-MEMBER:	W8" x 13# @48" O.C.
		FLOOR ASSEMBLY
B1	BOTTOM BOARD:	30 GAUGE GALVANIZED
B2	INSULATION:	R-19 KRAFT FACED FIBERGLASS BATT
B3	JOISTS:	2 x 6 (#2 SPF) AT 16" O.C. NOMINAL
B4	DECKING:	5/8" T&G CDX PLYWOOD (RATED 40/20)
		UNDER 5/8" SQ. EDGE UNDERLAYMENT PLYWOOD (RATED 40/20)
	COVERING:	SEE FINISH SCHEDULE

		EXTERIOR WALL ASSEMBLY	
	C1	STUDS	2 x 6 (SPF STUD) @ 16" O.C
	C2	BOTTOM PLATE	(1) 2 x 6 (#3 SPF)
	C3	TOP PLATE	(2) 2x6 (#3 SPF) RAFTER DIRECTLY OVER STUD
	C4	INT. COVERING	.090 FRP LAMINATED TO 5/8" UNIFINISHED GYPSUM BOARD
	C5	SHEATHING	5/8" DENSGLASS (TYPE-X) INSTALLED OVER FRAMING
	C5a	SHEATHING	1/2" F.R.T. EXTERIOR GRADE PLYWOOD - B-C or B-D (RATED 32/16) INSTALLED OVER 5/8" DENS-GLASS
	C5b	SHEATHING	AIR INFILTRATION BARRIER (TYVEK OR EQUAL)
			BETWEEN DENSGLASS AND PLYWOOD
	C6	INSULATION	R-19 OR R-21 KRAFT FACED FIBERGLASS BATT

	ROOF ASSEMBLY		
E1	RAFTERS:	2 x 10 (#2 SPF), UNTAPERED	
E3	SIDE WALL BEAM:	C10"x 20 # CHANNEL	
E4	CEILING	SUSPENDED (T-GRID) W/ 2' X 4' LAY-IN TILE	
E5	TRUE CEILING	(1) LAYER 5/8" TYPE "X" UNFINISHED GYP. B'D	
E6	INSULATION	R-30 KRAFT FACED (R-19 OVER R-11)	
E7	SHEATHING:	5/8" EXTERIOR GRADE PLYWOOD - B-C or B-D (RATED 40/20)	
E8	ROOFING	SEE FINISH SCHEDULE	

KITCHENS TO GO* by mobile moduler

P

4/11/2025 1:04:06

We Keep You Cooking!"

131 WEST JEFFERSON AVE. SUITE 223 NAPERVILLE, IL. 60540 630-355-1660 www.kitchenstogo.com


THE DESIGN AND DETAILS DISCLOSED HEREIN ARE THE EXCLUSIVE PROPERTY OF VITCHENS TO GO BY MOBILE MODULAR, AND SHALL NOT BE COPIED OR REPRODUI N WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF KITCHENS TO GO BY MOBILE MODULAR.



MCGRATH RENTCORP.
DBA KITCHENS TO GO
BY MOBILE MODULAR
DBA MOBILE MANAGEMENT CORP.
9876 WEST OLD US 30
ETNA GREEN, IN 46524

FDBY LEE'S SUMMIT MEDICAL CENTER

2100 SE Blue Pkwy Lee's Summit, MO 64063



11x17 SCALE: N/A 22x34 SCALE: N/A Typical 2A & 5B Construction Types Site Plan

Sheet

ഗ

Z

SUBMITT

G-004

