



Job Name:	
Tag#	



Submittal Data Sheet

FTX30NVJU / RK30NMVJU

2.5-Ton Wall Mounted Cooling Only System

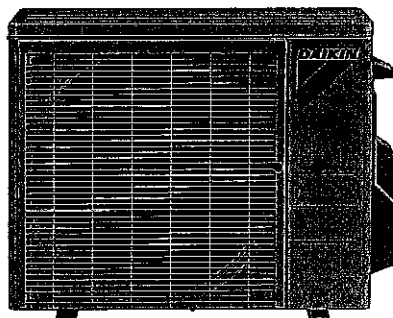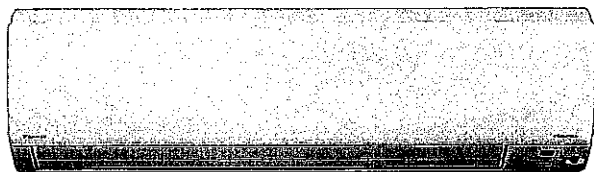

Efficiency

Cooling	
SEER	13.0
EER	10.5

Performance

Cooling (35°F DB)	
Rated Capacity (ton)	2.50 (2.50)
Capacity @ 45°F	2.15 (2.15)
Standard Operating Range	45°F - 95°F
Extended Operating Range	20°F - 115°F

Rated Cooling Conditions: Indoor: 80°F DB/67°F WB
Outdoor: 95°F DB/75°F WB

*With field settings and wind baffle

Complete warranty details available from your local dealer or at www.daikincomfort.com. Warranty registration not required to receive the 10-Year parts limited warranty for residential or commercial installations.

Indoor Specifications

Airflow Rate (cfm)	Cooling	
	High	Low
	300	200
Sound (dBA) H / M / L / SL	56 / 52 / 48 / 44	
Dimensions (H x W x D) (in)	13-3/8 x 47-1/4 x 10-3/16	
Weight (Lbs)	38	

Electrical

	208/60/1	230/60/1
System MCA	17	17
System MFA	20	20
Compressor RLA	16.25	16.25
Outdoor fan motor FLA	.62	.62
Outdoor fan motor W	93	93
Indoor fan motor FLA	.37	.37
Indoor fan motor W	64	64

MFA: Max. fuse amps MCA: Min. circuit amps (A) FLA: Full load amps (A)
RLA: Rated load amps (A) W: Fan motor rated output (W)

Outdoor Specifications

Compressor	Hermetically Sealed Swing Type	
Refrigerant	R-410A	
Factory Charge (Lbs)	3.64	
Refrigerant Oil	PVE (FVC50K)	
Airflow Rate (cfm)	Cooling	
	High	Low
	300	200
Sound Pressure Level (dBA)	56	
Dimensions (H x W x D) (in)	28-15/16 x 34-1/4 x 12-5/8	
Weight (Lbs)	133	

Piping

Liquid (in)	1/4
Gas (in)	5/8
Drain (in)	5/8
Max. Interunit Piping Length (ft)	98.4
Max. Interunit Height Difference (ft)	65.625
Chargeless (ft)	32.8
Additional Charge of Refrigerant (oz/ft)	.32


Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 1 of 4

RK30NMVJU Dimensional Data

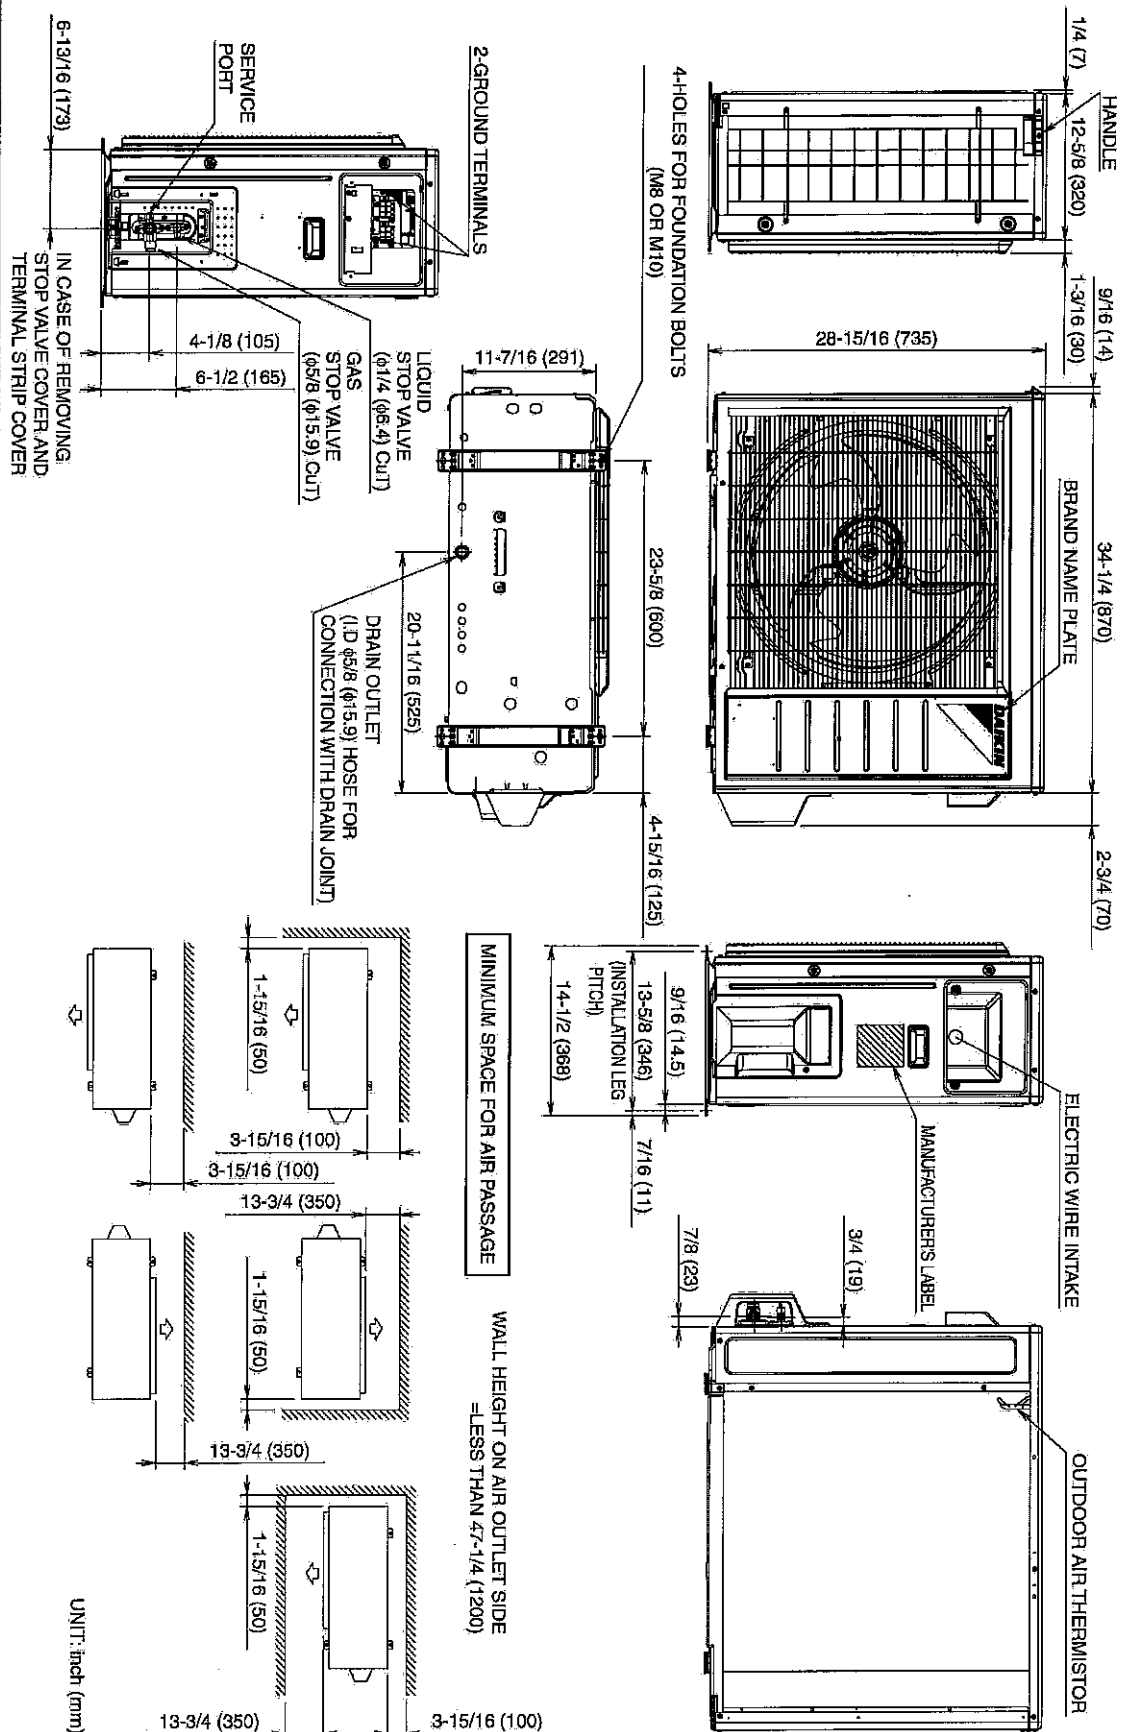

Daikin North America LLC 5151 San Felipe, Suite 500 Houston, TX 77056

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Revision Date: September 2018

Page 3 of 4

DAIKIN

Page 2 of 4