

Background

The proposed Winterset Cedar Creek single-family residential subdivision is to be located in the southwest quarter of the southwest quarter of Section 2, Township 47 North, Range 32 West, Lee's Summit, Jackson County, Missouri. The proposed development would be adjacent to Winterset Park and consist of an extension of SW Winter Road. The proposed development area is 3.69 acres. The proposed improvements would consist of five lots, a road extension with terminating cul-de-sac in addition to associated utility infrastructure. The property is currently wooded and does not contain any onsite detention systems, BMPs nor water bodies. Runoff from the north side of the property is tributary to Cedar Creek and runoff from the south side of the property is tributary to an unnamed branch of Cedar Creek. The confluence of Cedar Creek and Tributary C1 to Cedar Creek constitutes the Point of Interest (POI) for the subject project. The POI is adjacent to the property and represents the place where all contributing runoff from the project may be accounted. The POI is also the point at which the project sub-basins may be compared to the rest of the Cedar Creek Watershed. Exhibit A at the end of the report contains an aerial view of the existing project site. The proposed Site Plan may be found in Exhibit B. The overall Watershed Map for the proposed project may be found in Exhibit C.

Purpose

The purpose of the memorandum is to determine if any negative impacts due to storm water runoff from the proposed improvements are anticipated downstream due to the 2, 10, 100 and 1.37" water quality storm.

Scope

Determine Proximity of Property to Cedar Creek.

Determine Location of Property within the Overall Cedar Creek Watershed.

Determine the Pre verse Post Development Peak Flows for the 2, 10, 100 and Water Quality Storms at the POI.

Methodology

The memorandum conforms to KC Metro Area APWA Section 5600 requirements in addition to all other applicable codes and requirements of the City of Lee's Summit, Missouri.

FEMA Floodplain Determination

The property is located in an Area of Minimal Flood Hazard, Zone X, according to FEMA Firm Map Number 29095C0416G, effective January 20, 2017.

See Exhibit D for a FIRMette which includes the proposed project site. Note the large regulatory floodplain and floodway present on both Cedar Creek and Tributary C1 to Cedar Creek adjacent to the proposed project site.

NRCS Soil Classification

Soil classifications are published by the United States Department of Agriculture/National Resources Conservation Service (USDA/NRCS) and made available via their website. Data was taken from the web soil survey for Jackson County, Missouri, Version 22, May 29, 2020. The existing site contains one major soil type:



10082 Snead-Rock Outcrop Complex, 14 to 30 percent slopes Hydrologic Soils Group (HSG): Type D

See Exhibit E for a detailed soils report of the proposed project site.

Sub-basin/Watershed Analysis

The overall watershed map for the project was developed to determine both the proximity of the project to the receiving stream and the location of the project in the overall watershed. See Exhibit C for a depiction of the Overall Watershed Map for the project. The overall watershed is approximately 6,290 +/- acres with the majority of the watershed being developed. The subject property encompasses 3.69 acres and accounts for approximately 0.06% of the overall watershed. The terrain consists of a Snead-Rock outcrop complex with steep slopes and high runoff rates per the NRCS soils report.

The proposed development is located adjacent to Cedar Creek on the north and an unnamed branch tributary to Tributary C1 to Cedar Creek on the south. The proposed development is located approximately 430' south of Cedar Creek. The south sub-basin of the project extends 6,000+ feet south from Cedar Creek and includes all lands contributing runoff to Tributary C1 to Cedar Creek. The development is located in the lower 1/10th of the sub-basin and is located adjacent to Cedar Creek. The following table summarizes the results of the Existing Conditions Analysis for the proposed project sub-basin.

Table 1 - Existing Conditions Sub-basin & Hydrologic Data at the POI

Sub-basin	POI	Area (ac.)	CN	Tc (min.)	Q(1.37") (cfs)	Q2 (cfs)	Q10 (cfs)	Q100 (cfs)
Existing	Confluence	5042	85	242.0	319.42	1999.69	3560.08	5916.63

The following table summarizes the results of the Proposed Conditions Analysis. A complete Hydraflow Report may be found in Exhibit F which contains both Existing and Proposed Hydrologic Data.

Table 2 - Proposed Conditions Sub-basin & Hydrologic Data at the POI

Sub-basin	POI	Area	CN	Tc	Q(1.37")	Q2	Q10	Q100
		(ac.)		(min.)	(cfs)	(cfs)	(cfs)	(cfs)
Prop. Project	Confluence	3.69	82	16.94	1.031	7.97	14.50	24.35
Prop.	Confluence	5038.31	85	242.0	319.19	1998.23	3557.48	5912.31
Remainder								
Prop.	Confluence	5042			319.27	1998.59	3558.09	5913.27
Combined								

As discussed, the data shown in the above tables confirms that the development of the subject project due to its location in the watershed will reduce the overall peak flow rates at the POI for



all regulatory storm events including the 1.37" water quality storm. The reduction in peak flow may be attributed to the time variance of contributing areas within the watershed.

Table 3 below provides a comparison of runoff data between Proposed and Existing Conditions for the Proposed Development.

Table 3 - Point of Interest Discharge Comparison

	Condition	Q1.37" (cfs)	Q2 (cfs)	Q10 (cfs)	Q100 (cfs)
	Proposed	319.27	1998.59	3558.09	5913.27
POI Confluence	Existing	319.42	1999.69	3560.08	5916.63
	Difference	-0.15	-1.10	-1.99	-3.36

As shown in the Table above all proposed peak flows will be attenuated below existing peak flows for all regulatory design storm events. Therefore the development and free release of runoff from this property will not create any negative downstream hydraulic impacts but will reduce the required carrying capacity of downstream elements providing increased freeboard. Due to the large size of the sub-basin and the minimal size of the proposed development the proposed peak flow generated during the water quality storm will not create deleterious conditions to downstream conveyance elements. Proposed peak flows will actually be reduced below existing with free release actually improving downstream channel conditions.

Conclusion

No further developments will be directly downstream and adjacent to Winterset Cedar Creek. Based on the size, geometry, soil characteristics and downstream position of the property in its sub-basin the free release of proposed peak flows will provide attenuation below existing conditions for all regulatory design storms including the 1.37" water quality storm. We recommend the free release of runoff from all stormwater events. The study is in conformance with all applicable City of Lee's Summit standards and criteria.

Should you have any questions related to the storm water memorandum please contact Matt Schlicht with Engineering Solutions.

Sincerely,

Matt Schlicht

Waiver Requests: KCAPWA Section 5608 Stormwater Detention and Retention






Exhibit A Project Aerial View








Exhibit B Proposed Site Plan

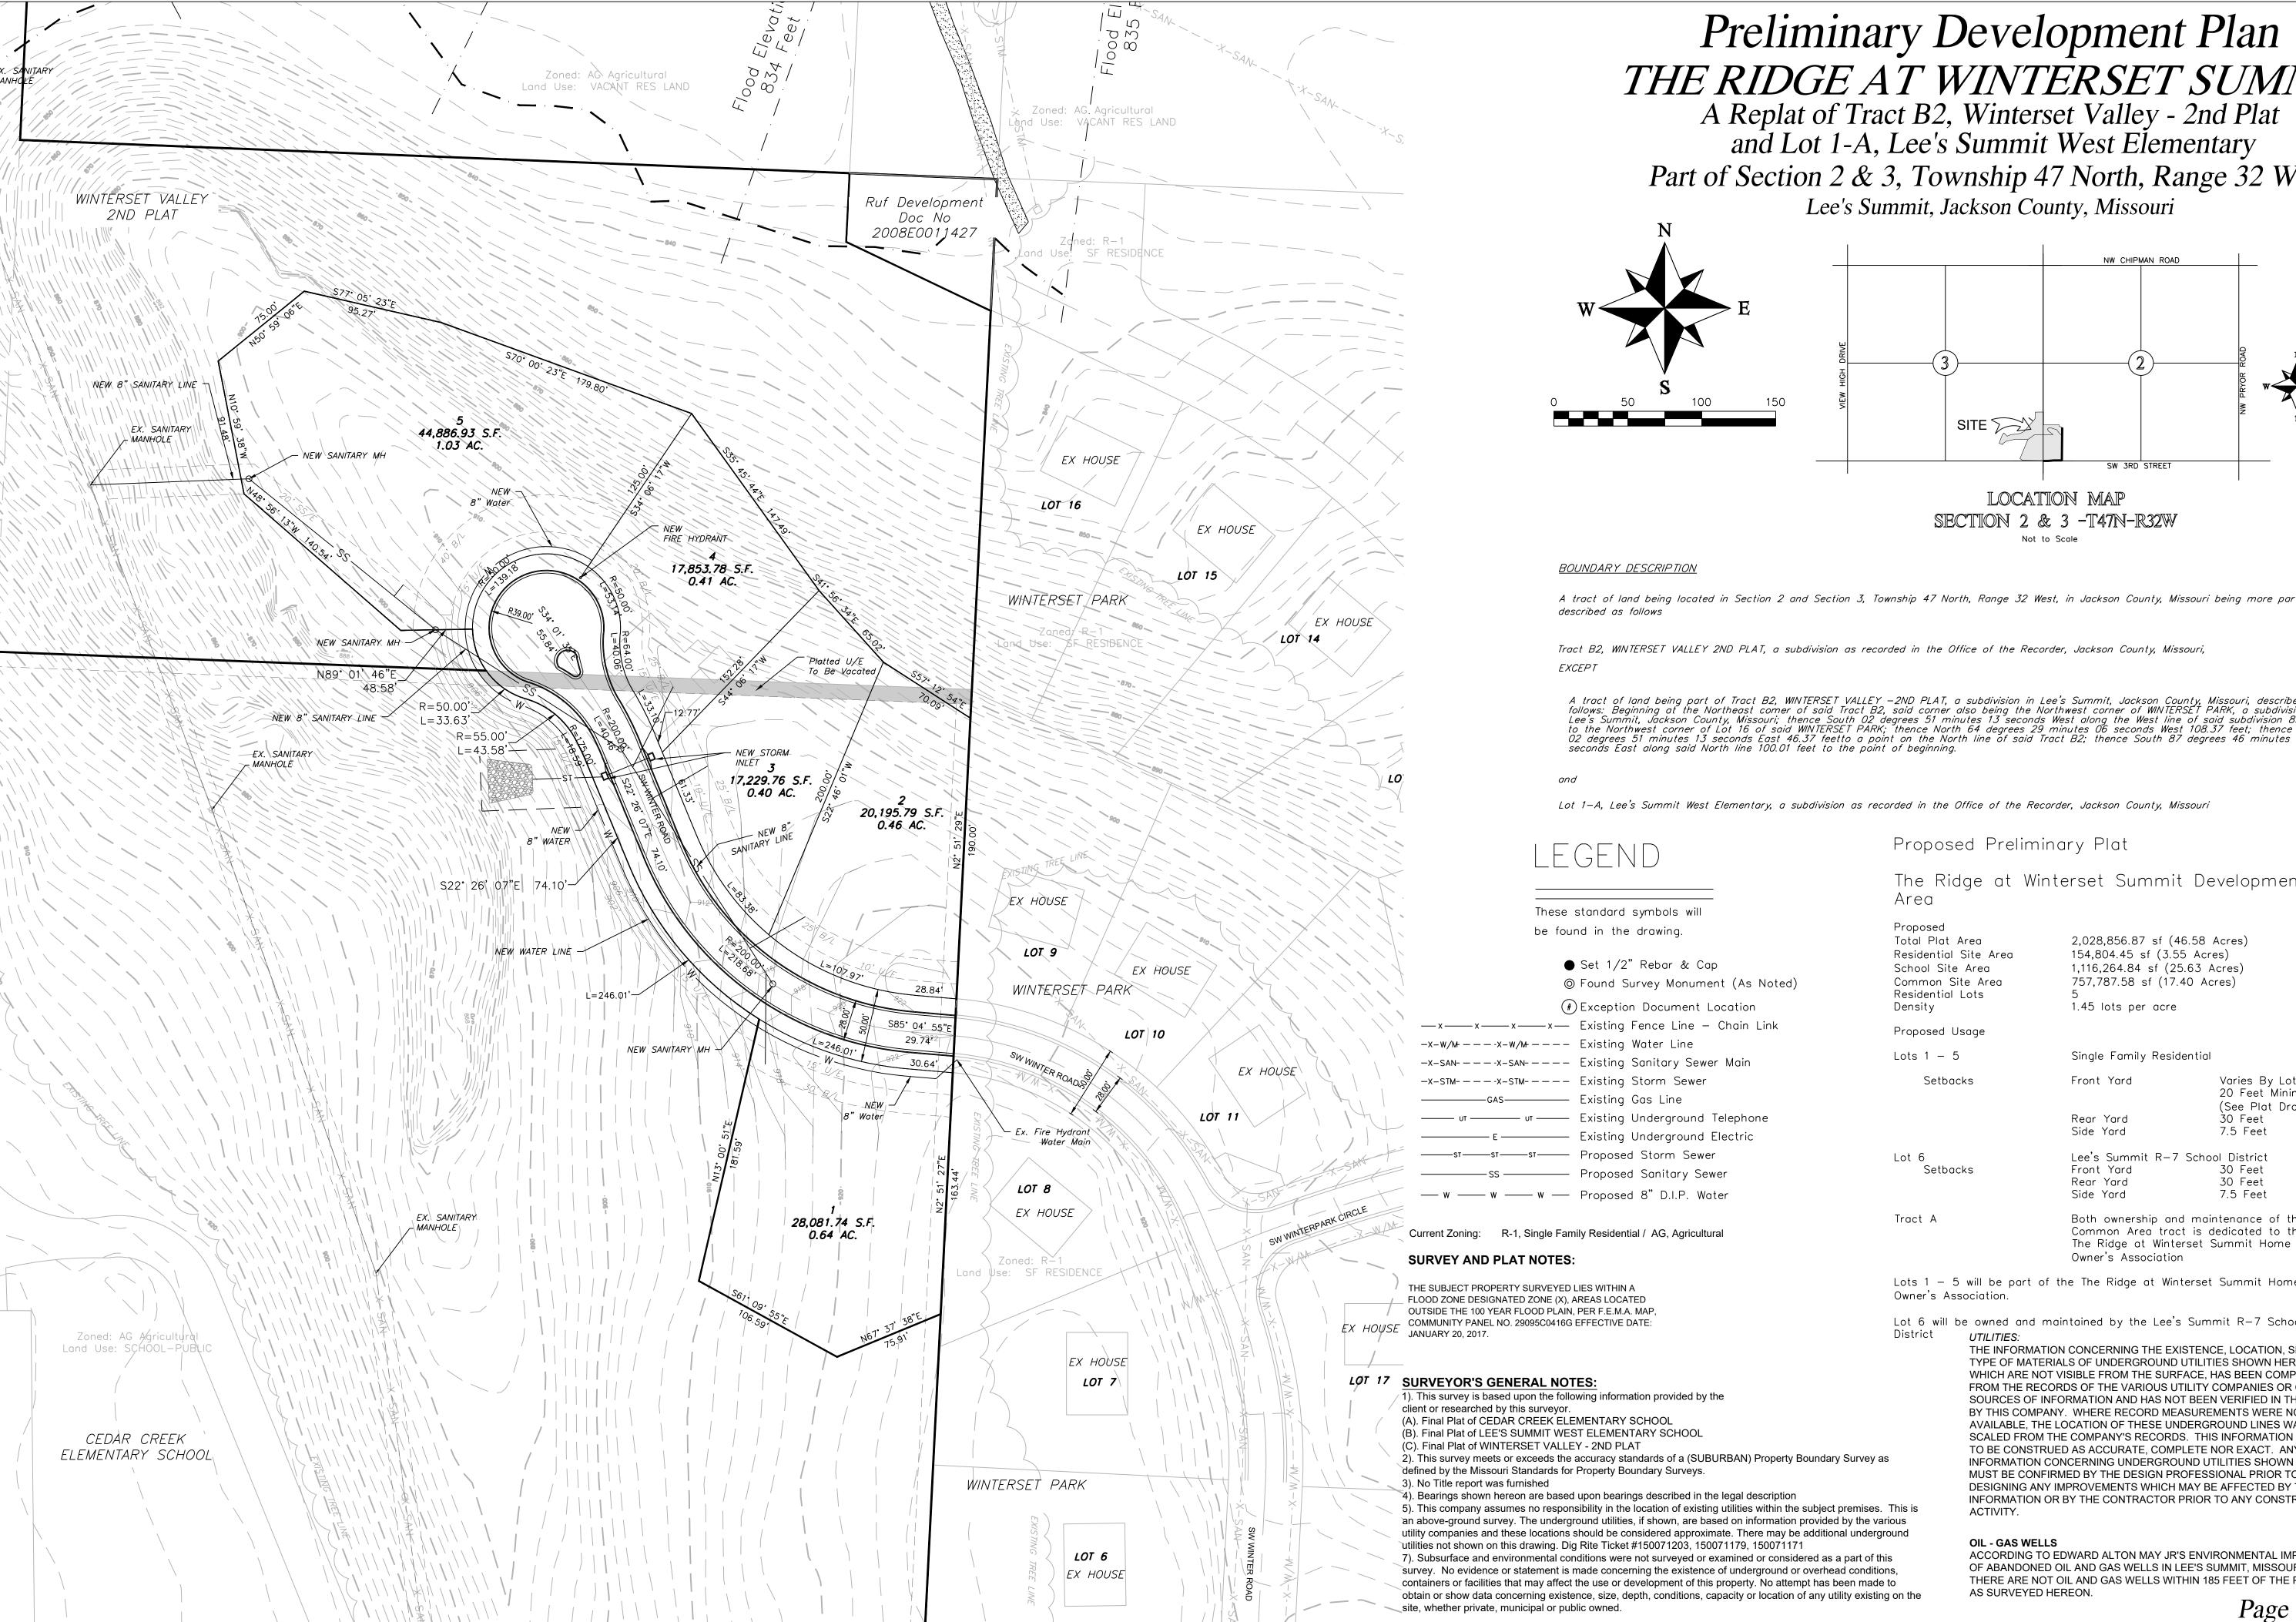

Preliminary Development Plan THE RIDGE AT WINTERSET SUMMIT

A Replat of Tract B2, Winterset Valley - 2nd Plat and Lot 1-A, Lee's Summit West Elementary Part of Section 2 & 3, Township 47 North, Range 32 West

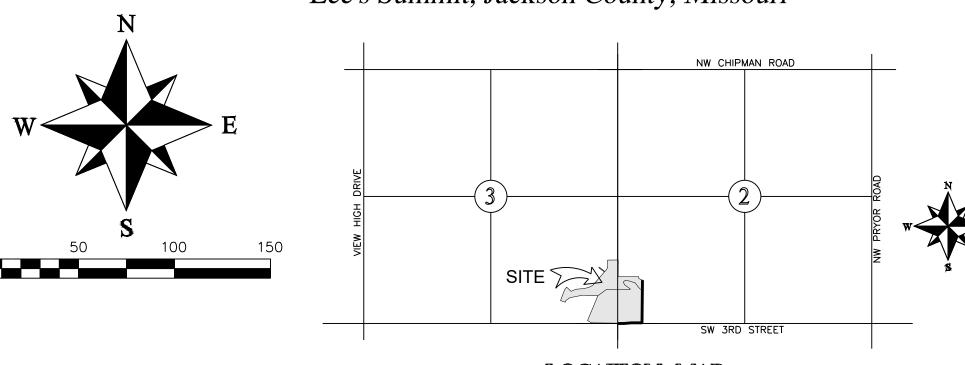

A tract of land being located in Section 2 and Section 3, Township 47 North, Range 32 West, in Jackson County, Missouri being more particularly

Tract B2, WINTERSET VALLEY 2ND PLAT, a subdivision as recorded in the Office of the Recorder, Jackson County, Missouri,

A tract of land being part of Tract B2, WINTERSET VALLEY –2ND PLAT, a subdivision in Lee's Summit, Jackson County, Missouri, described as follows: Beginning at the Northeast comer of said Tract B2, said corner also being the Northwest corner of WINTERSET PARK, a subdivision in Lee's Summit, Jackson County, Missouri; thence South 02 degrees 51 minutes 13 seconds West along the West line of said subdivision 89.23 feet to the Northwest corner of Lot 16 of said WINTERSET PARK; thence North 64 degrees 29 minutes 06 seconds West 108.37 feet; thence North 02 degrees 51 minutes 13 seconds East 46.37 feetto a point on the North line of said Tract B2; thence South 87 degrees 46 minutes 53 seconds East along said North line 100.01 feet to the point of beginning.

Lot 1-A, Lee's Summit West Elementary, a subdivision as recorded in the Office of the Recorder, Jackson County, Missouri

The Ridge at Winterset Summit Development

2,028,856.87 sf (46.58 Acres) 154,804.45 sf (3.55 Acres) 1,116,264.84 sf (25.63 Acres) 757,787.58 sf (17.40 Acres)

Single Family Residential

20 Feet Minimum (See Plat Drawing) 30 Feet 7.5 Feet

Varies By Lot

7.5 Feet

Lee's Summit R-7 School District 30 Feet 30 Feet

Both ownership and maintenance of the Common Area tract is dedicated to the


Lots 1 — 5 will be part of the The Ridge at Winterset Summit Home

Lot 6 will be owned and maintained by the Lee's Summit R-7 School

THE INFORMATION CONCERNING THE EXISTENCE, LOCATION, SIZE OR TYPE OF MATERIALS OF UNDERGROUND UTILITIES SHOWN HEREON, WHICH ARE NOT VISIBLE FROM THE SURFACE, HAS BEEN COMPILED FROM THE RECORDS OF THE VARIOUS UTILITY COMPANIES OR OTHER SOURCES OF INFORMATION AND HAS NOT BEEN VERIFIED IN THE FIELD BY THIS COMPANY. WHERE RECORD MEASUREMENTS WERE NOT AVAILABLE, THE LOCATION OF THESE UNDERGROUND LINES WAS SCALED FROM THE COMPANY'S RECORDS. THIS INFORMATION IS NOT TO BE CONSTRUED AS ACCURATE, COMPLETE NOR EXACT. ANY INFORMATION CONCERNING UNDERGROUND UTILITIES SHOWN HEREON MUST BE CONFIRMED BY THE DESIGN PROFESSIONAL PRIOR TO DESIGNING ANY IMPROVEMENTS WHICH MAY BE AFFECTED BY THIS INFORMATION OR BY THE CONTRACTOR PRIOR TO ANY CONSTRUCTION

ACCORDING TO EDWARD ALTON MAY JR'S ENVIRONMENTAL IMPACT STUDY OF ABANDONED OIL AND GAS WELLS IN LEE'S SUMMIT, MISSOURI IN 1995, THERE ARE NOT OIL AND GAS WELLS WITHIN 185 FEET OF THE PROPERTY

Page 1 of 2




velopr al

PROFESSIONAL SEAL

in

Prelim








Exhibit C Overall Watershed Map

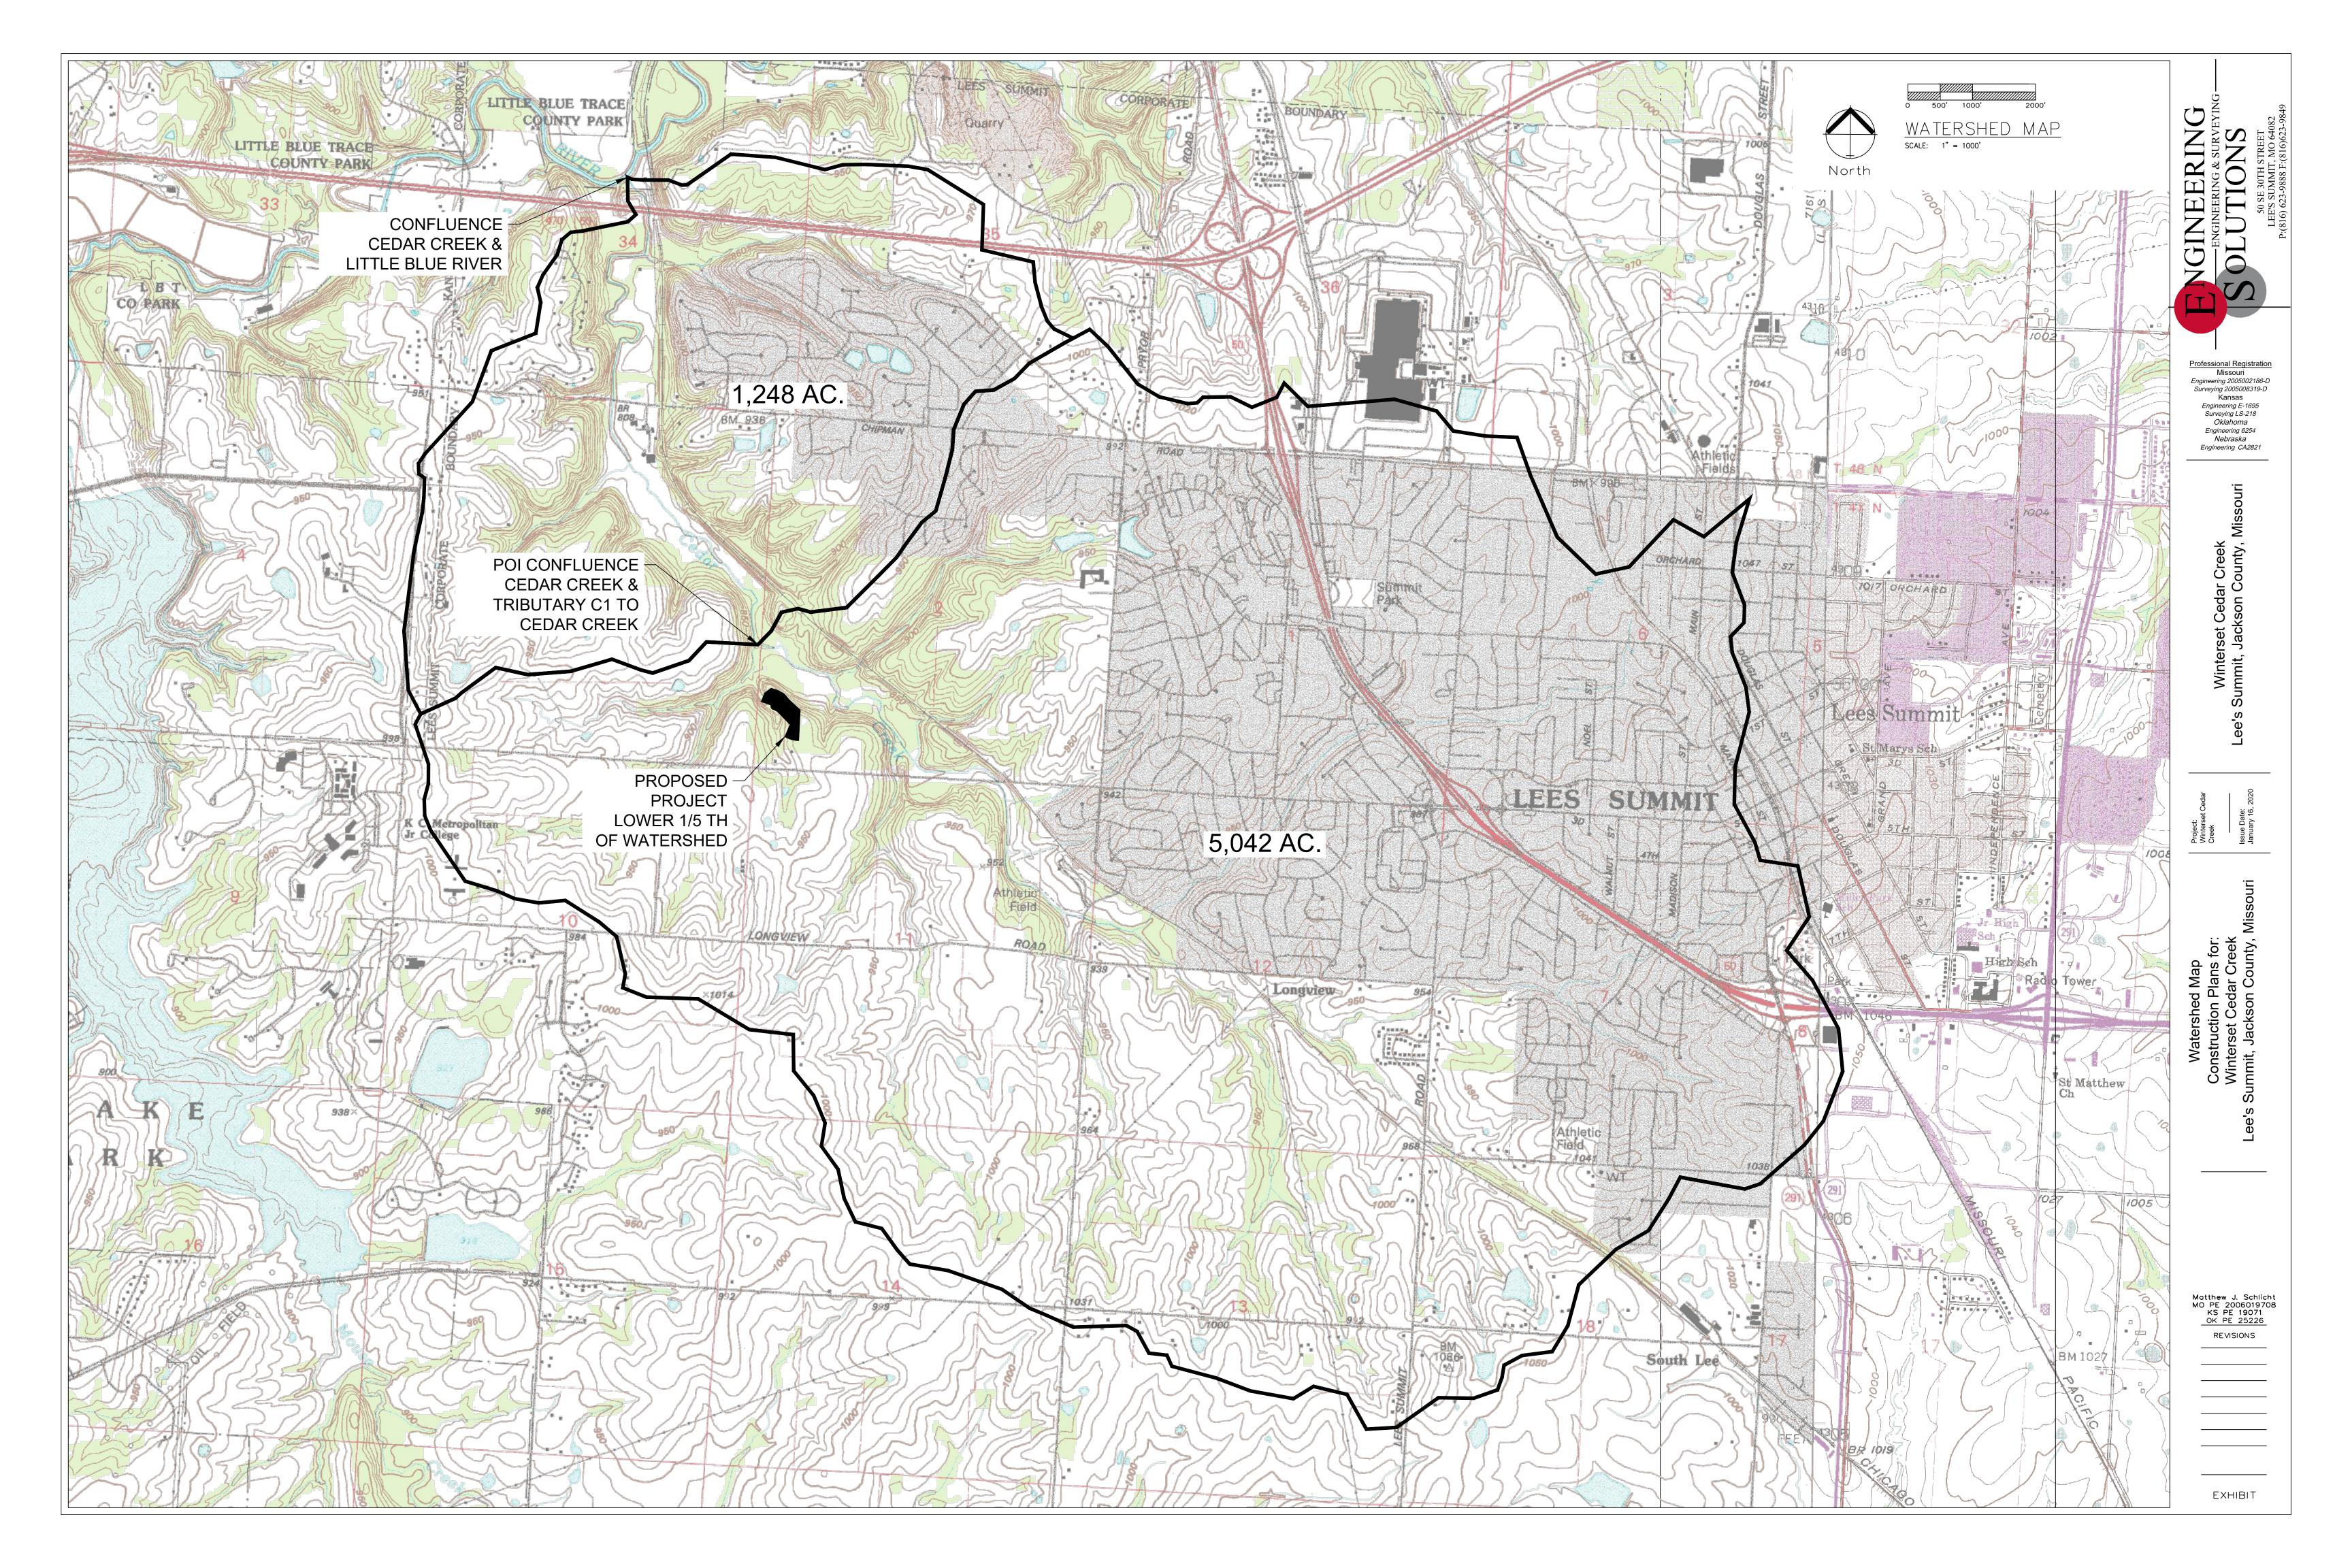






Exhibit D FIRMette

50 SE 30th Street Lee's Summit, MO 64082

P: (816) 623-9888 F: (816) 623-9849

National Flood Hazard Layer FIRMette

250


500

1,000

1,500




94°25'31"W 38°54'39"N

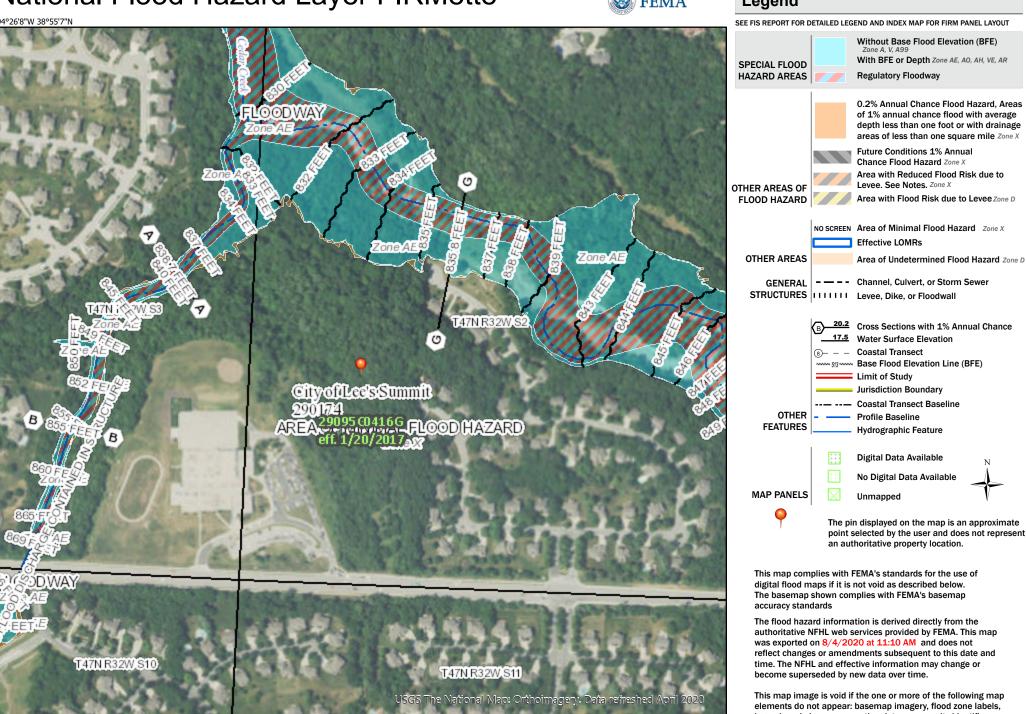

1:6.000

2,000

Legend

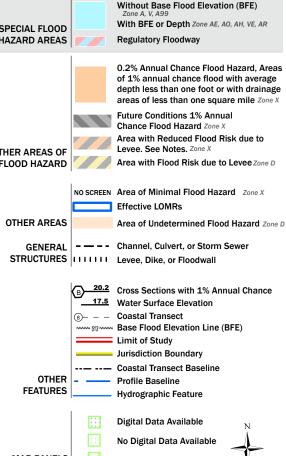

This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 8/4/2020 at 11:10 AM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.





Exhibit E NRCS Soils Report



Natural Resources Conservation Service

A product of the National Cooperative Soil Survey, a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local participants

Custom Soil Resource Report for Jackson County, **Missouri**



Preface

Soil surveys contain information that affects land use planning in survey areas. They highlight soil limitations that affect various land uses and provide information about the properties of the soils in the survey areas. Soil surveys are designed for many different users, including farmers, ranchers, foresters, agronomists, urban planners, community officials, engineers, developers, builders, and home buyers. Also, conservationists, teachers, students, and specialists in recreation, waste disposal, and pollution control can use the surveys to help them understand, protect, or enhance the environment.

Various land use regulations of Federal, State, and local governments may impose special restrictions on land use or land treatment. Soil surveys identify soil properties that are used in making various land use or land treatment decisions. The information is intended to help the land users identify and reduce the effects of soil limitations on various land uses. The landowner or user is responsible for identifying and complying with existing laws and regulations.

Although soil survey information can be used for general farm, local, and wider area planning, onsite investigation is needed to supplement this information in some cases. Examples include soil quality assessments (http://www.nrcs.usda.gov/wps/portal/nrcs/main/soils/health/) and certain conservation and engineering applications. For more detailed information, contact your local USDA Service Center (https://offices.sc.egov.usda.gov/locator/app?agency=nrcs) or your NRCS State Soil Scientist (http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/contactus/?cid=nrcs142p2 053951).

Great differences in soil properties can occur within short distances. Some soils are seasonally wet or subject to flooding. Some are too unstable to be used as a foundation for buildings or roads. Clayey or wet soils are poorly suited to use as septic tank absorption fields. A high water table makes a soil poorly suited to basements or underground installations.

The National Cooperative Soil Survey is a joint effort of the United States Department of Agriculture and other Federal agencies, State agencies including the Agricultural Experiment Stations, and local agencies. The Natural Resources Conservation Service (NRCS) has leadership for the Federal part of the National Cooperative Soil Survey.

Information about soils is updated periodically. Updated information is available through the NRCS Web Soil Survey, the site for official soil survey information.

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, age, disability, and where applicable, sex, marital status, familial status, parental status, religion, sexual orientation, genetic information, political beliefs, reprisal, or because all or a part of an individual's income is derived from any public assistance program. (Not all prohibited bases apply to all programs.) Persons with disabilities who require

alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD). To file a complaint of discrimination, write to USDA, Director, Office of Civil Rights, 1400 Independence Avenue, S.W., Washington, D.C. 20250-9410 or call (800) 795-3272 (voice) or (202) 720-6382 (TDD). USDA is an equal opportunity provider and employer.

Contents

Preface	2
How Soil Surveys Are Made	
Soil Map	
Soil Map	
Legend	10
Map Unit Legend	
Map Unit Descriptions	11
Jackson County, Missouri	13
10141—Snead-Rock outcrop complex, 14 to 30 percent slopes	13
References	15

How Soil Surveys Are Made

Soil surveys are made to provide information about the soils and miscellaneous areas in a specific area. They include a description of the soils and miscellaneous areas and their location on the landscape and tables that show soil properties and limitations affecting various uses. Soil scientists observed the steepness, length, and shape of the slopes; the general pattern of drainage; the kinds of crops and native plants; and the kinds of bedrock. They observed and described many soil profiles. A soil profile is the sequence of natural layers, or horizons, in a soil. The profile extends from the surface down into the unconsolidated material in which the soil formed or from the surface down to bedrock. The unconsolidated material is devoid of roots and other living organisms and has not been changed by other biological activity.

Currently, soils are mapped according to the boundaries of major land resource areas (MLRAs). MLRAs are geographically associated land resource units that share common characteristics related to physiography, geology, climate, water resources, soils, biological resources, and land uses (USDA, 2006). Soil survey areas typically consist of parts of one or more MLRA.

The soils and miscellaneous areas in a survey area occur in an orderly pattern that is related to the geology, landforms, relief, climate, and natural vegetation of the area. Each kind of soil and miscellaneous area is associated with a particular kind of landform or with a segment of the landform. By observing the soils and miscellaneous areas in the survey area and relating their position to specific segments of the landform, a soil scientist develops a concept, or model, of how they were formed. Thus, during mapping, this model enables the soil scientist to predict with a considerable degree of accuracy the kind of soil or miscellaneous area at a specific location on the landscape.

Commonly, individual soils on the landscape merge into one another as their characteristics gradually change. To construct an accurate soil map, however, soil scientists must determine the boundaries between the soils. They can observe only a limited number of soil profiles. Nevertheless, these observations, supplemented by an understanding of the soil-vegetation-landscape relationship, are sufficient to verify predictions of the kinds of soil in an area and to determine the boundaries.

Soil scientists recorded the characteristics of the soil profiles that they studied. They noted soil color, texture, size and shape of soil aggregates, kind and amount of rock fragments, distribution of plant roots, reaction, and other features that enable them to identify soils. After describing the soils in the survey area and determining their properties, the soil scientists assigned the soils to taxonomic classes (units). Taxonomic classes are concepts. Each taxonomic class has a set of soil characteristics with precisely defined limits. The classes are used as a basis for comparison to classify soils systematically. Soil taxonomy, the system of taxonomic classification used in the United States, is based mainly on the kind and character of soil properties and the arrangement of horizons within the profile. After the soil

Custom Soil Resource Report

scientists classified and named the soils in the survey area, they compared the individual soils with similar soils in the same taxonomic class in other areas so that they could confirm data and assemble additional data based on experience and research.

The objective of soil mapping is not to delineate pure map unit components; the objective is to separate the landscape into landforms or landform segments that have similar use and management requirements. Each map unit is defined by a unique combination of soil components and/or miscellaneous areas in predictable proportions. Some components may be highly contrasting to the other components of the map unit. The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The delineation of such landforms and landform segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Soil scientists make many field observations in the process of producing a soil map. The frequency of observation is dependent upon several factors, including scale of mapping, intensity of mapping, design of map units, complexity of the landscape, and experience of the soil scientist. Observations are made to test and refine the soil-landscape model and predictions and to verify the classification of the soils at specific locations. Once the soil-landscape model is refined, a significantly smaller number of measurements of individual soil properties are made and recorded. These measurements may include field measurements, such as those for color, depth to bedrock, and texture, and laboratory measurements, such as those for content of sand, silt, clay, salt, and other components. Properties of each soil typically vary from one point to another across the landscape.

Observations for map unit components are aggregated to develop ranges of characteristics for the components. The aggregated values are presented. Direct measurements do not exist for every property presented for every map unit component. Values for some properties are estimated from combinations of other properties.

While a soil survey is in progress, samples of some of the soils in the area generally are collected for laboratory analyses and for engineering tests. Soil scientists interpret the data from these analyses and tests as well as the field-observed characteristics and the soil properties to determine the expected behavior of the soils under different uses. Interpretations for all of the soils are field tested through observation of the soils in different uses and under different levels of management. Some interpretations are modified to fit local conditions, and some new interpretations are developed to meet local needs. Data are assembled from other sources, such as research information, production records, and field experience of specialists. For example, data on crop yields under defined levels of management are assembled from farm records and from field or plot experiments on the same kinds of soil.

Predictions about soil behavior are based not only on soil properties but also on such variables as climate and biological activity. Soil conditions are predictable over long periods of time, but they are not predictable from year to year. For example, soil scientists can predict with a fairly high degree of accuracy that a given soil will have a high water table within certain depths in most years, but they cannot predict that a high water table will always be at a specific level in the soil on a specific date.


After soil scientists located and identified the significant natural bodies of soil in the survey area, they drew the boundaries of these bodies on aerial photographs and

Custom Soil Resource Report

identified each as a specific map unit. Aerial photographs show trees, buildings, fields, roads, and rivers, all of which help in locating boundaries accurately.

Soil Map

The soil map section includes the soil map for the defined area of interest, a list of soil map units on the map and extent of each map unit, and cartographic symbols displayed on the map. Also presented are various metadata about data used to produce the map, and a description of each soil map unit.

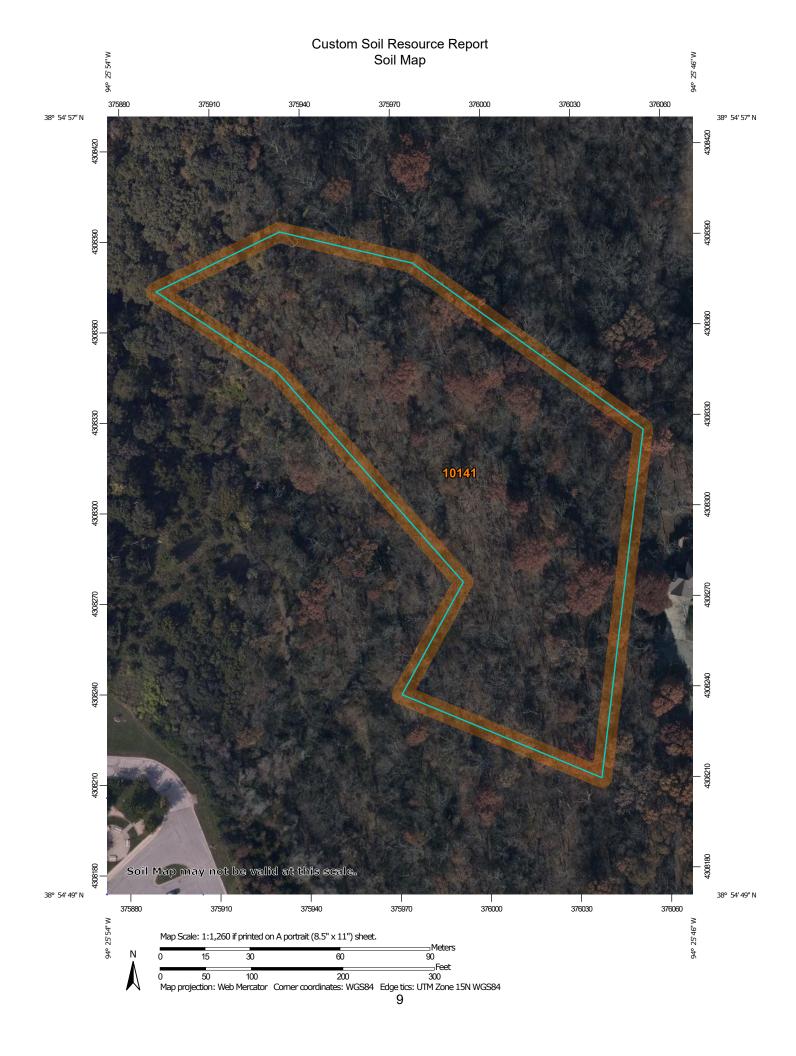

MAP LEGEND

Area of Interest (AOI)

Area of Interest (AOI)

Soils

Soil Map Unit Polygons

-

Soil Map Unit Lines

Soil Map Unit Points

Special Point Features

()

Blowout

 \boxtimes

Borrow Pit

Ж

Clay Spot

 \Diamond

Closed Depression

v

Gravel Pit

.

Gravelly Spot

0

Landfill Lava Flow

٧.

Marsh or swamp

2

Mine or Quarry

W.

Miscellaneous Water

0

Perennial Water

 \vee

Rock Outcrop
Saline Spot

~

Sandy Spot

000

Severely Eroded Spot

^

Sinkhole

5D

Slide or Slip

Ø

Sodic Spot



Spoil Area Stony Spot

Ø

Very Stony Spot

87

Wet Spot Other

_

Special Line Features

Water Features

_

Streams and Canals

Transportation

ransp

Rails

~

Interstate Highways

~

US Routes

 \sim

Major Roads

 \sim

Local Roads

Background

The same

Aerial Photography

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at 1:24.000.

Warning: Soil Map may not be valid at this scale.

Enlargement of maps beyond the scale of mapping can cause misunderstanding of the detail of mapping and accuracy of soil line placement. The maps do not show the small areas of contrasting soils that could have been shown at a more detailed scale.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service

Web Soil Survey URL: Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Jackson County, Missouri Survey Area Data: Version 22, May 29, 2020

Soil map units are labeled (as space allows) for map scales 1:50.000 or larger.

Date(s) aerial images were photographed: Sep 6, 2019—Nov 16, 2019

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
10141	Snead-Rock outcrop complex, 14 to 30 percent slopes	3.2	100.0%
Totals for Area of Interest		3.2	100.0%

Map Unit Descriptions

The map units delineated on the detailed soil maps in a soil survey represent the soils or miscellaneous areas in the survey area. The map unit descriptions, along with the maps, can be used to determine the composition and properties of a unit.

A map unit delineation on a soil map represents an area dominated by one or more major kinds of soil or miscellaneous areas. A map unit is identified and named according to the taxonomic classification of the dominant soils. Within a taxonomic class there are precisely defined limits for the properties of the soils. On the landscape, however, the soils are natural phenomena, and they have the characteristic variability of all natural phenomena. Thus, the range of some observed properties may extend beyond the limits defined for a taxonomic class. Areas of soils of a single taxonomic class rarely, if ever, can be mapped without including areas of other taxonomic classes. Consequently, every map unit is made up of the soils or miscellaneous areas for which it is named and some minor components that belong to taxonomic classes other than those of the major soils.

Most minor soils have properties similar to those of the dominant soil or soils in the map unit, and thus they do not affect use and management. These are called noncontrasting, or similar, components. They may or may not be mentioned in a particular map unit description. Other minor components, however, have properties and behavioral characteristics divergent enough to affect use or to require different management. These are called contrasting, or dissimilar, components. They generally are in small areas and could not be mapped separately because of the scale used. Some small areas of strongly contrasting soils or miscellaneous areas are identified by a special symbol on the maps. If included in the database for a given area, the contrasting minor components are identified in the map unit descriptions along with some characteristics of each. A few areas of minor components may not have been observed, and consequently they are not mentioned in the descriptions, especially where the pattern was so complex that it was impractical to make enough observations to identify all the soils and miscellaneous areas on the landscape.

The presence of minor components in a map unit in no way diminishes the usefulness or accuracy of the data. The objective of mapping is not to delineate pure taxonomic classes but rather to separate the landscape into landforms or landform segments that have similar use and management requirements. The delineation of such segments on the map provides sufficient information for the development of resource plans. If intensive use of small areas is planned, however, onsite investigation is needed to define and locate the soils and miscellaneous areas.

Custom Soil Resource Report

An identifying symbol precedes the map unit name in the map unit descriptions. Each description includes general facts about the unit and gives important soil properties and qualities.

Soils that have profiles that are almost alike make up a *soil series*. Except for differences in texture of the surface layer, all the soils of a series have major horizons that are similar in composition, thickness, and arrangement.

Soils of one series can differ in texture of the surface layer, slope, stoniness, salinity, degree of erosion, and other characteristics that affect their use. On the basis of such differences, a soil series is divided into *soil phases*. Most of the areas shown on the detailed soil maps are phases of soil series. The name of a soil phase commonly indicates a feature that affects use or management. For example, Alpha silt loam, 0 to 2 percent slopes, is a phase of the Alpha series.

Some map units are made up of two or more major soils or miscellaneous areas. These map units are complexes, associations, or undifferentiated groups.

A *complex* consists of two or more soils or miscellaneous areas in such an intricate pattern or in such small areas that they cannot be shown separately on the maps. The pattern and proportion of the soils or miscellaneous areas are somewhat similar in all areas. Alpha-Beta complex, 0 to 6 percent slopes, is an example.

An *association* is made up of two or more geographically associated soils or miscellaneous areas that are shown as one unit on the maps. Because of present or anticipated uses of the map units in the survey area, it was not considered practical or necessary to map the soils or miscellaneous areas separately. The pattern and relative proportion of the soils or miscellaneous areas are somewhat similar. Alpha-Beta association, 0 to 2 percent slopes, is an example.

An *undifferentiated group* is made up of two or more soils or miscellaneous areas that could be mapped individually but are mapped as one unit because similar interpretations can be made for use and management. The pattern and proportion of the soils or miscellaneous areas in a mapped area are not uniform. An area can be made up of only one of the major soils or miscellaneous areas, or it can be made up of all of them. Alpha and Beta soils, 0 to 2 percent slopes, is an example.

Some surveys include *miscellaneous areas*. Such areas have little or no soil material and support little or no vegetation. Rock outcrop is an example.

Jackson County, Missouri

10141—Snead-Rock outcrop complex, 14 to 30 percent slopes

Map Unit Setting

National map unit symbol: 2ql0p Elevation: 600 to 1,100 feet

Mean annual precipitation: 33 to 41 inches
Mean annual air temperature: 50 to 55 degrees F

Frost-free period: 177 to 220 days

Farmland classification: Not prime farmland

Map Unit Composition

Snead and similar soils: 70 percent

Rock outcrop: 15 percent Minor components: 5 percent

Estimates are based on observations, descriptions, and transects of the mapunit.

Description of Snead

Setting

Landform: Hillslopes

Landform position (two-dimensional): Backslope Landform position (three-dimensional): Side slope

Down-slope shape: Convex Across-slope shape: Convex

Parent material: Residuum weathered from calcareous shale

Typical profile

Ap - 0 to 3 inches: silty clay loam Bw - 3 to 24 inches: silty clay Cr - 24 to 80 inches: bedrock

Properties and qualities

Slope: 14 to 30 percent

Depth to restrictive feature: 20 to 40 inches to paralithic bedrock

Drainage class: Moderately well drained

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Moderately low to

moderately high (0.06 to 0.20 in/hr)

Depth to water table: About 24 to 36 inches

Frequency of flooding: None Frequency of ponding: None

Calcium carbonate, maximum content: 10 percent

Maximum salinity: Nonsaline to very slightly saline (0.0 to 2.0 mmhos/cm)

Available water capacity: Low (about 3.0 inches)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 6e

Hydrologic Soil Group: D

Ecological site: R109XY012MO - Interbedded Sedimentary Backslope Savanna Other vegetative classification: Mixed/Transitional (Mixed Native Vegetation)

Hydric soil rating: No

Custom Soil Resource Report

Description of Rock Outcrop

Typical profile

R - 0 to 80 inches: bedrock

Properties and qualities

Slope: 14 to 30 percent

Depth to restrictive feature: 0 inches to lithic bedrock

Runoff class: Very high

Capacity of the most limiting layer to transmit water (Ksat): Very low to moderately

high (0.00 to 0.20 in/hr)

Interpretive groups

Land capability classification (irrigated): None specified

Land capability classification (nonirrigated): 8

Hydric soil rating: No

Minor Components

Sampsel

Percent of map unit: 5 percent

Landform: Hillslopes

Landform position (two-dimensional): Footslope Landform position (three-dimensional): Base slope

Down-slope shape: Convex Across-slope shape: Concave

Other vegetative classification: Grass/Prairie (Herbaceous Vegetation)

Hydric soil rating: No

References

American Association of State Highway and Transportation Officials (AASHTO). 2004. Standard specifications for transportation materials and methods of sampling and testing. 24th edition.

American Society for Testing and Materials (ASTM). 2005. Standard classification of soils for engineering purposes. ASTM Standard D2487-00.

Cowardin, L.M., V. Carter, F.C. Golet, and E.T. LaRoe. 1979. Classification of wetlands and deep-water habitats of the United States. U.S. Fish and Wildlife Service FWS/OBS-79/31.

Federal Register. July 13, 1994. Changes in hydric soils of the United States.

Federal Register. September 18, 2002. Hydric soils of the United States.

Hurt, G.W., and L.M. Vasilas, editors. Version 6.0, 2006. Field indicators of hydric soils in the United States.

National Research Council. 1995. Wetlands: Characteristics and boundaries.

Soil Survey Division Staff. 1993. Soil survey manual. Soil Conservation Service. U.S. Department of Agriculture Handbook 18. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_054262

Soil Survey Staff. 1999. Soil taxonomy: A basic system of soil classification for making and interpreting soil surveys. 2nd edition. Natural Resources Conservation Service, U.S. Department of Agriculture Handbook 436. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2 053577

Soil Survey Staff. 2010. Keys to soil taxonomy. 11th edition. U.S. Department of Agriculture, Natural Resources Conservation Service. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2 053580

Tiner, R.W., Jr. 1985. Wetlands of Delaware. U.S. Fish and Wildlife Service and Delaware Department of Natural Resources and Environmental Control, Wetlands Section.

United States Army Corps of Engineers, Environmental Laboratory. 1987. Corps of Engineers wetlands delineation manual. Waterways Experiment Station Technical Report Y-87-1.

United States Department of Agriculture, Natural Resources Conservation Service. National forestry manual. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/home/?cid=nrcs142p2 053374

United States Department of Agriculture, Natural Resources Conservation Service. National range and pasture handbook. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/landuse/rangepasture/?cid=stelprdb1043084

Custom Soil Resource Report

United States Department of Agriculture, Natural Resources Conservation Service. National soil survey handbook, title 430-VI. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/scientists/?cid=nrcs142p2_054242

United States Department of Agriculture, Natural Resources Conservation Service. 2006. Land resource regions and major land resource areas of the United States, the Caribbean, and the Pacific Basin. U.S. Department of Agriculture Handbook 296. http://www.nrcs.usda.gov/wps/portal/nrcs/detail/national/soils/?cid=nrcs142p2_053624

United States Department of Agriculture, Soil Conservation Service. 1961. Land capability classification. U.S. Department of Agriculture Handbook 210. http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052290.pdf





Exhibit F Hydraflow Report


Hydraflow Table: Oftents KISTORM STUDY 200902 REV STUDY 200902 WINTERSET CEDAR CREEK. gpw

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Watershed Model Schematic	. 1
Hydrograph Return Period Recap	2
1 - Year	
Summary Report	
Hydrograph Reports	
Hydrograph No. 1, SCS Runoff, Existing Sub-basin	
Hydrograph No. 2, SCS Runoff, Proposed Project	
Hydrograph No. 3, SCS Runoff, Remainder Proposed Sub-basin	
Hydrograph No. 4, Combine, Proposed Sub-basin	. 7
2 - Year	
Summary Report	. 8
Hydrograph Reports	. 9
Hydrograph No. 1, SCS Runoff, Existing Sub-basin	
Hydrograph No. 2, SCS Runoff, Proposed Project	
Hydrograph No. 3, SCS Runoff, Remainder Proposed Sub-basin	
Hydrograph No. 4, Combine, Proposed Sub-basin	12
10 - Year	
Summary Report	13
Hydrograph Reports	14
Hydrograph No. 1, SCS Runoff, Existing Sub-basin	
Hydrograph No. 2, SCS Runoff, Proposed Project	
Hydrograph No. 3, SCS Runoff, Remainder Proposed Sub-basin	
Hydrograph No. 4, Combine, Proposed Sub-basin	17
100 - Year	
Summary Report	18
Hydrograph Reports	19
Hydrograph Reports Hydrograph No. 1, SCS Runoff, Existing Sub-basin	19
Hydrograph No. 2, SCS Runoff, Proposed Project	20
Hydrograph No. 3, SCS Runoff, Remainder Proposed Sub-basin	21
Hydrograph No. 4, Combine, Proposed Sub-basin	
IDF Report	23

Watershed Model Schematic

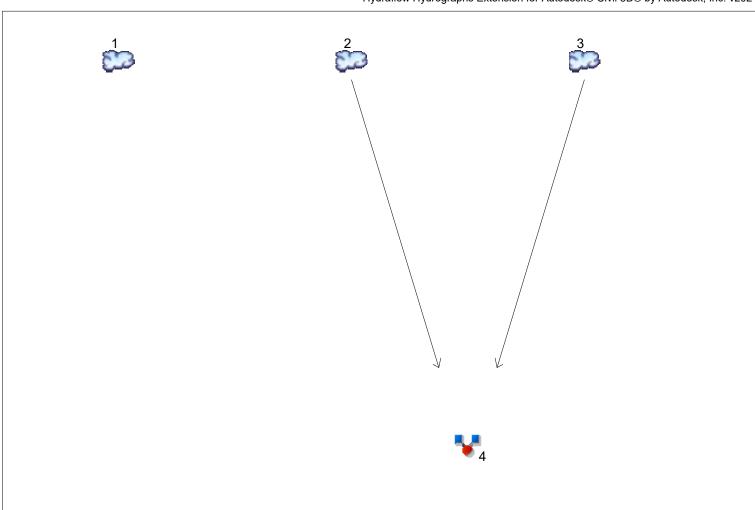

Legend

<u>Hyd.</u>	<u>Origin</u>	<u>Description</u>
1	SCS Runoff	Existing Sub-basin
2	SCS Runoff	Proposed Project
3	SCS Runoff	Remainder Proposed Sub-basin
4	Combine	Proposed Sub-basin

Project: Z:\acad\WINTERSET CEDAR CREEK\STORM STUDY\200902 REV STUDY\2009002e\dribstag,S1917/QE126470CREEK.gpw

Hydrograph Return Period Recap Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Hyd. No.	Hydrograph	Inflow				Hydrograph					
0.	type (origin)	hyd(s)	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr	Description
1	SCS Runoff		319.42	1999.69			3560.08			5916.63	Existing Sub-basin
2	SCS Runoff		1.031	7.968			14.50			24.35	Proposed Project
3	SCS Runoff		319.19	1998.23			3557.48			5912.31	Remainder Proposed Sub-basin
4	Combine	2, 3	319.27	1998.59			3558.09			5913.27	Proposed Sub-basin

Proj. file: Z:\acad\WINTERSET CEDAR CREEK\STORM STUDY\200902 REV STVEDM\20090209VINTERSET CEDAR CREEK.gpw

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

iya. lo.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	Hyd. volume (cuft)	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	319.42	1	875	6,799,870				Existing Sub-basin
2	SCS Runoff	1.031	1	726	3,672				Proposed Project
3	SCS Runoff	319.19	1	875	6,794,926				Remainder Proposed Sub-basin
ļ	Combine	319.27	1	875	6,798,591	2, 3			Proposed Sub-basin

Z:\acad\WINTERSET CEDAR CREEK\STORNRSturdDY\e200d9012YREIV STUDY\20090621Ne/shlate_R09E72 @200240R CREEK.gpw

Hydrograph Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

= 319.42 cfs


Hyd. No. 1

Existing Sub-basin

Hydrograph type = SCS Runoff Peak discharge Storm frequency = 1 yrsTime interval = 1 min Drainage area = 5042.000 ac Basin Slope = 1.4 % Tc method = LAG Total precip. = 1.37 inStorm duration = 24 hrs

Time to peak
Hyd. volume
Curve number
Hydraulic length
Time of conc. (Tc)
Distribution
Shape factor

= 14.58 hrs
= 6,799,870 cuft
= 18972 ft
= 242.00 min
= Type II
= 484

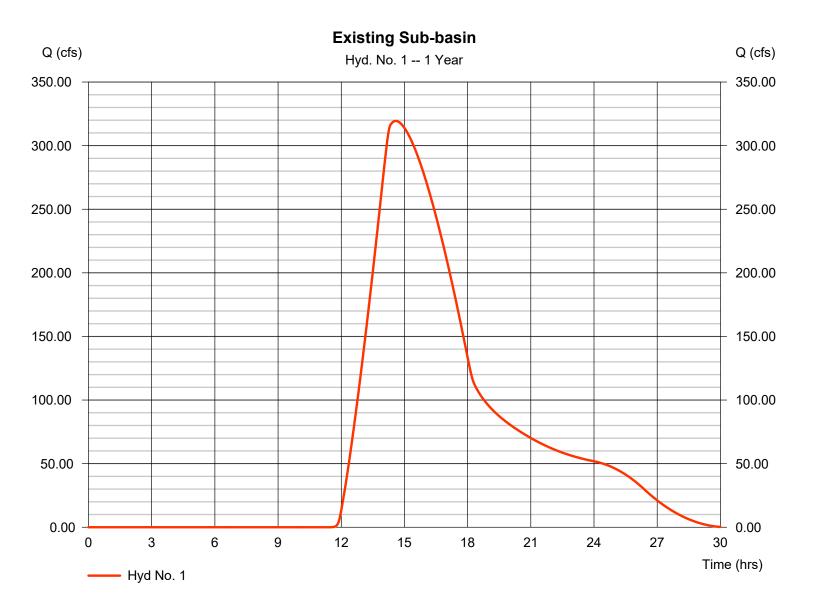

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 2

Proposed Project

Hydrograph type = SCS Runoff Peak discharge = 1.031 cfsStorm frequency Time to peak = 12.10 hrs= 1 yrsTime interval = 1 min Hyd. volume = 3.672 cuft Curve number Drainage area = 3.690 ac= 82 Basin Slope = 6.4 % Hydraulic length = 1565 ftTc method = LAG Time of conc. (Tc) = 16.94 min Total precip. = 1.37 inDistribution = Type II Storm duration = 24 hrs Shape factor = 484

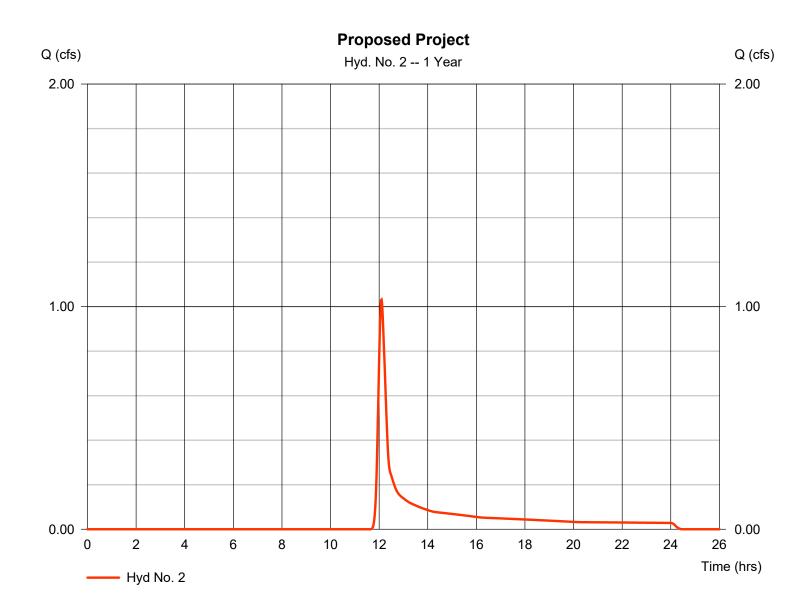

Hydrograph Report


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 3

Remainder Proposed Sub-basin

Hydrograph type = SCS Runoff Peak discharge = 319.19 cfsStorm frequency Time to peak = 14.58 hrs= 1 yrsTime interval = 1 min Hyd. volume = 6,794,926 cuft Drainage area Curve number = 5038.310 ac = 85 Hydraulic length Basin Slope = 1.4 % = 18972 ftTc method = LAG Time of conc. (Tc) = 242.00 min Total precip. = 1.37 inDistribution = Type II Storm duration = 24 hrs Shape factor = 484

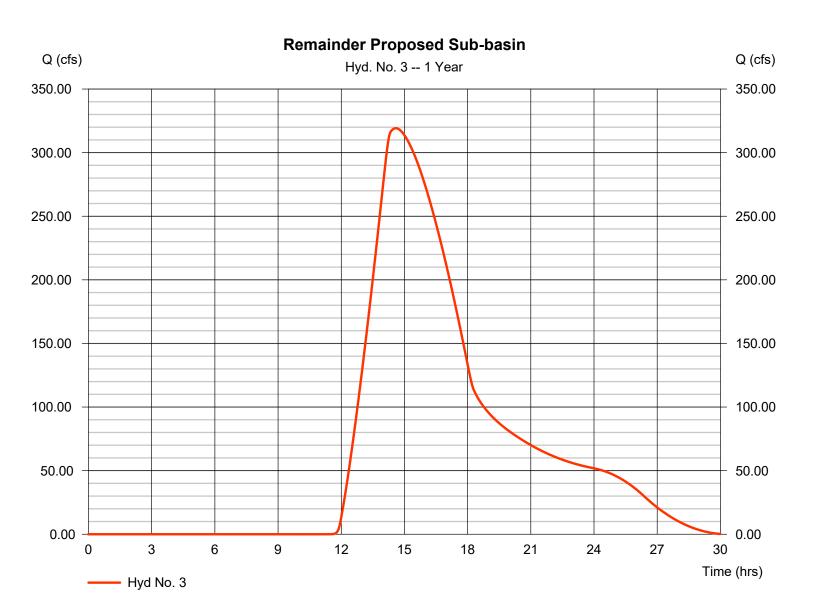


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 4

Proposed Sub-basin

Hydrograph type = Combine Peak discharge = 319.27 cfsStorm frequency Time to peak = 1 yrs $= 14.58 \, hrs$ = 6,798,591 cuft Time interval = 1 min Hyd. volume Inflow hyds. = 2, 3 Contrib. drain. area = 5042.000 ac

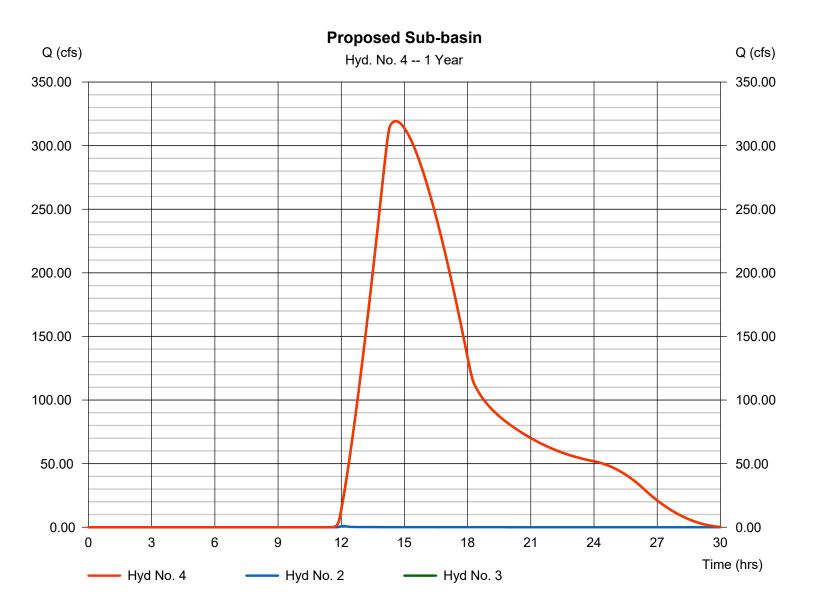

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

lyd. Io.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	1 -	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	1999.69	1	859	36,872,352				Existing Sub-basin
2	SCS Runoff	7.968	1	724	23,606				Proposed Project
3	SCS Runoff	1998.23	1	859	36,845,540				Remainder Proposed Sub-basin
4	Combine	1998.59	1	859	36,869,120	2, 3			Proposed Sub-basin

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 1


Existing Sub-basin

Hydrograph type = SCS Runoff Storm frequency = 2 yrsTime interval = 1 min Drainage area = 5042.000 ac = 1.4 % Basin Slope Tc method = LAG Total precip. = 3.50 inStorm duration = 24 hrs

Peak discharge = 1999.69 cfs
Time to peak = 14.32 hrs
Hyd. volume = 36,872,352 cuft
Curve number = 85
Hydraulic length = 18972 ft
Time of conc. (Tc) = 242.00 min
Distribution = Type II

= 484

Shape factor

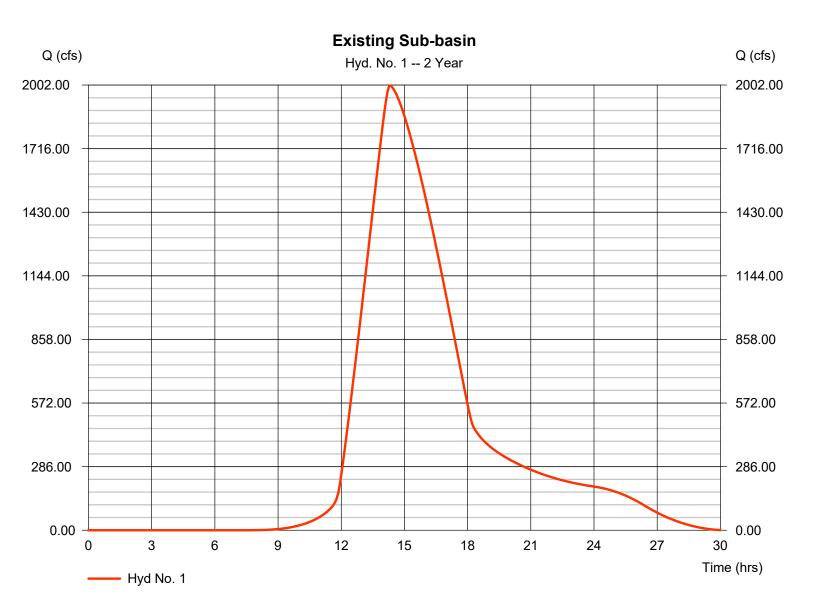


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 2

Proposed Project

Hydrograph type = SCS Runoff Peak discharge = 7.968 cfsStorm frequency = 2 yrsTime to peak = 12.07 hrsTime interval = 1 min Hyd. volume = 23,606 cuft Curve number Drainage area = 3.690 ac= 82 Basin Slope = 6.4 % Hydraulic length = 1565 ftTc method = LAG Time of conc. (Tc) = 16.94 min Total precip. = 3.50 inDistribution = Type II Storm duration = 24 hrs Shape factor = 484

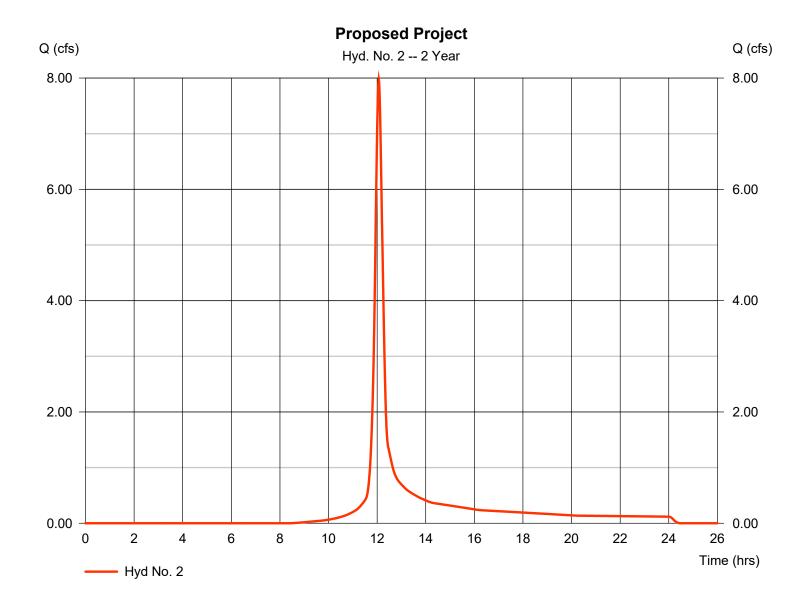


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 3

Remainder Proposed Sub-basin

Hydrograph type = SCS Runoff Peak discharge = 1998.23 cfsStorm frequency = 2 yrsTime to peak = 14.32 hrsTime interval = 1 min Hyd. volume = 36,845,540 cuft Curve number Drainage area = 5038.310 ac = 85 Basin Slope = 1.4 % Hydraulic length = 18972 ftTc method = LAG Time of conc. (Tc) = 242.00 min Total precip. = 3.50 inDistribution = Type II Shape factor Storm duration = 24 hrs = 484

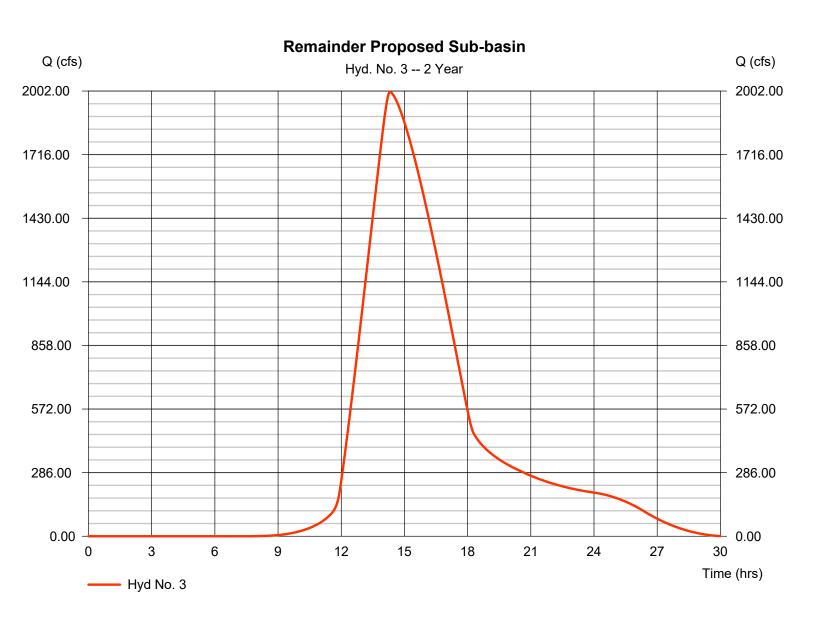


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 4

Proposed Sub-basin

Peak discharge Hydrograph type = Combine = 1998.59 cfsStorm frequency = 2 yrsTime to peak $= 14.32 \, hrs$ Time interval = 1 min Hyd. volume = 36,869,120 cuftInflow hyds. = 2, 3 Contrib. drain. area = 5042.000 ac

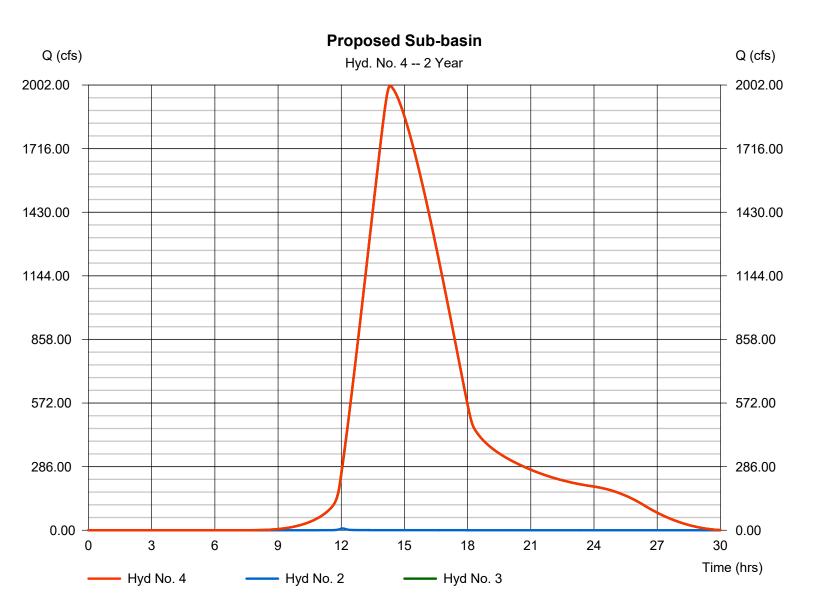

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

łyd. lo.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	1 -	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	3560.08	1	858	64,978,248				Existing Sub-basin
2	SCS Runoff	14.50	1	724	43,152				Proposed Project
3	SCS Runoff	3557.48	1	858	64,930,932				Remainder Proposed Sub-basin
4	Combine	3558.09	1	858	64,974,080	2, 3			Proposed Sub-basin

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 1


Existing Sub-basin

Hydrograph type = SCS Runoff Storm frequency = 10 yrsTime interval = 1 min Drainage area = 5042.000 ac = 1.4 % Basin Slope Tc method = LAG Total precip. = 5.20 inStorm duration = 24 hrs

Peak discharge = 3560.08 cfs
Time to peak = 14.30 hrs
Hyd. volume = 64,978,248 cuft
Curve number = 85
Hydraulic length = 18972 ft
Time of conc. (Tc) = 242.00 min
Distribution = Type II

= 484

Shape factor

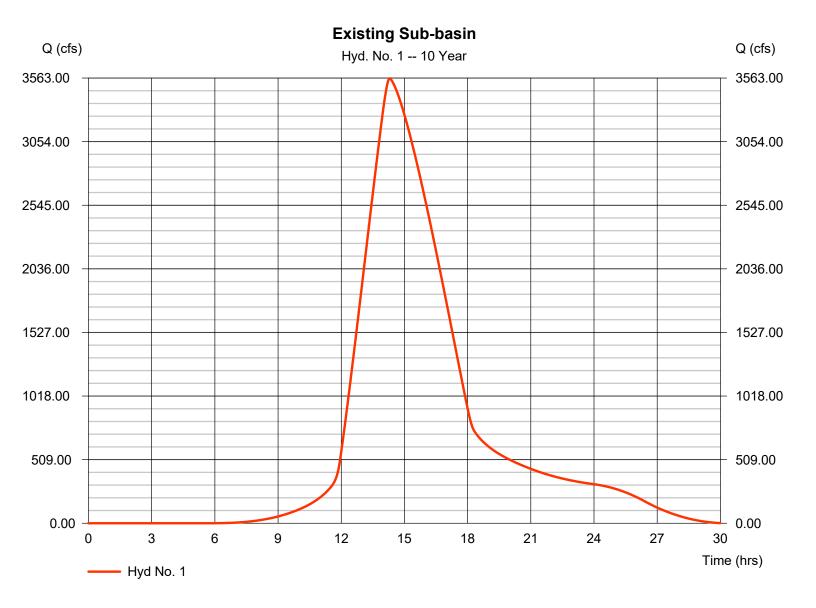


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 2

Proposed Project

Hydrograph type = SCS Runoff Peak discharge = 14.50 cfsStorm frequency = 10 yrsTime to peak = 12.07 hrsTime interval = 1 min Hyd. volume = 43,152 cuft Drainage area Curve number = 3.690 ac= 82 Basin Slope = 6.4 % Hydraulic length = 1565 ft= LAG Tc method Time of conc. (Tc) = 16.94 min Total precip. = 5.20 inDistribution = Type II Storm duration = 24 hrs Shape factor = 484

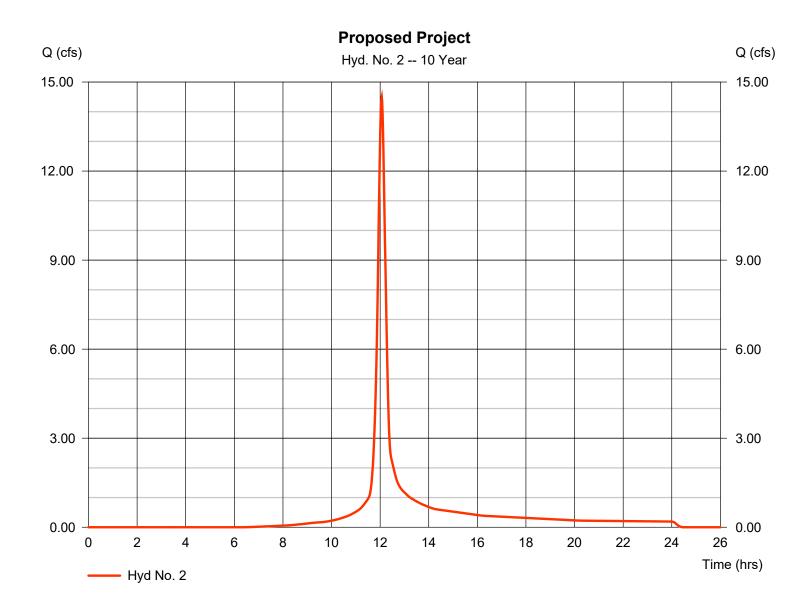


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 3

Remainder Proposed Sub-basin

Hydrograph type = SCS Runoff Peak discharge = 3557.48 cfsStorm frequency = 10 yrsTime to peak = 14.30 hrsTime interval = 1 min Hyd. volume = 64,930,932 cuft Curve number Drainage area = 5038.310 ac = 85 Basin Slope = 1.4 % Hydraulic length = 18972 ftTc method = LAG Time of conc. (Tc) = 242.00 min Total precip. = 5.20 inDistribution = Type II Shape factor Storm duration = 24 hrs = 484

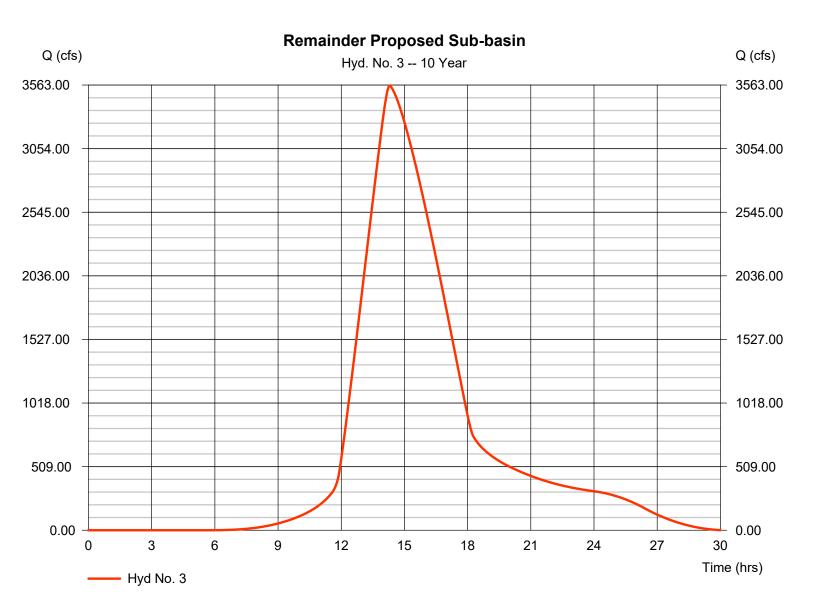

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021


Wednesday, 09 / 2 / 2020

Hyd. No. 4

Proposed Sub-basin

Hydrograph type = Combine
Storm frequency = 10 yrs
Time interval = 1 min
Inflow hyds. = 2, 3

Peak discharge = 3558.09 cfs
Time to peak = 14.30 hrs
Hyd. volume = 64,974,080 cuft
Contrib. drain. area = 5042.000 ac

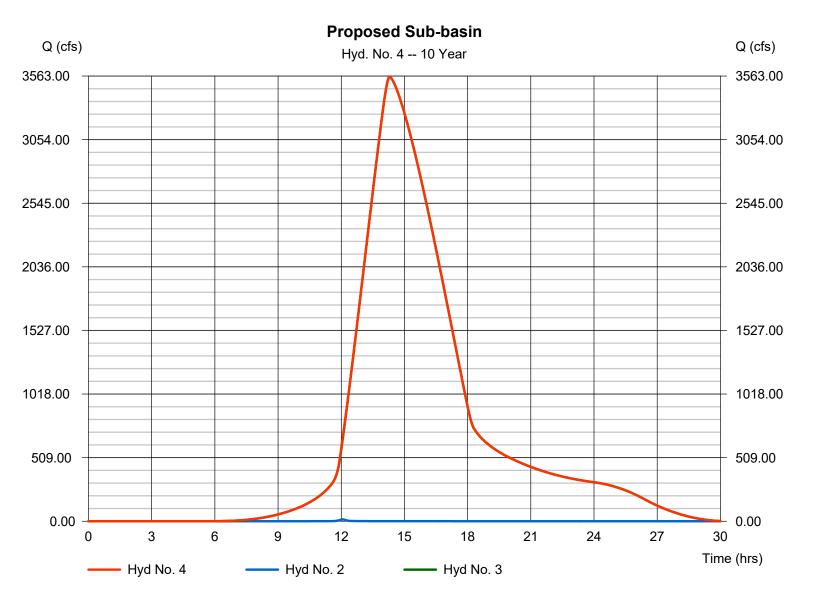

Hydrograph Summary Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

yd. o.	Hydrograph type (origin)	Peak flow (cfs)	Time interval (min)	Time to Peak (min)	-	Inflow hyd(s)	Maximum elevation (ft)	Total strge used (cuft)	Hydrograph Description
1	SCS Runoff	5916.63	1	857	108,331,17	6			Existing Sub-basin
2	SCS Runoff	24.35	1	724	73,833				Proposed Project
3	SCS Runoff	5912.31	1	857	108,252,22	4			Remainder Proposed Sub-basin
ı	Combine	5913.27	1	857	108,326,02	4 2, 3			Proposed Sub-basin

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 1

Existing Sub-basin

Hydrograph type = SCS Runoff Storm frequency = 100 yrsTime interval = 1 min Drainage area = 5042.000 ac Basin Slope = 1.4 % Tc method = LAG Total precip. = 7.70 inStorm duration = 24 hrs

Peak discharge = 5916.63 cfs
Time to peak = 14.28 hrs
Hyd. volume = 108,331,176 cuft
Curve number = 85
Hydraulic length = 18972 ft
Time of conc. (Tc) = 242.00 min

= Type II

= 484

Distribution

Shape factor

Existing Sub-basin Q (cfs) Q (cfs) Hyd. No. 1 -- 100 Year 5922.00 5922.00 5076.00 5076.00 4230.00 4230.00 3384.00 3384.00 2538.00 2538.00 1692.00 1692.00 846.00 846.00 0.00 0.00 3 6 9 12 15 18 21 24 27 30 Time (hrs) Hyd No. 1


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 2

Proposed Project

Hydrograph type = SCS Runoff Peak discharge = 24.35 cfsStorm frequency = 100 yrsTime to peak = 12.07 hrsTime interval = 1 min Hyd. volume = 73.833 cuft Curve number Drainage area = 3.690 ac= 82 Basin Slope = 6.4 % Hydraulic length = 1565 ftTc method Time of conc. (Tc) = 16.94 min = LAG Total precip. = 7.70 inDistribution = Type II Storm duration = 24 hrs Shape factor = 484

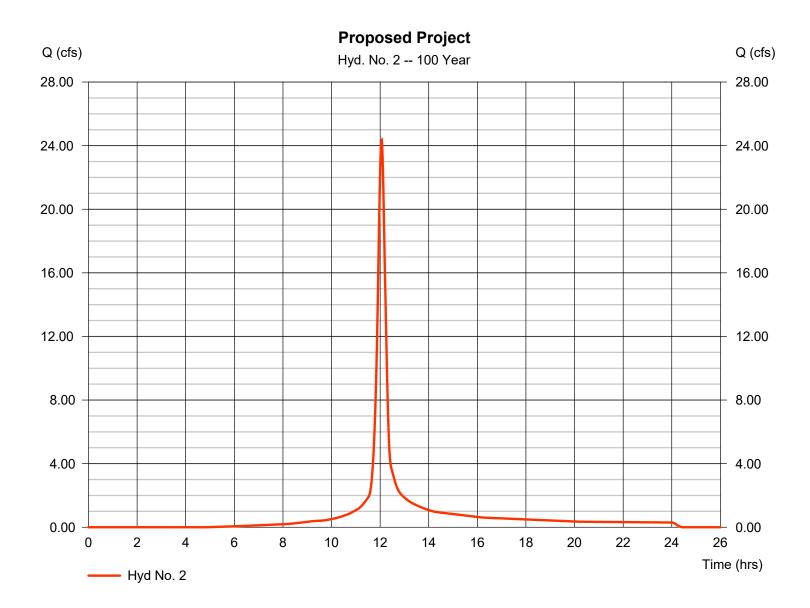


Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Hyd. No. 3

Remainder Proposed Sub-basin

Hydrograph type = SCS Runoff Peak discharge = 5912.31 cfsStorm frequency = 100 yrsTime to peak = 14.28 hrsTime interval = 1 min Hyd. volume = 108,252,224 cuft Curve number Drainage area = 5038.310 ac = 85 Basin Slope = 1.4 % Hydraulic length = 18972 ftTc method Time of conc. (Tc) = 242.00 min = LAG Total precip. = 7.70 inDistribution = Type II Shape factor Storm duration = 24 hrs = 484

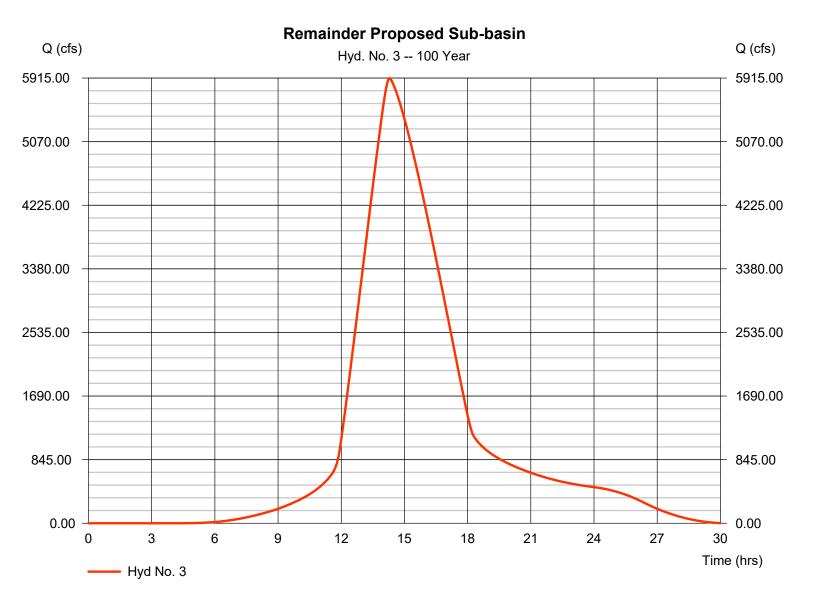

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021


Wednesday, 09 / 2 / 2020

Hyd. No. 4

Proposed Sub-basin

Hydrograph type = Combine Peak discharge = 5913.27 cfs Storm frequency = 100 yrs Time to peak = 14.28 hrs

Time interval = 1 min Hyd. volume = 108,326,024 cuft Contrib. drain. area = 5042.000 ac

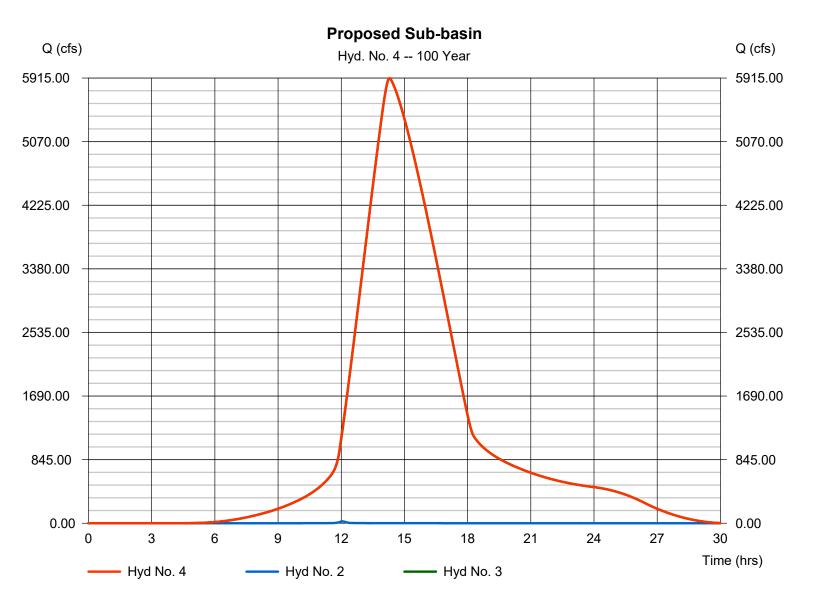

Hydraflow Rainfall Report

Hydraflow Hydrographs Extension for Autodesk® Civil 3D® by Autodesk, Inc. v2021

Wednesday, 09 / 2 / 2020

Return Period	Intensity-Du	Intensity-Duration-Frequency Equation Coefficients (FHA)									
(Yrs)	В	D	E	(N/A)							
1	64.1474	17.7000	0.8922								
2	95.7859	19.2000	0.9317								
3	0.0000	0.0000	0.0000								
5	118.7799	19.1000	0.9266								
10	125.1300	18.2000	0.9051								
25	158.9867	18.7000	0.9180								
50	171.2459	18.3000	0.9078								
100	187.3624	18.1000	0.9031								

File name: KCMO.IDF

Intensity = B / (Tc + D)^E

Return					Intens	ity Values	(in/hr)					
Period (Yrs)	5 min	10	15	20	25	30	35	40	45	50	55	60
1	3.96	3.31	2.86	2.52	2.25	2.04	1.87	1.72	1.60	1.49	1.40	1.32
2	4.92	4.13	3.56	3.14	2.81	2.54	2.32	2.14	1.98	1.85	1.73	1.63
3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	6.23	5.23	4.51	3.98	3.56	3.22	2.94	2.71	2.52	2.35	2.20	2.07
10	7.27	6.09	5.26	4.63	4.14	3.75	3.43	3.16	2.93	2.74	2.57	2.42
25	8.70	7.30	6.30	5.54	4.96	4.49	4.10	3.78	3.51	3.27	3.07	2.89
50	9.83	8.24	7.11	6.26	5.60	5.07	4.64	4.27	3.97	3.70	3.47	3.27
100	11.00	9.21	7.95	7.00	6.26	5.67	5.19	4.78	4.44	4.14	3.89	3.66

Tc = time in minutes. Values may exceed 60.

Precip. file name: Z:\acad\KCMO.pcp

		F	Rainfall F	Precipitat	tion Tab	le (in)		
Storm Distribution	1-yr	2-yr	3-yr	5-yr	10-yr	25-yr	50-yr	100-yr
SCS 24-hour	1.37	3.50	0.00	3.30	5.20	6.00	6.80	7.70
SCS 6-Hr	0.00	1.80	0.00	0.00	2.60	0.00	0.00	4.00
Huff-1st	0.00	1.55	0.00	2.75	4.00	5.38	6.50	8.00
Huff-2nd	2.49	3.10	0.00	4.01	4.64	5.52	6.21	6.90
Huff-3rd	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Huff-4th	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Huff-Indy	0.00	1.55	0.00	2.75	4.00	5.38	6.50	8.00
Custom	0.00	1.75	0.00	2.80	3.90	5.25	6.00	7.10