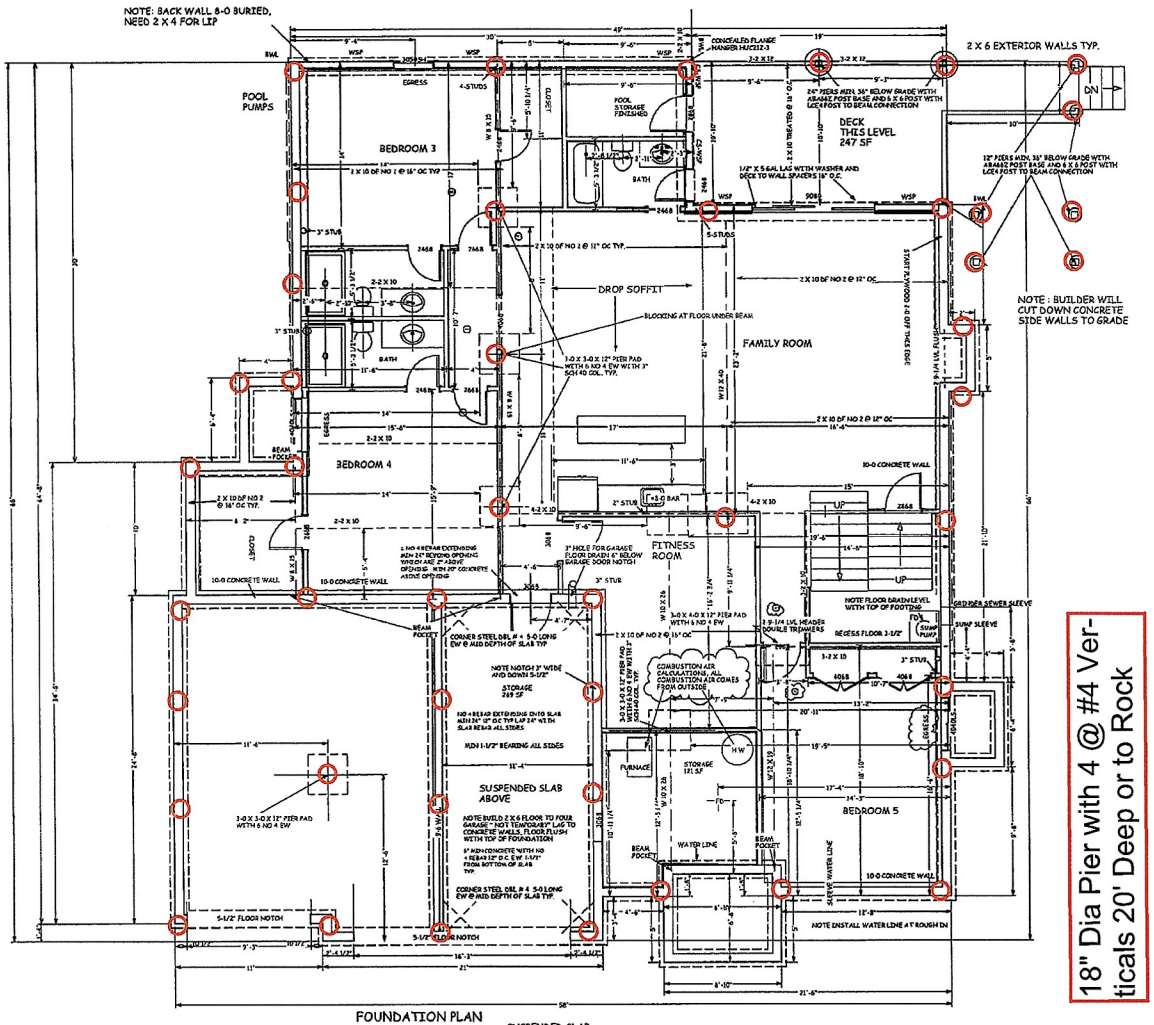

FOUNDATION PLAN
2004 SF FINISHED
390 SF UNFINISHED

SUSPENDED SLAB
CONCRETE MIN 3,500 PSI
GRADE 40 REBAR

Pier Plan Layout
Total of 45 Piers

18" Dia Pier with 4 @ #4 Verticals 20' Deep or to Rock

BUILD IN ACCORDANCE WITH 2018 INTERNATIONAL RESIDENTIAL CODE AND LOCAL CODES.

TRUMARK customHOMES
KYLE VI
LOT 11 WOODLAND OAKS
2524 NE WOODLAND OAK CIR.
LEE SUMMIT MO

SCALE	1/4" = 1-0
DATE	11-5-24
PLAN NO.	4312
SHEET NO.	2

12-3-24

11/12/2024 10: