


APPROVED

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION PROCESSES AND TECHNIQUES OF CONSTRUCTION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.

REVIEWED BY:
RESIDENTIAL ENGINEERING SERVICES, LLC


BRAD A. HUXOL, P.E.

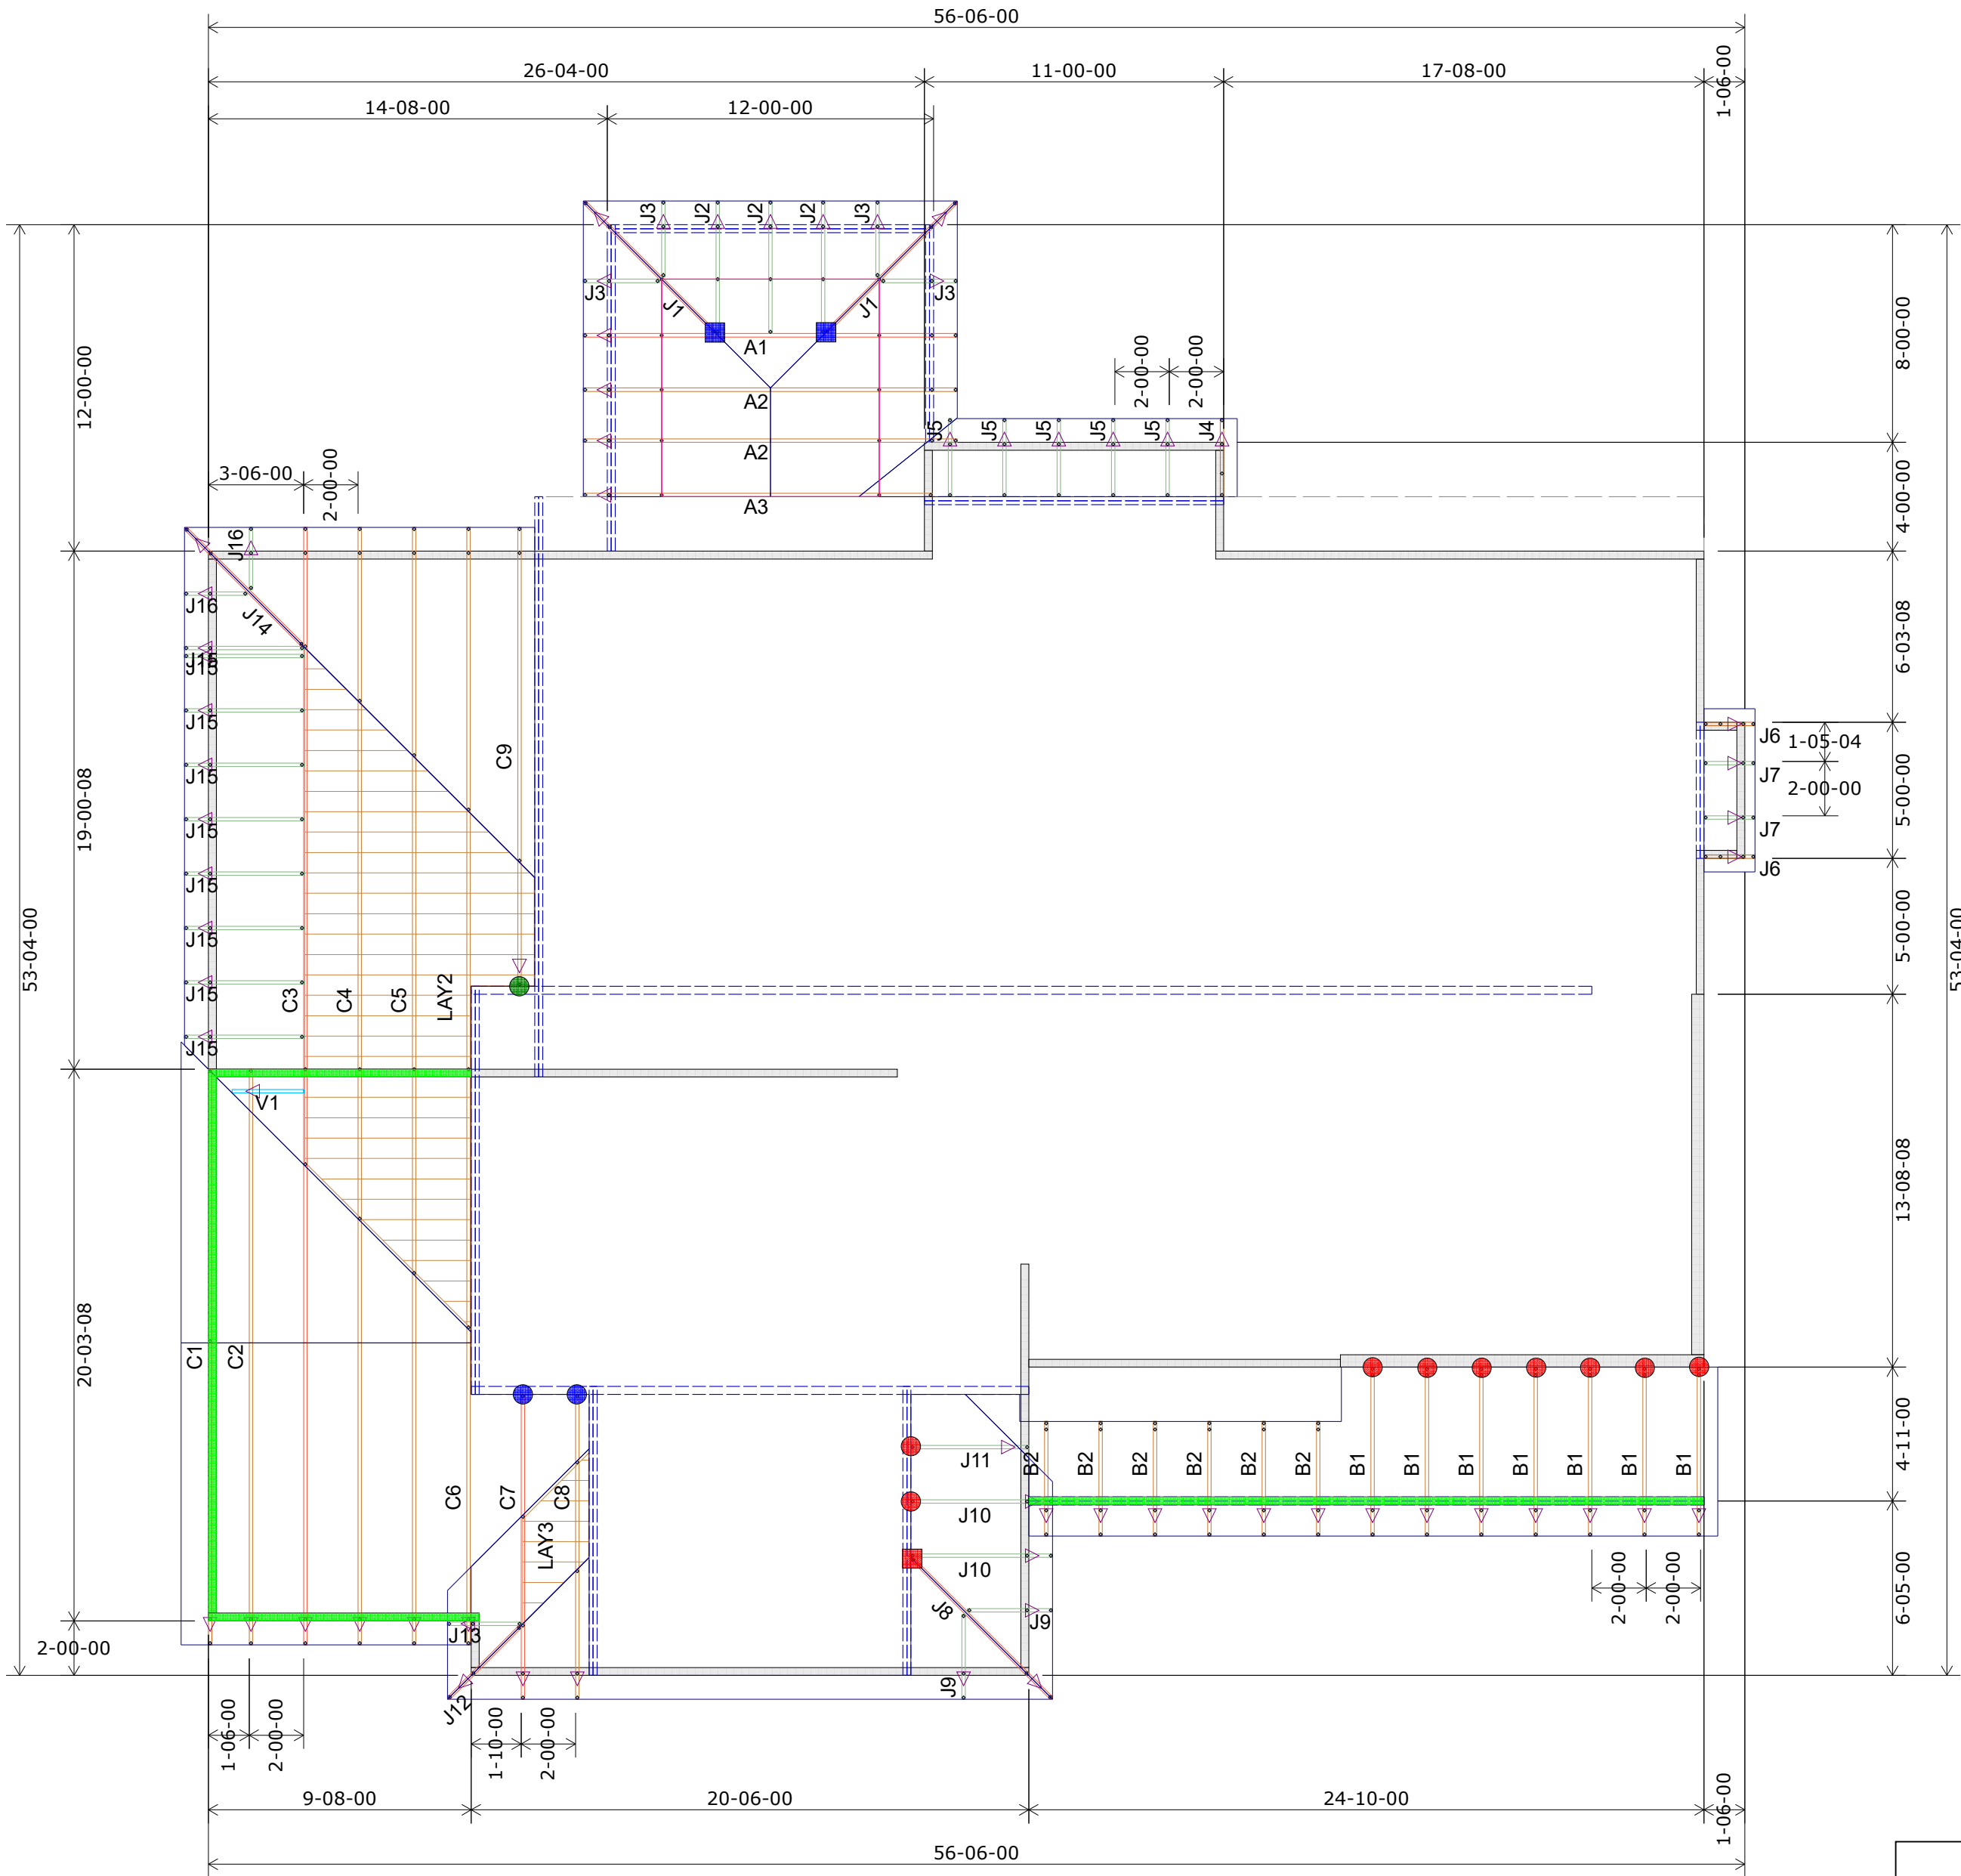

1st Floor Truss Layout
Scale: 3/16" = 1'

| HANGER SCHEDULE | | Quantity |
|-----------------|----------|----------|
| ● | LUS24 | 9 |
| ● | LUS26 | 2 |
| ● | HUS26 | 11 |
| ▲ | HHUS26-2 | 0 |
| ▲ | HGUS26-2 | 0 |
| ▲ | HGUS28-3 | 0 |
| ■ | LTHJA26 | 1 |
| ■ | TJC37 | 2 |
| ■ | TJC57 | 0 |
| ▲ | HTS20 | 0 |

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

| # of Uplift | Connector |
|-------------|-----------|
| 0 - 495: | (1) H2.5A |
| 495 - 990: | (2) H2.5A |
| 990 - 1245: | (1) HTS20 |

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Wall Heights:
1st Floor = 9-1-2 U.N.O
2nd Floor = 8-1-2 U.N.O

| Wall Heights | |
|--------------|--|
| 8-01-02 | |
| 9-01-02 | |

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

04/02/2020

| SUMMIT HOMES | |
|------------------|------------------------------------|
| Customer | Lot 62 The Reserve at Stoney Creek |
| Job Name | 1413 SW Georgetown Dr. |
| Job Site Address | Lee's Summit |
| City, State | MO |
| Designer | Chance 785-746-4240 |
| 3/19/2020 | Job # 400144 |

| | |
|---|--|
| THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses during construction. The building designer is responsible for the general layout and bearing of the trusses, walls and columns. The responsibility of the building designer for general layout and bearing of the trusses, walls and columns is the responsibility of the building designer. See individual design sheets for "Bearing of wood trusses" available from the Truss Plate Institute, 583 Dornfro Drive, Madison, WI 53179. | |
| THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU. | |

Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871

