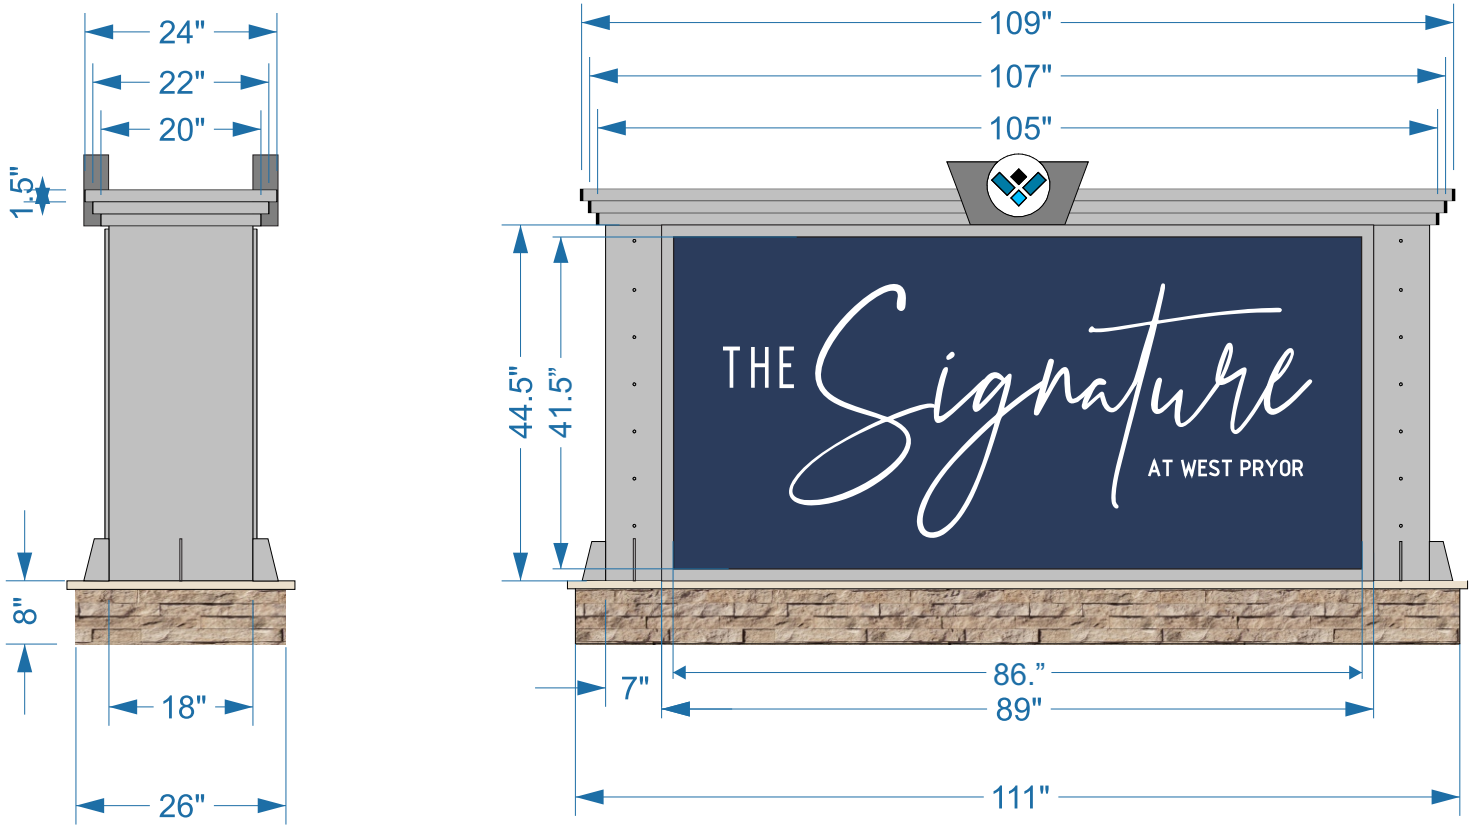


# ILLUMINATED D/S MONUMENT SIGN (EXTERIOR)

Company Colors: TBD

**ELECTRICAL POWER (BY OTHERS) TO BE RUN WITHIN 3 FT. OF SIGN INSTALL LOCATION BEFORE INSTALL CAN BEGIN.**

- Qty: (1) One Total Double-sided Illuminated Monument sign.
- Welded Aluminum framework, with painted Alum. skins.
- Tenant Panel removable for Name changes.
- Illumination via Internally-mounted WHITE LED's, (Tenant Panels/ Logo are illuminated).
- Circular Logo: WHITE Acrylic Face w/ colored Vinyl, BLACK Trimcap, BLACK Returns.
- Wedge-shaped Decorative gussets: 1/2 Acrylic, painted METALLIC SILVER.
- Side columns/ Tiered Topper painted METALLIC SILVER.
- Keystone-shaped Aluminum box painted MEDIUM GREY.
- Decorative Buttons: 1" Dia. Plastic, painted METALLIC SILVER.

Drawing Prepared by:

MIDWEST SIGN COMPANY

**Location:** Vanguard Villas & Signature Streets of West Pryor

**Project #:**

**Loc #**

**Filename:** Vanguard Villas & Signature at West Pryor_Monument_ SIGNATURE (B)_02

Drawing Prepared for:

STREETS OF WEST PRYOR

| Rev #: | Req #: | Date | Req by: | Drawn by: | Revision Description: | Drawings are the exclusive property of Midwest Sign Company | |
|---|---|---|---|---|---|---|---|
| Original | | | JY | RH | | | |
| | Rev 01 | 5/20/22 | JY | RH | Final artwork, Adjust artwork for fabrication | | |
| | Rev02 | 6/13/22 | JY | RH | Changed design/size of monument sign | | |
| | | | | | | Approved By: | Date: |