


Roof Truss Layout
Scale: 3/16" = 1'

HANGER SCHEDULE	Quantity
● LUS24	6
● LUS26	0
● HUS26	3
▲ HHUS26-2	0
▲ HGUS26-2	0
▲ HGUS28-3	0
■ LTHJA26	0
■ TJC37	7
■ TJC57	0
▲ HTS20	0

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

# of Uplift	Connector
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Plate Heights 9-01-02 U.N.O.	
8-01-02	
10-01-02	
13-01-02	

EVERSTEAD
SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.

STATUS:
APPROVED


06/28/2023

REVIEWED BY:
BH

ENGINEER, EVERSTEAD

Customer		Job Name		Job Site Address		City, State		Designer	
Summit Homes		Lot 98 Reserve at Stoney Creek		1804 SW Hightown Dr		Lee's Summit MO		Chuck Haspels (785) 746-4266	
Job #		Date		Approved By		Date		Date	
B230098		6/27/2023		[Signature]		6/27/2023		6/27/2023	

Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871

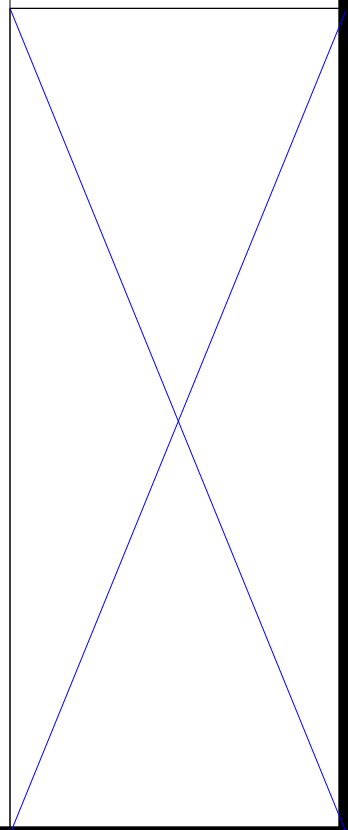

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses during construction. The building designer is responsible for providing the building designer with the required bracing details. The building designer is responsible for providing the building designer with the required bracing details. The building designer is responsible for providing the building designer with the required bracing details. The building designer is responsible for providing the building designer with the required bracing details.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.