
SEQUOIA DUPLEX - BLDG 2

FOR DICK BURTON 211-213 NW ORCHARD COURT, LEE'S SUMMIT, MO 2020-01



SITE LOCATION MAP



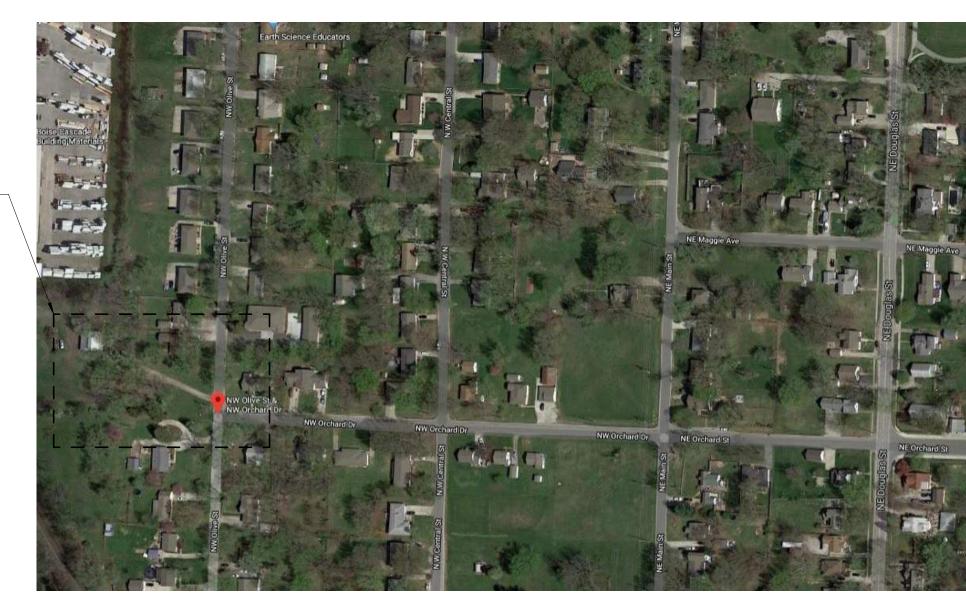

code floor plan - roof terrace


SHEET INDEX

INFORMATION


G201 INFORMATION

ROOF PLAN & DETAILS


roof wall section

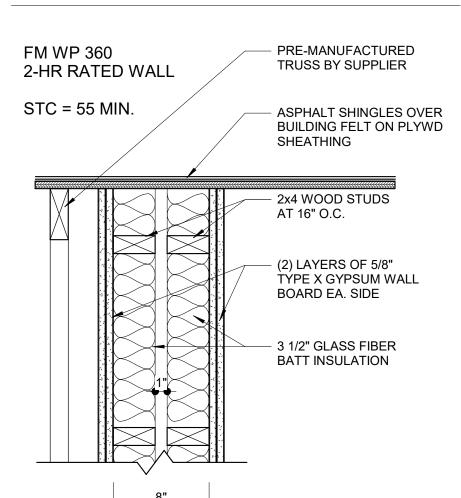

outside corner separation firewall

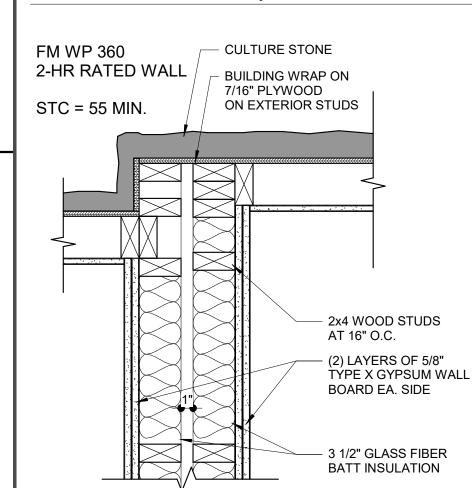



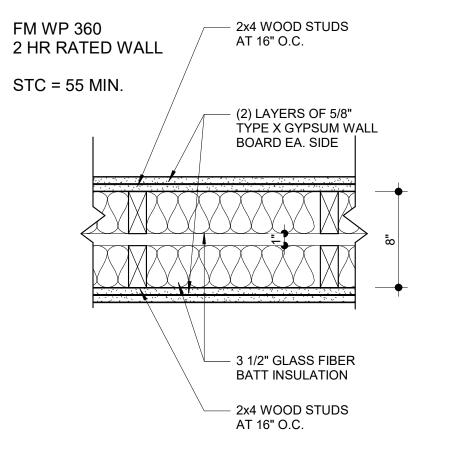

2020-01 TITLE SHEET

ompkins project no.:


sheet issue date:


2023.01.03


REVISIONS

www.tom-arch.com

G101

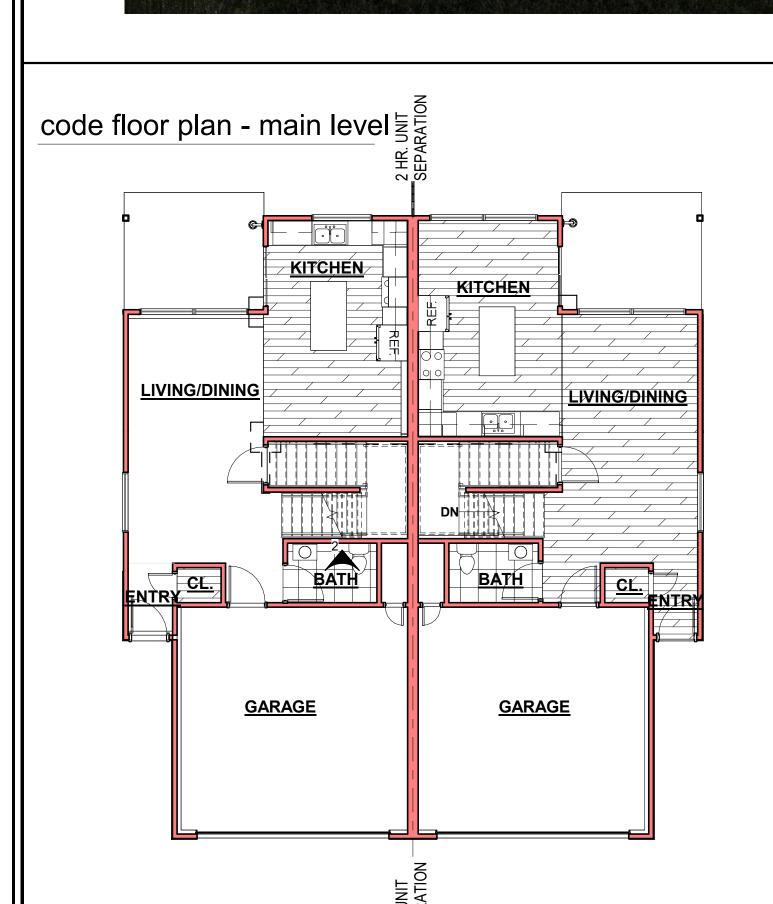

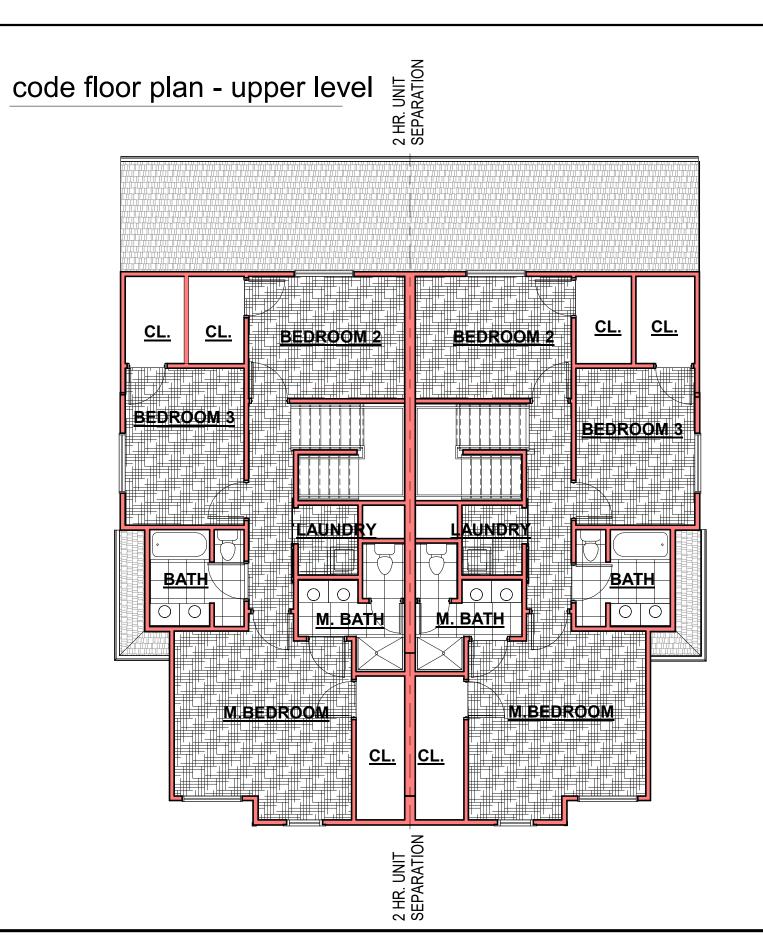

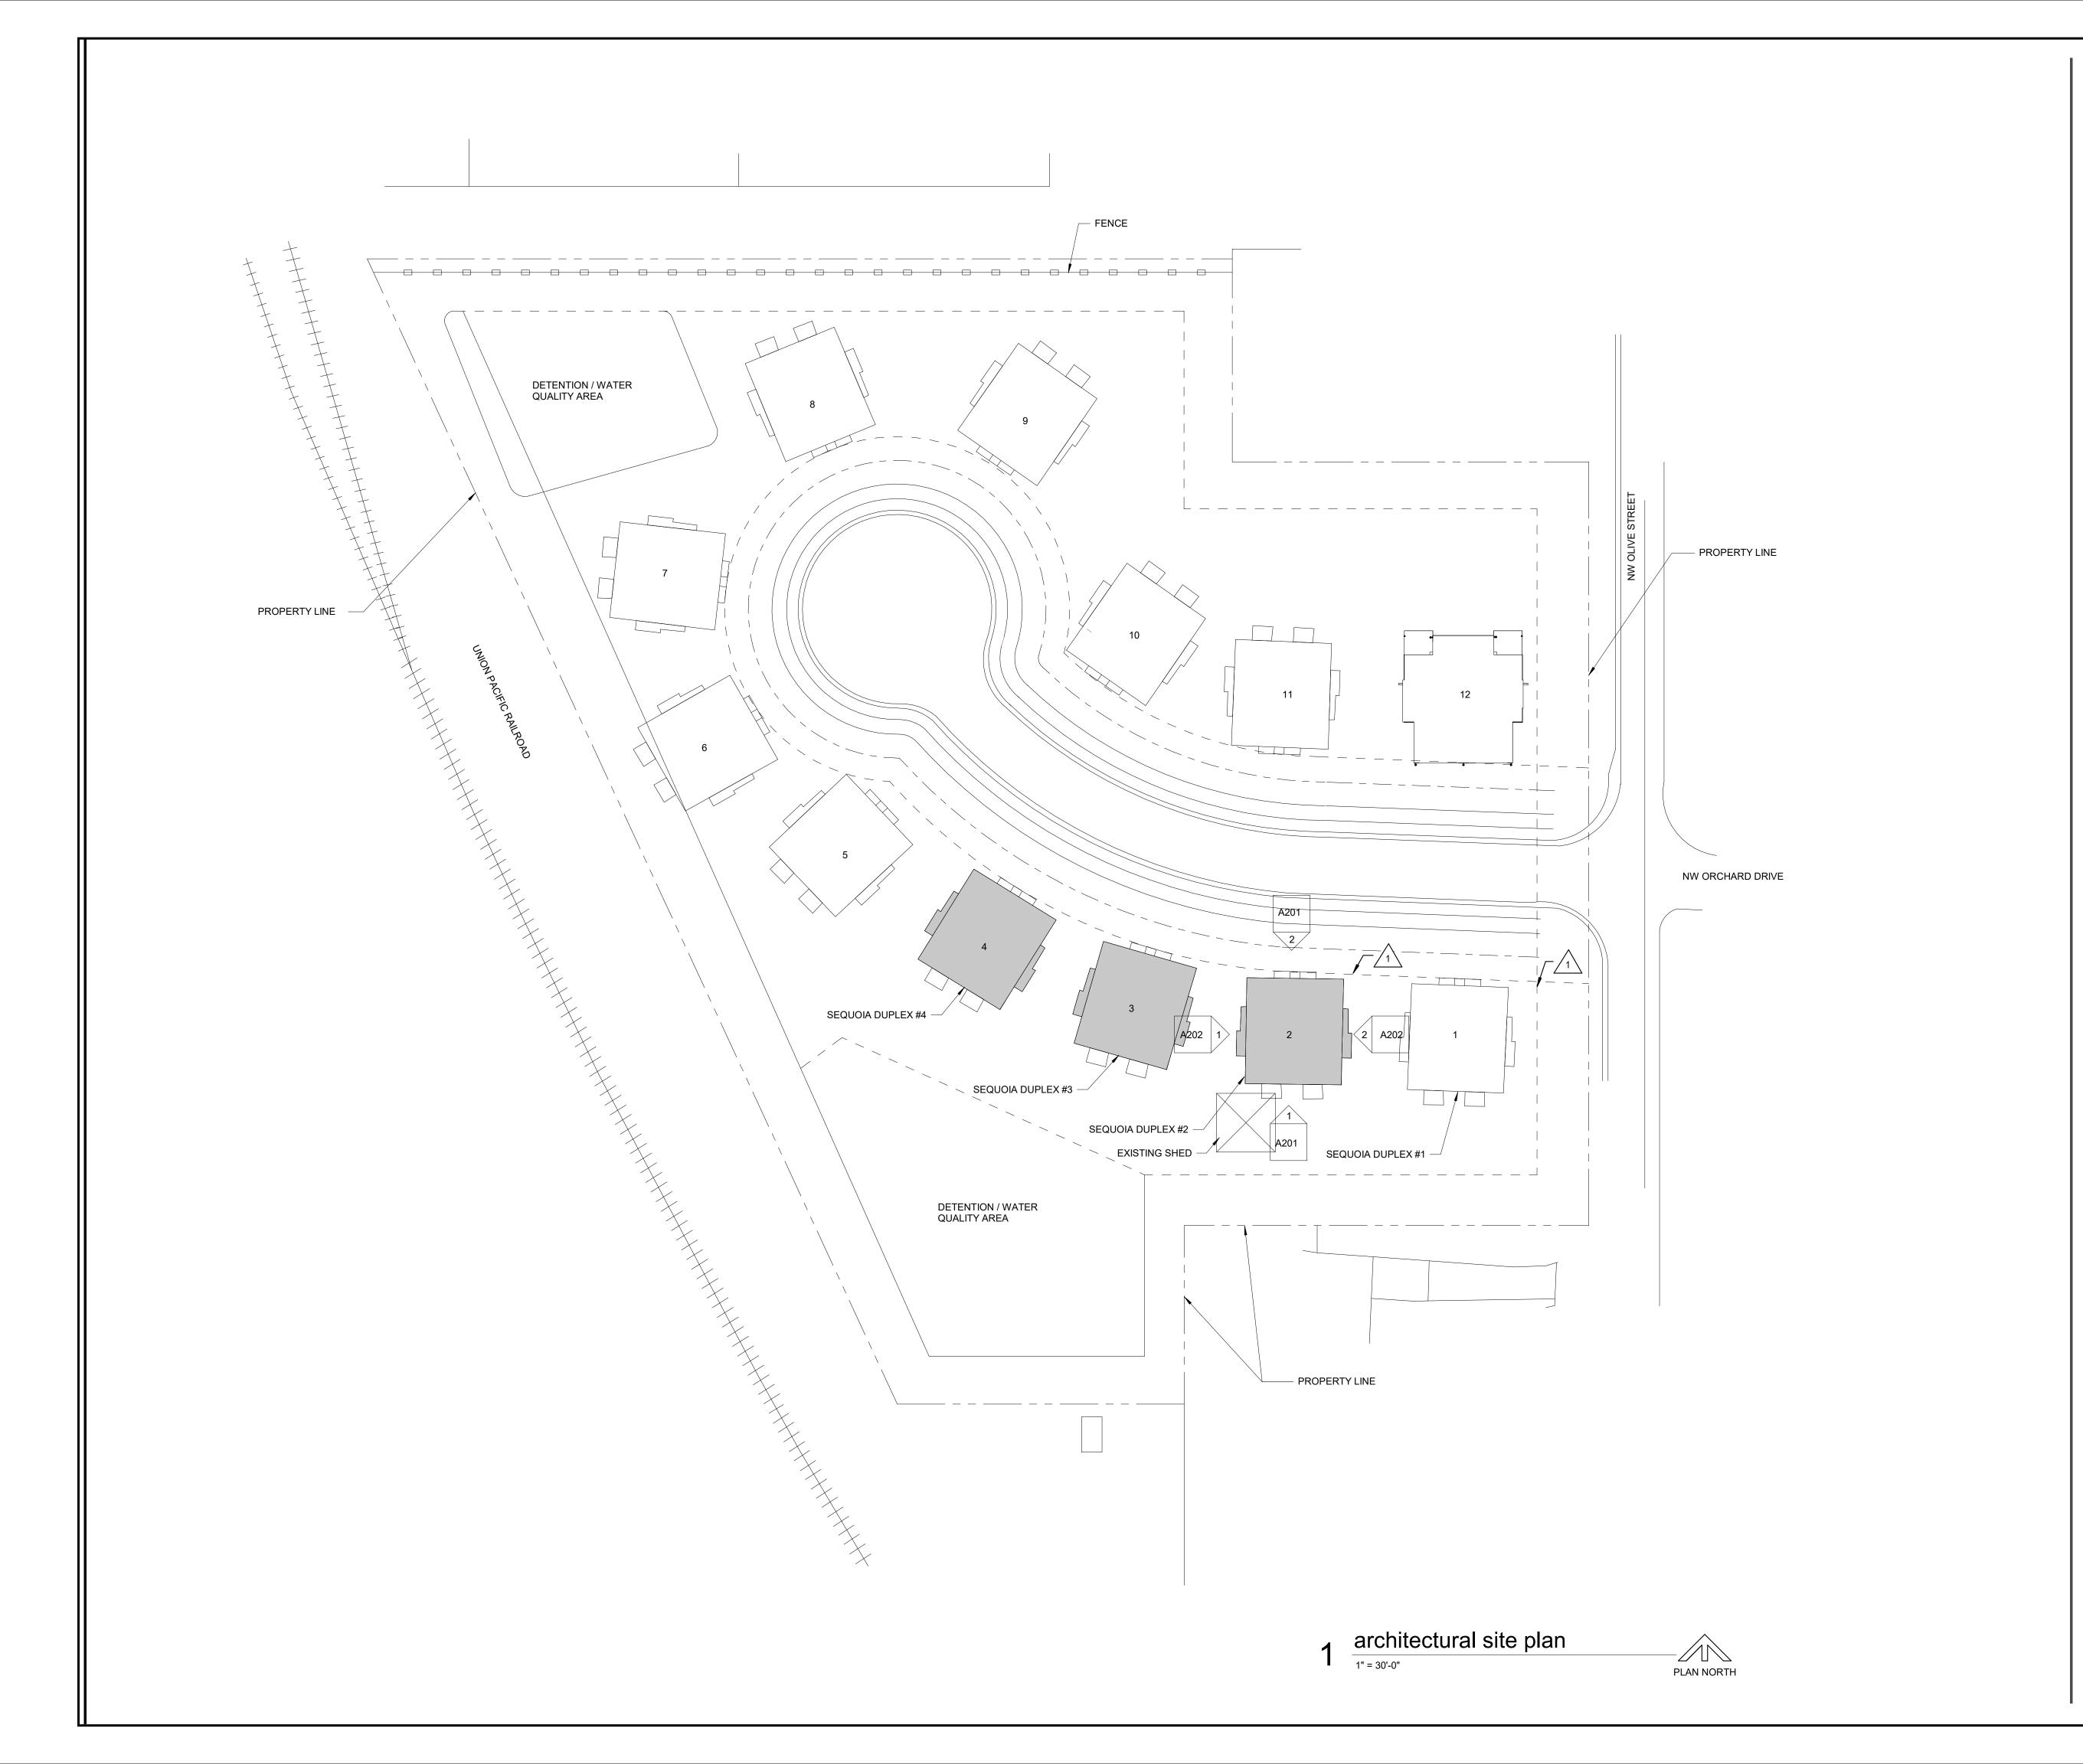

site general notes

- CONTRACTOR TO REMOVE TRASH AND DEBRIS FROM SITE PRIOR TO START OF EXCAVATION.
 CONTRACTOR TO CUT ROUGH GRADE TO 4" BELOW FINAL FLATWORK.
 CONTACTOR TO LOCATE DEBRIS AND CONCRETE PIECES TO DESIGNATED LOCATION ON/NEAR SITE.
 FINAL GRADE TO BE PITCHED AWAY FROM FOUNDATION 6" IN 10' UNLESS NOTED OTHERWISE.
 CONTRACTOR TO CALL MISSOURI ONE CALL SYSTEM PRIOR TO START OF EXCAVATION
 COORDINATE SITE REQUIREMENTS w/CIVIL ENGINEERING DRAWINGS.


site plan keynotes



BUILDING SET BACK LINE



www.tom-arch.com 816.284.6518



sheet issue date:

2023.01.03 tompkins project no.:

2020-01

SITE PLAN & DETAILS

general notes

1) GENERAL CONTRACTOR SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES BETWEEN SPECIFICATIONS AND DRAWINGS, BETWEEN MULTIPLE SPECIFICATION SECTIONS AND/OR BETWEEN MULTIPLE DRAWINGS. THE ARCHITECT WILL DETERMINE WHICH SHALL GOVERN.

2) GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS OF THE JOB SITE INCLUDING UTILITIES AND EXISTING STRUCTURES PRIOR TO BEGINNING WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT.

3) GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR STABILITY OF THE STRUCTURE DURING CONSTRUCTION INCLUDING ALL SHORING AND BRACING REQUIRED TO RESIST REQUIRED VERTICAL AND LATERAL FORCES.

4) ALL ARCHITECTURAL FLOOR PLAN DIMENSIONS ARE FROM FACE OF CONCRETE OR FACE OF STUD.

5) INTERIOR WALLS ARE TO BE COMPRISED OF 2x4 STUDS AT 16" O.C. MAX WITH 1/2" DRYWALL EACH SIDE UNLESS NOTED OTHERWISE.

6) MECHANICAL/PLUMBING CONTRACTOR TO COORDINATE EACH OTHERS' WORK WITH ARCHITECTURAL PLANS AND TO NOTIFY ARCHITECT OF NEED FOR SOFFITS OR CHASES FOR INSTALLATION OF DUCTWORK OR PLUMBING.

7) ELECTRICAL CONTRACTOR TO INSTALL OUTLETS AS REQUIRED PER CODE. VERIFY ALL LOCATIONS WITH OWNER PRIOR TO BEGINNING DRYWALL.

structural plan keynotes

 $\frac{\sqrt{3}}{\sqrt{3}}$ (2)1\(^3\)\(^4\)x9\(^4\)LVL UNDER BEARING WALL ABOVE

4 3'-0"x3'-0"x1'-0" FOOTING W/ (6) #4 BARS EACH WAY

EACH SIDE OF BEAM

2'-6"x2'-6"x1'-0" FOOTING W/ (5) #4 BARS EACH WAY,

8"x16" WALL FOOTING W/ (3) #4, TYP WHERE SHOWN

NOTE: REFER TO STRUCTURAL DRAWINGS FOR REINFORCING

NOTE: REFER TO ALL SECTIONS (SECTIONS LOCATED ON THIS SHEET, PRECEEDING SHEETS AND FOLLOWING SHEETS) FOR

STEEL IN EXTERIOR WALLS AND CONCRETE NOT SHOWN

NOTE: REFER TO ALL DETAILS (DETAILS LOCATED ON THIS SHEET, PRECEEDING SHEETS AND FOLLOWING SHEETS) FOR

APPLICABLE NOTES NOT SHOWN

APPLICABLE NOTES NOT SHOWN


8) ALL EXTERIOR WALLS TO RECIEVE R-19 BATT INSULATION, U.N.O.

Ta)

TOMPKINS architects

816.284.6518

www.tom-arch.com



DUPLEX - BI

REVISIONS


No. Description

sheet issue date:
2023.01.03
tompkins project no.:

2020-01

FOUNDATION PLAN

sheet no.:

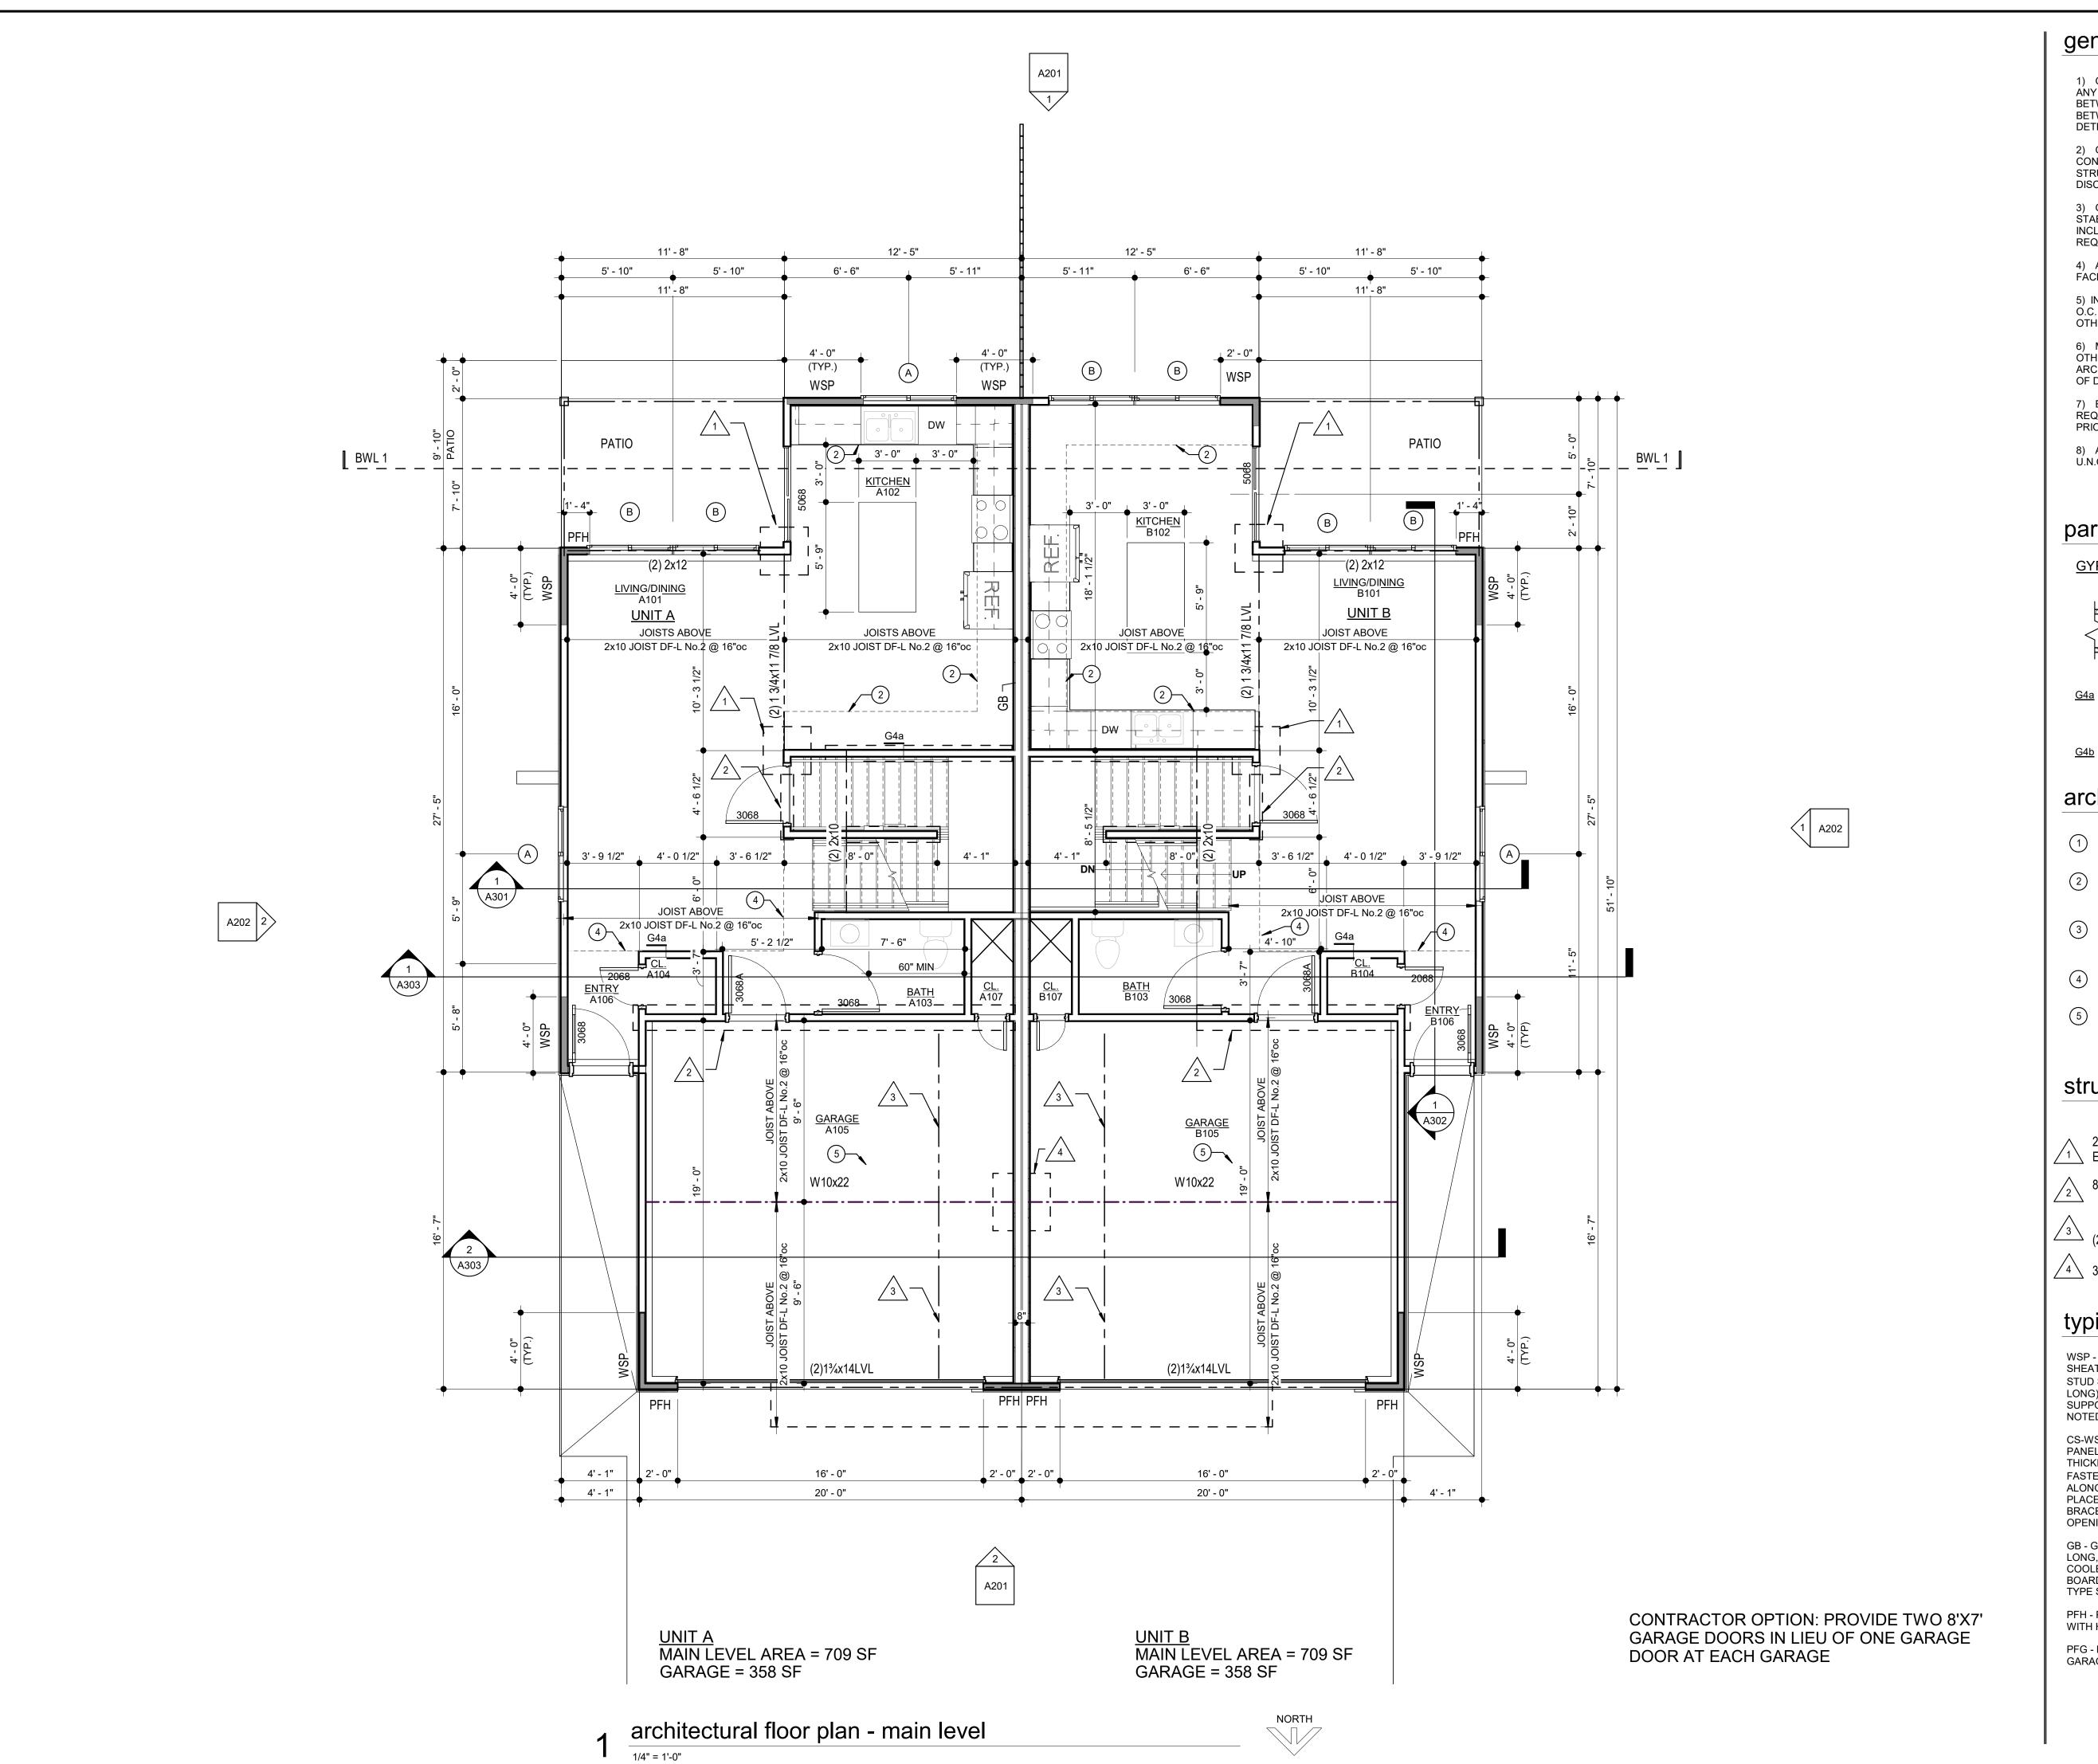



1) GENERAL CONTRACTOR SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES BETWEEN SPECIFICATIONS AND DRAWINGS, BETWEEN MULTIPLE SPECIFICATION SECTIONS AND/OR BETWEEN MULTIPLE DRAWINGS. THE ARCHITECT WILL DETERMINE WHICH SHALL GOVERN.

2) GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS OF THE JOB SITE INCLUDING UTILITIES AND EXISTING STRUCTURES PRIOR TO BEGINNING WORK AND REPORT ANY DISCREPANCIES TO THE ARCHITECT.

3) GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR STABILITY OF THE STRUCTURE DURING CONSTRUCTION INCLUDING ALL SHORING AND BRACING REQUIRED TO RESIST REQUIRED VERTICAL AND LATERAL FORCES.

4) ALL ARCHITECTURAL FLOOR PLAN DIMENSIONS ARE FROM FACE OF CONCRETE OR FACE OF STUD.

5) INTERIOR WALLS ARE TO BE COMPRISED OF 2x4 STUDS AT 16" O.C. MAX WITH 1/2" DRYWALL EACH SIDE UNLESS NOTED OTHERWISE.

6) MECHANICAL/PLUMBING CONTRACTOR TO COORDINATE EACH OTHERS' WORK WITH ARCHITECTURAL PLANS AND TO NOTIFY ARCHITECT OF NEED FOR SOFFITS OR CHASES FOR INSTALLATION OF DUCTWORK OR PLUMBING.

7) ELECTRICAL CONTRACTOR TO INSTALL OUTLETS AS REQUIRED PER CODE. VERIFY ALL LOCATIONS WITH OWNER PRIOR TO BEGINNING DRYWALL.

8) ALL EXTERIOR WALLS TO RECIEVE R-19 BATT INSULATION, U.N.O.

partition types

<u>GYPSUM</u>



GYPSUM BOARD PARTITION:

2x4 STUDS @ 16" OC - COVER EACH SIDE WITH 1/2"
GYPSUM BOARDS.

GYPSUM BOARD PARTITION:

2x4 STUDS @ 16" OC - COVER EXPOSED SIDE WITH

1/2" GYPSUM BOARDS.

architectural plan keynotes

- STAIR MAIN TO SECOND LEVEL- (15) RISERS AT APPROX. 7 1/2" AND (14) TREADS AT 10"
- 2 SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 2'-0" WIDE AND 7'-0" AFF
- ATTIC ACCESS. ROUGH FRAMED OPENING TO NOT BE LESS THAN 22" X 30". ACCESS TO MEET THE REQUIEREMENTS OF R807.1 OF THE IRC.
- (4) SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 8'-0" AFF
- (5) 4" CONCRETE SLAB REFER TO STRUCTURAL

structural plan keynotes

2'-6"x2'-6"x1'-0" FOOTING W/ (5) #4 BARS EACH WAY, EACH SIDE OF BEAM

8"x16" WALL FOOTING W/ (3) #4, TYP WHERE SHOWN

(2)1¾x9¼LVL UNDER BEARING WALL ABOVE

4 3'-0"x3'-0"x1'-0" FOOTING W/ (6) #4 BARS EACH WAY

typical braced wall method

WSP - WOOD STRUCTURAL PANEL; WOOD STRUCTURAL PANEL SHEATHING WITH A THICKNESS NOT LESS THAN 3/8" FOR 16" STUD SPACING, FASTEN WITH 6d COMMON NAILS (.131"∅x2" LONG) AT 6"oc ALONG EDGES AND 12"oc AT INTERMEDIATE SUPPORTS, WHERE SHOWN ON PLANS. UNLESS OTHERWISE NOTED, PANEL WIDTH = 4'-0".

CS-WSP - CONTINOUSLY SHEATHED WOOD STRUCTURAL PANEL; WOOD STRUCTURAL PANEL SHEATHING WITH A THICKNESS NOT LESS THAN 3/8" FOR 16" STUD SPACING, FASTEN WITH 6d COMMON NAILS (.131"Øx2" LONG) AT 6"oc ALONG EDGES AND 12"oc AT INTERMEDIATE SUPPORTS, PLACED ON ALL SHEATHABLE SURFACES ON ONE SIDE OF THE BRACED WALL LINE INCLUDING AREAS ABOVE AND BELOW OPENINGS AND GABLE END WALLS.

GB - GYPSUM BOARD; 1/2" GYPSUM BOARD WITH 13 GAGE, 1 3/8" LONG, 19/64" HEAD; 0.098" DIA, 1 3/8" LONG, ANNULAR-RINGED; 6d COOLER NAIL, 0.092" DIA, 1 7/8" LONG, 1/4" HEAD; OR GYPSUM BOARD NAIL, 0.0915" DIA, 1 7/8" LONG, 19/64' HEAD; TYPE W OR TYPE S SCREWS; AT 7"oc EDGES & 7"oc FIELD


PFH - PORTAL FRAME WITH HOLD-DOWNS; REF PORTAL FRAME WITH HOLD-DOWNS DETAIL

PFG - PORTAL FRAME AT GARAGE; REF PORTAL FRAME AT GARAGE DETAIL



TOMPKINS ARCHITECT:

816.284.6518




sheet issue date:
2023.01.03
compkins project no.:

sheet contents:

FLOOR PLAN - MAIN

2020-01

heet no.:

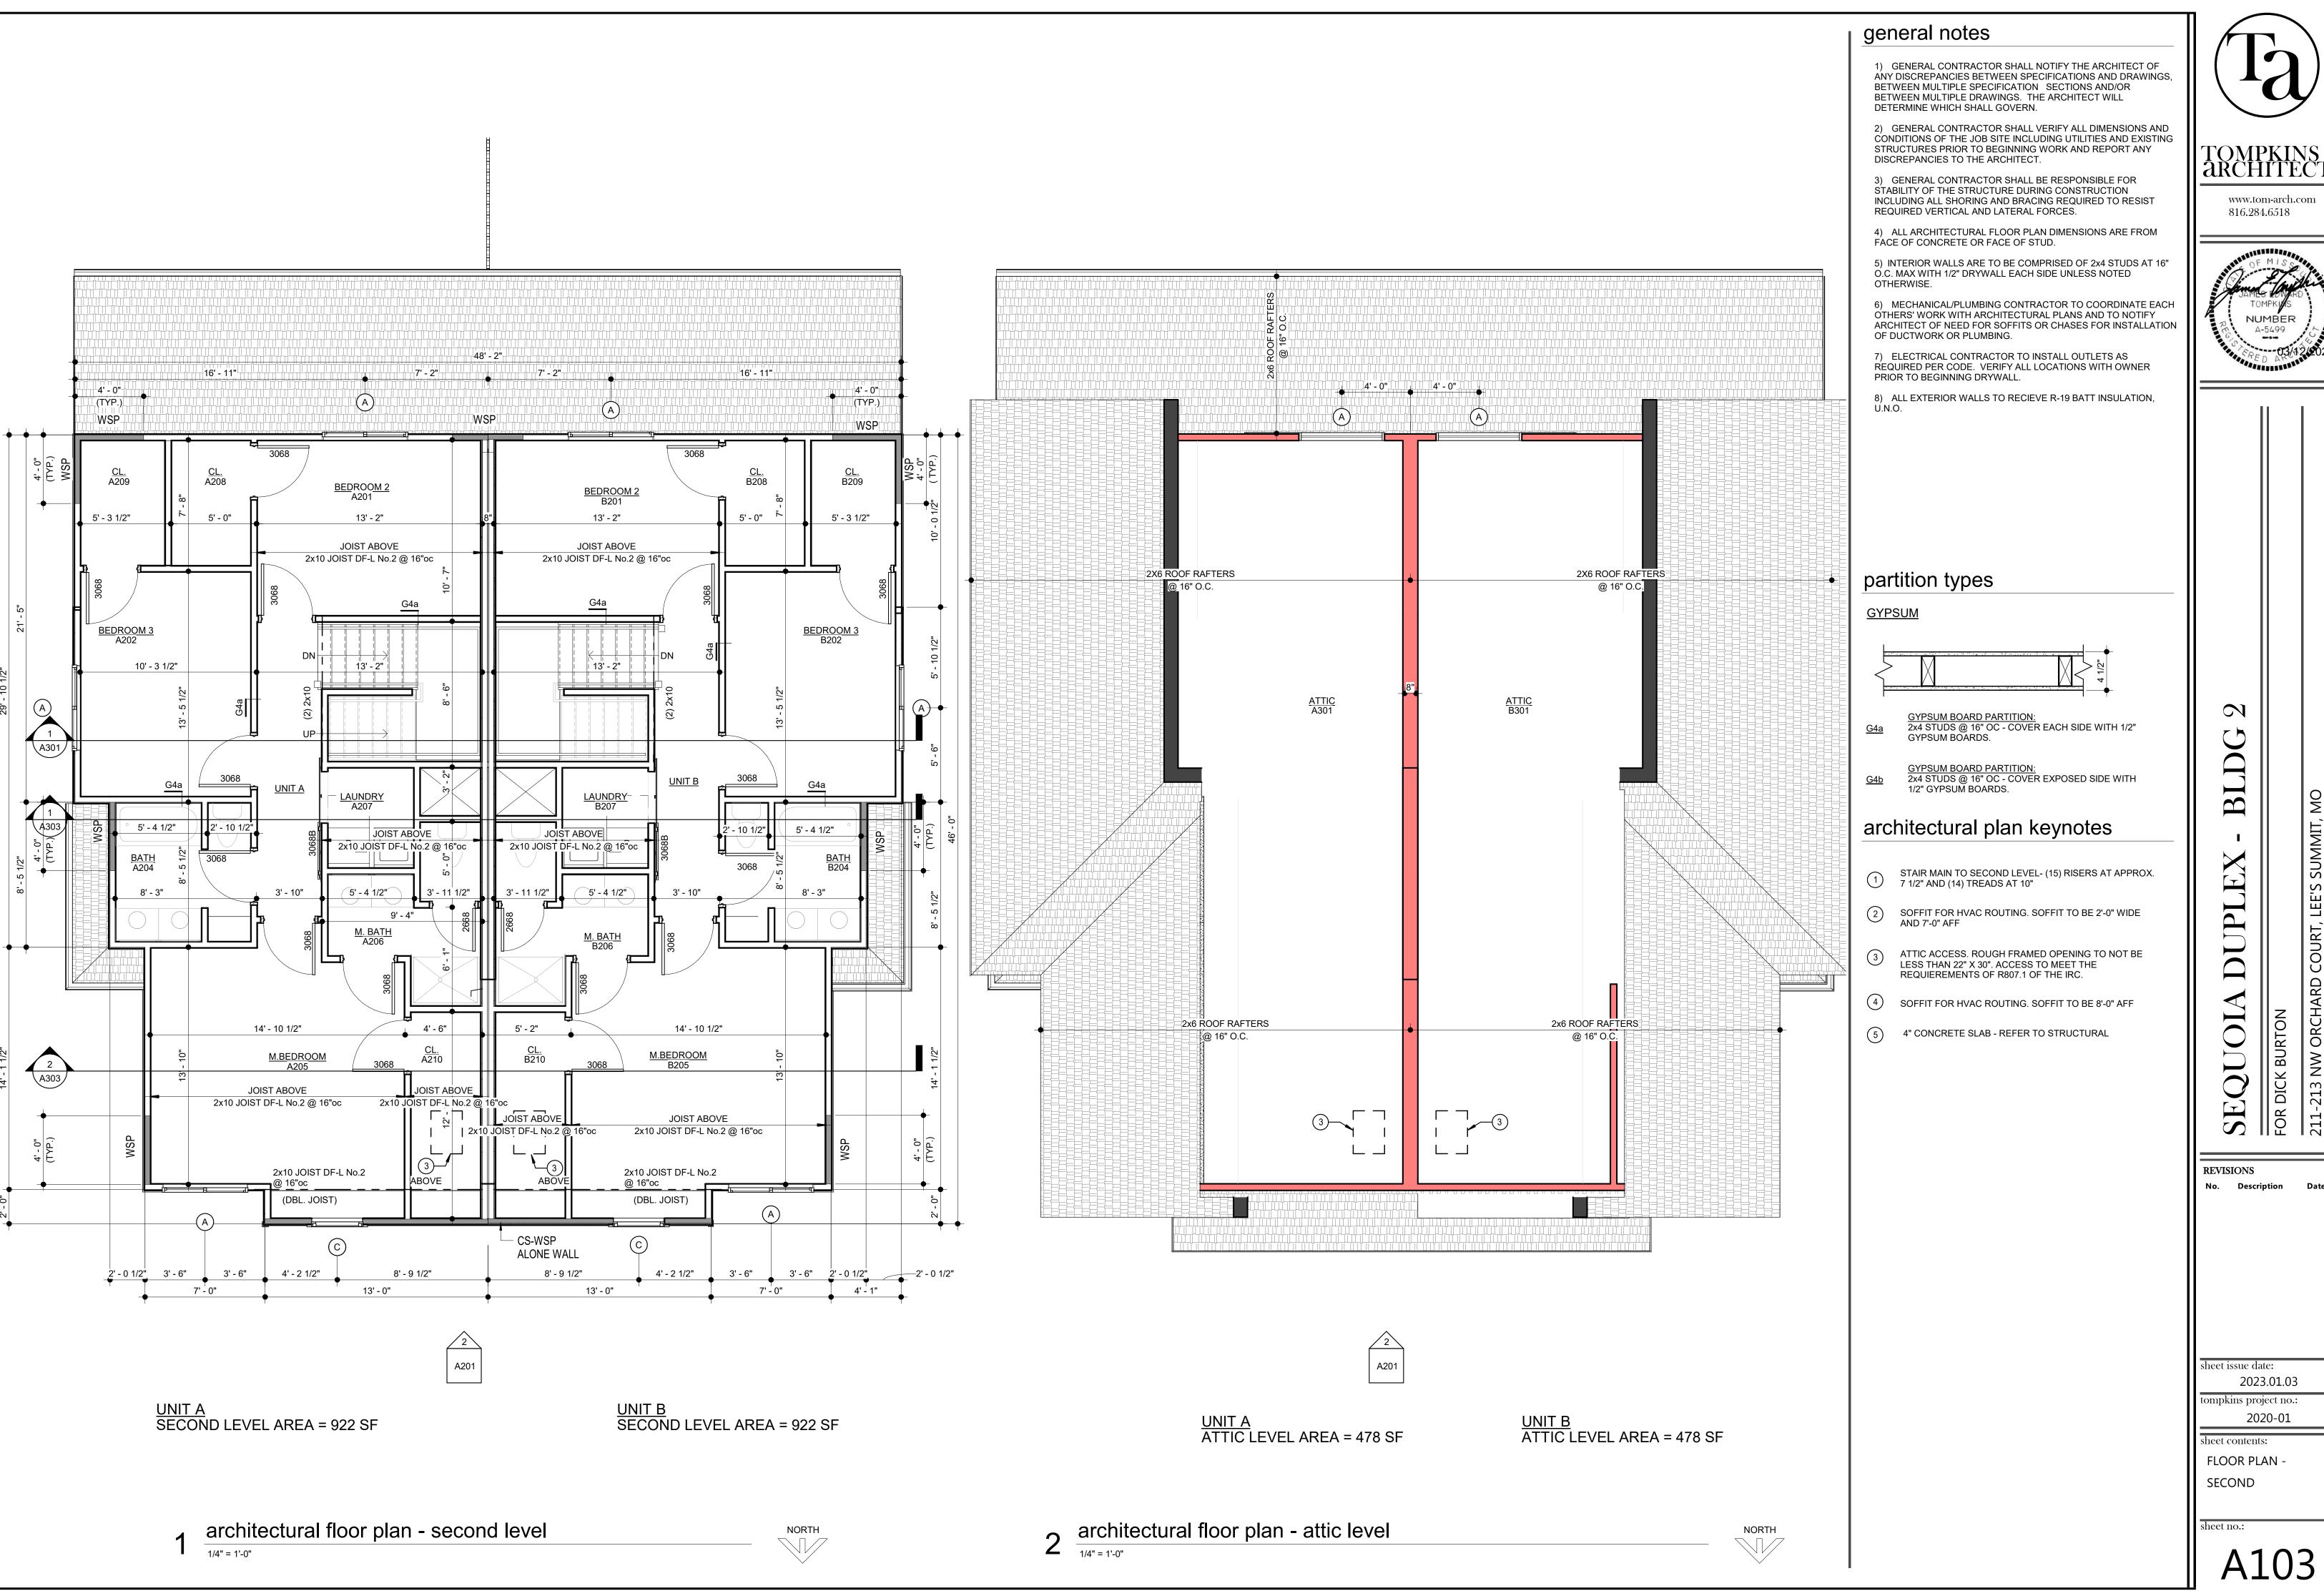



ORCHARD COURT, LEE'S SUMN

REVISIONS

sheet issue date: 2023.01.03 compkins project no.:

2020-01

FLOOR PLAN -



exterior elevation general notes

- 1. SLOPE GRADE A MINIMUM OF 5% AWAY FROM THE HOUSE FOR A MINIMUM DISTANCE OF 10'-0"
- 2. MAINTAIN MIN. 8" CLEARANCE BETWEEN FINAL GRADE AND
- **EXPOSED WOOD** 3. EXTERIOR SIDING INDICATED ON DRAWINGS SHALL BE INSTALLED OVER BUILDING WRAP, RESULTING IN A WATER-
- SECTION 703.2. WHERE DIFFERENTIAL BETWEEN PORCH/PATIO AND SURROUNDING GRADE IS GREATER THAN 18" GUARDRAIL SHALL BE PROVIDED. THE GUARDRAIL SHALL BE 42" TALL AND SHALL BE CONSTRUCTED SUCH THAT A 4" SPHERE
- CANNOT PASS THROUGH IT. REFER TO SHEET A601 FOR EXTERIOR LIGHTING. ALL EXTERIOR LIGHTING SHALL HAVE A CONCEALED LIGHT
- 6. ALL EXTERIOR METAL SHALL BE CORROSION RESISTANT. 7. ALL EXTERIOR MECHANICAL AND PLUMBING VENT LOCATIONS SHALL BE APPROVED WITH ARCHITECT, PRIOR TO INSTALLATION. ALL PIPING SHALL PAINTED TO MATCH

exterior material legend building 2

MATERIAL TYPE

- A. LAP SIDING B. EIFS
- C. ASPHALT SHINGLES
 D. METAL TRIM E. BRICK

MATERIAL FINISH

- 1. PAINT, COLOR 1, TBD 2. EIFS FINISH COAT - 3, COLOR TBD 3. PER MANUFACTURER, TBD
- 4. PAINT, ACCENT COLOR 2, TBD 5. PER MANUFACTURER, TBD
- 6. EIFS FINISH COAT 2, COLOR TBD7. EIFS FINISH COAT 4, COLOR TBD
- exterior material legend building 3

- MATERIAL TYPE A. T 1-11
- B. EIFS
 C. ASPHALT SHINGLES
 D. METAL TRIM
 E. MANUFACTURED STONE

MATERIAL FINISH

- PAINT, COLOR 1, TBD
 EIFS FINISH COAT 3, COLOR TBD
 PER MANUFACTURER, TBD
- PAINT, ACCENT COLOR 2, TBD
 PER MANUFACTURER, TBD
- 6. EIFS FINISH COAT 2, COLOR TBD 7. EIFS FINISH COAT - 4, COLOR TBD

exterior material legend building 4

MATERIAL TYPE

- A. BATTEN BOARD
 B. EIFS
 C. ASPHALT SHINGLES
 D. METAL TRIM
 E. BRICK

MATERIAL FINISH

- PAINT, COLOR 1, TBD
 EIFS FINISH COAT 3, COLOR TBD
 PER MANUFACTURER, TBD
 PAINT, ACCENT COLOR 2, TBD
 PER MANUFACTURER, TBD
 EIFS FINISH COAT 2, COLOR TBD
 EIFS FINISH COAT 4, COLOR TBD

REVISIONS

BLD


www.tom-arch.com

816.284.6518


sheet issue date: 2023.01.03 tompkins project no.:

2020-01

EXTERIOR ELEVATIONS

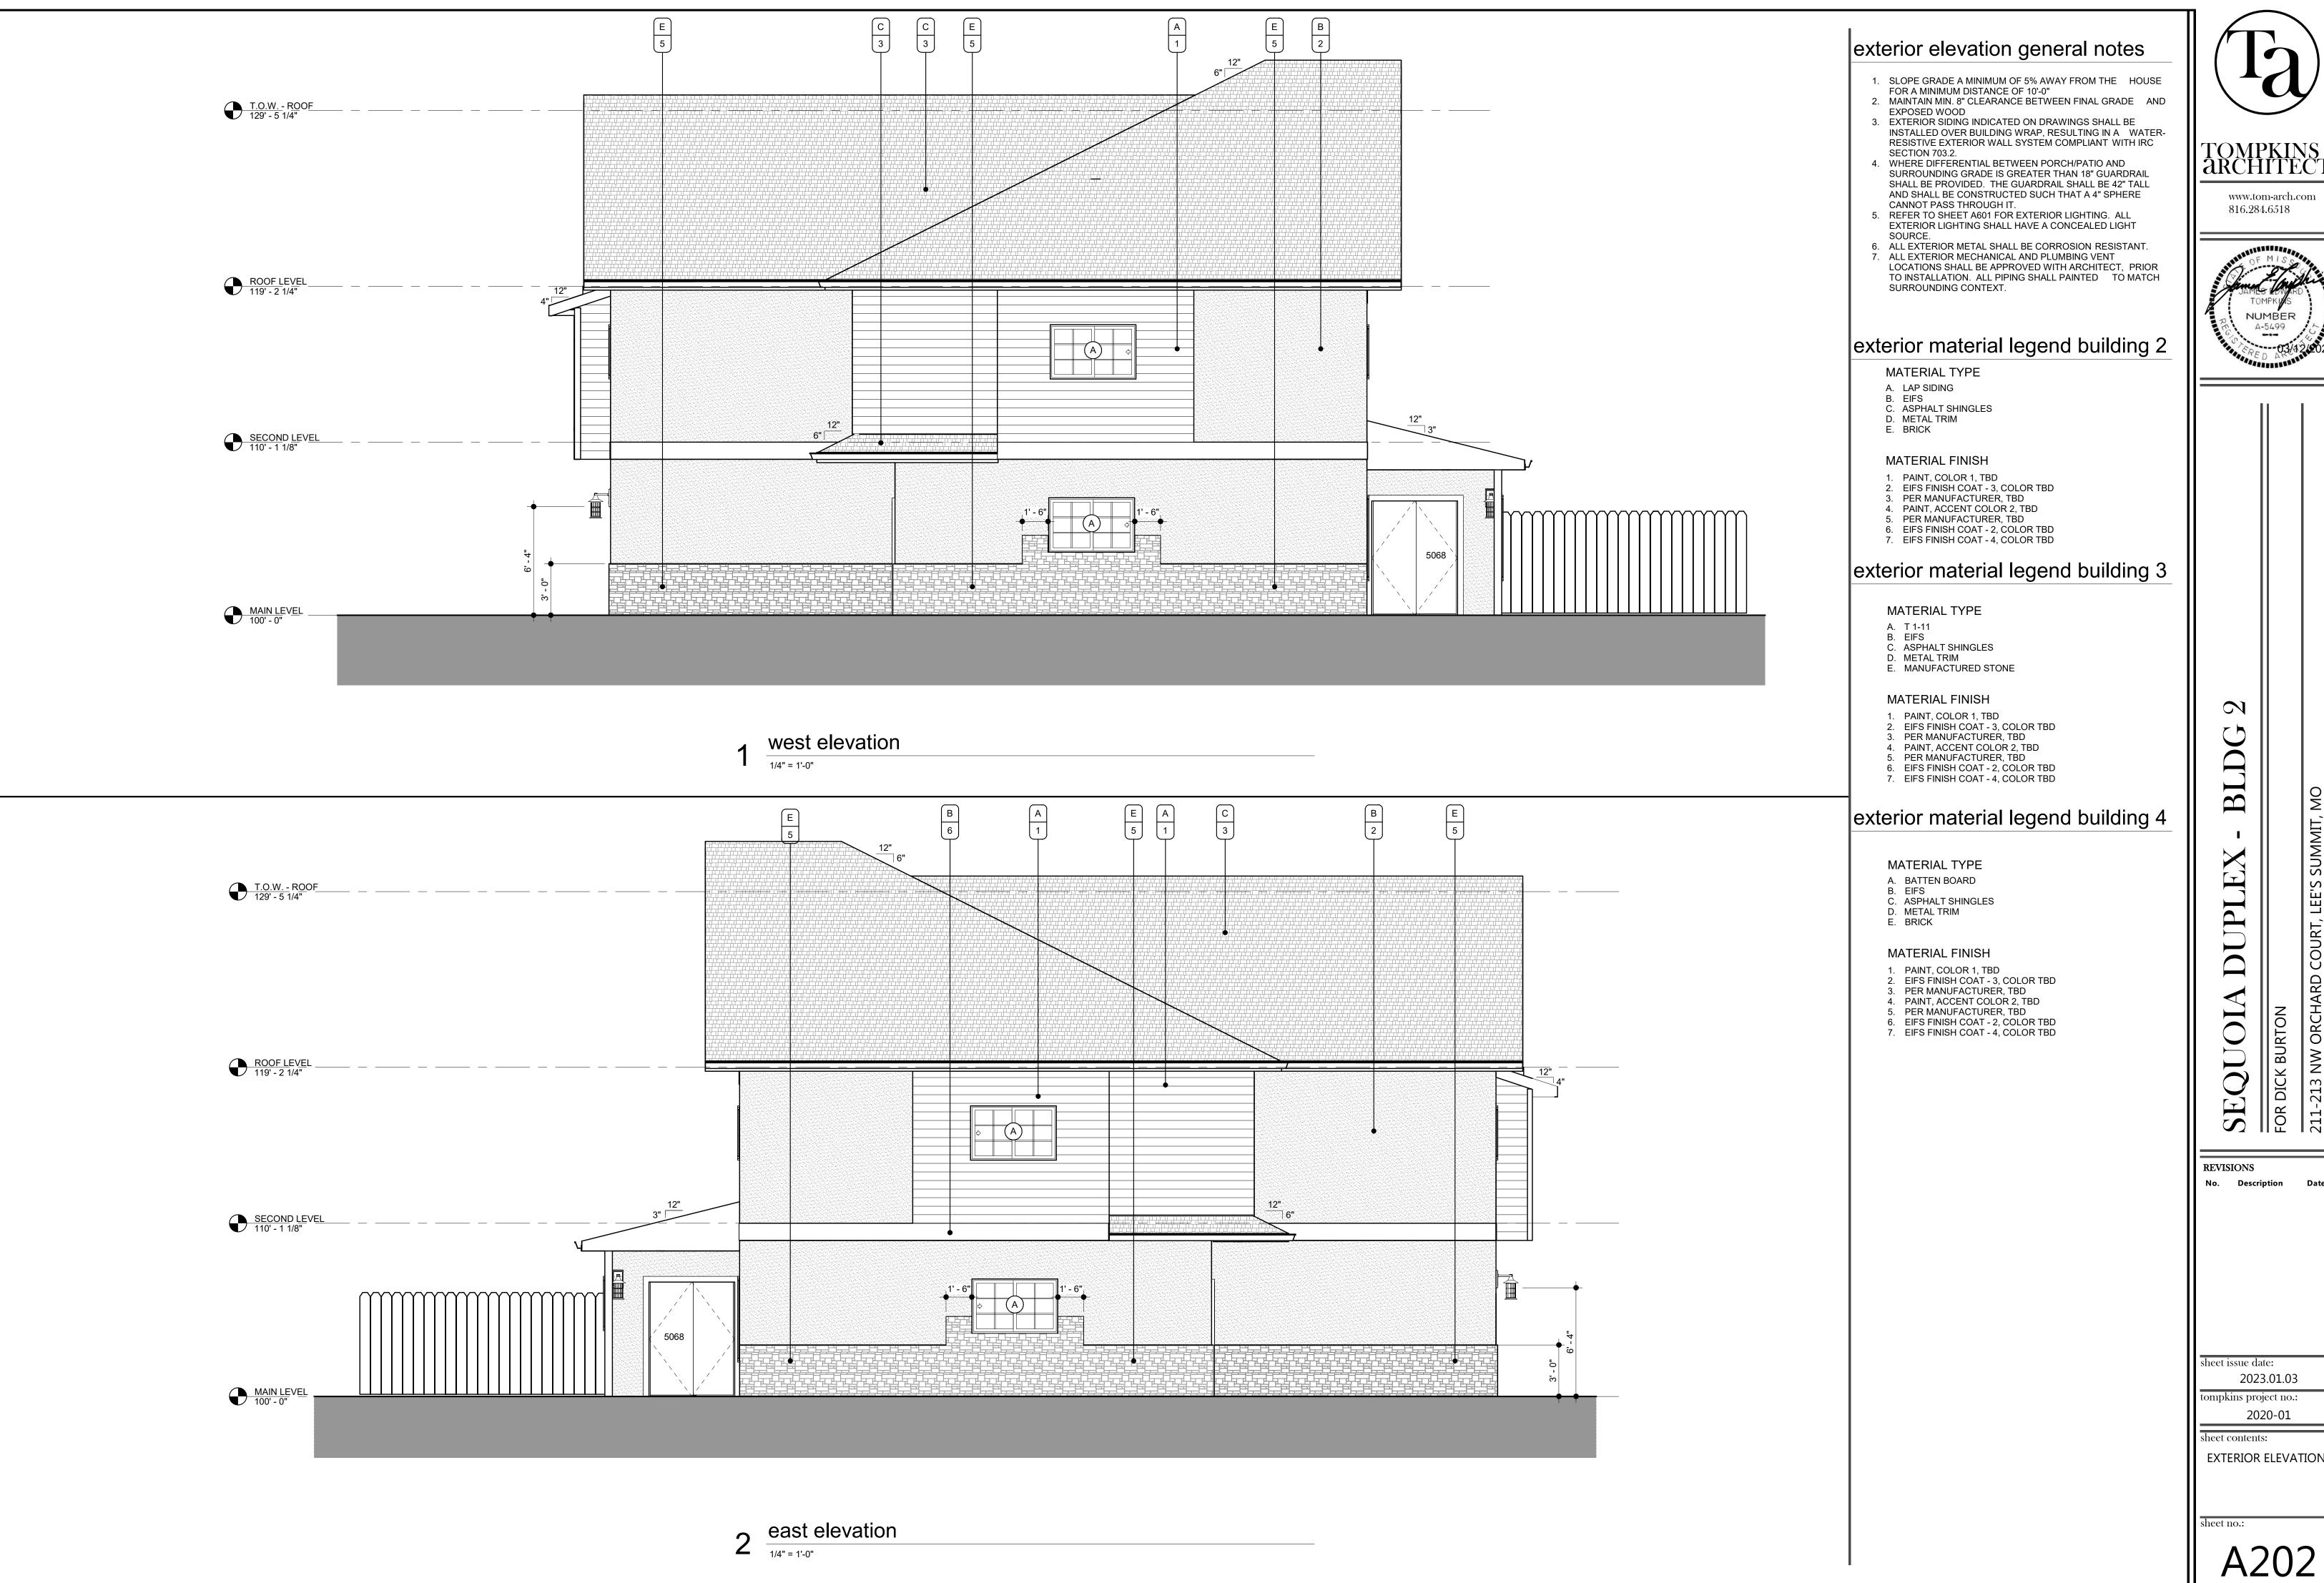






REVISIONS

sheet issue date: 2023.01.03

EXTERIOR ELEVATIONS



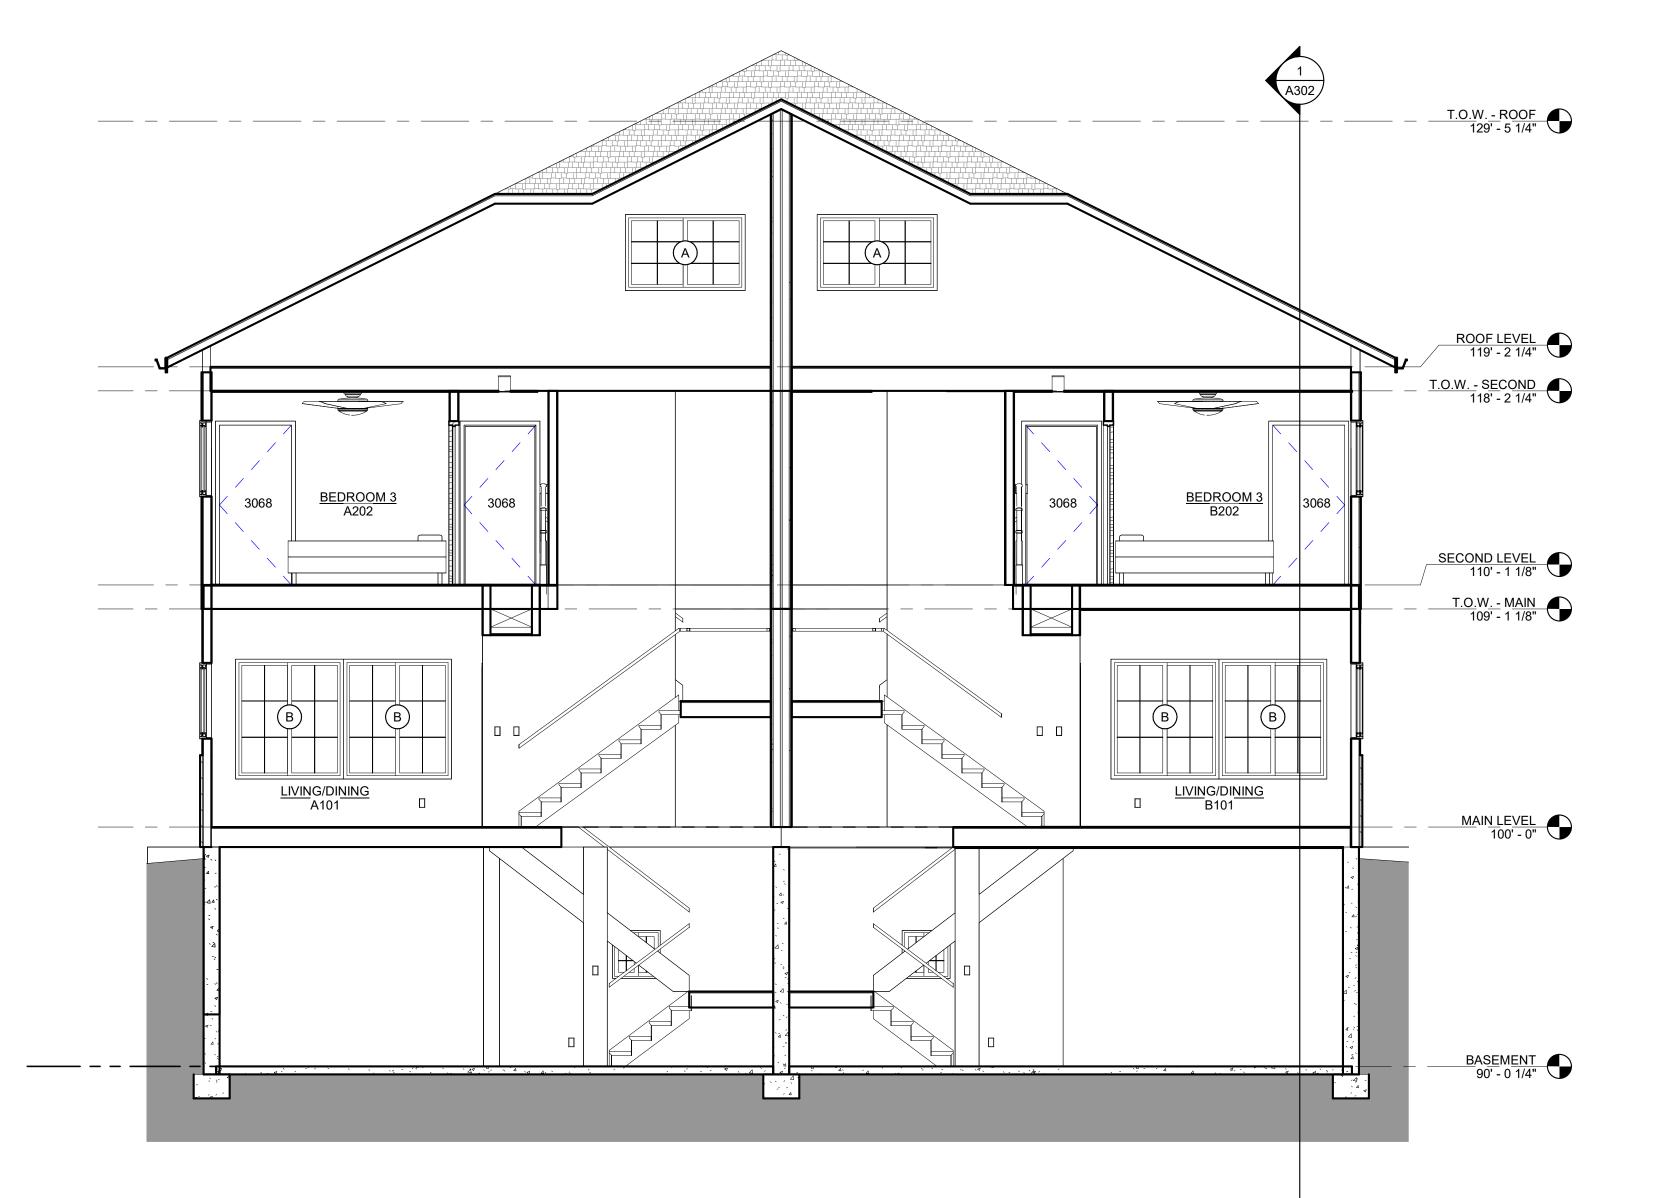

building section stairs looking south

1/4" = 1'-0"

2020-01 BUILDING SECTIONS

sheet issue date: 2023.01.03


tompkins project no.:

REVISIONS

A301

SEQUOIA DUPLEX FOR DICK BURTON

211-213 NW ORCHARD COURT, LEE'S SUMMIT

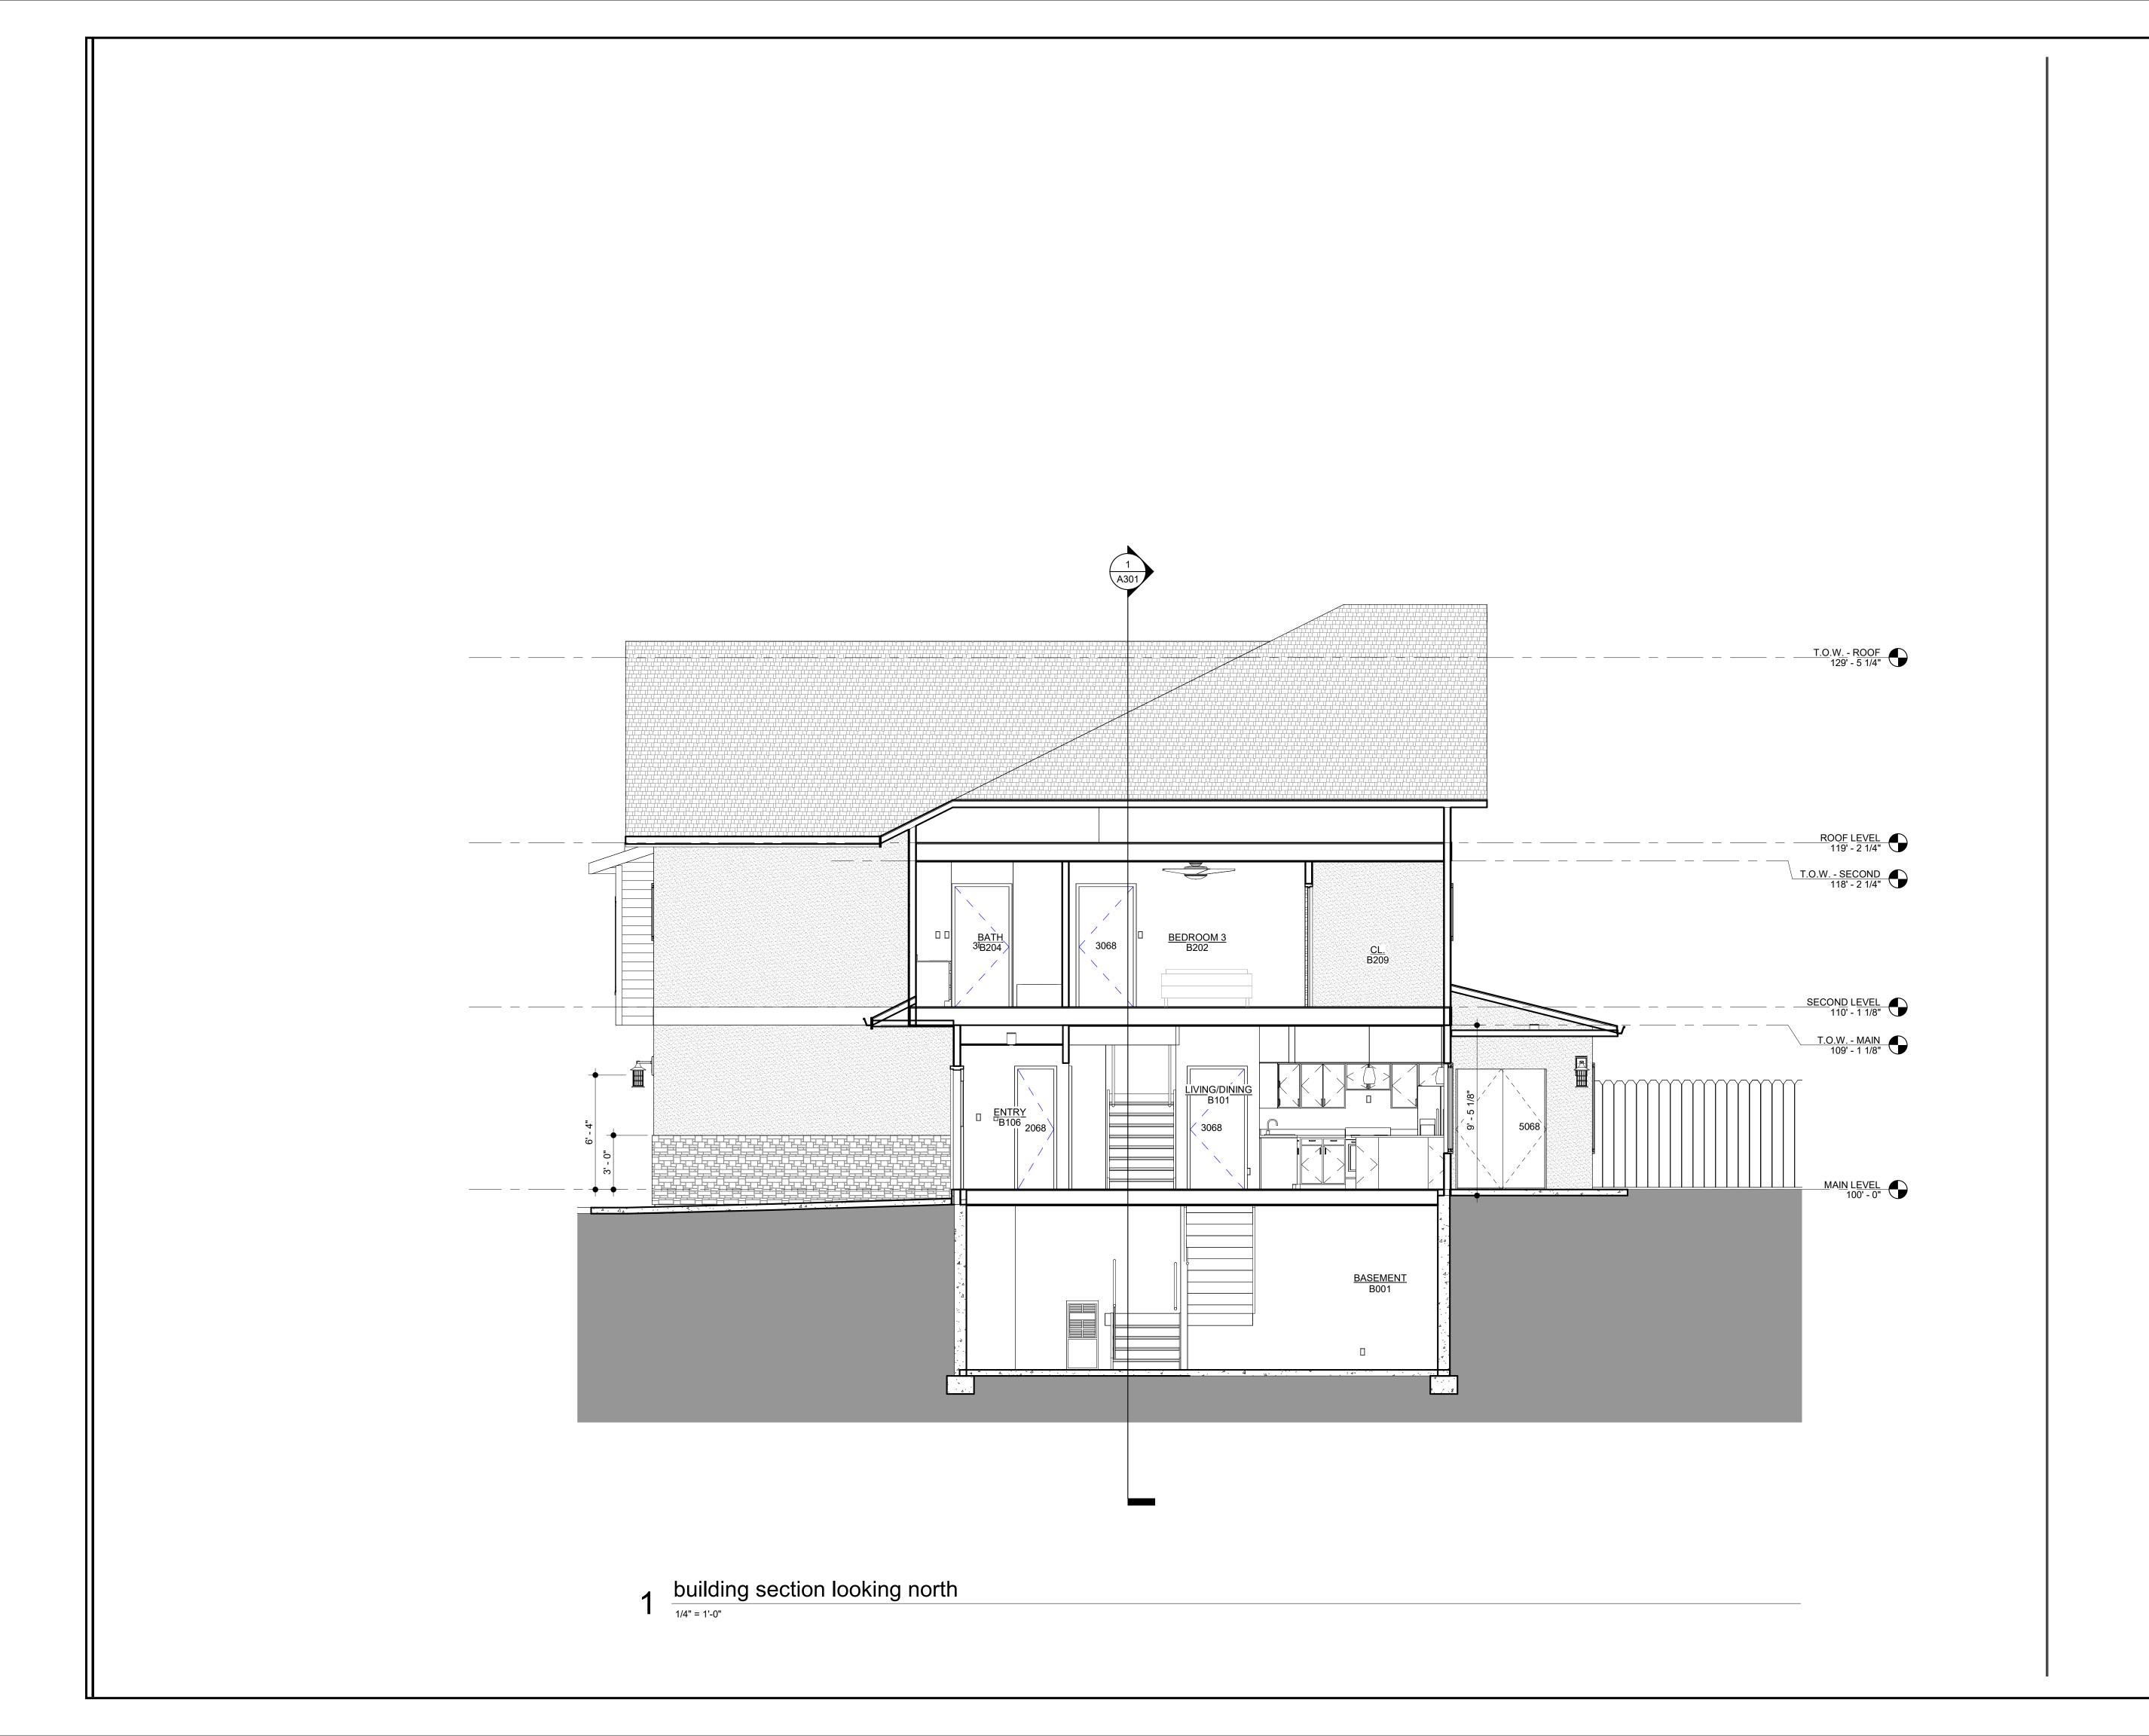



www.tom-arch.com 816.284.6518



SEQUOIA DUPLEX FOR DICK BURTON


211-213 NW ORCHARD COURT, LEE'S SUMMIT

REVISIONS

sheet issue date: 2023.01.03

tompkins project no.: 2020-01

BUILDING SECTIONS

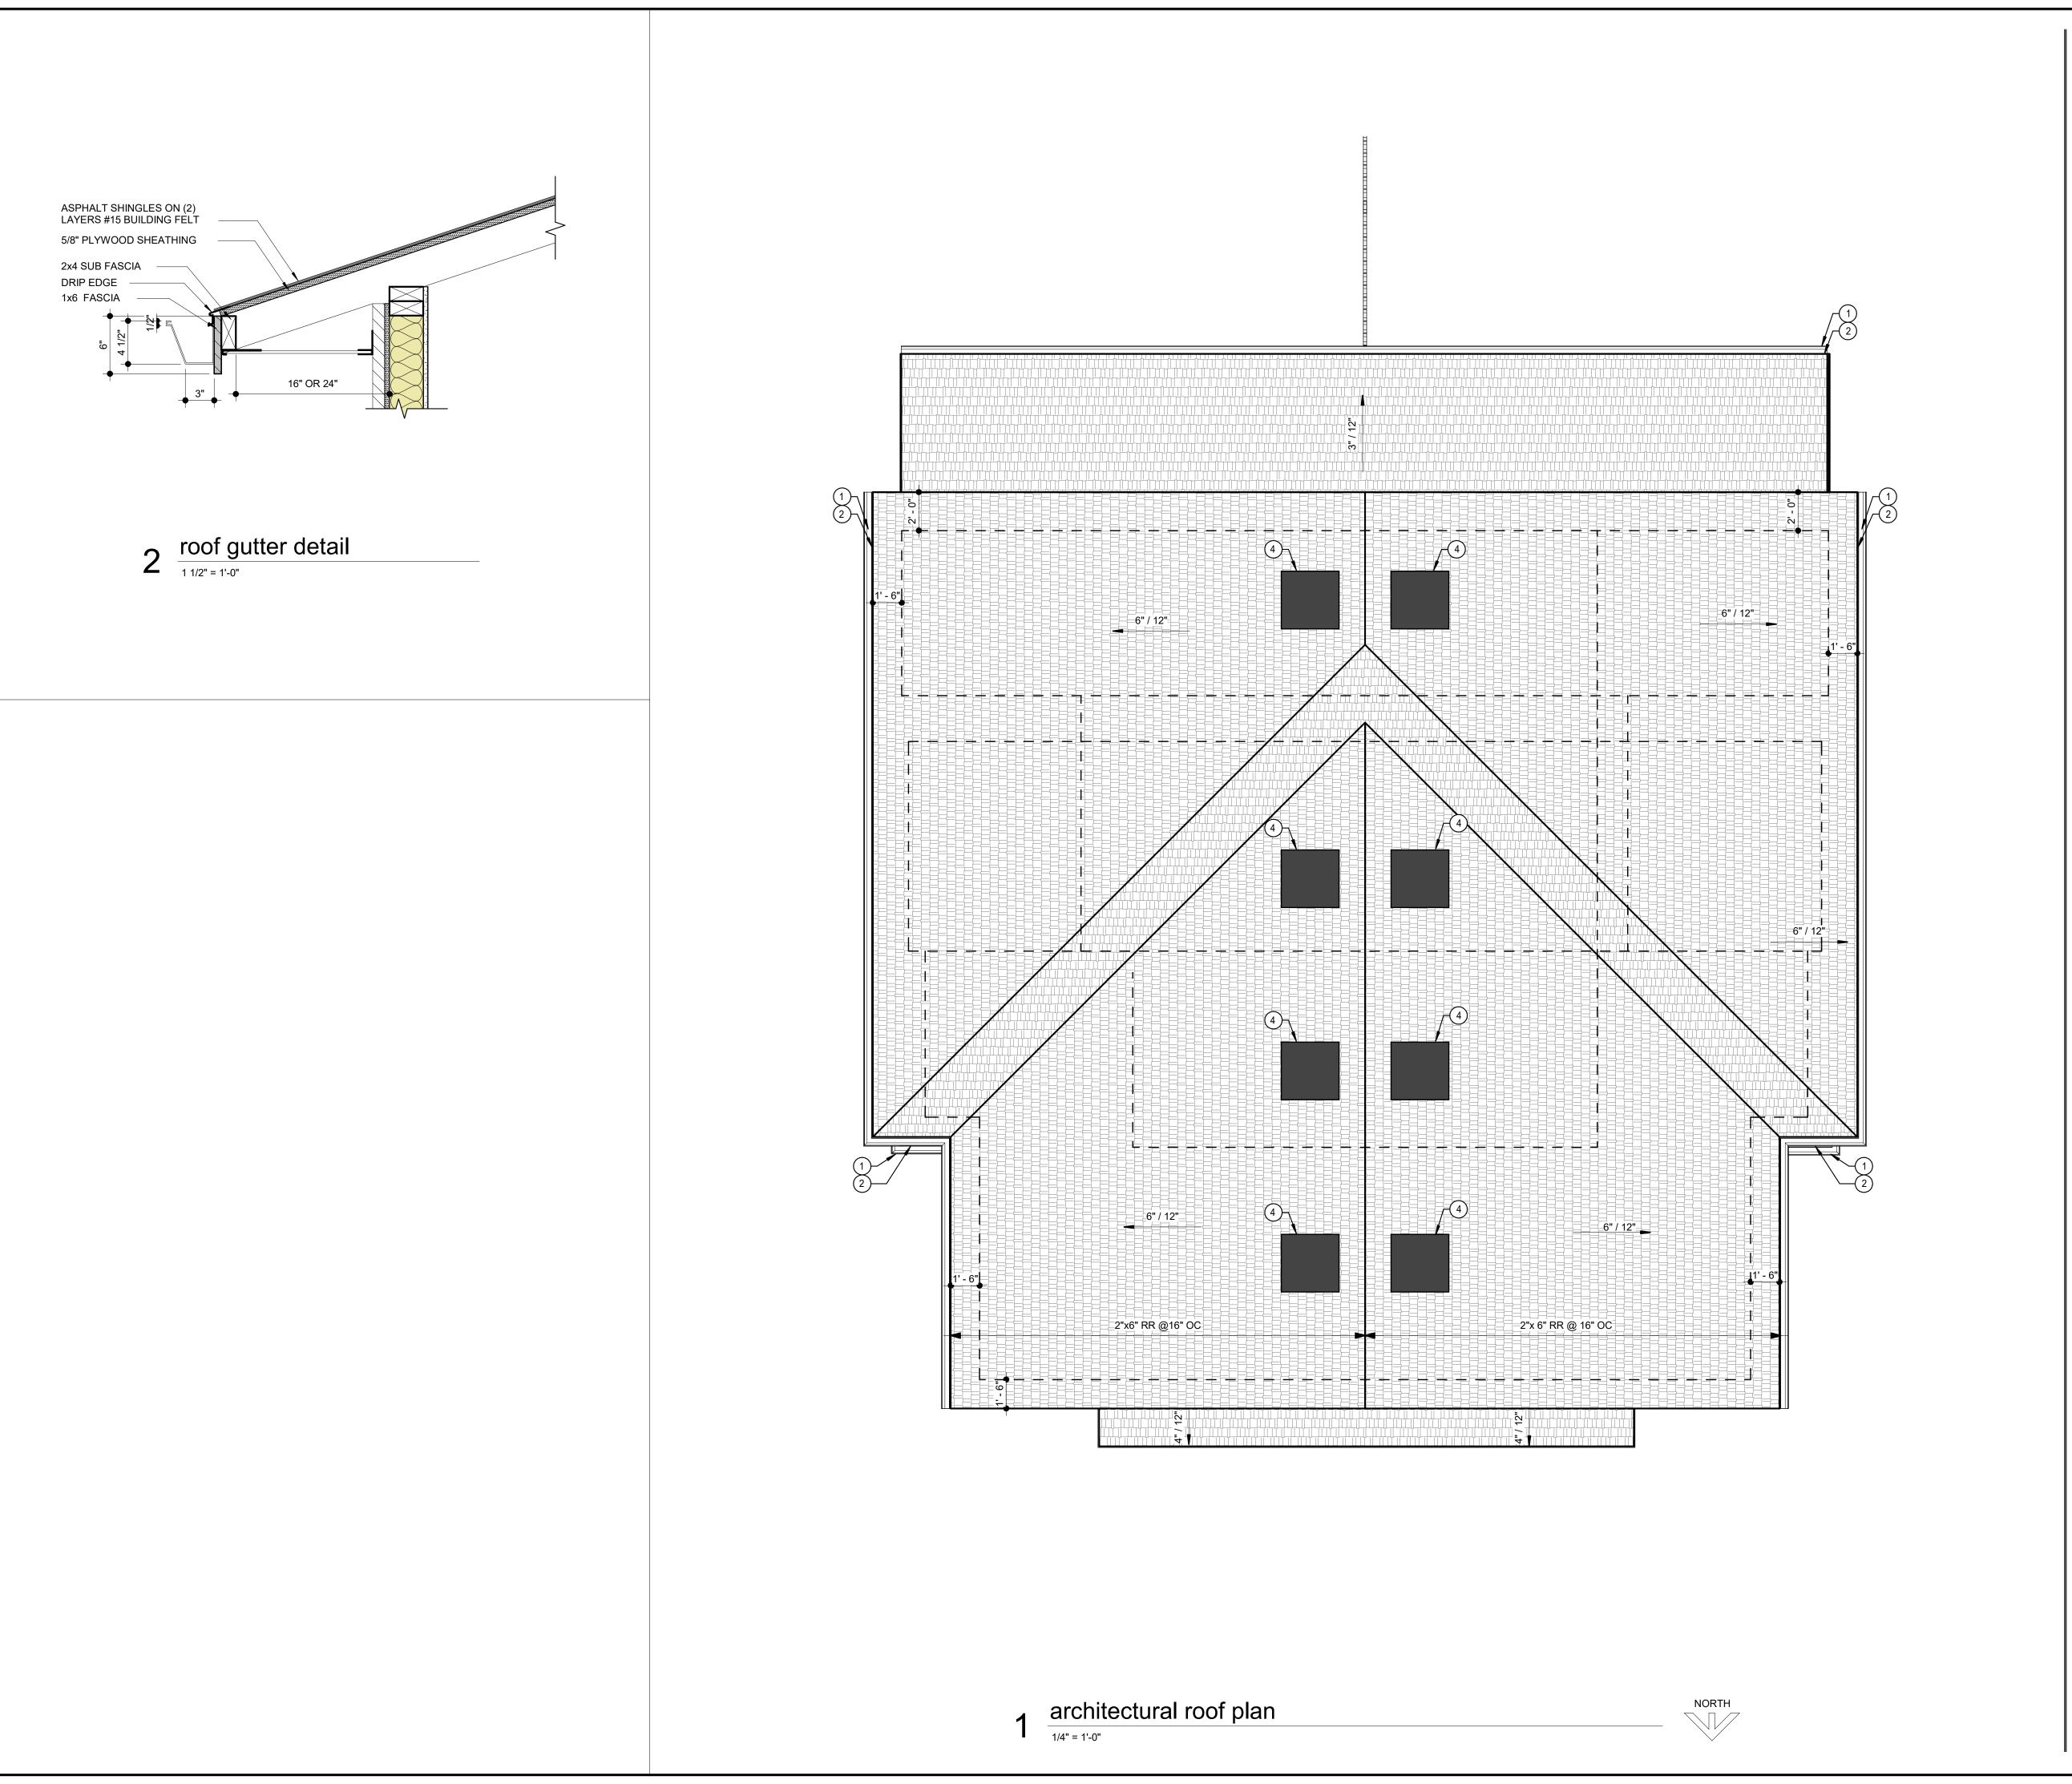

roof plan legend

ASPHALT SINGLE ROOF SYSTEM OVER (2) LAYERS #
15 BUILDING FELT ON SHEATHING AS INDICATED ON
STRUCTURAL



GENERAL: COORDINATE WITH WORK SHOWN ON STRUCTURAL DRAWINGS

ATTIC TO RECEIVE R-49 BLOWN-IN INSULATION

3 RIDGE VENT

2 FASCIA

4 ATTIC VENT

www.tom-arch.com

816.284.6518

BLDC

REVISIONS

sheet issue date: 2023.01.03 tompkins project no.:

2020-01

NOTE: REFER TO STRUCTURAL DRAWINGS FOR REINFORCING STEEL IN EXTERIOR WALLS AND CONCRETE NOT SHOWN

NOTE: REFER TO ALL DETAILS (DETAILS LOCATED ON THIS SHEET, PRECEEDING SHEETS AND FOLLOWING SHEETS) FOR

NOTE: REFER TO ALL SECTIONS (SECTIONS LOCATED ON THIS SHEET, PRECEEDING SHEETS AND FOLLOWING SHEETS) FOR

APPLICABLE NOTES NOT SHOWN

APPLICABLE NOTES NOT SHOWN

ROOF PLAN & DETAILS

door schedule							
PLAN		DOOR OPENING SIZE	Door Type (A)Door Type (A)	Door Material (B)Door			
MARK	Width	Н	Type (A)	Material (B)	NOTES		
2068	2' - 0"	6' - 8"	F	W			
2668	2' - 6"	6' - 8"	F	W			
2669	1' - 6"	6' - 8"	F	W			
2671	1' - 6"	6' - 8"	F	W			
3068	3' - 0"	6' - 8"	<varies></varies>	W			
3068A	3' - 0"	6' - 8"	F	W	20 MIN. SELF CLOSING		
3068B	3' - 0"	6' - 8"	F	WD	SLIDING BARN DOOR		
5068	5' - 0"	6' - 8"	FG	W			
70160	16' - 0"	7' - 0"	OHD	S			
Grand total: 36							

door schedule notes

DOOR GENERAL NOTES

- DOORS SHALL COMPLY WITH THE REQUIREMENTS OF SECTION 308 OF THE IRC FOR SAFETY GLAZING.
 THE GARAGE DOOR(S) SHALL MEET DASMA 90 MPH REQUIREMENTS

DOOR SCHEDULE LEGEND


DOOR TYPES

F - Flush

FG = Full Glass

OHD = Overhead Door

BF = Bi-fold BF = Bi-fold DOOR MATERIAL AND FRAME MATERIAL: S = Steel A = Aluminum W = Wood

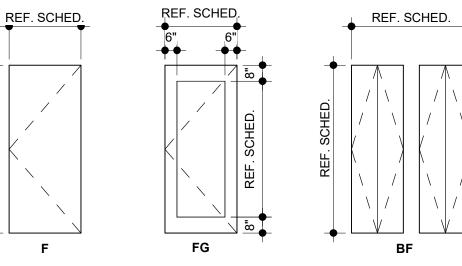

door types 1/4" = 1'-0"

window schedule					
PLAN MARK	CONFIGURATION	WIDTH	HEIGHT	COMMENTS	
A	SINGLE - SLIDER WINDOW	5' - 0"	3' - 2"		
В	SINGLE - SLIDER WINDOW	4' - 6"	5' - 0"		
С	SINGLE - CASEMENT WINDOW	3' - 0"	5' - 0"		
E	SINGLE - SLIDER WINDOW	2' - 0"	2' - 0"	EGRESS WINDOW	

window schedule notes

WINDOW GENERAL

NOTES

1. EGRESS WINDOWS SHALL COMPLY WITH SECTION 310 OF THE IRC.

2. WINDOWS SHALL HAVE FALL PROTECTION PER IRC 312.2 AS WHERE NEEDED.

3. WINDOWS, DOORS, AND OTHER GLAZING WILL COMPLY WITH THE REQUIREMENTS OF SECTION 308 OF THE IRC FOR SAFETY GLAZING.

WINDOW THERMAL

PROPERTIES

MANUFACTURER: JELD-WEN

PRODUCT LINE: BUILDER'S VINYL W/ LOW-E

U-FACTOR: 0.33

SHGC: 0.35


www.tom-arch.com 816.284.6518

REVISIONS

sheet issue date: 2023.01.03

tompkins project no.: 2020-01

DOOR AND WINDOW INFORMATION

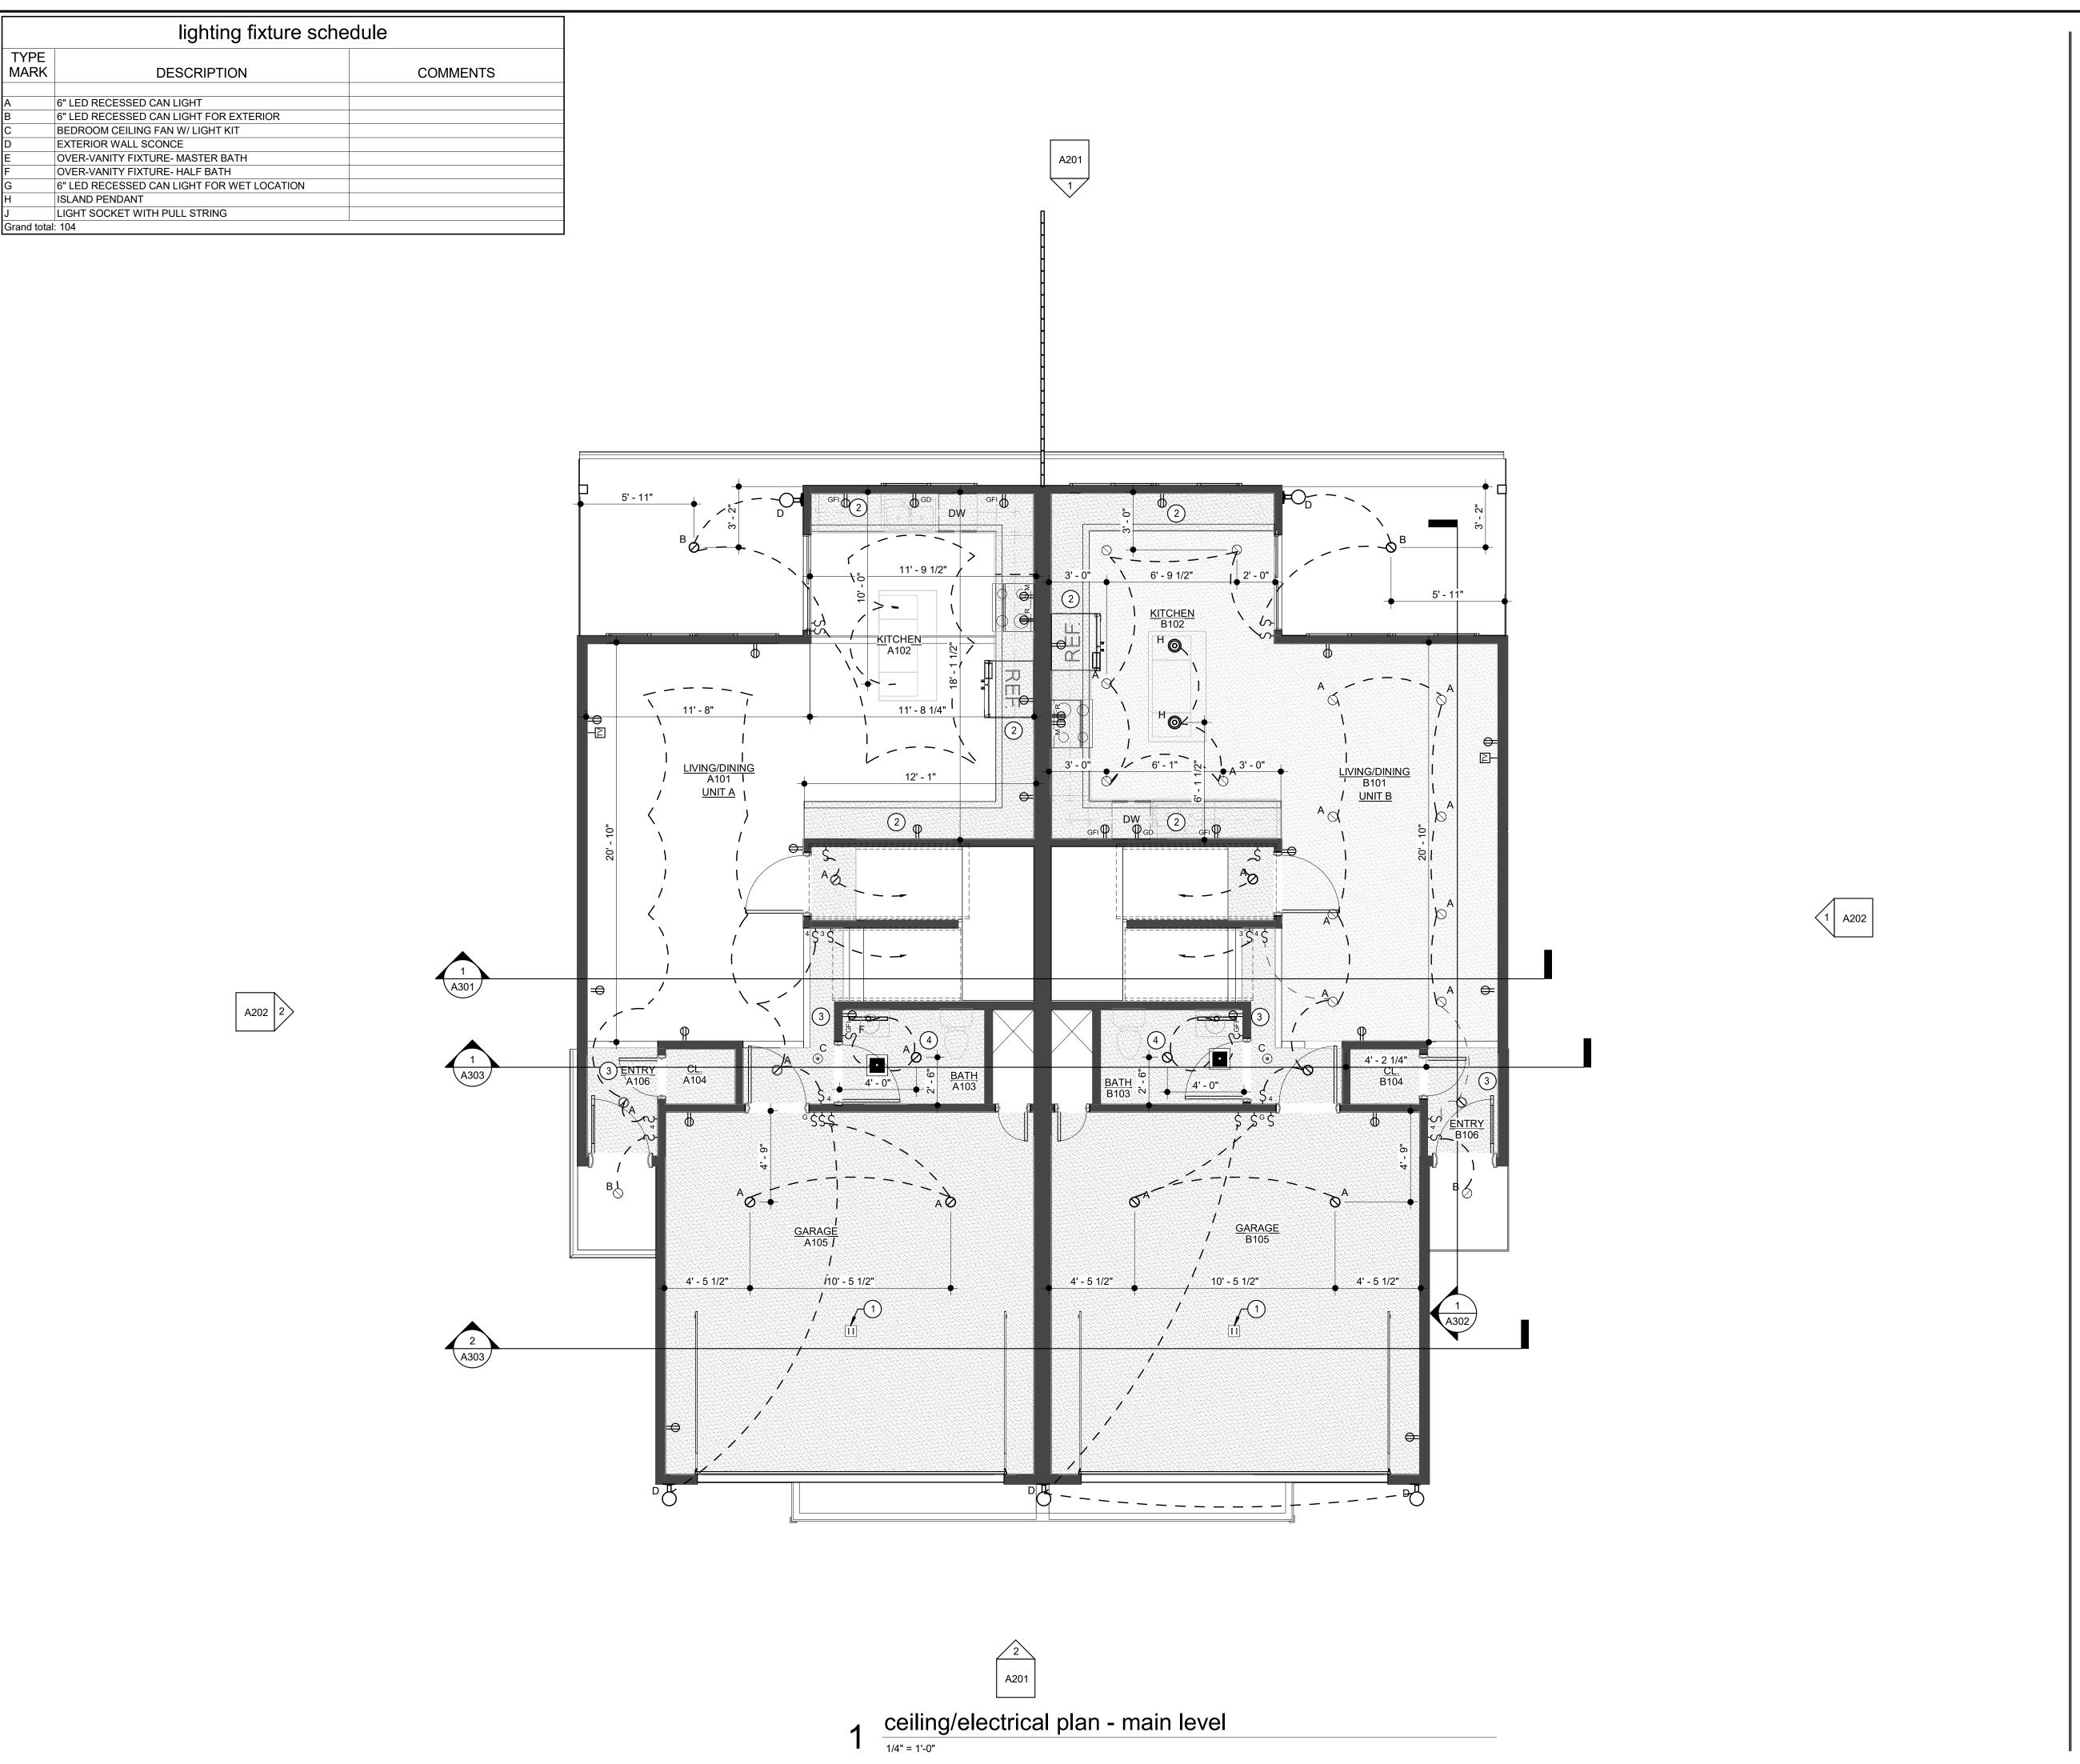




- GARAGE OPENER OUTLET IN CEILING
- SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 2'-0" WIDE
- AND 7'-0" AFF
- 3 SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 8'-0" AFF
- 4 RESTROOM CEILING HEIGHT TO BE 8'-0"

electrical/ceiling general notes

- 1. CARBON MONOXIDE DETECTORS SHALL BE INSTALLED PER
- 2. SMOKE DETECTORS SHALL BE INSTALLED PER R314. 3. COORDINATE REQUIREMENTS FOR ALL ELECTRICAL
- FIXTURES WITH SPECIFIC SELECTED FIXTURE REQUIREMENTS PRIOR TO ROUGH-IN. 4. THIS HOUSE SHALL BE PROVIDED WITH A "UFER" GROUND PER IRC SECTION 3608.1

electrical/ceiling legend

CEILING TYPES



EXTERIOR, PRE-FINISHED ALUMINUM




PAINTED GYP. BD. CEILING



RECESSED CAN LIGHT-REF. SCHEDULE FOR DETAILS



OVER-VANITY LIGHT-REF. SCHEDULE FOR DETAILS



CEILING FAN W/ LIGHT KIT-REF. SCHEDULE FOR DETAILS



REF. SCHEDULE FOR DETAILS

LARGE PENDANT LIGHT-REF. SCHEDULE FOR DETAILS

WALL SCONCE-



BATHROOM EXHAUST FAN- SWITCH AS

INDICATED AND COORDINATE EXHAUST




SMOKE ALARM- SHALL BE ELECTRIC WITH BATTERY BACKUP MEETING UL217.

> COMBINATION SMOKE AND CARBON MONOXIDE - SHALL BE ELECTRIC WITH BATTERY BACKUP MEETING UL2034

SWITCH TYPES

GARAGE DOOR OPENER SWITCH

CEILING FAN SWITCH- WIRE FOR INDEPENDENT FAN/SWITCH CONTROLS




DIMMER SWITCH




3-WAY SWITCH

4-WAY SWITCH

OUTLET TYPES




TELEPHONE/DATA OUTLET; COORDINATE WITH LOCAL PROVIDER AND OWNER



CABLE-TV OUTLET; COORDINATE EXTERIOR LOCATION WITH LOCAL PROVIDER AND OWNER




GFCI OUTLET PER CODE




DUPLEX OUTLET W/ USB OUTLETS

STANDARD DUPLEX OUTLET



DUPLEX OUTLET AT MICROHOOD LOCATION OVER RANGE- MOUNT AT



GARBAGE DISPOSAL OUTLET UNDER SINK- WIRE TO SWTICH LOCATION AS

TELEVISION OUTLET- UTILIZE RECESSED OUTLET- MOUNT AT 60"

240V 4-SLOT DRYER OUTLET-MOUNT AT 36" A.F.F.

REVISIONS

www.tom-arch.com

816.284.6518


sheet issue date: 2023.01.03


compkins project no.: 2020-01

CEILING/ELECTRICAL

PLANS - MAIN

lighting fixture schedule						
TYPE						
MARK	DESCRIPTION	COMMENTS				
Α	6" LED RECESSED CAN LIGHT					
В	6" LED RECESSED CAN LIGHT FOR EXTERIOR					
С	BEDROOM CEILING FAN W/ LIGHT KIT					
D	EXTERIOR WALL SCONCE					
E	OVER-VANITY FIXTURE- MASTER BATH					
F	OVER-VANITY FIXTURE- HALF BATH					
G	6" LED RECESSED CAN LIGHT FOR WET LOCATION					
Н	ISLAND PENDANT					
J	LIGHT SOCKET WITH PULL STRING					
Grand total	: 104	<u> </u>				

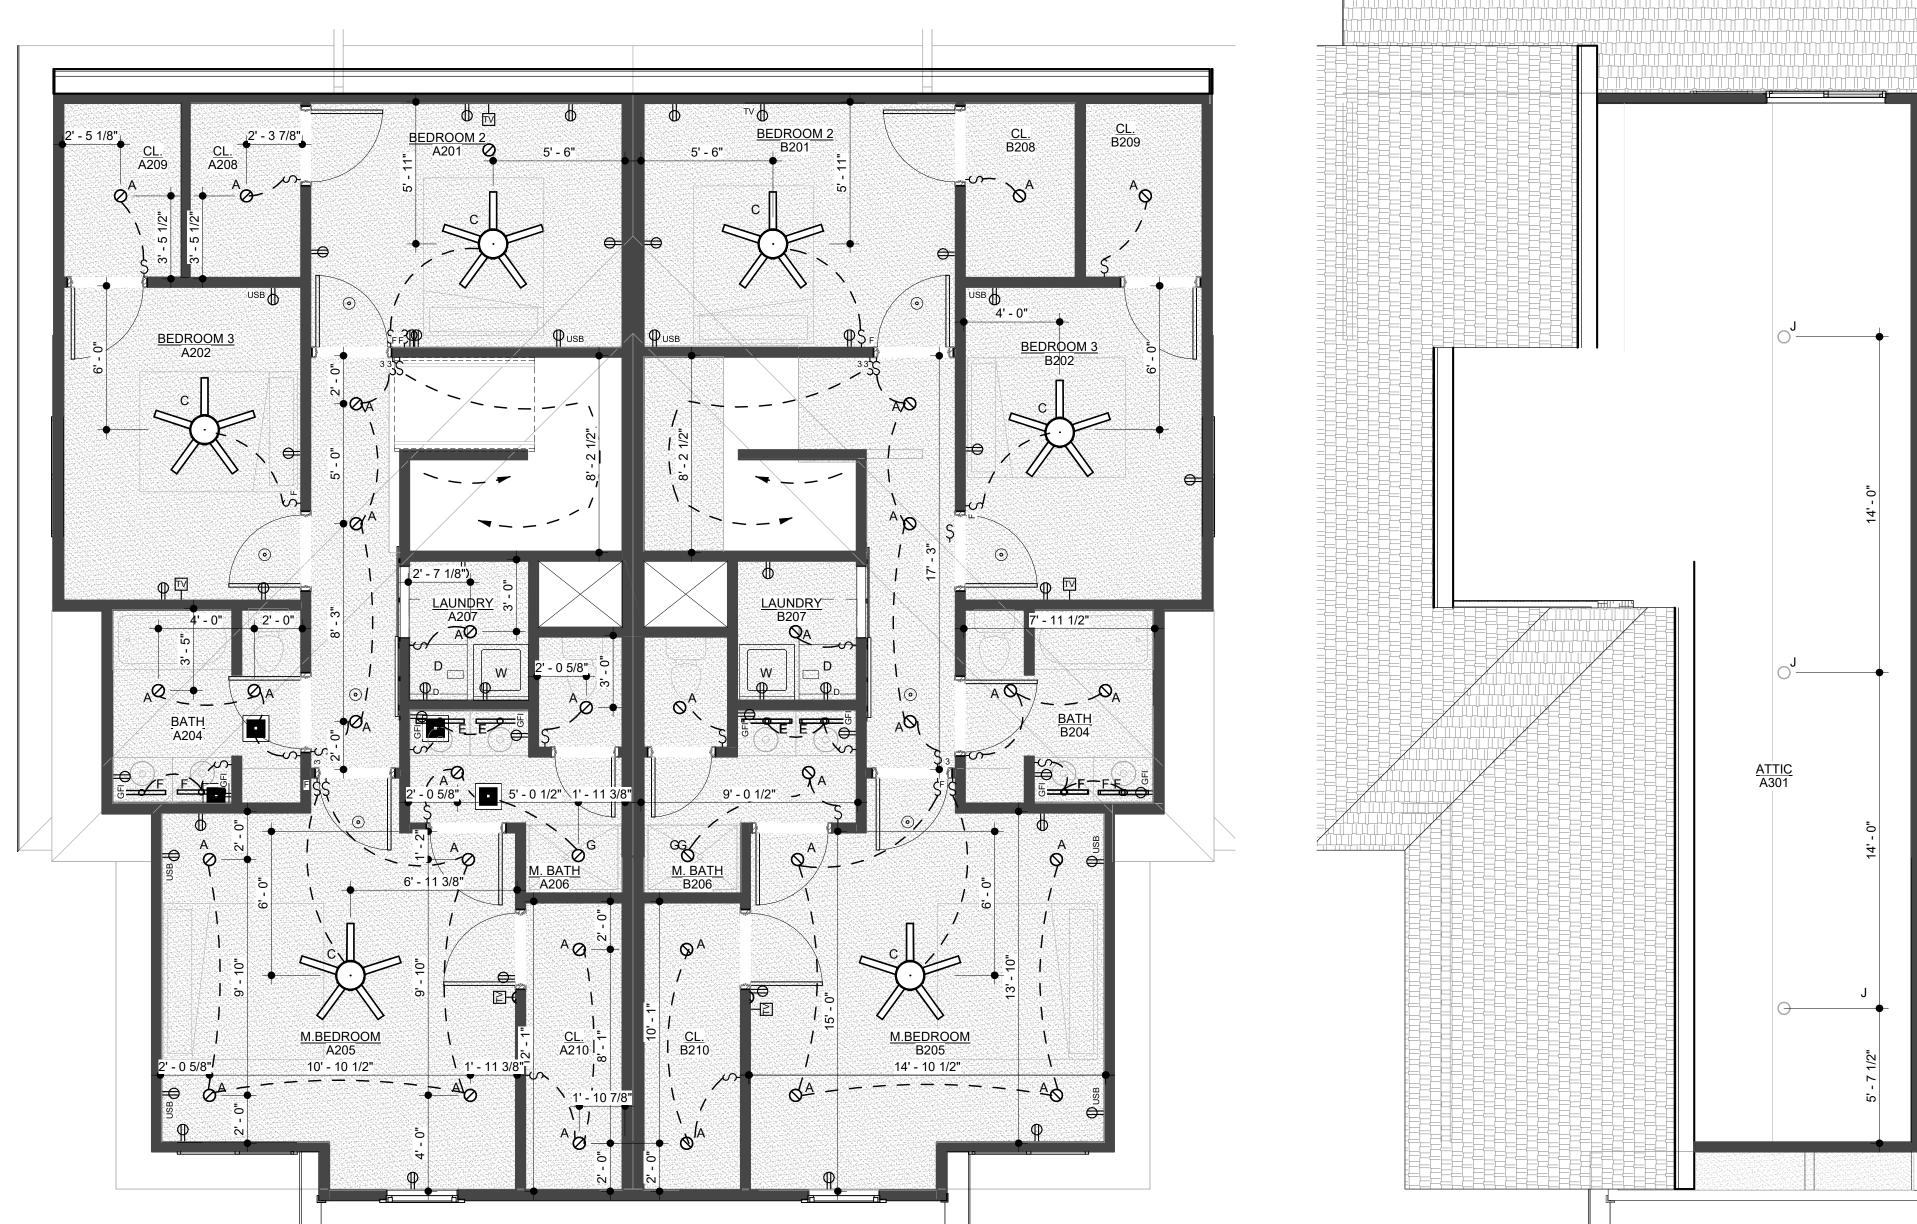

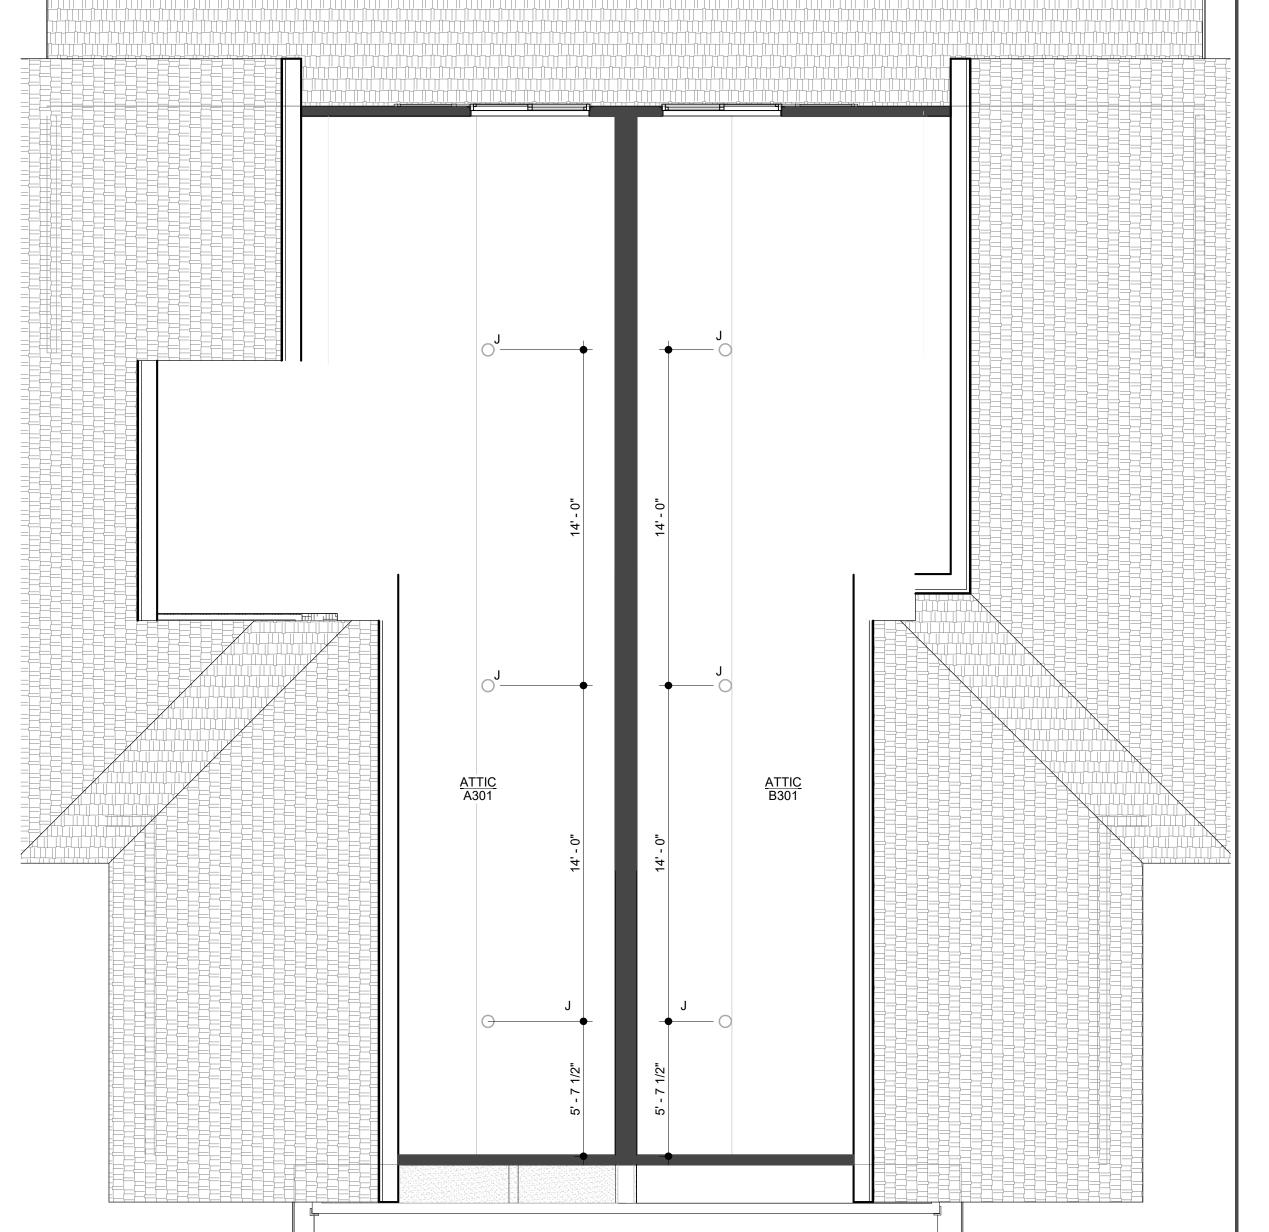

electrical/ceiling keynotes

- GARAGE OPENER OUTLET IN CEILING
- SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 2'-0" WIDE
- AND 7'-0" AFF
- 3 SOFFIT FOR HVAC ROUTING. SOFFIT TO BE 8'-0" AFF (4) RESTROOM CEILING HEIGHT TO BE 8'-0"

electrical/ceiling general notes

- 1. CARBON MONOXIDE DETECTORS SHALL BE INSTALLED PER
- SMOKE DETECTORS SHALL BE INSTALLED PER R314.
 COORDINATE REQUIREMENTS FOR ALL ELECTRICAL
- FIXTURES WITH SPECIFIC SELECTED FIXTURE REQUIREMENTS PRIOR TO ROUGH-IN.
 4. THIS HOUSE SHALL BE PROVIDED WITH A "UFER" GROUND

electrical/ceiling legend **CEILING TYPES**



PER IRC SECTION 3608.1

EXTERIOR, PRE-FINISHED ALUMINUM SOFFIT PANELS

www.tom-arch.com


816.284.6518




PAINTED GYP. BD. CEILING

LIGHT FIXTURE TYPES


RECESSED CAN LIGHT-REF. SCHEDULE FOR DETAILS



OVER-VANITY LIGHT-REF. SCHEDULE FOR DETAILS



CEILING FAN W/ LIGHT KIT-REF. SCHEDULE FOR DETAILS



WALL SCONCE-REF. SCHEDULE FOR DETAILS



LARGE PENDANT LIGHT-REF. SCHEDULE FOR DETAILS



BATHROOM EXHAUST FAN- SWITCH AS INDICATED AND COORDINATE EXHAUST VENT WITH MECHANICAL CONT'R

SMOKE ALARM TYPES

SMOKE ALARM- SHALL BE ELECTRIC WITH BATTERY BACKUP MEETING UL217.

COMBINATION SMOKE AND CARBON MONOXIDE - SHALL BE ELECTRIC WITH

BATTERY BACKUP MEETING UL2034

SWITCH TYPES

GARAGE DOOR OPENER SWITCH

CEILING FAN SWITCH- WIRE FOR INDEPENDENT FAN/SWITCH

DIMMER SWITCH




4-WAY SWITCH

OUTLET TYPES


TELEPHONE/DATA OUTLET; COORDINATE WITH LOCAL PROVIDER AND OWNER



CABLE-TV OUTLET; COORDINATE EXTERIOR LOCATION WITH LOCAL PROVIDER AND OWNER




GFCI OUTLET PER CODE




DUPLEX OUTLET W/ USB OUTLETS

STANDARD DUPLEX OUTLET



DUPLEX OUTLET AT MICROHOOD LOCATION OVER RANGE- MOUNT AT 60" A.F.F.



GARBAGE DISPOSAL OUTLET UNDER SINK- WIRE TO SWTICH LOCATION AS

TELEVISION OUTLET- UTILIZE RECESSED OUTLET- MOUNT AT 60"

240V 4-SLOT DRYER OUTLET-MOUNT AT 36" A.F.F.

A603

REVISIONS

sheet issue date:

compkins project no.:

2023.01.03


2020-01


CEILING/ELECTRICAL

PLANS - UPPER

ceiling/electrical plan - roof terrace

ceiling/electrical plan - upper level

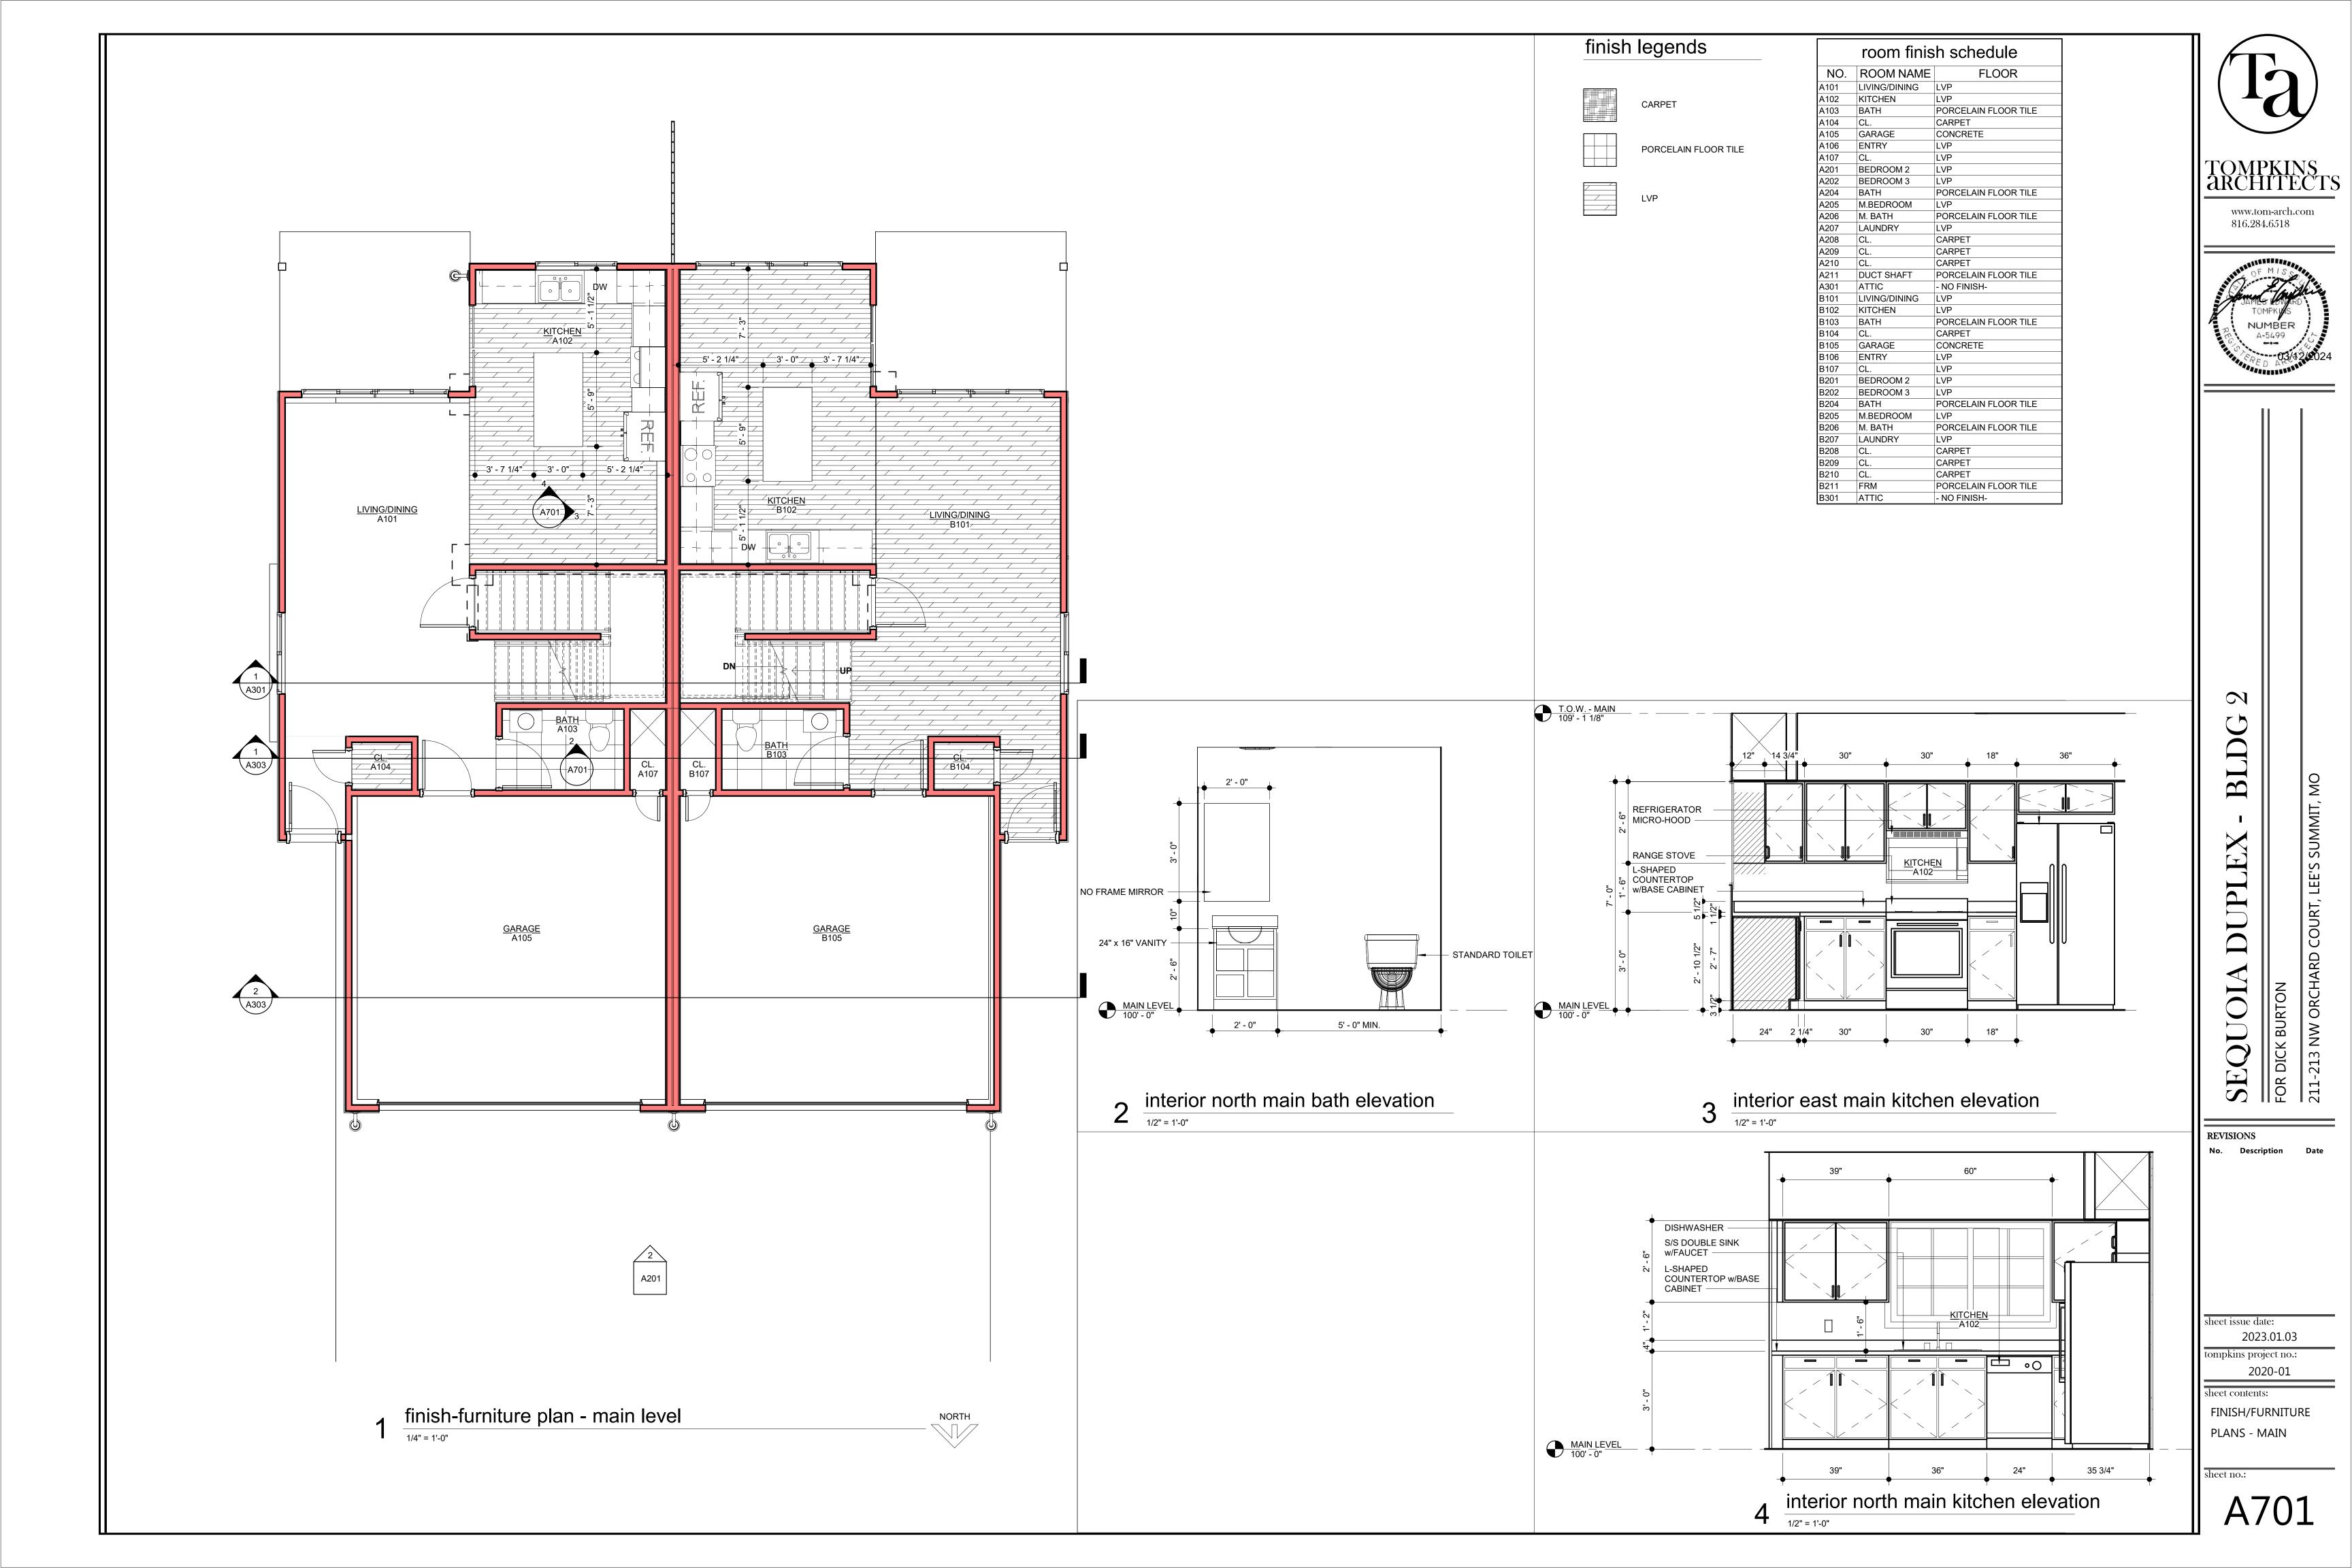

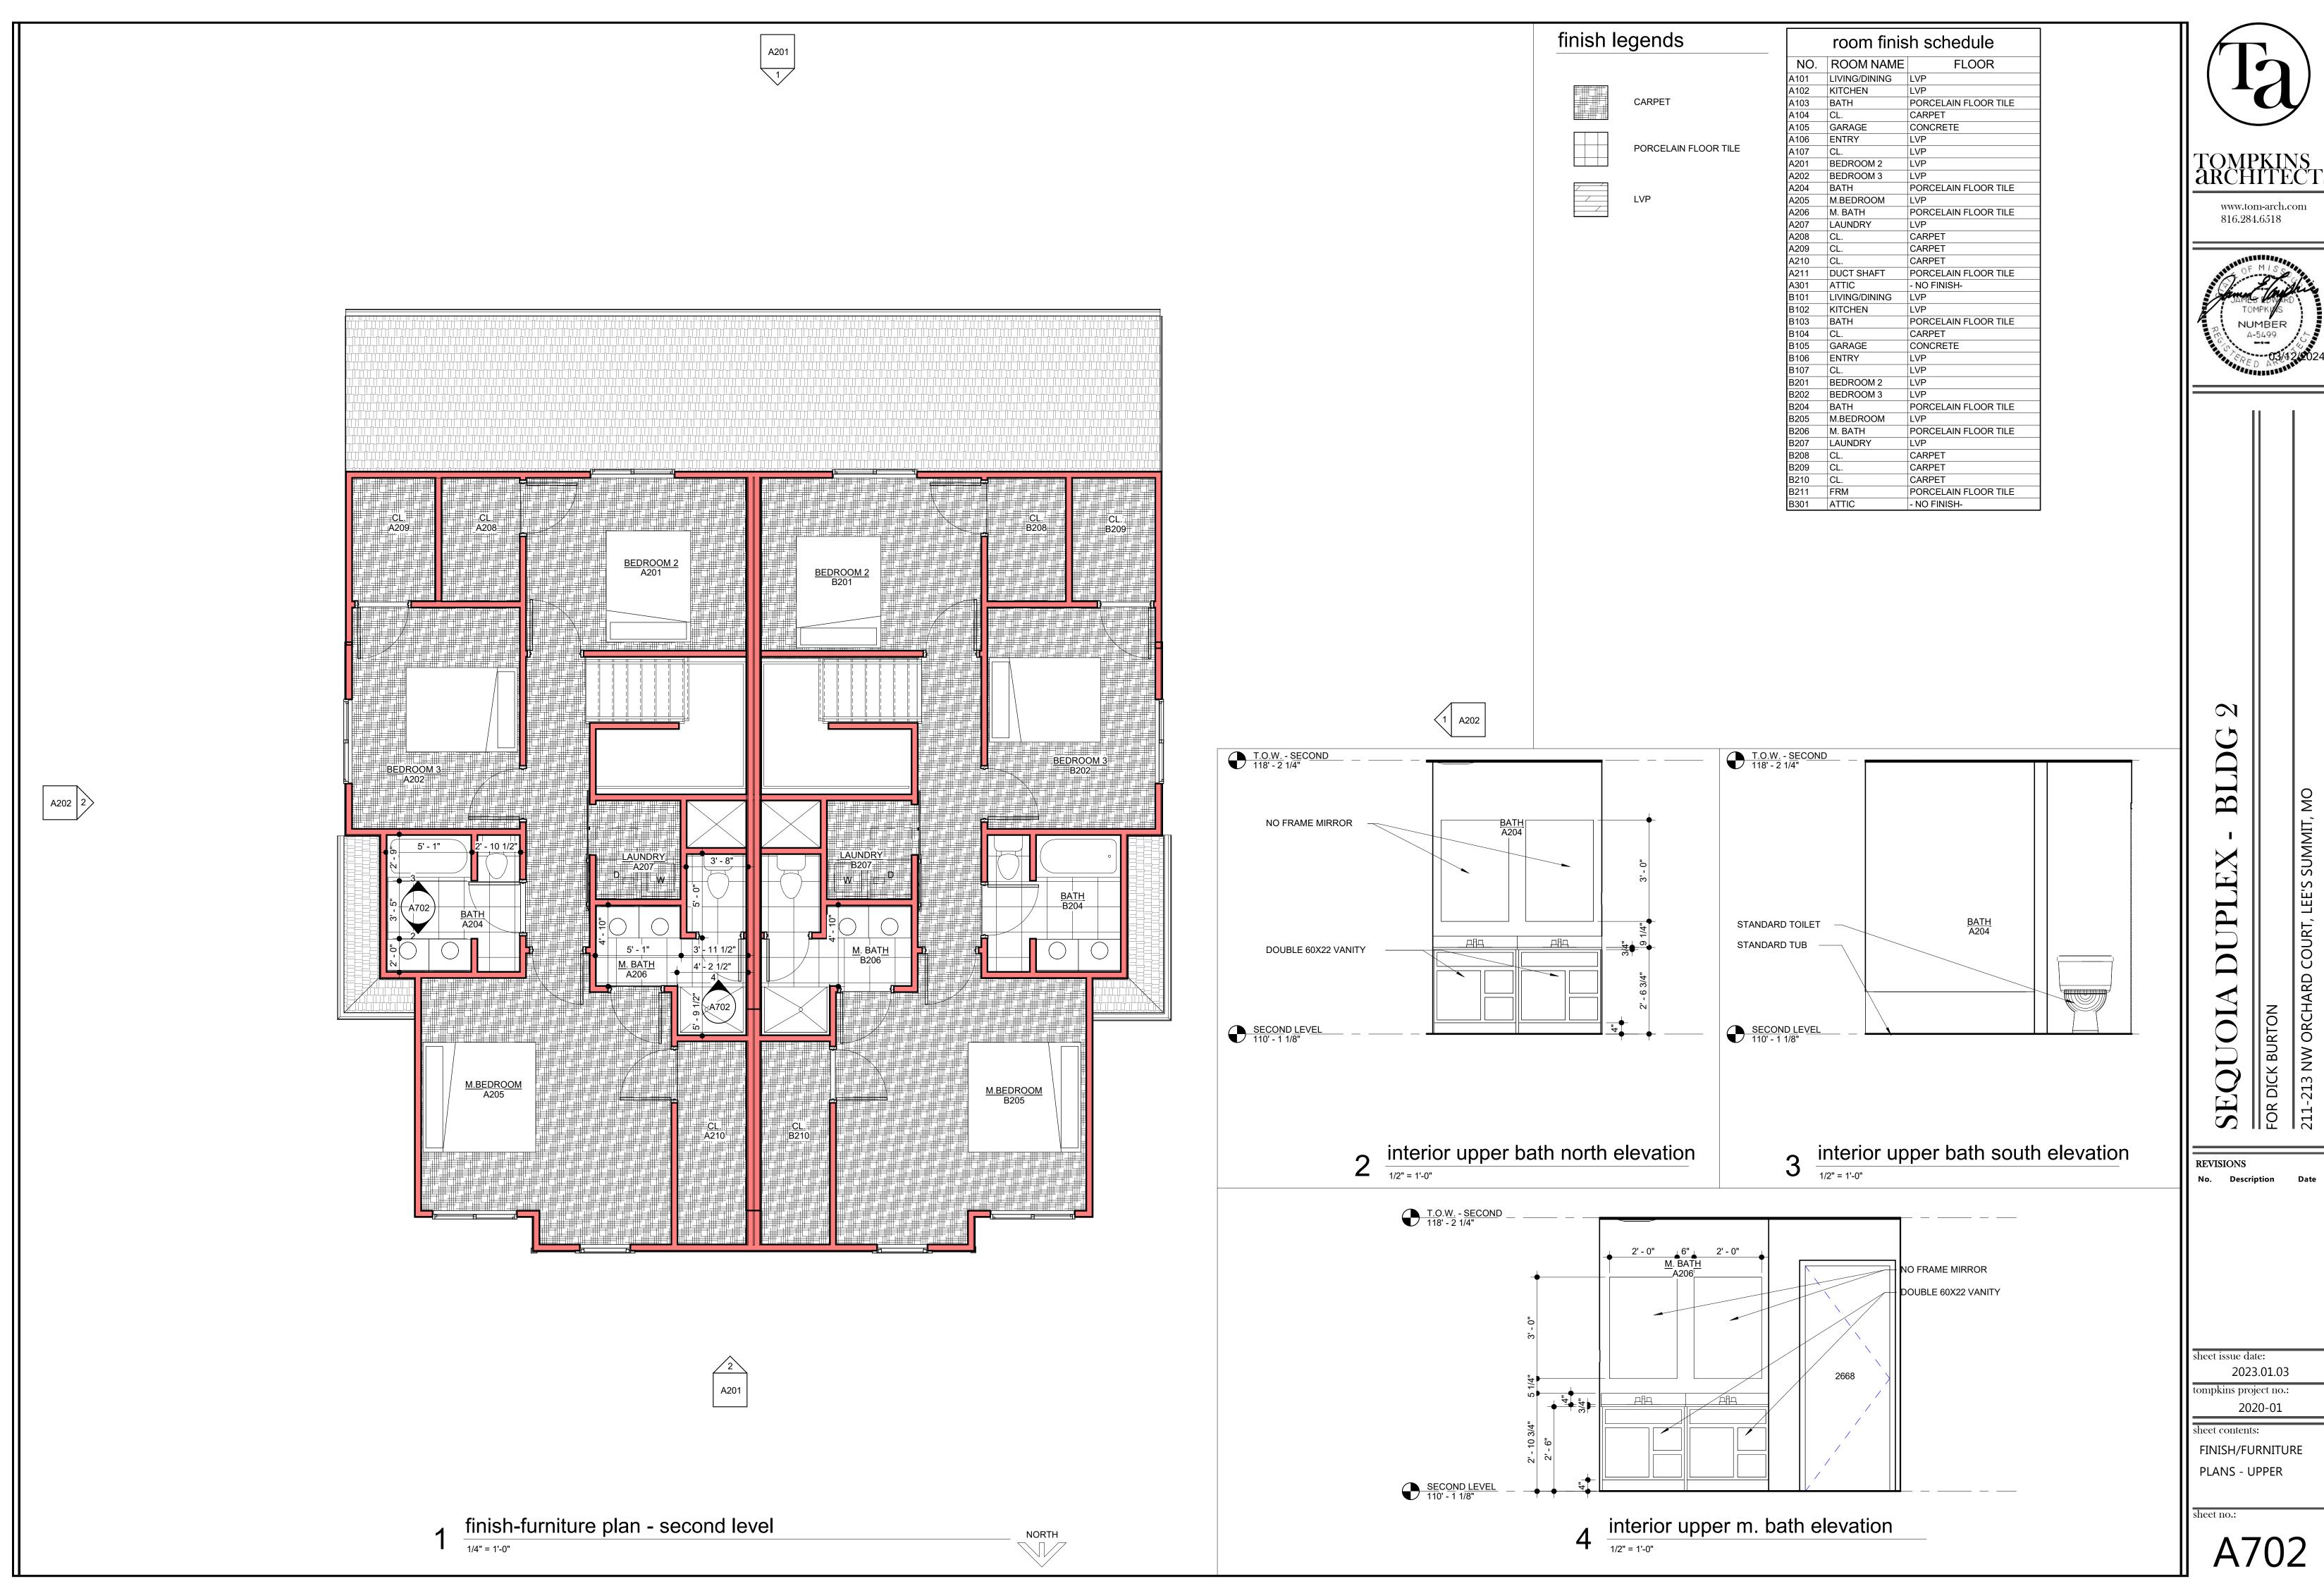



2023.01.03 tompkins project no.:

2020-01

FINISH/FURNITURE PLANS - UPPER